



This is a digital copy of a book that was preserved for generations on library shelves before it was carefully scanned by Google as part of a project to make the world's books discoverable online.

It has survived long enough for the copyright to expire and the book to enter the public domain. A public domain book is one that was never subject to copyright or whose legal copyright term has expired. Whether a book is in the public domain may vary country to country. Public domain books are our gateways to the past, representing a wealth of history, culture and knowledge that's often difficult to discover.

Marks, notations and other marginalia present in the original volume will appear in this file - a reminder of this book's long journey from the publisher to a library and finally to you.

Usage guidelines

Google is proud to partner with libraries to digitize public domain materials and make them widely accessible. Public domain books belong to the public and we are merely their custodians. Nevertheless, this work is expensive, so in order to keep providing this resource, we have taken steps to prevent abuse by commercial parties, including placing technical restrictions on automated querying.

We also ask that you:

- + *Make non-commercial use of the files* We designed Google Book Search for use by individuals, and we request that you use these files for personal, non-commercial purposes.
- + *Refrain from automated querying* Do not send automated queries of any sort to Google's system: If you are conducting research on machine translation, optical character recognition or other areas where access to a large amount of text is helpful, please contact us. We encourage the use of public domain materials for these purposes and may be able to help.
- + *Maintain attribution* The Google "watermark" you see on each file is essential for informing people about this project and helping them find additional materials through Google Book Search. Please do not remove it.
- + *Keep it legal* Whatever your use, remember that you are responsible for ensuring that what you are doing is legal. Do not assume that just because we believe a book is in the public domain for users in the United States, that the work is also in the public domain for users in other countries. Whether a book is still in copyright varies from country to country, and we can't offer guidance on whether any specific use of any specific book is allowed. Please do not assume that a book's appearance in Google Book Search means it can be used in any manner anywhere in the world. Copyright infringement liability can be quite severe.

About Google Book Search

Google's mission is to organize the world's information and to make it universally accessible and useful. Google Book Search helps readers discover the world's books while helping authors and publishers reach new audiences. You can search through the full text of this book on the web at <http://books.google.com/>

BAEDEKER'S GUIDE BOOKS.

Latest Editions always on hand and mailed to any address on receipt of price. Illustrated with numerous Maps, Plans, Panoramas, and Views. 12mo, Cloth. ALL PRICES NET.

UNITED STATES, WITH AN EXCURSION INTO MEXICO, with 25 Maps and 35 Plans,	\$3.60
NORD AMERIKA, DIE VEREINIGTEN STAATEN NEBST EINEM AUSFLUG NACH MEXIKO, mit 25 Karten, 32 Plänen, und 4 Grundrissen,	\$3.60
CANADA, WITH NEWFOUNDLAND, AND AN EXCURSION TO ALASKA, with 10 Maps and 7 Plans,	\$1.50
ALPS (EASTERN), INCLUDING THE BAVARIAN HIGHLANDS, TYROL, SALZBURG, etc., with 53 Maps, 10 Plans, and 7 Panoramas,	\$3.00
AUSTRIA, INCLUDING HUNGARY, TRANSYLVANIA, DALMATIA, AND BOSNIA, with 30 Maps and 36 Plans,	\$2.40
BELGIUM AND HOLLAND, with 14 Maps and 22 Plans,	\$1.80
BERLIN AND ITS ENVIRONS, with 4 Maps and 19 Plans,	\$0.90
EGYPT, with 23 Maps, 66 Plans, and 59 Views and Vignettes,	\$4.50
FRANCE (NORTHERN), FROM BELGIUM AND THE ENGLISH CHANNEL TO THE LOIRE, EXCLUDING PARIS AND ITS ENVIRONS, with 10 Maps and 34 Plans,	\$2.10
FRANCE (SOUTHERN), INCLUDING CORSICA, with 30 Maps, 37 Plans, and a Panorama,	\$2.70
GERMANY (NORTHERN), with 49 Maps and 74 Plans,	\$2.40
GERMANY (SOUTHERN), with 22 Maps and 16 Plans,	\$1.80
GERMANY (RHINE FROM ROTTERDAM TO CONSTANCE), with 45 Maps and 26 Plans,	\$2.10
GREAT BRITAIN, with 16 Maps and 30 Plans and a Panorama,	\$3.00
GREECE, with 8 Maps, 15 Plans, and a Panorama of Athens,	\$2.40
ITALY, FROM THE ALPS TO NAPLES, with 26 Maps and 44 Plans	\$2.40
ITALY (NORTHERN), INCLUDING LEGHORN, FLORENCE, RAVENNA, AND ROUTES THROUGH SWITZERLAND AND AUSTRIA, with 30 Maps and 39 Plans,	\$2.40
ITALY (CENTRAL) AND ROME, with 14 Maps, 49 Plans, a Panorama of Rome, and Views of the Forum Romanum and the Colosseum,	\$2.25
ITALY (SOUTHERN) AND SICILY, WITH EXCURSIONS TO THE LIPARI ISLANDS, TUNIS, SARDINIA, MALTA, AND CORFU, with 27 Maps and 24 Plans,	\$1.80
LONDON AND ITS ENVIRONS, with 4 Maps and 24 Plans,	\$1.80
NORWAY, SWEDEN, AND DENMARK, with 37 Maps, 22 Plans, and 3 Panoramas,	\$2.40
PALESTINE AND SYRIA, with 20 Maps, 43 Plans, and a Panorama of Jerusalem,	\$3.60
PARIS AND ENVIRONS, WITH ROUTES FROM LONDON TO PARIS, with 13 Maps and 33 Plans,	\$1.80
SPAIN AND PORTUGAL, with 7 Maps and 47 Plans,	\$4.80
SWITZERLAND AND THE ADJACENT PORTIONS OF ITALY, SAVOY, AND THE TYROL, with 65 Maps, 14 Plans, and 11 Panoramas,	\$2.40
TRAVELLER'S MANUAL OF GERMANY IN ENGLISH, GERMAN, FRENCH, AND ITALIAN,	\$0.90

WILLES SCRIPPS

Son

Ave., New York,

es.

MONEY-TABLE.


(Comp. p. ix.)

Approximate Equivalents.

Italian.		American.		English.			German.		Austrian.	
<i>Lire.</i>	<i>Cent.</i>	<i>Doll.</i>	<i>Cts.</i>	<i>L.</i>	<i>S.</i>	<i>D.</i>	<i>Mk.</i>	<i>Pfg.</i>	<i>K.</i>	<i>S.</i>
—	5	—	1	—	—	$1\frac{1}{2}$	—	4	—	12
—	25	—	5	—	—	$2\frac{1}{2}$	—	20	—	24
—	50	—	10	—	—	5	—	40	—	48
—	75	—	15	—	—	$7\frac{1}{4}$	—	60	—	72
1	—	—	20	—	—	$9\frac{3}{4}$	—	80	—	96
2	—	—	40	—	1	$7\frac{1}{2}$	1	80	1	92
3	—	—	60	—	2	5	2	40	2	88
4	—	—	80	—	3	$2\frac{1}{2}$	3	20	3	84
5	—	1	—	—	4	—	4	—	4	80
6	—	1	20	—	4	$9\frac{3}{4}$	4	80	5	76
7	—	1	40	—	5	$7\frac{1}{2}$	5	60	6	72
8	—	1	60	—	6	5	6	40	7	68
9	—	1	80	—	7	$2\frac{1}{2}$	7	20	8	64
10	—	2	—	—	8	—	8	—	9	60
11	—	2	20	—	8	$9\frac{3}{4}$	8	80	10	56
12	—	2	40	—	9	$7\frac{1}{2}$	9	60	11	52
13	—	2	60	—	10	5	10	40	12	48
14	—	2	80	—	11	$2\frac{1}{2}$	11	20	13	44
15	—	3	—	—	12	—	12	—	14	40
16	—	3	20	—	12	$9\frac{3}{4}$	12	80	15	36
17	—	3	40	—	13	$7\frac{1}{2}$	13	60	16	32
18	—	3	60	—	14	5	14	40	17	28
19	—	3	80	—	15	$2\frac{1}{2}$	15	20	18	24
20	—	4	—	—	16	—	16	—	19	20
25	—	5	—	1	—	—	20	—	24	—
100	—	20	—	4	—	—	80	—	96	—

DISTANCES. Italy, like most of the other European states, has adopted the French metric system. One kilometre is equal to 0.62136, or nearly $\frac{3}{5}$ ths, of an English mile (8 kil. = 5 M.).

The Italian railway-time is that of Central Europe. In official dealings the old-fashioned way of reckoning the hours from 1 to 24 has again been introduced. Thus, *alle tredici* is 1 p.m., *alle venti* 8 p.m., etc.

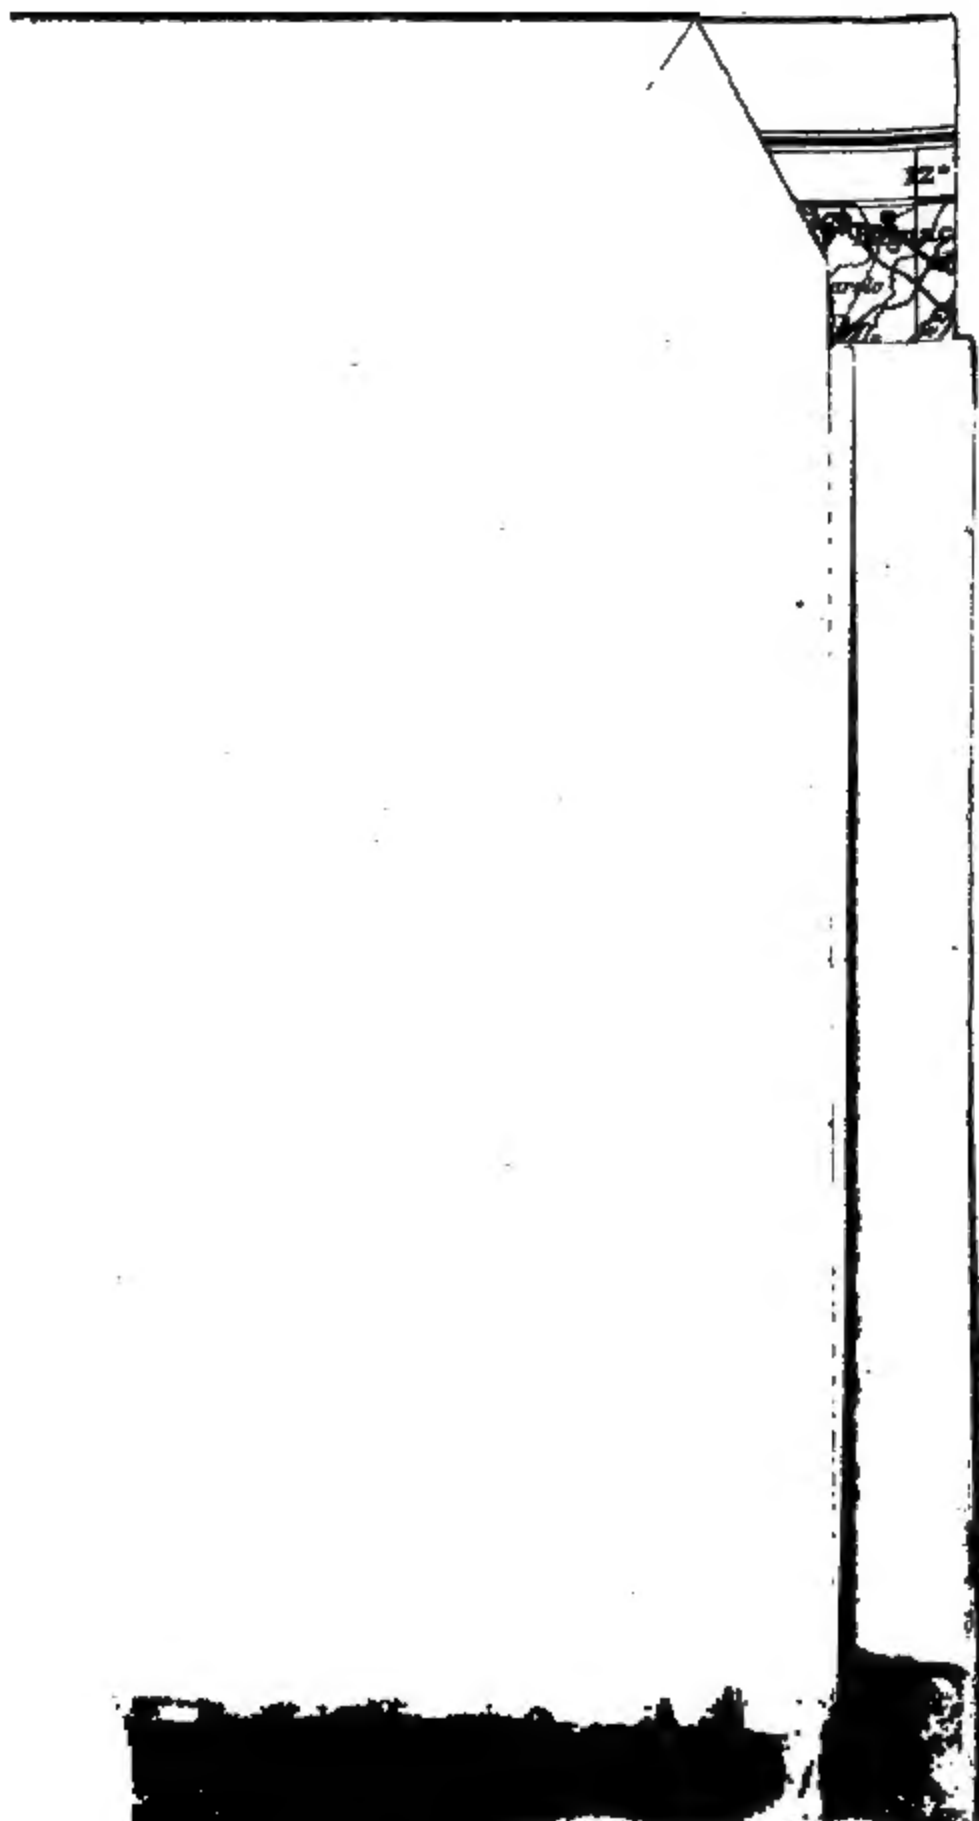

Geog 1540.45

'Go, little book, God send thee good passage,
And specially let this be thy prayer
Unto them all that thee will read or hear,
Where thou art wrong, after their help to call,
Thee to correct in any part or all.

111 024

a more modest character, when good of their class, are described as 'good' or 'very fair'. At the same time the Editor does not doubt that comfortable quarters are to be obtained at houses both of the first and second class that he has not recommended or even mentioned. The constant changes in the ownership and management of hotels, the varying tastes and requirements of travellers, even the different seasons at which tours are made, render an unconditional verdict quite impossible. Although changes frequently take place, and prices generally have an upward tendency, the average charges stated in the Handbook will enable the traveller to form a fair estimate of his probable expenditure.

To hotel-proprietors, tradesmen, and others the Editor begs to intimate that a character for fair dealing and courtesy towards travellers is the sole passport to his commendation, and that advertisements of every kind are strictly excluded from his Handbooks. Hotel-keepers are also warned against persons representing themselves as agents for Baedeker's Handbooks.

N.B. For the convenience of pedestrians and others who may be unwilling to carry the entire volume, the Handbook is bound in four sections (pp. i lxxvi; 1-180; 181-380; and 381 to the end), each of which may be easily removed from the others and used separately if desired.

Abbreviations.

M. = Engl. mile.	R. = room. Also, route.
ft. = Engl. foot.	B. = breakfast.
kil. = kilomètre.	D. = dinner.
kg. = kilogramme.	A. = attendance.
hr. = hour.	L. = light.
min. = minute.	déj. = déjeuner (luncheon).
Alb. = Albergo (hotel).	rfmts. = refreshments.
Tratt. = Trattoria (restaurant).	pens. = pension (i.e. board and lodging).
omn. = omnibus.	fr. = franc (Ital. lira).
carr. = carriage.	c. = centime (Ital. centesimo).
N. = north, northern.	ca. = circa (about).
S. = south, etc. Also, supper.	comp. = compare.
E. = east, etc.	capp. = cappella (chapel).
W. = west, etc.	

The letter *d* with a date, after the name of a person, indicates the year of his death. The number of feet given after the name of a place shows its height above the sea-level. The number of miles before the principal places on railway-routes and highroads indicates their distance from the starting-point of the route.

Asterisks are used as marks of commendation.

**Omnibus and Tramway Routes and Cab Tariff in Rome, and List of Streets
in the Plan of Rome, in the Appendix at the end of the volume.**

Maps.

1. MAP OF CENTRAL ITALY is title-page.
2. RAILWAY MAP OF ITALY is end of the Handbook.
3. ENVIRONS OF PERUGIA (1:100,000)
4. ENVIRONS OF SPOLETO (1:100,000)
5. ENVIRONS OF TERNI (1:100,000)
6. ENVIRONS OF CHIUSI (1:100,000)
7. THE ROMAN CAMPAGNA (1:100,000)
8. NEARER ENVIRONS OF ROME (1:100,000) 392.
9. THE ALBAN MOUNTAINS (1:100,000)
10. ENVIRONS OF TIVOLI (1:100,000)
11. THE SABINE MOUNTAINS of the Teverone, p. 424. ; I.: Tivoli and Valley
12. THE SABINE MOUNTAINS. Plate II.: Roriano, Subiaco, Capranica, p. 428.
13. THE SABINE MOUNTAINS. Plate III.: Tivoli, Palestrina, Olevano, p. 428.
14. THE VOLSCIAN MOUNTAINS (1:150,000), p. 430.

Plans.

1. ANCONA, p. 118. — 2. ANZIO-NETTUNO, p. 439. — 3. AREZZO, p. 45. — 4. ASSISI, p. 71. — 5. CREMA, p. 108. — 6. CITTÀ DI CASTELLO, p. 56. — 7. CORTONA, p. 51. — 8. FERRARA, p. 108. — 9. FORLÌ, p. 108. — 10. GUBBIO, p. 56. — 11. ORVITO, p. 89. — 12. OSTIA, p. 436. — 13. PERUGIA and Environs, p. 56. — 14. PESARO, p. 113. — 15. RIMINI, p. 108. — 16. SIENA, p. 18. — 17. SPOLETO and Environs, p. 78. — 18. TIVOLI, p. 421. — 19. VITERBO, p. 96. — 20. VOLTERRA, p. 10.

ROME.

21. TRAMWAY AND OMNIBUS PLAN (1:88,000); 22. LARGE PLAN (1:11,400); 23. CENTRAL ROME (1:8800); and 24. OLIVE PLAN (1:88,000), all in the Appendix. — 25. THERMÆ OF DIOCLETIAN, p. 168. — 26. THERMÆ MUSEUM, p. 168. — 27. GALLERIA D'ARTE MODERNA, p. 175. — 28. CASINO BORGHESE, p. 191. — 29. MUSEO KIRCHERIANO, p. 205. — 30. GALLERIA DORIA, p. 208. — 31. ANCIENT ROME, p. 234. — 32. PALACE OF THE CONSERVATORS, p. 238. — 33. CAPITOLINE MUSEUM, p. 238. — 34. FORUM ROMANUM, p. 260. — 35. INTERIOR OF THE COLOSSEUM (restored), p. 267. — 36. FORA OF THE EMPERORS, p. 272. — 37. THE PALATINE, p. 276. — 38. SANTA MARIA IN COSMEDIN, p. 283. — 39. THERMÆ OF CARACALLA, p. 281. — 40. Section and Ground-plan of SAN CLEMENTE, p. 299. — 41. SAN GIOVANNI IN LATERANO, BAPTISTERY, and LATERAN MUSEUM, p. 302. — 42. Reconstruction of the MOLES HADRIANI and section of the CASTELLO SANT' ANGELO, p. 315. — 43. SAN PIETRO IN VATICANO and the VATICAN PALACE (survey-plan), p. 318. — 44. Ground-plan of SAN PIETRO IN VATICANO in its present state, p. 320. — 45. SAN PIETRO IN VATICANO (Bramante's ground-plan), p. 320. — 46. SAN PIETRO IN VATICANO (Michael Angelo's ground-plan), p. 321. — 47. VATICAN PALACE, S. Wing (Sistine Chapel, Raphael's Logge and Stanzas), p. 330. — 48. VATICAN PALACE, N. Wing (Museum of Antiquities), p. 348. — 49. HADRIAN'S VILLA, p. 420.
- VIEW OF THE FORUM ROMANUM in its former and present condition, p. 252.
PANORAMA OF ROME (from SAN PIETRO IN MONTORIO), p. 376.
ARMS OF THE POPES, from 1417 to the present day, p. xlii.

{ The gold coins (10, 20, 50, and 100 fr.) are seldom met with, their

place being taken by *Biglietti di Stato* (treasury-notes) for 5, 10, and 25 fr., and the banknotes of the *Banca d'Italia*, the *Banco di Napoli*, and the *Banco di Sicilia*, all of which, owing to the improved financial condition of the country, now circulate at their face-value. Other notes should be refused. All foreign silver and copper coins (including the old papal coinage) should also be rejected, with the exception of the five-franc pieces (*scudi*) of the Latin Monetary League (Italy, France, Switzerland, Belgium, and Greece). The gold coins of the Latin League, of course, circulate in Italy at their full value. Obsolete and worn coins are frequently offered to strangers at shops and inns and even at railway ticket-offices. — A piece of 5 c. is called a *soldo*, and as the lower classes often keep their accounts in *soldi*, the traveller will find it useful to accustom himself to this mode of reckoning (*dieci soldi* = 50 c., *dodici soldi* = 60 c., etc.).


BEST MONEY FOR THE TOUR. *Circular Notes* or *Letters of Credit*, obtainable at the principal English and American banks, are the proper medium for the transport of large sums, and realise the most favourable exchange. English and German banknotes also realise their nominal value. *Sovereigns* are received at the full value (not less than 25 fr.) by the principal hotel-keepers. Besides silver and small notes, 1-1½ fr. in copper should also be carried in a separate pocket or pouch (comp. p. xii).

MONEY ORDERS payable in Italy, for sums not exceeding 10*l.*, are granted by the British Post Office at the following rates: not exceeding 2*l.*, 8*d.*; 5*l.*, 1*s.*; 7*l.*, 1*s.* 8*d.*; 10*l.*, 2*s.* These are paid in gold. The identity of the receiver must be guaranteed by two well known residents or by an exhibition of the passport. It is therefore often convenient to arrange to have the money sent to one's landlord. The charge for money-orders granted in Italy and payable in Great Britain is 40 c. per *l.* sterling.

II. Language.

The time and labour which the traveller has bestowed on the study of Italian at home will be amply repaid as he proceeds on his journey. It is quite possible for persons entirely ignorant of Italian and French to travel through Italy with tolerable comfort; but such travellers cannot conveniently deviate from the ordinary track, and are moreover invariably made to pay '*alla Inglese*' by hotel-keepers and others, i. e. considerably more than the ordinary charges. French is very useful, and it may suffice for Rome; but for those who desire the utmost possible freedom, combined with the lowest possible expenditure, a slight acquaintance with the language of the country is indispensable. † — Those who spend any time in Rome are recom-

† A few words on the pronunciation may be acceptable to persons unacquainted with the language. *C* before *e* and *i* is pronounced like the 'ch' in *ch*; *g* before *e* and *i* like *j*. Before other vowels *c* and *g* are 'h' and 'gh', which generally precede *e* or *i*, are hard. *Sc* before *e* is pronounced like *sh*; *gn* and *gl* between vowels like *nyl* and *lyl*. 'als *a*, *e*, *i*, *o*, *u* are pronounced *ah*, *ä*, *ee*, *o*, *oo*. — In ad.



Volterra, San Gimignano, Montepulciano, Viterbo, and Gubbio, though less conveniently situated, are also well worthy of a visit. With regard to the towns lying on the coast of the Adriatic, comp. pp. 106 et seq. The farther the traveller diverges from the beaten track, the more he will learn of the characteristics of this delightful country.

V. Gratuities. Guides. Public Safety. Begging.

Gratuities. There is no other country where one has to give so many gratuities as in Italy, or where such small sums are sufficient. The traveller, therefore, should always be provided with an abundant supply of copper coins. Drivers, porters, etc., invariably expect, and often demand as their right a gratuity (*buona mano, mancia, da bere, caffè, sigaro*), in addition to the hire agreed on, varying according to circumstances from 10-15 c. to a franc or more. The gratuities suggested in this Handbook are on a sufficiently liberal scale; some, however, will of course give more, while the traveller of modest claims will find perhaps two-thirds or even less enough. In public collections, where a charge for admission is made, the keepers (*controlli*) are forbidden to accept gratuities. In private collections 1-2 pers. should bestow a gratuity of $\frac{1}{2}$ -1 fr., 3-4 pers. 1-1 $\frac{1}{2}$ fr.; for repeated visits less. For opening a church-door, etc. 10-20 c. is enough, but if extra services are rendered (e.g. uncovering an altar-piece, lighting candles, etc.), from 40 c. to 1 fr. may be given.

In hotels and restaurants about 5-10% of the reckoning should be given in gratuities, or less if service is charged for. In restaurants where 'service' and 'couvert' appear on the bill, the fee should be proportionately reduced.

Guides (*Guide*, sing. *la Guida*) may be hired at 6-10 fr. per day, but their services may generally well be dispensed with by those who are not pressed for time. Purchases should never be made in their company as they receive at least 10% commission from the shop, which of course comes out of the purchaser's pocket. Neither should contracts with *vetturini* or other persons be made in presence or with the aid of a commissionaire, as any such intervention tends considerably to increase the prices. Licensed guides (*Guide patentes*) may now be obtained in Rome (apply at any hotel). Their licenses are issued by the Italian Archaeological Commission, and contain a tariff of charges.

Public Safety. Travelling in Northern and Central Italy is not attended with greater hazard than in any of the northern European countries. The traveller should, of course, avoid the less frequented parts of Rome and its environs after nightfall. Information as to the safety of the Campagna is also not to be despised, though cases of robbery there are hardly more numerous than in the neighbourhood of any large city. Ladies should never undertake expeditions into the more solitary districts without escort; and even the mascu-

may break their journey once, those with tickets for over 910 M. (500 kil.) twice; but the ticket must be shown to the *capostazione* on leaving the train, and again presented at the ticket-office to be stamped before the journey is resumed.

RETURN TICKETS (*Biglietti di andata-ritorno*) for distances up to 100 kilometres (62 M.) are valid for one day only, up to 200 kil. for 2 days, up to 300 kil. for 3 days, and beyond 300 kil. for 4 days. But those issued on Sat. and the even of festivals are available for three, those issued on Sun. or festivals for two days at least. These tickets do not allow the journey to be broken.

CIRCULAR TOUR TICKETS. The regulations affecting circular tours in Italy resemble those in force in France, Belgium, Germany, and other continental countries. The *Orario Ufficiale* (p. xiii) contains a list of separate journeys or stages, which may be combined by the traveller to suit himself (*biglietti a itinerario combinabile*). For some of the more popular circular tours tickets (books of coupons) are kept in readiness by the railway companies (*biglietti combinati*). Order-forms for these tickets may be obtained at any of the more important stations in Italy, and, when filled up, should be forwarded, along with a fee of 1 fr., to the station whence the ticket is to be issued. Such tickets are not issued for distances under 400 kil. (248 M.). Those for 400-800 kil. are valid for 15 days; for 800-2000 kil. for 30 days; for 2-3000 kil. for 45 days, beyond that distance for 60 days. — *Biglietti circolari internazionali*, including coupons for foreign as well as Italian railways, are not issued for distances under 600 kil. (373 M.), those for distances up to 2000 kil. are valid for 45 days, for 2000-3000 kil. for 60 days, and beyond that distance for 90 days. They may be obtained in London at the principal southern railway-stations or from Messrs. Cook & Son (Ludgate Circus); in Paris from Cook & Son (Place de l'Opéra 1), P. D. Lubin (Boulevard Haussmann 38), or the Société des Voyages Economiques (Rue du Faubourg-Montmartre 17), and also from Cook's agencies in Brussels (Rue de la Madeleine 41), Cologne (Domhof 1), and Geneva (Rue du Rhône 90). In Italy they may be ordered at any large station but are issued only by Messrs. Cook & Son at Rome (Piazza Esedra di Termini 54) and by Messrs. Gondrand in Milan (Galleria Vittorio Emanuele). — These international tickets allow the journey to be broken without any formality at the terminal stations of the coupons and at the stations indicated on them. If the traveller alights at other stations, he must at once apply to the *capostazione* for recognition of the break of the journey.

The *Biglietti combinati* (see above) have to be signed by the traveller and allow the journey to be broken at the terminal station and at three intermediate stations, but they require to be stamped at each fresh starting-point with the name of the next station at which the traveller intends to halt. This may be done either at the city-office or at the railway-station (usually at a special ticket-office,

a minimum of 10 c. Luggage, however, may be sent on to the final destination, though the traveller himself break the journey. On alighting at small stations the traveller should at once look after his luggage in person.

As several robberies of passengers' luggage have been perpetrated in Italy without detection, it is as well that articles of great value should not be entrusted to the safe-keeping of any trunk or portmanteau, however strong and secure it may seem. — Damaged trunks may be secured with leaden seals (*piombare* = to seal with lead) for 5c. each package.

The enormous weight of the trunks used by some travellers not unfrequently causes serious and even lifelong injury to the hotel and railway porters who have to handle them. Travellers are therefore urged to place their heavy articles in the smaller packages and thus minimise the evil as far as possible.

VII. Cycling.

(Communicated by W. O'Meara, Manager of C. T. C. Touring Bureau.)

Central Italy is not so well adapted to cycling as the N. regions. The roads are not so good as those about the Lakes or in the Veneto; the climate, too, is less favourable. Still there is considerable utility to be derived from one's wheel, especially in Tuscany.

Most English cyclists visit the country in the winter months, but it is quite feasible to ride in August and September, or in May and June, provided one takes the precaution of riding early and late, resting during the hotter portions of the day. The landscape is infinitely prettier than in winter.

In the winter months, provided the weather is dry, one can ride almost anywhere in perfect comfort, as far as the roads are concerned. In the warmer months the chief objection to the roads is the dust. This makes it absolutely necessary to have a gear-case, as otherwise one's chain is sure to become clogged. The cyclist's clothing should be all-wool and not too thin; the great difference in temperature makes the nights often feel chilly by comparison. When the sun is strong it is perhaps advisable to wear a white calico hat with very broad brim; and to protect one's eyes from dust, insects, and the glare of the sun it is prudent to wear goggles with coloured glasses. The machine should, of course, have a good brake and also a powerful lamp, for it is often pleasant to ride at dusk, when the heat of the day is over.

As regards the question of personal security, it is difficult to say anything precise. Cautious riders will not venture in the interior of the country south of Tuscany, though the Mediterranean coast road is commonly followed to Rome, or even as far south as Naples. The Adriatic coast, except along frequented stretches of road, is best left alone. Venturesome riders may, however, be interested to know that the Peninsula has been and is occasionally cycled over in all directions wherever there is a rideable road. But that applies to men only; ladies must not under any circumstances ride alone. On the whole the country is not suitable for cycling

lazioni, déjeuner), however, need not be ordered at the hotel. Meals served at other than the usual hours, or in the traveller's private rooms, are, of course, considerably dearer. The charge for the use of the hotel-omnibus from the station to the hotel is so high ($1-1\frac{1}{2}$ fr.), that it is often cheaper to take a cab. It is also easier for those who use a cab (definite bargain as to fare) to proceed to another hotel, should they dislike the rooms offered to them. Rooms on the ground-floor should be avoided. — The best hotels in Rome are sometimes so crowded at the height of the season, that accommodation cannot always be reckoned upon even when ordered in advance. A reply post-card will, however, ensure definite information on the point, and so prevent trouble and disappointment.

The **SECOND CLASS HOTELS** (*Alberghi* or, in the smaller towns, *Locande*), thoroughly Italian in their arrangements, are much cheaper, but they are rarely very clean or comfortable: R. 1-3, L. $\frac{1}{2}$, A. $\frac{1}{2}$ fr. One advantage they possess is that the traveller is free to take his meals where he pleases, though there is generally a *trattoria* (p. xix) connected with the house. Morning coffee is usually taken at a *café* (p. xx) and not at the inn (where the charge is $1\frac{1}{4}-1\frac{1}{2}$ fr.). The better houses of this class may be visited even by ladies; but the new-comer should, perhaps, frequent first-class hotels only. It is quite customary to make enquiries as to charges beforehand, and in bargaining as to the price of a room the '*servizio e candela*' should not be forgotten. If no previous agreement has been made an extortionate bill is not uncommon.

HÔTELS GARNIS are to be found in most of the larger towns, with charges for rooms similar to those in the second-class hotels. As matches are rarely found in hotels the guest should provide himself with a supply of the wax-matches (*cerini*) sold in the streets (1-2 boxes, 10-15 c.). Soap also is an 'extra', for which a high price is charged.

Money and other valuables should either be carried on the person (p. xvi) or entrusted to the landlord in exchange for a receipt.

The **PENSIONS** mentioned in the Handbook are in every respect reliable. They are generally conducted by ladies. They also receive passing travellers, but as the price of *déjeuner* is usually (though not universally) included in the fixed daily charge, the traveller has either to sacrifice some of the best hours for visiting the galleries or to pay for a meal he does not consume.

PRIVATE APARTMENTS are recommended for a prolonged residence. A rent lower than that first asked for is often accepted. When a whole suite of apartments is hired, a written contract on stamped paper should be drawn up with the aid of some one acquainted with the language and customs of the place (e.g. a banker), in order that 'misunderstandings' may be prevented. To sign such a contract without reliable advice is distinctly dangerous. Payment of the rent in advance is quite customary; but such payment

List of the ordinary dishes at the Italian restaurants. —

Antipasti, Principii, relishes taken as whets (such as sardines, olives, or radishes).
Minestra or *Zuppa*, soup.
Brodo or *Consommé*, broth or bouillon.
Zuppa alla Santè, soup with green vegetables and bread.
Minestra di riso con piselli, rice-soup with peas.
Risotto (alla Milanese), a kind of rice-soup (rich).
Pasta asciutta, macaroni, *al sugo e al burro*, with sauce and butter, *ai pomé d'oro*, with tomatoes.
Carnè lessa, bollita, boiled meat; *in umido, alla genovese*, with sauce; *ben cotta*, well-done; *al sangue, all' inglese*, underdone; *ai ferri*, cooked on the gridiron.
Manzo, boiled beef.
Fritto, una Frittura, fried meat.
Fritto misto, a mixture of fried liver, brains, artichokes, etc.
Arrosto, roasted meat.
Arrosto di vitello, roast-veal.
Bistecca, beefsteak.
Male, pork.
Moutons, mutton.
Agnello, lamb.
Capretto, kid.
Testa di vitello, calf's head.
Fegato di vitello, calf's liver.
Braciola di vitello, veal-cutlet.
Costoletta alla Milanese, veal-cutlet, baked in dough.
Egaloppe, veal-cutlet with bread-crumbs.
Ostriche, oysters (good in winter only).
Pesce, fish.
Soglià, a kind of sole.
Prosciutto, ham.
Salame, sausage (usually with garlic, *aglio*).
Pollo, fowl.
Uova, eggs, *da bere*, soft, *dure*, hard, *al platto*, poached.
Anitra, duck.
Pollo d'India, Tacchino, or Gallinaccio, turkey.

Gnocchi, small dumplings of dough.
Sinfatino, cibreo, ragout.
Crocchetti, croquettes.
Pasticcio, pie.
Contorno, Guarnizione, garnishing, vegetables, usually not charged for.
Patate, potatoes.
Polenta, squashed maize.
Insalata, salad.
Asparagi, asparagus (green).
Spinaci, spinach.
Cardi, artichokes.
Piselli, peas.
Lenticchie, lentils.
Cavoli fiori, cauliflower.
Gobbi, cardi, artichoke-stalks (with sauce).
Zucchini, gherkins.
Fave, beans.
Fagioli, French beans.
Fagiolini, young French beans.
Funghi, mushrooms.
Mostarda francese, sweet mustard (mixed with vinegar).
Mostarda inglese or Senape, hot mustard.
Sale, salt.
Pepe, pepper.
Dolce, sweet dish.
Zuppa inglese, a kind of trifle.
Frutta, Giardinetta, fruit, dessert.
Frágole, strawberries.
Pera, pear.
Mela, apples.
Pêriche, Pesche, peaches.
Uva, grapes.
Fichi, figs.
Noci, nuts.
Limone, lemon.
Arancio, orange.
Finocchio, root of fennel.
Frittata, omelette.
Dolce, sweets.
Pane francese, bread made with yeast (the Italian is made without).
Formaggio, cheese (*Gorgonzola, Stracchino*).
Burro, butter.

WINE (*vino da pasto*; *nero*, rosso, red; *bianco*, white; *secco*, asciutto, dry; *dolce*, pastoso, sweet; *vino del paese*, wine of the country) is usually brought in open flasks, one-half, one-fourth, or one-fifth of a litre (*un mezzo litro*; *un quarto*; *un quinto* or *bicchiere*). Wines of a better quality are served in ordinary corked and labelled bottles.

Cafés are frequented mostly in the late afternoon and evening. The tobacco-smoke is frequently objectionable.

are open until 8 or 9 a.m. only. Visitors may inspect the works of art even during divine service, provided they move about noiselessly, and keep aloof from the altar where the clergy are officiating. On the occasion of festivals and for a week or two before Easter the works of art are often entirely concealed by the temporary decorations. The *verger* (*sagraiano*) receives a fee of 30-50 c. or upwards, if his services are required (comp. p. xii).

Museums, picture-galleries, and other collections that belong to government are usually open from 10 (9) to 3 o'clock, on weekdays at a charge of 1 fr., and on Sundays gratis. In Rome the collections of the Vatican and the private galleries are closed on Sundays and on ecclesiastical festivals. The national collections are closed only on the holidays recognized by government, viz. New Year's Day, Epiphany (Jan. 8th), Queen's birthday (Jan. 8th), Lady Day (March 25th), Easter Day, Ascension Day, Festa dello Statuto (first Sun. in June), Fête de Dieu (Corpus Domini), June 29th (SS. Peter and Paul), Assumption of the Virgin (15th Aug.), Sept. 8th (Nativity of the Virgin), Sept. 20th (anniversary of the entry of the Italian troops in 1870, see p. xxxvii), Nov. 1st (All Saints' Day), King's birthday (Nov. 11th), Dec. 8th (Immaculate Conception), and Christmas Day. In smaller towns museums and galleries are also often closed during the Carnival, on Palm Sunday, Whitsunday and Whitmonday, and on the day sacred to the local patron saint.

Those who desire to study, draw, or copy in the papal museums or private collections must procure a *Permesso* through their consul. For the *Papal Museum* permission is granted by Monsignor della Voipe (maggior domo of the pope) at his office, the written application having been left there a day or two previously. (Separate permission required for the museums of the Vatican and Lateran, the Vatican picture-gallery, and Raphael's Loggia.) In the case of *Private Galleries*, application must be made to the proprietor in Italian or French, stating also which picture is to be intended to copy, and the size and description of the copy. In some collections copies of the original size must not be made. As to this and similar regulations, information should be previously obtained from the custodian. The following form of application to the *Monagr. Maggior-domo*, may be also addressed to a prince or marchese, the 'Revins' being in this case omitted.

Eccellenza Reale,

Il sottoscritto, che si trattiene a Roma con lo scopo di proseguire in questa capitale i suoi studi artistici (storici, etc.), si prende la libertà di rivolgersi con questa a V. E. Eccellenza Reale pregando La perchè voglia accordargli il prezioso permesso di far degli studi (dei disegni, delle notizie, etc.) nel Museo (nella Galleria) Vaticana.

Sperando di essere favorito da V. E. Eccellenza Reale e pregando La di gradire anticipatamente i più ossequiosi ringraziamenti, ho l'onore di protestare col più profondo rispetto

*di V. E. Eccellenza Reale
Udmo Ottavo Direttore
N. N.*

Roma il . . .

A Sua Eccellenza Reale

Magr. della Voipe

Maggior-domo di Sua Santità.

Artists, archaeologists, and scholars, on making application to the Ministry of Education on a stamped form (1 fr. 50 c.), receive free admission (*permesso di entrata gratuita*) to all government collections through-

shops. The Italian for letter-box is *Bucca* or *Cassetta* (for letters, *per le lettere*; for printed papers, *per le stampe*).

LETTERS of 15 grammes ($\frac{1}{2}$ oz., about the weight of three sous) by town-post 5 c., to the rest of Italy 20 c., abroad (*per fastero*) 25 c. The penalty (*segnalanza*) for insufficiently prepaid letters is double the deficiency. — POST CARDS (*cartolina postale*) within the town 5 c., for both Italy and abroad 10 c., reply-cards (*con risposta pagata*), inland 15 c., for abroad 20 c. — LETTER CARDS (*biglietto postale*), for the city 5 c., for Italy 20 c., for foreign countries 25 c. — BOOK PACKETS (*stampe sotto fascia*) 2 c. per 50 grammes, for abroad 5 c. — RECOMMENDATION FEE (*raccomandazione*) for letters for the same town and printed matter 10 c., otherwise 25 c. The packet or letter must be inscribed '*raccomandata*'. — POST OFFICE ORDERS, see p. x. Sums not exceeding 25 fr. may be sent within Italy by the so-called *cartolina vaglia* (see 10 c. for 1 fr. and 5 c. for each 5 fr. more). Money may also be transmitted by telegraph.

PARCEL POST. Parcels not exceeding 5 kg. (11 lbs.) in weight or 20 cubic decimètres in size (longest dimension not more than 60 centimètres, or about 2 ft.) may be sent by post in Italy for 60 c.; to England, via France, 2 fr. 75 c. The parcels must be carefully packed and fastened and may not contain anything in the shape of a letter; and two custom-house declarations must be filled up for each parcel for abroad. Articles such as flowers, etc., not liable to duty are best sent as samples of no value (*compiene senza valore*) in Italy 2 c. per 50 gr., abroad 10 c., each additional 50 gr. 5 c. (maximum 500 gr.).

Telegrams. For telegrams to foreign countries the following rate per word is charged in addition to an initial payment of 1 fr.: Great Britain and Sweden 26 c., France and Germany 14, Switzerland and Austria 8-14, Belgium 19, Holland 23, Denmark 23, Russia 42, Norway 34. A receipt (*ricevuta*; 5 c.) should be asked for. — To America from $3\frac{3}{4}$ fr. per word upwards, according to the state. — In Italy, 15 words 1 fr., each additional word 5 c. Telegrams with special haste (*telegrammi urgenti*), which take precedence of all others, may be sent in Italy at thrice the above rates.

XII. Climate of Rome. Health.

The climate of Rome is determined by its situation in the Campagna, almost equidistant from the Apennines and the sea (14 M.), and about 100 ft. above the level of the latter. The Roman winter owes its mildness to the sea, and the daily recurring breeze in summer is due to the same source. A marked feature of the climate is the coolness which sets in after sunset on clear days, followed by a comparatively low temperature at night. The wind, too, often changes its quarter. During winter the prevalent wind is the *Tra-montana*, a term applied not only to the N. wind but also to the N.N.E. wind (*Greco*); it blows more and more frequently from October to December, then becomes gradually rarer, and by April or May ceases altogether. This dry and cool (sometimes even cold) wind is generally accompanied by a clear sky, and except when unusually violent (in which case it irritates the mucous membrane) is not found trying even by invalids. The *Scirocco*, a general name for the S.E., S., and S.W. winds, is especially prevalent in October

a reputation for sweetness and purity, and might be drunk with impunity but for the excess of lime which it contains; the water of the Teveri is the most wholesome in this respect.

The hotels and pensions best suited for foreigners all lie in the best quarters of the town; and there, too, is a large choice of private apartments supplied with all needful comforts. A southern aspect is absolutely essential for the delicate, and highly desirable for the robust. An Italian proverb says: '*Dove non va il sole, va il medico*'. Rooms on the upper floor are drier than those on the groundfloor. Carpets and an adequate heating-apparatus are indispensable; stoves are best, but the more usual fire-places are not to be disdained, while the braziers (*scaldini*) beloved of the native are, of course, to be rejected. Windows should be closed at night.

Inhabitants of more northern countries generally become unusually susceptible to cold in Italy, and therefore should not omit to be well supplied with warm clothing for the winter. Even in summer it is advisable not to wear too light clothing. Flannel is strongly recommended. In the middle of the day the inside of unheated buildings is generally colder than the outside, so that it is often advisable on entering chilly picture-galleries, churches, etc., to put on an overcoat. It is also advisable to drive to such places and walk back, as otherwise the visitor has afterwards no opportunity of regaining the desirable temperature through exercise. — The Pincio is the safest promenade in Rome, but a prolonged sojourn in the somewhat damp gardens of the Villa Borghese is not advisable. The visitor should be careful not to drive in an open carriage after dark, or to sit in the evening in such malarial places as the Colosseum. Exposure to the summer-sun should be avoided as much as possible in the warmer months. According to a Roman proverb, only dogs and foreigners (*Inglese*) walk in the sun, Christians in the shade. Umbrellas or goggles of coloured glass (grey, concave glasses to protect the whole eye are best) may be used with advantage when a walk in the sun is unavoidable. Blue veils are recommended to ladies. Repose during the hottest hours is advisable, and a siesta of moderate length is often refreshing.

Persons with delicate chests often find a winter in Rome very beneficial. It is less dusty than the Riviera, and not so windy as the Sicilian health-resorts, though of course considerably cooler.

There are several good English and German doctors in Rome, but it is sometimes wise, in the case of maladies arising from local causes, to employ native skill. German and English chemists are preferable to the Italian. Foreigners frequently suffer from diarrhoea in Italy, which is generally occasioned by the unwonted heat. Tea and rice are two of the commonest remedies. The homœopathic tincture of camphor may also be mentioned. In such cases, however, thorough repose is the chief desideratum. A small portable medicine case, such as those prepared and stocked with tabloid drugs by *Messrs. Burroughs, Williams, & Co., Holborn Viaduct, London*, will often be found useful.

ferred to Romulus, its extension is attributed with something more of certainty to Servius Tullius. Around the twin settlements on the Palatine and Quirinal, extensive suburbs on the *Esquiline* and *Caelius*, as well as on the lower ground between the hills, had sprung up; for not only were numerous strangers induced to settle permanently at Rome on account of its commercial advantages, but the inhabitants of conquered Latin towns were frequently transplanted thither. Out of these heterogeneous elements a new civic community was organised towards the close of the period of the kings, and its constitution commemorated by the erection of the *Servian Wall*. This structure included an external wall round the whole of the town, and also the fortifications of the Capitol and other heights within it. The outer wall led from the N. slope of the Capitol across what was later the Forum of Trajan, skirted the Quirinal, and turned to the S.E. at the gardens of Sallust (pp. 169, 172). For more than $\frac{3}{4}$ M. at this part of the circuit, where the artificial defences are not aided by nature, the wall was replaced by a rampart about 80 ft. in breadth, with a moat 100 ft. wide in front of it. Considerable remains of this rampart are extant near the railway-station (p. 166). The wall recommenced on the E. side of the Esquiline, skirted the S. slope of the Caelius, enclosed the two summits of the Aventine, and ended at the Tiber (below St. Sabina's, p. 286). While care was taken thus to protect the city externally, the kings were not less solicitous to embellish the interior with handsome buildings. To this period belong the *Temple of Jupiter Capitolinus* (p. 235), the *Circus* in the valley between the Palatine and the Aventine (p. 286), the *Cavea Mamertinus* (p. 271), and above all the *Cloaca Maxima* (p. 283), destined to drain the swampy site of the Forum, and still admired for its massive construction. This energetic and brilliant development of the city under the kings of the Tarquinian family in the 6th cent. B.C. came to a close with the expulsion of the last king Tarquinius Superbus (509).

During the first century of the *REPUBLIC* the united efforts of the citizens were directed to the task of establishing themselves more securely in the enjoyment of their new acquisitions; and in this they succeeded, although not without serious difficulty. It was a hard and bitter period of probation that the nation had to undergo in the first period of its new liberty, and it was not till the decline of the Etruscan power that Rome began to breathe freely again. After protracted struggles she succeeded in conquering and destroying her formidable rival *Vols* (396), a victory by which the Roman supremacy was established over the south of Etruria as far as the Ciminian Forest. Shortly afterwards (390) the city, with the exception of the Capitol, was taken and entirely destroyed by the *Gauls*. Although this catastrophe occasioned only a transient loss of the prestige of Rome, it produced a marked effect on the external



(p. 200); 2. *Castellum*, *Collias* (p. 204); 3. *Isis at Burgo*, *Colosseum* (p. 204), *Baths of Trajan* (p. 271); 4. *Templum Pacis*, *Venus at Rome* (p. 200), *Basilica of Constantine* (p. 204), *Temple of Vesta* (p. 203); 5. *Aqueduct*, *Temple of Minerva Medica* (p. 195); 6. *Alta Roma*, *Baths of Constantine* (p. 212) and *Diocletian* (p. 187); 7. *Via Lata*, between the modern *Corso*, the *Quirinal*, and *Pincio* (p. 187); 8. *Forum Romanum*, the republican and imperial *Fora* (pp. 260-271) and the *Capitol* (p. 214); 9. *Circus Flaminius*, *Theatre of Marcellus* (p. 202) and *Pompey* (p. 228), *Porticus of Octavia* (p. 251), *Pantheon* (p. 216), *Column of Marcus Aurelius* (p. 200), and the *Temple of Neptune* (p. 200); 10. *Palatium*, *Palatine* (p. 215); 11. *Circus Maximus*, temple in the *Forum Boarium* (p. 207); 12. *Palatio Faustae*, *Baths of Caracalla* (p. 201); 13. *Aventine*, *Pyramid of Cestius* (p. 200); 14. *Transtiberim*, *Trastevere* and the *Borgo*. According to the statistics of this period, Rome possessed 19 aqueducts, and although four only of these are now in use, there is probably no city in the world which can boast of such an excellent supply of water as Rome. The banks of the *Tiber* were connected by 8 bridges. There were 423 streets, 1780 palaces, and 46,022 dwelling houses. Among the public structures are mentioned 11 *Thermae*, 856 *baths*, 1302 fountains in the streets, 36 triumphal arches, 10 *basilicas*, etc. When the grandeur and magnificence suggested by these numbers is considered, it may occasion surprise that comparatively so few relics now remain, but it must be borne in mind that the work of destruction progressed steadily during nearly a thousand years, and was not arrested till the era of the Renaissance, but for which even the monuments still extant would ere now have been consigned to oblivion.

The *Catacombs*, the earliest burial-places of the Christians, illustrate the gradual progress of this interesting community, in spite of every persecution, from the 1st century onwards. At the beginning of the year 313 Constantine issued his celebrated decree from Milan, according to Christianity equal rights with all other religions. This was the decisive step which led to the union of the church with the state. In 325 the first œcumenical council was held at *Nicæa*, and in 337 the emperor caused himself to be baptized when on his death-bed. Tradition attributes the earliest ecclesiastical division of Rome into seven *diaconates* to *St. Clement*, the fourth bishop, and *St. Peter* is said to have founded the first place of worship in the house of the senator *Pudens*, now the church of *Santa Pudenziana* (p. 179). To *Calixtus I* (218-22) is ascribed the foundation of the church of *Santa Maria in Trastevere* (p. 374), and to *Urban*, his successor, that of *Santa Cecilia* (p. 375). About the beginning of the fourth century *Santi Alessio* and *Santa Prisca* on the *Aventine* (pp. 287, 290) are supposed to have been founded. Of these churches, however, and also of the edifices erected by *Constantine*, no trustworthy record has been handed down to us. To that monarch tradition attributes the foundation of the following churches — the *Lateran*, *St. Peter's*, *San Paolo Fuori*, *Santa Croce in Gerusalemme*, *Santi Agnese Fuori*, *San Lorenzo Fuori*, and *Santi Pietro e Marcellino* at *Torre Pignattara* (p. 391) — but probably erroneously, with the exception of the first, which was styled 'omnium urbis et orbis ecclesiarum mater et caput'. It is, however, noteworthy that the oldest and most important churches were generally outside the gates, or at least in their immediate vicinity, and this is accounted for by the fact that the Roman aristocracy at first clung

cept during the absence of the papal court at Avignon. No thorough restoration was possible, for the Byzantine emperors cared nothing for Rome, and in the Lombards arose new enemies to their dynasty in Italy. In 663 *Constantine II.* visited Rome, an interval of 306 years having elapsed since it had been entered by a Byzantine emperor, and availed himself of the opportunity to carry off the last remains of the bronze with which the ancient monuments were decorated. In 755 the Longobards under their duke *Aistulf* besieged Rome for two months and ruthlessly devastated the Campagna, which during the preceding interval of peace had begun to wear a more smiling aspect. A lamentation of that period begins thus: —

‘Nobilibus quondam fueras constructa patronis,
Subdita nunc servis, heu male Roma ruis;
Deservere tui tanto te tempore reges,
Cessit et ad Græcos nomen homosque tuus’.

and terminates with the words: —

‘Nam nisi te Petri meritum Fanique foveret,
Tempore jam longo Roma miscella foret’

It was in fact the tradition, indelibly attaching to Rome, of the great struggles and victories of Christianity which preserved the city from total destruction. The transformation of heathen into Christian Rome was accompanied by the gradual development of the PAPACY as the supreme ecclesiastical power in the West. *Leo the Great* (440–461) and *Gregory the Great* (590–604) may be regarded as the chief originators of this scheme of aggrandisement. These prelates and their successors were indefatigable in their efforts to realise their project, and under their auspices, notwithstanding the poverty and misery into which Rome had sunk, new churches and monasteries were constantly springing up among the ruins of the monuments of antiquity, and the last feeble spark of artistic taste that still survived was devoted to the decoration of these buildings. The objects at which they chiefly aimed were independence of Byzantium, the subjection of the Eastern church to the court of Rome, and the conversion of the heathen Germans, the accomplishment of which would materially pave the way for their ulterior ambitious schemes. In 727 the Longobard king *Luitprand* presented Sutri, which had been captured by him, to the pope, this being the first instance of a town being presented to the church, and this gift constituted a basis for the subsequent formation of the States of the Church. In 755, on the invitation of the pope, the Frankish king *Pepin* proceeded to Italy and practically put an end to the Byzantine supremacy. It is not known whether that monarch actually fulfilled his promise of making over the Exarchate of Ravenna and the other towns to the representative of St. Peter; but it is certain that the temporal power of the popes and their supremacy over Rome dates from the grants made by Pepin to the church. On Christmas Day, in the year 800, *Charlemagne* was crowned by *Leo III.*, and

tion of which numerous monuments of antiquity were ruthlessly destroyed for the sake of the building materials they afforded. Every temporary re-establishment of peace was invariably followed by new scenes of devastation, as when the senator *Bronco Leone* dismantled no fewer than 140 of the strongholds of the warlike nobles.















The constantly increasing civic and national dissensions at length compelled *Clement V.* (1306-16) in 1309 to transfer the seat of the pontifical government to Avignon, where it remained till 1377, whilst Rome was successively governed by Guelphs and Ghibellines, Neapolitans and Germans, Orsini's and Colonna's, and for a brief period (1347) *Cola di Rienzi* even succeeded in restoring the ancient republican form of government. This was an epoch of the utmost misery, when poverty, war, and disease had reduced the population to less than 20,000 souls.

























A happier era was inaugurated by the return of *Gregory XI.* (1370-78) to the city (1377). After the termination of the papal schism (1378-1417), the new development of the city progressed rapidly, aided by the vast sums of money which flowed into the papal coffers, and by the revival of taste for art and science promoted by *Nicholas V.* (1447-55), *Julius II.* (1503-13), *Leo X.* (1513-22), etc. In 1527 the city was devastated by the troops of Charles of Bourbon; but it gradually recovered from the blow, its population again increased, many palaces were reared by papal favourites, while the popes and their cardinals restored the old churches and vied with each other in building new ones. This was especially the case during the pontificate of *Sixtus V.* (1585-90), to whom modern Rome is chiefly indebted for its characteristic features. Comp. p. lxxviii.

In 1798 a republic was established for a short period at Rome, and from 1809 to 1814 the city was under the supremacy of France. A republican form of government was again declared in 1849, in consequence of the events of 1848, but *Pius IX.* was restored by the French in 1850. The city was then garrisoned by 15,000 French troops, who were withdrawn in 1866, in accordance with the convention of 1864; but they were recalled after the Garibaldian hostilities of 1867, and were quartered in the environs until the breaking out of the Franco-Prussian war of 1870. On 20th Sept. of that year the Italian troops marched into the city, after a bombardment of five hours. The States of the Church are now incorporated with the kingdom of Italy, of which Rome is once more the capital. The population of the city in 1870 was about 215,000. — On Jan. 9th, 1878, occurred the death of *Victor Emmanuel II.* He was succeeded by his son, *Humbert I.* (b. 1844; assassinated July 29th, 1900) and his grandson *Victor Emmanuel III.* (b. Nov. 11th, 1869).

xlii *Chronolog. Table of* HISTORY. *Emperors and Popes.*

A.D.	Rom. Emp.	Popes.	A.D.	Rom. Emp.	Popes.
1288	Albert I.		1555	Mary I. of England, 1553-1558.]	Julius III. (Giov. Maria de Monte).
1303		Benedict XI.			
1305		Clement V.			
1308	Henry VII. of Luxembourg.				Marcellus II. (Marcello Cervino of Siena).
1314	Louis of Bavaria and Frederick of Austria.				Paul IV. (Gian Pietro Caraffa of Naples).
1316	Edward III. of England, 1327-1377.]	John XXII.	1558	Ferdinand I.	
1334		Benedict XII.	1560	[Elizabeth of England, 1558-1603.]	Pius IV. (Giov. Angelo Medici of Milan).
1342		Clement VI.			
1348	Charles IV. of Luxembourg.		1564	Maximilian II	
1352		Innocent VI.	1565		St. Pius V. (Ghisleri of Piedmont).
1362		Urban V.*			Gregory XIII. (Ugo Buoncompagni of Bologna).
1370		Gregory XI.			
1378	Wenzel.	Urban VI.	1572		
1388		Boniface IX.			
1400	Rupert of the Palatinate.				
1404		Innocent VII.	1578	Rudolph II.	
1408		Gregory XII.	1585		Sixtus V. (Felice Peretti).
1409		Alexander V.			Urban VII. (Giambattista Castagna of Rome).
1410	Sigismund.	John XXIII.	1590		Gregory XIV. (Nic. Sfondrati of Milan).
1417	[Henry V. of England, 1413-1422.]	Martin V.			Innocent IX. (Giannantonio Facchinetti of Bologna).
1431		Eugene IV.			Clement VIII. (Ippolito Aldobrandini of Florence).
1438	Albert II.		1590		Leo XI. (Alessandro Medici).
1440	Frederick III.				Paul V. (Camillo Borghese).
1447		Nicholas V.			
1455	[Henry VI. of England, 1422-1461.]	Calixtus III.	1591		
1458		Pius II. (Aeneas Sylvius, Siena).			
1464		Paul II.			
1471		Sixtus IV. (Francesco della Rovere of Savona).	1592		
1484	[Henry VII. of England, 1485-1509.]	Innocent VIII. (Giov. Batt. Cibo of Genoa).	1605	[James I. of England, 1603-1625.]	
1492		Alexander VI. (Roder. Borgia).			
1493	Maximilian I.		1612	Matthias.	
1503	[Henry VIII. of England, 1509-1547.]	Pius III. (Francesco Piccolomini of Siena).	1619	Ferdinand II	
1508		Julius II. (Giuliano della Rovere).	1621	[Charles I. of England, 1625-1649.]	Gregory XV. (Alessandro Ludovisi).
1513		Leo X. (Giovanni de' Medici).	1623		Urban VIII. (Maffeo Barberini).
1519	Charles V.		1637	Ferdinand III.	
1522		Hadrian VI. (Dedel of Utrecht).	1644	[Commonwealth and Protectorate, 1649-1660.]	Innocent X. (Giambattista Pamphili).
1523		Clement VII. (Giulio Medici).	1655		
1534		Paul III. (Alessandro Farnese).	1658	Leopold I.	Alexander VII. (Fabio Chigi of Siena).

<p>MARTINUS V. 1417 1431</p>  <p>COLONNA</p>	<p>EUGENIUS IV. 1431 1447</p>  <p>CONDOLMIERI</p>	<p>NICOLAUS V. 1447 1455</p>  <p>PARENTUCELLI</p>	<p>CALIXTUS III. 1455 1458</p>  <p>BORGIA</p>
<p>PIUS II. PIUS III. 1458 1461</p>  <p>PICCOLOMINI</p>	<p>PAULUS II. 1464 1471</p>  <p>BARBO</p>	<p>SIXTUS IV. 1471 1484</p>  <p>DELLA ROVERE</p>	<p>INNOCENTIUS VII. 1484 1492</p>  <p>CINO</p>
<p>ALEXANDER VI. 1492 1503</p>  <p>BORGIA</p>	<p>JULIUS II. 1503 1513</p>  <p>DELLA ROVERE</p>	<p>LEO X. LEO XI. 1513 1521</p>  <p>MEDICI</p>	<p>MADRIANUS VI. CLEMENS VII. 1521 1523</p>  <p>DEDEL MEDICI</p>
<p>PAULUS III. 1524 1548</p>  <p>PARMBSE</p>	<p>JULIUS III. 1550 1555</p>  <p>DEL MONTE</p>	<p>MARCELLUS II. 1555</p>  <p>CERVINO</p>	<p>PAULUS IV. 1555 1559</p>  <p>CARRAPA</p>
<p>PIUS IV. 1559 1565</p>  <p>MEDICI</p>	<p>PIUS V. 1566 1572</p>  <p>GRISLIERI</p>	<p>GREGORIUS XIII. 1572 1585</p>  <p>BUNCOMPAGNO</p>	<p>SIXTUS V. 1585 1590</p>  <p>PERETTI</p>
<p>URBANUS VI. CASTAGNA 1590</p>  <p>1591</p>	<p>CLEMENS VIII. 1592 1605</p>  <p>ALDOBRANDINI</p>	<p>PAULUS V. 1605 1621</p>  <p>BORGHESE</p>	<p>GREGORIUS XIV. 1621 1623</p>  <p>LUDOV</p>

<p>URBANUS VIII. 1623 1644</p>  <p>BARBERINI</p>	<p>INNOCENTIUS X. 1644 1655</p>  <p>PAMPILI</p>	<p>ALEXANDER VII. 1655 1687</p>  <p>CHIGI</p>	<p>CLEMENS IX. 1667 1669</p>  <p>ROSPIGLIOSI</p>
<p>CLEMENS X. 1670 1676</p>  <p>ALTIERI</p>	<p>INNOCENTIUS XI. 1676 1689</p>  <p>ODESCALCHI</p>	<p>ALEXANDER VIII. 1689 1691</p>  <p>OTTORONI</p>	<p>INNOCENTIUS XII. 1691 1700</p>  <p>PIGNATELLI</p>
<p>CLEMENS XI. 1700 1721</p>  <p>ALBANI</p>	<p>INNOCENTIUS XIII. 1721 1724</p>  <p>CONTI</p>	<p>BENEDICTUS XIII. 1724 1730</p>  <p>ORSINI</p>	<p>CLEMENS XII. 1730 1740</p>  <p>CORSINI</p>
<p>BENEDICTUS XIV. 1740 1758</p>  <p>LAMBERTINI</p>	<p>CLEMENS XIII. 1758 1769</p>  <p>REZZONICO</p>	<p>CLEMENS XIV. 1769 1774</p>  <p>GANGANELLI</p>	<p>PIUS VI. 1775 1799</p>  <p>BRASCHI</p>
<p>PIUS VII. 1800 1823</p>  <p>CHIARAMONTI</p>	<p>LEO XII. 1823 1829</p>  <p>DELLA GENGA</p>	<p>PIUS VIII. 1829 1830</p>  <p>CASTIGLIONE</p>	<p>GREGORIUS XVI. 1831 1846</p>  <p>CAPELLARI</p>
<p>PIUS IX. 1846 1878</p>  <p>PIETRA-SANTAI-FERETTI</p>	<p>LEO XIII. 1878 1903</p>  <p>PECCI</p>	<p>PIUS X. 1903</p>  <p>SARTO</p>	

ANCIENT ART.

A Historical Sketch by Prof. Reinhard Kekulé von Stradonitz.

"As the streams lose themselves in the mightier Ocean, so the history of the peoples once distributed along the Mediterranean shores is absorbed in that of the mighty Mistress of the World".
NIEBUHR.

The traveller who would not wander through the galleries of Rome in mere vacant wonderment may bear in mind these words of Niebuhr. As a preface to the following pages, they will not only help the intelligent observer to a worthy appreciation of the masterpieces presented to him, but enable him to invest them with appropriate historical associations.

But this is not so easy as it may at first appear; and, strange as it may seem, the present condition of our knowledge of the history of antique art makes it more difficult than ever. No one who is accustomed to use his own eyes, or has learned to do so in Rome, can have failed to observe a fact in connection with most of the statues in the Roman museums, in many cases the statues that have been most celebrated for centuries, which seriously interferes with the enjoyment to be derived from them; the fact, namely, that they have been ruthlessly bathed with mordant acids, trimmed, retouched, smoothed, polished, and restored in a fashion that is always arbitrary and frequently senseless. This pernicious practice, which was applied without exception to everyone of the earlier discoveries that attracted any attention at all, began in Rome and has maintained its ground longest there; indeed, is not yet by any means extinct. Its object was to adapt the works of art for the drawing-room, to render them more suitable as ornaments for the villa and the palazzo. But it robbed the ancient sculptures which fell victim to it of all their original freshness and charm, and it has irrevocably injured their artistic significance. Apart, however, from this external treatment, the crowd of statues that fills the Vatican, the Capitol, and the other Roman galleries bears to us a different relation from that which they bore to Winckelmann and his immediate successors, such as Goethe and Herder. To the latter they represented the inexhaustible source whence they drew, with ever fresh admiration, all their conceptions of Greek art. But we have access to other and purer sources. Goethe himself was keenly alive to the revolution

authors themselves maintain that all the artistic undertakings of the first centuries of Rome were performed by Etruscans or after Etruscan models. Artists or works of Greek origin were of only occasional occurrence. The earliest *Importation of Greek Works of Art* on a large scale did not take place until after the capture of Syracuse in 212 B.C. Then for the first time, says Plutarch, Roman eyes were opened to the beauty of Greek art. Thenceforward every fresh victory of the legions on Greek soil brought fresh spoils of art to Rome. Capua and Tarentum, Eretria and Macedonia, Corinth and Athens were all laid under the artistic tribute. When Paulus Æmilius triumphed over Macedonia in 167 B.C., two hundred and seventy waggon-loads of statues and pictures — the spoils of seventy cities — swelled the victor's procession in Rome. Works of art, which were at first carried off only as the proofs of victory, gradually became more and more prized for their own sake. Everyone who laid claim to a tincture of letters sought, by force or fraud, by purchase or exchange, to obtain works of art for the adornment of his palace, his villa, or his library. The connoisseur and the enthusiast, the ostentatious and the fashionable competed, just as they compete to-day, to raise the prices of recognized works of famous artists. Even under the emperors, Greece continued to be the artistic emporium of Rome. Works of all kinds were brought to Rome under Augustus, still more under Caligula, most of all under Nero. Thus there were collected at Rome Greek works of every epoch and of every school, works of the highest excellence and others of mediocre value, originals from the chisels of the great masters, and copies executed to order. At first the selection was dictated by chance or, rather, by the greed of acquisition. If any works were preferred to others, they were those that were imposing, costly, or striking. Gradually, however, connoisseurship and a critical taste were developed; but unpretending or archaic works received little attention unless some historic event or anecdote was connected with them. On the other hand the desire to possess what others possessed flourished all the more, and when the originals were unattainable, copies, and if possible full-sized copies, were eagerly sought. Dozens of copies of especially popular statues exist at the present day. Frequently the costly bronze statues were reproduced in the cheaper marble. The value of these copies naturally varies very much; some of them are very inferior.

Greek Art had passed through many vicissitudes before it became familiarly known to the Romans. Even under the tyrants, such as Polycrates in Samos and Pisistratus and his sons at Athens, the artistic activity of Greece was in a flourishing and productive condition. ARCHAIC ART received its first great impetus at the period of the Persian Wars; for the warlike spirit and the military exploits infused new life into it instead of injuring it. Extant works have rendered us especially familiar with the achievements

among which are the beautiful *Relief of Orpheus*, represented by an antique copy in the Villa Albani, and a magnificent and large Attic *Relief of an Equestrian Combat*, in the same collection, closely resembling the metopes of the Parthenon but even excelling them in excellence of workmanship. — A specially characteristic example of Athenian art is to be seen in the *Standing Diacobolus* in the Sala della Biga in the Vatican.

The Myronian stage of art, if we may use that expression, was closely allied to the stages that followed. This is illustrated by the *Statue of Amazon*, of which many replicas (some very poor) are to be seen in the Roman museums. The earliest type represents a wounded Amazon quitting the battle and advancing painfully, with her right hand resting on her spear. In a later type the exhausted and vanquished Amazon appears in a stationary attitude, with her right arm resting on her head. This latter type is due to Polyclitus, who must have been familiar with the earlier Attic Amazon. On the other hand, the so-called *Mattel Amazon*, whose attitude has not yet been satisfactorily explained, is a later modification of the type of Polyclitus. Polyclitus seems to have enjoyed great popularity with the Romans. He was the celebrated master of the *Argive Bronze Sculptors* in the latter half of the 5th cent., and was also extolled as a teacher, following fixed formulae for the attitudes and proportions of his statues, and enjoining them upon his pupils. His *Doryphorus*, surnamed the 'Canon', was regarded as a model of art; and his *Diadumenus* was a counterpart to it. The *Doryphorus* leans his weight on his right foot, with the left foot a little in the rear; the head is turned slightly to the side, in an attitude of attention; the right arm hangs down, while the left hand grasps a spear resting on the shoulder. The *Diadumenus* is in a similar attitude; the head is also turned to the side, but with a more marked movement; the hands are raised and in the act of fastening a fillet round the head. The proportions of the two statues are harmonious and attractive, but scarcely so slender as those afterwards in vogue, and it is easy to understand how the following generations found them a little heavy. We are also at no loss to understand what the ancient writers on art mean when they speak of the special attitude which Polyclitus is said to have invented, or of the sameness with which his statues are charged. The attitude is evidently that of the *Doryphorus* and the *Diadumenus*, which also recurs in his *Amazon*. Its essence is in the position of the feet, while the quiet, well-considered, and harmonious movement of the body serves to throw into prominence the powerful beauty of the frame, its carefully calculated symmetry, and the normal proportions of the whole and of the individual parts, and also allows the most delicate and equally finished execution of details. To our modern taste the beauty of these statues seems, indeed, of a somewhat over-muscular and even coarse type, and we are better able to sympathize with the moderate

it was supposed to represent Apollo as the god of slaughter, shouting aloud, and holding the mgs in his left hand, and it was believed to be a marble replica of a bronze original, that had been created as a memorial of the repulse of the Gallic invaders from Delphi in 278 B.C. But the foundations on which this theory was built up have been shaken. It is more probable that the god, advancing slowly, raised his bow with a threatening gesture. The points which most seriously interfere with our interpretation of the statue are due to the modern restorer, who has turned the left hand too far out and has raised the right hand too high; while the ancient sculptor who carved this figure has erred in substituting a heightened elegance in the forms for the powerful 'pathos' that signalized his model. The *Sixtinäuser Head*, at Bäle, essentially agrees with the Belvedere Apollo in point of type, and, though it has suffered greatly from unsuccessful restoration, shows unmistakable affinities with the epoch of Scopas. Those, therefore, who are dissatisfied with the Belvedere Apollo as it is, may reconstruct an original for themselves with the assistance of the Mausoleum sculptures. But the statue as we have it is none the less a precious possession. No one need be ashamed of receiving from it, as Goethe did, a deep and inspiring impression.

It is said that ALEXANDER THE GREAT would entrust the execution of his portrait in sculpture to no one but LYSIPPOS of Sikyon in the Peloponnesus; and with the name of Lysippus may be associated a revolution in taste that culminated in this period. Before the magnificent marble replica of his *Apoxyomenos*, the original of which was in bronze, we are face to face with the expression of an absolutely new epoch. We behold a strikingly tall and slender youth, with a small head poised on a long neck, unconstrained and free in his motions, with feet placed far apart, in a manner well adapted to the general motive. The effect depends upon the truth and beauty of the youthful figure in itself and on the charm of the vigorous motion beneath the apparent repose. We almost see the left hand moving, the lissom body swaying above the hips, the whole figure displaying an elastic play of muscles. The hair has a style and beauty of its own, though the form of the skull can also be traced. The forehead projects and is made expressive and animated by cross-lines. The advance in art that is marked by this figure may be easily appreciated by comparing it with the statue in the style of Polycletus in the same hall of the Vatican. The proportions are more slender, while all the forms have become richer, more complex, and more individual, and at the same time nobler and more natural. Lysippus, like Myron, was famous as an animal sculptor and also, unlike Praxiteles, carved many portraits. He is said to have produced 1500 works, including large groups, figures of gods and heroes, portrait-statues, chariots, hunts, lions, dogs, and even bold personifications such as that of *Kairos*, or Passing Opportunity.

the Greek, was a study of engrossing interest to the sculptor, and was reproduced with physiological accuracy. At the same time, that the fame of the victor might be magnified to the utmost, the sculptor sought to embody all that was admirable in the character of the vanquished: his ill-trained but chivalrous valour, his inflexible determination to die rather than suffer disgrace. So late as the 4th century A. D. there was still to be seen on the Acropolis a votive offering of King Attalus in the shape of a group with numerous figures representing the struggles of the gods with the giants, of the Athenians with the Amazons, of the Athenians with the Persians, and of Attalus himself with the Celts. Figures in the collections of Venice, Rome, and Naples have been recognised as copied from these groups. The largest extant work of Pergamene art is the *Giants' Frieze*, executed under Eumenes II. (197-169 B.C.), the successor of Attalus I. The remains of this huge work are now in Berlin. — Rome, as is well known, stood in very close relations with Pergamum and Rhodes; and those Romans who were interested in Hellenic culture were especially attracted by Rhodes, where the art of sculpture was intelligently fostered and skilfully and prosperously practised. The bronze colossus of the Rhodian god of the Sun, 105 ft. in height, was regarded as one of the wonders of the world. Its execution occupied the Rhodian Chares of Lindos, a pupil of Lydippus, for twelve years.

The so-called *Farnese Bull*, by APOLLOXUS and TAURISCHUS of Tralles, stood in Rhodes until it was brought to Rome by C. Asinius Pollio. This huge marble group produces its striking and penetrating effect by the boldness with which architectonic and plastic principles are united in its composition. In the complexity and richness of the accessory details and in many other points it is closely allied with the Pergamene *Giants' Frieze*. Probably about the same period the famous group of *Laocoon* and his two sons, by AGESANDROS and his sons ARTHODOROS and POLYDOROS, was also brought from Rhodes to Rome. Since the days of Winckelmann, who assigned it to the time of Alexander, and of Lessing, who maintained that it belonged rather to that of Titus, there has been a constantly recurring controversy as to the date of this group. Lessing's view finds few modern supporters. A third view, viz. that the *Laocoon* dates from about 100 B. C. or a little earlier, will probably soon come to be generally accepted. Inscriptions containing the names of the artists have been found, written in letters the form of which refers them to this date. The group, moreover, is not composed in the style of a genuinely and purely plastic work, but rather in the style of a relief, a peculiarity that first appears about this date. Finally there is an obvious relationship between the *Laocoon* and the large *Giants' Frieze*. It has therefore been concluded, though not without opposition, that the *Laocoon* is posterior in date to the Pergamene frieze.

of princes and princesses of the Julian house. Many of the heads, especially among the female members of the family, will recall types that are still to be seen among the proud inhabitants of Rome or the Roman mountains. Another famous work is the *Bronze Equestrian Statue of Marcus Aurelius* on the Capitol. The frequently recurring likeness of *Caracalla* is most masterly; the artist seems to have fathomed the inmost depths of that emperor's character and to represent him in his mental and physical identity with a ruthless, almost hostile, sharpness of observation. The art of portraiture, in fact, retained so high a level in periods when every other branch of art seemed devoted to decay, that so keen a critic as *Burckhardt* was almost inclined to believe in a universal degeneration of the human race. Yet, after all, achievement in portraiture is one of the chief standards by which to estimate general artistic capacity.

Only less attractive than the portraits are the plastic representations of scenes from actual Roman life, especially those celebrating their *Military Exploits*. The best are the reliefs on the *Arch of Titus* and the detailed, absolutely correct, and authoritative scenes on *Trajan's Column*, which celebrate the excellence and bravery of the Roman army and all its marches, labours, battles, manœuvres, and successes. These are infinitely more attractive than the artificial and essentially false hot-house productions of the preceding eclectic period under *HADRIAN*, in which everything, old or new, was imitated and pretentiously reproduced. The portrait of the soldierly *Trajan* is far more attractive than that of the vain dilettante *Hadrian* or of his beautiful favourite *Antinous*, in which a somewhat lugubrious solemnity is combined with a smooth and superficial elegance.

Finally there remain to be noticed the *SARCOPHAGI*, which, variously ornamented with reliefs, are to be seen in museum, in villa, and in palace court. The only specimen preserved to us from the old Roman time is the Sarcophagus of *L. Cornelius Scipio Barbatus* in the Museum of the Vatican. It resembles an altar both in shape and style of ornamentation, and is almost the counterpart of an altar still standing in *Pompeii*. It is quite consistent with the religious ideas of antiquity that sepulchral monuments should thus borrow their form and ornaments from sacred structures; and all sarcophagi which have been discovered within the sphere of Greek influence show a distinctly monumental or architectonic treatment. The Roman sarcophagi combine much that is essentially Greek with adaptations from the funeral urns of *Etruria*. They give signs, however, of an independent development, and although including a diversity of shapes and decoration, have for the most part their bas-reliefs arranged on the front and sides (and, where extraordinary richness of effect was desiderated, on the back also) as a frieze or band. One naturally endeavours to trace in the decoration bestowed on these

majority of Roman sarcophagi belong to the 2nd and 3rd centuries after Christ, or to an even later period.

The *Early Christian Sarcophagi* simply repeat and perpetuate preceding pagan models. It is a peculiar coincidence that these inconspicuous memorials should have contributed to the revival of art in the middle ages. Niccolò Pisano found a fertile source of inspiration in the Roman sarcophagi of the *Campo Santo* in Pisa; nor did Peruzzi and Raphael disdain to use them as models.

Raphael was not blind to the very various degrees of excellence displayed by the sculptures in Rome, and he sought for the explanation of this fact in the pages of history. But all Roman buildings seemed to him alike admirable, no matter from what period they dated. In fact, *ROMAN ARCHITECTURE* in all its manifestations has consistently moved the astonishment and admiration of both artists and architects — its masses are so grand, its ground-plans so simple and so well adapted to their ends, the methods used with such clear appreciation of their possibilities are so imposing, the forms and decorations at its disposal so unusually rich.

The specifically Roman architecture found its more immediate models in the Hellenistic countries and cities, just as the specifically Roman plastic arts had found them. Probably we regard a good deal as peculiarly Roman simply because we have never seen its Hellenistic patterns. The student familiar with the three orders of architecture, viz. the Doric, Ionic, and Corinthian, as they are to be seen in Athens, and comparing these examples with their reproductions in Rome, will detect with some misgivings a divergence which cannot be explained by differences either in forms of worship or in the general scope of the design (a conspicuous basement with flights of steps in front). The delicate modelling of the best period of Greek art was in Roman hands either simplified, and so denuded of its true artistic significance — looking in short like the work of the handicraftsman — or so overloaded as to become hopelessly confused. Even in their most admirable buildings a mere profusion of superficial decoration is substituted for that perfect harmony pervading and animating the Greek structure, whether as a whole or in its minutest detail, which we find in the Parthenon for example. — But in many instances the process of borrowing from buildings in Asia Minor of the 4th cent. B.C., or from Hellenistic buildings, may be clearly traced in all its steps, though the simplifications and generalizations due to the Roman architects are no less apparent.

The *Doric* and *Ionic* orders found comparatively little favour with the Romans, and where they appear, it is rather in the form of mural columns than entire shafts. The exquisite taper of the shaft was thus sacrificed, the capitals were not happily disposed, and the Doric column instead of springing, as with the Greeks, direct from the flooring received a separate base. The *Tuscan* or *Italian* order, a very early attempt to originate a new style, closely related

ROMAN ART.

MEDIEVAL AND MODERN.

By Prof. Anton Springer.

Rome as Mistress of the World became the centre of contemporaneous culture. Art had found with her a new term: and Greece as fitting tribute to the conqueror laid at her feet the accumulated wealth of ages — the treasures of her art, which long had embodied the loftiest conception of the beautiful.

Her supremacy secured, Rome became the chief resort of artists, and their liberal patron. She dictated the tone, alike in taste and fashion, and determined the destinies of art. Down to mediæval times Rome continued to receive the proud title of 'Caput mundi'. Presently, however, she laid claim to supremacy in another realm than that of art, and this latter, as the ancient traditions were gradually outlived, finally fell into neglect. In more recent, as in former times Rome has failed to create for herself, as the outcome of her individuality, an art peculiar to and a part of herself. Her destiny seems to have been to gather from external sources the wealth in which she revelled, with the difference that while ancient Rome furnished nothing beyond a magnificent arena for the art of her day, in later times the artist found in Rome herself his sources of inspiration, compelled as he was to contemplate perfection reflected in the dazzling mirror of antique art. Ten centuries, however, elapsed ere Rome resumed this proud pre-eminence. A glance may now be directed to the interval between the fall of old Rome and the period when, animated with a new life, Rome drew to herself the foremost representatives of the Renaissance, to whom she afforded inspiration for their grandest efforts. It is not, however, the 16th century, not the glories of the Renaissance, that give to the Rome of our day her distinctive character, but rather the new and imposing exterior which she received at the hand of her architects in the 17th century. The mind must be disenchanted before the veil can be penetrated and the Rome of antiquity adequately comprehended.

The protracted suspension of all activity in art makes it apparent that Roman art has a history distinct from Italian art. For several centuries the towns of Tuscany were the principal abodes of a natural art life. But just as in Rome Italian art achieved its most signal triumphs in the persons of Raphael and Michael Angelo and the masters of that period: so in Roman ground we find that Christian art first took root and attained to its most important dimen-

The term *BASILICA* is understood to apply to Christian temples up to the 10th century. The subsequent belief that a more intimate relation than that suggested by a common name subsisted between these early Christian edifices and the forensic Basilica of ancient Rome, was altogether an erroneous one. The latter were in fact the Roman courts of law and places of public meeting. They had a place in most of the towns of the Roman empire and were erected in the forum, but have nothing, whether of origin or form, essentially in common with the early Christian temple or church. These forensic basilicas were not adapted to purposes of Christian worship, nor did the old Roman basilicae serve as a model for the building of Christian places of worship. In proof of the one assertion may be adduced the fact that the forensic basilicas at the end of the 4th century retained intact their original destination, and in individual cases have been restored; while the other will be justified by an unprejudiced examination of the various parts of the Christian basilicas, which give evidence of having sprung from another source than that of the old Roman basilica. Neither did the temple of antiquity furnish the model for churches built by the early Christians. The church of *Santi Cosma e Damiano*, of the 6th century, is the earliest example of a pagan temple applied to Christian use. The Christian basilica may be said rather to have grown out of the Roman dwelling-house, where at first the community was in the habit of assembling. The plan for future ecclesiastical edifices was acquired by simply extending the proportions of the dwelling-house. The churches of *San Clemente* and *Santa Maria in Cosmedin* in Rome are relatively the most perfect examples existing of the architectural properties and internal arrangement of the early Christian basilica. A small portico supported by pillars leads to the outer court (*atrium*), enclosed by a colonnade and having in its midst a fountain (*cantharus*). The eastern colonnade leads into the interior of the church which was usually divided into three aisles. Two rows of columns divide the side aisles from the loftier one in the centre known as the nave; the nave and aisles abut upon a half-circle or *apex*. At right angles to these aisles, between them and the apex, was sometimes interposed a third space — the *transept*, the altar stood within the apex and apart beneath a canopy supported by pillars, and in front of it, enclosed by rails or *cancelli*, was the choir for the officiating priests and two pulpits (*ambones*), one used for reading the Gospel, the other the Epistles. In marked contrast to the temple of antiquity, little care was bestowed upon the external architecture of these early Christian basilicas, the most impressive effect being reserved for the interior. And to this end, especially in earlier mediæval times, a ready expedient for supplying decorative material was adopted in the plunder of the monuments of antiquity. Columns were carried off and set up in Christian churches without regard to congruity

of material or consistency of style. Thus in the churches of *Santa Maria in Trastevere* and *San Lorenzo fuori le Mura* are to be seen pillars of different material and workmanship. The churches of *Santa Sabina*, *Santa Maria Maggiore*, and others give evidence of similar depredations. Crosses and lustres in metal, tapestries bestowed by papal piety contributed to the ornate effect of these interiors. But the principal decorative feature were the pictures in mosaic which covered the recess of the apse in particular as well as the arch which connected the apse with the nave (the *Triumphal Arch*). These *Mosaic Pictures*, as far, at least, as the material was concerned, demanded a novel artistic treatment, massive and monumental in character. In them we find the traditions of antiquity abandoned, giving place to a style which from its harshness as well as austere solemnity of conception has been confounded with the Byzantine style. In reality the art was of indigenous growth; and its salient characteristic may be defined as the substitution of the real for the symbolical in general treatment. Now for the first time the popular mind became thoroughly imbued with ecclesiastical sentiment, of which the crucified Saviour was the chief embodiment. The oldest mosaics, composed of glass cubes, are to be seen in the church of *Santa Pudenziana*. They date from the 4th century like those in *Santa Costanza* and the Baptistery of Naples; while those in *Santa Maria Maggiore* and *Santa Sabina* belong to the 5th century. The mosaics in *Santi Cosma e Damiano* in the Forum (528-30) may be pronounced the most beautiful.

The rudiments of Christian art are to be found in Rome; but its further development was promoted in an equal degree by other Italian states. Building was still active in the 9th century, while the popes of the 7th and 8th centuries, especially Leo III., did good service in church decoration. But during this period there is no evidence either of progress or continuous development in the mosaic art and as little in architecture itself. The experiment (as seen in *Santa Prassede*, 9th century) of combining piers with the pillars of the nave as a support to the walls and of connecting these with transverse arches was not repeated. Finally it may be said of the mosaics (*Santa Prassede*, *Santi Nereo ed Achilleo*, *San Marco*), that, while they bear a superficial resemblance to the works of the 5th and 6th centuries, they show unmistakable signs of corruption and decline. This may be accounted for to some extent by the evil times which had fallen upon Rome since the 9th century, culminating in a conflagration — the work of an incendiary *Guiscard* — which in 1084 laid waste the entire southern quarter of the city, extending from the Forum to the Lateran and to the slopes of the *Esquiline*. The chief employment of the architect was the construction of fortified towers and places of strength rendered necessary by the ceaseless warring of factions within the city. In 1257 *Brancalcione* demolished 140 of these strongholds, the majority

of which had been erected on the ruins of some monument of antiquity. The most striking example of the rudeness of early mediæval architecture is to be seen in the *Casa di Pilato* or *di Rensi* (p. 285). Built by one Nicholas, son of Crescentius (probably in the 11th or 12th century), its chief ornamentation consists of marble fragments apparently picked up at random and put together in the wildest confusion.

At the close of the 12th century brighter days dawned for Roman art. 'Magister Romanus' now became a title which the artist was proud to append to his surname. A speciality in decorative art appeared in Rome about this time which did not connect itself, it is true, with the traditions of antique art, though ready to utilise its material, without, however, resort to the depredations of a bygone age. And material was still at hand in richest abundance, in an endless array of shattered marbles. These were divided and subdivided, cut or sawn into minute slabs, arranged in patterns, enlivened by the introduction of stained glass and gold leaf, presenting as a whole a richly coloured decorative effect. These marble mosaics adorn the flooring of churches, altar sides, episcopal chairs, pulpits, and doorways; they enliven monumental sculpture; they fill the flutings of the elegantly twisted columns which bore the Easter candles or support the entablature of cloistered courts. This art became the monopoly of particular families and was regularly transmitted from generation to generation. The monumental marbles of this time are generally known as *Cosmato Work*, a name derived from two members of a family thus privileged. Such work is frequently to be met with in Rome. Conspicuous among the mosaic floorings are those of *Santa Maria Maggiore*, *Santa Maria in Trastevere*, and *San Lorenzo fuori le Mura* (12th century). *San Clemente* and *San Giorgio in Velabro* possess altar tabernacles of Cosmato work and *San Lorenzo* the finest example in its pulpit. Of similar work in *San Paolo fuori le Mura* (13th cent.) Cosmato work is not infrequently cloisters (*Santa Sabina*, *Lateran*) the best specimen is in the convent of found elsewhere than in Rome. It is uncertain how far this Roman work is connected with kindred examples to be met with in Southern Italy. In technical detail some differences are to be detected, such as the more copious use of the glass pastes by the artists of the South. On the other hand we fancy that the identity of pattern in the mosaics of the *Cappella Palatina* in Palermo with those of *San Lorenzo* cannot be accidental.

Along with this decorative mosaic work, the *MOSAIO PIAINTINO* of apse and choir-arch had since the 12th century successfully asserted itself. That impress of the antique borne by the early Christian mosaics is gone; the drawing has lost its incisiveness as well as its traditional typical character, and, in lieu of this, receives a new and more lively impulse from colour and wealth of ornament. The mosaics in front of the church of *Santa Maria in Trastevere*, in

when Pope NICHOLAS V. (1447-1455), a Humanist, vied with the Medici in his passion for books and building. He was bent upon a renovation of the Vatican Quarter; his ambition was to erect a papal residence of surpassing splendour; nay, he entertained designs on the St. Peter's pile itself and contemplated its reconstruction. The most imposing work of this period was the *Palazzo Venezia* begun by Pietro Barbo (1455), afterwards Pope PAUL II. (1464-71), which is to a great extent mediæval in character. *Leon Battista Alberti*, who resided in Rome about this time and died there in 1472, may have furnished the plans for this palace. There is documentary evidence to prove that the Florentine *Bernardo (di Matteo) Rossellino* was entrusted with the chief direction of the extensive building operations of Pope Paul II.; and that painting in all its branches, especially as represented by *Gentile da Fabriano*, was warmly patronized by that pope.

So far indeed had the fostering of art become obligatory on the occupants of the papal chair, that they could not neglect this function without forfeiting their individual influence, and impairing the dignity of their office. The right powers were not, however, immediately at hand, which should give effect to the building projects of these Sovereign Pontiffs, enamoured as they were of splendour in every shape. The architect who during the pontificate of SIXTUS IV. (1471-1484) was most employed was not *Baccio Pontelli*, as was at one time supposed, but a son of *Francesco di Domenico*, surnamed *Il Caprino*, of Settignano. This was *Amadeo* or *Meo del Caprino*, who came to Rome in 1462 and remained there in the papal service until 1489. He died at Florence in 1501. The building of *San' Agostino* and *San Pietro in Montorio*, as well as the façades of *San' Apostoli* and *San Pietro in Vincoli* were from his plans. A celebrated work of this period is the Popes' private chapel in the Vatican, called after Pope Sixtus the *Sistine Chapel*, which owes its chief attractions far less to its architecture, which was perforce adapted for defensive as well as for ecclesiastical purposes, than to the artistic decoration of wall and ceiling.

Abundant employment together with the favour which artists found with dignitaries of the Church had already allured numerous Tuscan and Umbrian PAINTERS to Rome. Amongst those thus engaged in beautifying the churches of Rome and the Vatican Palace we meet such Florentine celebrities as *Maestro Sandro Botticelli*, *Filippino Lippi*, *Domenico Ghirlandajo*, *Cosimo Rosselli*, and from the Umbrian School the immediate forerunner of Michael Angelo, bold *Luca Signorelli*, along with *Perugino* and *Pinturicchio*. An attempt was made to found an Academy, or Guild of St. Luke at Rome. Amongst its members we find *Melozzo da Forlì* (1438-94; p. 107), the painter of a fresco (transferred to canvas) in the Vatican Gallery, representing the foundation of the Vatican library. — The execution of the *Wall Paintings in the Sistine Chapel*, by order of Sixtus IV., was a moment-

less grandeur. So far, however, Rome did not in this respect surpass the other chief towns of Italy; so far art had not assumed that particular form of life and direction which only the atmosphere of Rome could sustain, or which the genius of the Vatican alone could quicken. During the pontificate of JULIUS II. (1503-1513), where the golden era of Roman art began, this consummation was actually achieved.

To Julius belongs the glory of having associated with Rome three names, *Bramante, Michael Angelo, Raphael*, everlasting beacons in the path of art — three men who in the course of the 16th century (*cinquecento*) raised modern art to its loftiest pitch of splendour. His successor LEO X. (1513-1522) of the house of Medici owes it to his lineage only that he should have transmitted to posterity so splendid a reputation, — that his name should be associated inseparably with the greatest triumphs of art in modern times. Leo X. inherited the well-earned fame of his predecessor, but knew not how either to value or to use his inheritance aright. It was not given him to sway the imperious temper of Michael Angelo, nor fully to comprehend the mighty schemes of Bramante. The latter's chief work, the rebuilding of *St. Peter's*, can be adequately studied only in the collection of original drawings in Florence which set forth the grandeur of Bramante's designs in all their completeness; for so many different hands were employed in giving effect to these, that little remains of the original plan. Happily this little, viz. the dome with the overwhelming impression of vastness it conveys, is of the very best. Bramante contemplated a central structure in the form of a Greek cross, rounded at its extremities, which, crowned by a gigantic dome, should present an ensemble at once simple and majestic. Succeeding generations have failed to embody Bramante's ideal. His career, extending probably from 1444 to 1514, is involved in obscurity. Of his works, Rome possesses numerous examples. The circular chapel in the monastery of *San Pietro in Montorio*, the court of *Santa Maria della Pace*, and the arcades in the first court of the Vatican (*Cortile di San Damaso*) are all by Bramante. The *Palazzo Giustiniani* and the *Cancellaria* are no longer ascribed to him (comp. pp. 317, 227).

We are wont to wonder at the profusion and splendour, too, of works to which the cinquecento gave birth. How much richer, how much more splendid would have been this profusion, had only these works been carried out as originally designed by the artist's creative genius!

The same fatality which pursued Bramante's mightiest projects served to mar Michael Angelo's (1475-1564) supreme effort in the realm of PLASTIC ART. The *Tomb of Julius II.*, begun while that pope was still living, was to consist of a large detached structure with statues of Moses, St. Paul, and other colossal figures at its projecting bases, and ranged along its wall the naked forms of men in chains.

with a power of organization such as no other artist has attained to. The thoughtful beholder will not confine himself exclusively to the study of the central pictures. The figures in monochrome and minor decorations are replete with a beauty peculiar to themselves.

Of the '*Last Judgment*', begun by Michael Angelo in 1534 and unveiled on Christmas Day, 1541, it is difficult, owing to its dilapidated condition, to form an accurate estimate. The unerring audacity, however, with which figure and group alike are thrown into every conceivable attitude and movement, must command a mute and amazed attention. The two frescoes in the *Cappella Paolina* in the Vatican, executed at a later period (1550), reveal, perhaps, a failing eye but give no evidence of falling mental power.

With the names of Bramante and Michael Angelo is associated that of Raphael (1483-1520), whose youthful genius had very early declared itself, first in Perugia and later in Florence. In Rome are to be seen interesting mementoes of both these periods. In the *Coronation of the Virgin* in the Vatican Gallery we see him still in the trammels of the Umbrian School, the effects of his Florentine training are visible in his *Entombment of Christ* in the Borghese Gallery (belonging to later periods are the so called *Formarina* in the Barberini Gallery, the portraits of *Navigero* and *Beassano* in the Palazzo Doris, the *Madonna di Foligno*, and the *Transfiguration*, the master's last work, both in the Vatican Gallery). The majority of Raphael's easel-pictures are to be found elsewhere than in Rome.

But in Rome only could Raphael have found a field suited to the exercise of his highest powers in FANASCO PAINTING. The mural paintings in the state apartments of the popes in the Vatican palace must first be noticed. In order rightly to appreciate these, it must not on the one hand be forgotten that fresco-painting never completely loses its decorative character; nor on the other must the peculiar position of the Pontificate in the beginning of the 16th century be lost sight of. In the palace of the Vatican the same courtly tone, the same pursuit of sensuous pleasures, of the mere joys of existence, prevailed as in the courts of the younger Italian dynasties; expressions of national sentiment met with a favorable reception, while an active agitation on the part of the Humanists did not appear to have compromised the dignity of the papal court. These conditions are more or less distinctly reflected in the frescoes of Raphael. The courtier repeatedly asserts himself; even a delicate compliment to the patron is not disdained, nor the ceremonial spectacle excluded. Political as well as personal allusions are not wanting, while ample space is devoted to the glorification of the Humanistic ideal. Finally, when it is borne in mind that Raphael was constantly compelled to defer to the exigencies of the allotted space, to study the separate requirements of wall and ceiling, we gain an insight into the nature and extent of the restraints imposed upon the artist. They beset him indeed on

every hand, and constantly compel him to alter or modify his design. Curiously enough these restrictions are to this day interpreted as an act of the artist's free and daring will. One wonders at the amount of theological learning, of philosophical erudition displayed in the *Disputa* and the *School of Athens*, as well as at the inventiveness which could connect subjects so remote from one another as the *Heliodorus driven from the Temple*, and the expulsion of the French from Italy. Through the entire range of subjects there runs a vein of profound and continuous thought. But especially admirable are alike the discernment which enabled Raphael to select, from apparently the most heterogeneous sources, matter suitable for pictorial embodiment; the resolution with which he guarded the realm of fancy; and his sense of the beautiful, whereby he was enabled to bring the most intractable material into subjection to his purpose. These qualities are most conspicuous in the picture known as the *Burning of the Lacina Quarter* (the so-called *Borgo*) of Rome, or rather, as the artist's patron would have it, the conflagration extinguished by intercession of the pope. The spectator forgets the preposterous demand that a miracle should be thus palpably depicted: Raphael relegates the action to the heroic age, fills his picture with figures and groups of surpassing grandeur and animation (such as succeeding generations have striven in vain to imitate), and depicts the confusion, the preparation for rescue and flight with surpassingly graphic effect. The picture was not what he had been commissioned to paint; but in lieu of this we have a creation teeming with imaginative power and masterful execution. In like manner Raphael disposed of the celebrated frescoes in the second Stanza, the *Disputa* and the *School of Athens*. Had he not been required to illustrate a chapter from the history of dogma (the proclamation of the doctrine of transubstantiation) or to present a pictorial extract from the history of ancient philosophy, the task of depicting a procession of historical celebrities known to fame as fathers of the church or mundane philosophers could not be particularly inviting. And further, while Raphael mingled with historical personages figures purely typical, and in the *Disputa* represents the assembled company of believers as beholding a vision, where each individual present is naturally more or less overpowered by emotion — while in the *School of Athens* he especially emphasises the blessedness of knowledge, the good fortune which leads to the higher paths of learning (whether his representation literally coincides with the *Diogenes Laertius* or *Sidonius Apollinaris* or not) — he has asserted with brilliant success the artist's right to supremacy in the realm of creative fancy.

After the foregoing remarks the unprejudiced reader will need a hint only as to the mental attitude he should assume as a student of Raphael's works. If the mere subject of the picture exclusively

occupies his attention, if he must know the name and history of every figure, and feels it incumbent upon him to admire the intellectual grasp of an artist who gathered his materials from the remotest provinces of learning and who abounds in literary allusions, he is no longer in a condition fairly to test the artistic value of Raphael's works. From this point of view he will fail to detect in them any essential difference from the allegorical pictures of the period, nay he may even give precedence to many of these: to the wall-paintings in the Cappella degli Spagnuoli (Santa Maria Novella in Florence) for example, which indisputably exhibit greater versatility, a superior daring in the embodiment of the preternatural, and a loftier conception of the didactic capabilities of art. It is still a matter of uncertainty how far the erudition displayed by Raphael was an acquirement of his own or how far he may have relied on the contributions of contemporary scholars, such for example as Castiglione, Bembo, and Ariosto, who would in so far share with him the merit due to fertility of thought. Assuming, however, that Raphael himself supplied the wealth of literary research which the frescoes of the Stanze are said to reveal, he would not as artist become more intelligible to us. His intellect might thus have been exercised, but not his imagination. Raphael's pictures will not only be more thoroughly enjoyed, but his individuality and purpose will be more perfectly apprehended when the effort is made to understand, how the painter by force of his imagination could out of material for thought, dead in itself, create new and living forms; how he imparted to single figures so distinct a psychological impress that the mere bearers of historical names are made to appear as representative human characters; how subtly he balanced action and repose in his groups, not dwelling too long on mere beauty of outline and contour, but intent on giving harmonious expression to a more profound intellectual antithesis. From this point of view, interest in the works of Raphael will be enlightened and enduring. Numerous problems will present themselves to the amateur for solution: what motive Raphael might have had in treating the Disputa and the School of Athens so differently in respect of colour, how far in the latter picture the architectural character of the background is essential to the collective impression to be conveyed; for what reason the domain of portraiture is here narrowed to the utmost, while there (Jurisprudence) it is extended; what were the grounds for the manifold changes in composition which are accurately traced in his numerous sketches, etc.

The condition of the Stanze frescoes is such, alas, as to afford anything but unqualified gratification, just as in the Logge we regretfully trace the departed glory of unique examples of decorative art, and with difficulty recognise the summit of Raphael's attainments in the grievously injured *Tapestries*. These latter, it is true, in the detail of their composition may be studied in the cartoons now in

In the *Sibyls of Raphael* in Santa Maria della Pace (1514) we find him computing — if the expression may be allowed — in another field. Here he trenches upon the domain of Michael Angelo; not, however, that he is for a moment betrayed into dissimulateness by contact with a presence so overpowering, or that he is beguiled into assuming a style foreign to his genius. True to himself, he accepts the limits proscribed by his subject, and combines an air of pleasing serenity and infinite grace with the expression of prophetic inspiration.

Around these three art heroes, Bramante, Raphael, and Michael Angelo, is grouped a brilliant circle of pupils and dependents. The best works of the School of Raphael are undoubtedly those executed in his lifetime and under his direction. *Giulio Romano* (1492-1546) and *Francesco Penni* (1488-1528) had a considerable share in the painting of the Hall of Constantine; the completion of the Loggia paintings was entrusted to them, *Perin del Vaga* (1499-1547), *Raffaello del Colle*, and others. For the decorative ornamentation of the Loggia and the Farnesina the master engaged the services of *Giovanni da Udine* (1487-1564). Giulio Romano exhibits himself most clearly as a pupil of Raphael in the Villa Madama, less so in his Madonnas (Gal. Colonna and Borghese).

The crowd of ARCHITECTS, who appeared in Bramante's time, showed greater independence. *Baldassare Peruzzi* (1481-1536; p. 22), who built the Farnesina and Pal. Massimo, *Raphael* himself and *Giulio Romano* (Villa Madama), *Antonio da Sangallo* the younger, with whom originated the Pal. Farnese and a new plan for St. Peter's, and lastly *MICHAEL ANGELO*, whose influence, gradually deposing Bramante, irresistibly impelled the architecture of Rome into new courses. And just as in plastic art he scornfully rejects the recognised forms and forces upon them a new construction, in like manner as architect he concerns himself little about the accurate adjustment of subordinate parts, intent rather upon the effect to be produced by the structure as a whole — usually one of ponderous immensity. The colonnades in the Palazzo Farnese, the conversion of the Baths of Diocletian into the church of *Santa Maria degli Angeli* — a work subsequently spoiled — and the *Porta Pia* are among his chief works. His chief merit consists in his having reverted to the plans of Bramante for the completion of *St. Peter's*, which since 1546 had been under his superintendence. The cupola at least was carried out according to his designs, but the ground-plan, to the injury of the building, was much altered, and the Latin substituted for the Greek Cross.

As long as the 'divine' Michael Angelo lived, Rome was so dazzled by the splendour of his renown that no one suspected the DECLINE OF ART was at hand. In fact, however, it had already declared itself at the death of Raphael. Rome once more captured and pillaged; orthodoxy reinstated, the church recoiling from the taint of Humanism: these were incisive events in the history of art, which now received a more distinctively ecclesiastical direction. The foreign



the Borghese family, that the interest in art became again widely spread. It was about this period that Rubens visited Rome, where he profited by a study of the best qualities of every school, without identifying himself with any.

Caravaggio (1569-1609) was the chief of the NATURALIST SCHOOL. He was triumphant in the possession of popular favour. On the other hand it was objected that his drawing was bad, that he failed in the essential of grouping the figures in his larger compositions. Nevertheless the mass is presented with such startling reality, and animated with gesture so impassioned, that every figure asserts itself, while a corresponding force in colour conveys an impression powerfully suggestive of the turbulent licence then prevailing. — The Eclucrice took an opposite direction. Trained in a regularly-constituted school of art, such as had been established at Bologna, initiated moreover in the art of Correggio and the Venetians, full of reverence for more remote traditions, thoroughly versed in the rules of drawing and composition as well as familiar with the fresco painter's art — thus formidably equipped, *Annibale Carracci*, *Domenichino*, *Guido Reni*, *Guercino* appeared amongst the rival aspirants to fame in Rome. They supplanted the Naturalists, appropriating as much of the latter's method as appeared available, and finally monopolised the favour of the court and aristocracy. Nor was the struggle by any means confined to the palette and the brush. Personalities arose, and amongst themselves the partisans of Carracci were seldom at peace. Their contributions are in part, at any rate, of the highest excellence. *Annibale Carracci's* frescoes in the Palazzo Farnese, *Guido Reni's* Aurora in the Casino Rospigliosi; the frescoes of *Domenichino* in San Luigi dei Francesi, Sant' Andrea della Valle, at Grotta Ferrata near Rome, are not mere masterpieces of technical skill, but are replete with artistic beauty and vitality. Easel-paintings of this school abound in the Roman galleries and enjoy a considerable popularity; among them may be mentioned *Domenichino's* Last Communion of St. Jerome, *Sacchi's* St. Romualdus (both in the Vatican Gallery), and numerous Madonnas by *Sassoferrato*, painted under the inspiration of Guido Reni.

The Neapolitan sculptor *Lorenzo Bernini* (1598-1680) flourished up to the close of the 17th century. His works occupy the concluding chapter in the history of Roman Art. It is superfluous to bid the beholder beware of being led captive by art essentially flimsy and meretricious; rather perhaps it is necessary, as a set off against the now prevailing depreciation of Bernini's works, to plead the important historical significance they possess amidst all their too conspicuous defects; to bear in mind that throughout the course of nearly a century they were regarded as the most brilliant production of that period and were very generally imitated.

Since the 17th century, Rome has not given birth to nor nurtured any distinctive art life, though the past has held artists of

1

.

Glossary of Art Terms.

- Afriense**, a dark variegated marble from the Greek island of Chios.
- Ambo** (pl. *ambones*), a reading-desk or pulpit placed beside the choir screen in early basilicas. In Rome ambones are usually in pairs, the S for the Epistle, the M for the Gospel.
- Apse**, **Tribuna**, the vaulted semicircular or polygonal recess at the end of the choir. Comp. *Basilica*.
- Archais**, as a term in art-history, is equivalent to 'pre-Phidian'.
- Archaism** describes works in the archaic style, but executed in a later age, e.g. by Lantini (p. liii).
- Atico**, *Atic Story*, a low story with pilasters instead of pillars.
- Badia Abbatia**, abbey, convent.
- Baldachin**, a canopy supported by four columns over the altar.
- Basilica**, a rectangular edifice with the nave loftier than the aisles, and a recess or hemicycle at the end of the nave. For the early-Christian basilicas see p. ix.
- Braccia** or **Bracciale**, a kind of marble-conglomerate.
- Bucrania**, an antique architectural ornament in the form of an ox's skull.
- Campanile**, the detached bellry of Italian churches.
- Ciborium**, originally = *Baldachin* (see above), now the receptacle on the altar for the Host.
- Cinquecento**, the 15th century.
- Cipollino**, a green-veined white marble from Lucca.
- Cippus**, a cubical tombstone, sometimes hollowed out to receive the ashes, also a boundary-stone.
- Climacostyle**, case, generally of bronze, and sometimes richly decorated.
- Confessio**, a chamber beneath the high-altar, containing the tomb of the saint, the origin of the crypt.
- Cornate Work**, mosaic work of coloured marbles, glass paste, and gold-leaf found on columns, choir-screens, and altars in Roman churches. Comp. p. lxii.
- Diptych**, a folding tablet with two leaves, of wood, ivory, metal, etc.
- Enclava**, a recess or hemicycle projecting from an ancient building.
- Galles Antico**, yellow Numidian marble, veined with red.
- Hermes** (pl. *Hermes*), a bust attached to a quadrangular pillar.
- Loggia**, an open arcade, occurring both on the exterior walls of palaces and in their courts.
- Municipio**, a municipality; sometimes = town-hall.
- Nero Antico**, black Laconian marble.
- Opus Verde**, incised designs on silver or gold plates with the lines filled up with a black composition.
- Opus Alarabescum**, a kind of stone mosaic used for pavements (12th and 13th cent.).
- Opus Reticulatum** (net-work), masonry with the joints running in diagonal lines.
- Opus Spicatum**, pavement of small bricks laid on their edge in herring-bone fashion.
- Palazzo Comunale**, *Pal. Pubbico*, a town-hall.
- Parosetto**, a yellow marble shot with blue.
- Peperino**, volcanic tuff from the vicinity of Rome (so called from the black grains it contains, like peppercorns). Comp. p. 407.
- Pala**, a representation of the Madonna with the dead Christ.
- Porta Santa**, a kind of braccia, of mingled red, white, black, blue and violet; used in the Porta Santa (p. 321).
- Porticus**, a roofed colonnade, either enclosing a space or in a straight line; not to be confounded with *peristyle*, a porch.
- Prodello**, a small narrow painting placed under a large altar-piece.
- Pupa**, the figure of a child.
- Quattrocento**, the 15th century.
- Ross Antico**, a brownish red marble found in Greece.
- Rustico Work**, masonry of large rough blocks, draughted or smoothed round the edges only.
- Sarmin**, the Latin expression for *Hermes* (see above).
- Trasertino**, a kind of limestone found near Tivoli.
- Triclinium**, the dining-room of an ancient house.
- Triumphal Arch** in churches is the lofty arch dividing the choir from the transept or the nave (p. lxi).
- Villa**, a country-estate, including the house and park. The house itself — the 'villa' in the English sense — is called *Curia*.

FIRST SECTION.

S. TUSCANY. UMBRIA. THE MARCHES.

1. From Leghorn or Pisa to Rome by the Maremma	2
Plombino and Populonia, 3. — Massa Marittima. Rosellina, 4. — Monte Argentario, 5. — From Montalto to Vulci, 5. — From Civita Vecchia to Tolfa, 8.	
2. From Leghorn to Volterra	9
The Boracic Acid Works on Monte Cerboli, 10. — From Volterra to San Girolamo; to the Copper Mines at Montecatini; to Colle di Val d'Elsa, 13.	
3. Elba and the Tuscan Islands	13
4. From Florence to Siena via Empoli	15
From Poggibonsi to Colle di Val d'Elsa, 15. — San Gimignano, 16.	
5. Siena	19
Excursions from Siena. Osservanza, Santa Colomba, etc. 37.	
6. From Siena to Chiusi	39
From Asciano to Monte Oliveto Maggiore, 39. — From Asciano to Grosseto, 40. — Monte Amiata, 41. — From Montepulciano to Pienza, 43.	
7. From Florence to Perugia via Arezzo, Cortona, and Terontola (<i>Chiusi-Rome</i>)	44
From Arezzo to Monte Sansavino, Fojano, and Betolle, 49, 50.	
8. From Arezzo to Fossato di Vico. Sansepolero. Città di Castello. Gubbio	54
9. Perugia	59
From Perugia to Gubbio and Todi, 69.	
10. From Perugia to Foligno and Orte (<i>Rome</i>). Assisi. Spoleto. Waterfalls of Terni. Narni	70
From Foligno to Bevagna and Montefalco, 77. — Monte Luco, 81. — From Spoleto to Norcia and Ascoli Piceno, 82.	
11. From Florence to Rome via (<i>Arezzo</i>) Terontola and Chiusi. Orvieto. Bolsena	86
From Chiusi to Sarteano and to Cetona, 83. — Monte San Pancrazio, 94. — From Borghetto to Civitella Castellana, 95. — Falerii. Soracte. Nepi, 96.	
12. From Attigliano to Viterbo and Rome	97
Excursions from Viterbo: Quercia, Bagnaia, Ferento, Bulicame, Castel d'Asso, Tuscanella, Lago di Vico, 100, 101. — Norbia. Sutri. Caprarola, 102.	
13. From Bologna to Rimini, Falconara (<i>Rome</i>), and Ancona	105
From Rimini to San Marino, and to San Leo, 112. — From Pesaro to Urbino, 115. — From Fano to Fossato via Fossombrone and Furla Pass, 117.	
14. Ancona and its Environs. Osimo. Loreto	118
From Porto Civitanova to Albacina and Fabriano, 124.	
15. From Ancona to Foligno (<i>Orte, Rome</i>)	125
16. From Fabriano to Urbino	127

The Region BETWEEN THE TYRRHENIAN SEA AND THE TISAR is a hilly district differing considerably in its formation from the Apennines. The latter consist of long and regular chains with parallel valleys between them, while the former is composed of numerous isolated groups of mountains and hills, which at one time, before a final upheaval of the Apennines converted the whole district into dry land, formed a group of islands like the Tuscan Archipelago off the present coast. The characteristic features of its N. portion are the valleys of Chiana, Elsa, and Era, which stretch from N.W. to S.E., while the S. portion is marked by the mighty volcanoes that dominate the entire district to the W. of the lower course of the Tiber. These volcanoes, beginning with Monte Amiata on the N., form a continuous chain, characterized by numerous large lakes, and prolonged on the other side of the Tiber by the Alban Mountains. — Southern Tuscany offers considerable variety of scenery, with its isolated limestone mountains abounding in minerals, and its eruptive cones rising from the midst of gentle slopes of marl and clay. As a whole it is a very fertile district, though the presence of gypsum makes the neighbourhood of Volterra and some other points unproductive. The Montagna di Senese (p. 18) and other isolated limestone ridges are covered with forests of beech; elsewhere the chief products are grain, wine, oil, and (near the sea) hay. The green land of Umbria abounds in trees, though these are generally too scattered to form woods or forests proper. — The so-called *Marches* (p. 103), or frontier districts of the Apennines are naturally more rugged, being seamed with deep and narrow lateral ravines, as well as with broader and more fertile longitudinal valleys. Many of the latter, now filled with debris, were formerly lakes or morasses. On the E. side extends a very productive hilly district which, from Ancona southwards, abuts directly on the Adriatic Sea and is intersected by numerous small rivers. The chief artery on the W. side is the Tiber, which rises in the Bolognese Apennines (see p. 56) and flows to the S. through valleys connected by short transverse valleys. On one side it receives the streams descending from the Apennines, while its tributaries on the other flow through districts of clay and tufa. Its bed is thus largely filled with debris, its water turbid, and in times of flood huge masses of alluvium are washed down to the sea. Where its tributary streams run through the softer kinds of rock they have worn sharply-cut channels, and wherever two river-valleys meet have formed triangular and bastion-like promontories (S. Strada).

1. From Leghorn or Pisa to Rome by the Maremma.

207 M. (from Pisa 208½ M.). RAILWAY. Express in 6-7½ hrs., fares 42 fr. 65, 29 fr. 85 c. (from Pisa 42 fr. 80, 29 fr. 76 c.); ordinary trains in ca. 10 hrs., fares 58 fr. 75, 27 fr. 16, 17 fr. 45 c. (or 58 fr. 85, 27 fr. 6, 17 fr. 40 c.). On Sat. there is a *train de luxe* with higher fares. — During the tourist-season restaurant-cars are attached to the express trains (dél. 8½, D. 4½ fr., wine extra).

The MARITIME RAILWAY coincides with the ancient *Via Aurelia*. It runs inland as far as Cecina, where it approaches the coast, commanding fine views of the sea with its promontories and islands. Best views on the right. Many places on this route are subject to malaria between the end of May and the end of October (comp. p. 8).

Leghorn and Pisa, see *Baedeker's Northern Italy*. — The lines unite shortly before reaching *Colle Salvetti*, which is 10 M. distant from Leghorn and 9½ M. from Pisa. 13 M. (from Pisa) *Fauglia*.

About 7½ M. to the E. (carriage in 1½ hr.) lies *Cascina* (182 ft.; abikimento Sagui, pens. from 9 fr.; Stalla, Giappone, pens. 6-7 fr.), a

branch-line to *Vulturno* diverges (see p. 9), is of modern origin.

55½ M. *Bibbione-Casale*. The line now approaches the coast. The loftily-situated, ancient Etruscan *Populonia* (see below) becomes visible to the right, on a chain of hills projecting into the sea; beyond it, the island of *Elba* (p. 13).

42 M. *Castagneto*; 47 M. *San Vincenzo*, with a small harbour.

53½ M. *Campiglia Marittima*, the town (5269 inhab.) lies on the height (906 ft.), with a ruined castle and Etruscan tombs of no great interest.

FROM *CAMPIGLIA* TO *PIOMBINO*, 8½ M., railway in 34-46 min. (fares 1 fr. 65, 1 fr. 15, 75 c.), via (3 M.) *Foggia* and (3 M.) *Portoferraio*.

Piombino: *A. Borge dalle Api*, unpretending, bargaining advisable. Lloyd's agents, *A. Belfanti & Co.*, a town with 5979 inhab., originally belonged to Pisa, in 1399 became a principality of the *Apstani*, in 1605 was acquired by Spain, and then by the family of *Buenosapagus-Ludovisi*, from whom it was wrested by Napoleon in 1805 in favour of his brother-in-law, the Corsican *Pierre Buonaparte*. In 1815 it was assigned to Tuscany. It lies at the E. end of a wooded promontory, formerly an island but now joined to the mainland owing to the siltling up of the river *Cornia*. A weather beaten tower on the harbour commands a grand view of the sea and the island of *Elba* (in front of which rise the cliffs of *Corbali* and *Palmasola*), of *Giglio* and the coast, and *Corsica* in the distance. — Steamboat to *Elba* every afternoon, returning the following morning (p. 13).

A forenoon suffices for a visit to (3 M.) *Populonia*, the ancient Etruscan seaport of *Pythia*, at the N. end of the peninsula. The shorter route through the woods requires a guide. The town with its mediæval castle, situated on a lofty and precipitous hill, is conspicuous from all sides. It suffered greatly from a siege by *Sulla*, in the time of *Strabo* it had fallen to decay, and it is now a poor village. In ancient times the iron of *Elba* was smelted here, together with the tin and copper ores of the neighbouring district which formed the material basis of the Etruscan art of bronze founding. The old town walls, which may still be distinctly traced, are particularly well preserved on the side next the sea; they consist of huge blocks, approaching the polygonal style. The views towards the land and the sea are striking and extensive. A few arches, erroneously said to belong to an amphitheatre, and a reservoir are of Roman origin. The Etruscan tombs in the vicinity are hardly worthy of a visit.

The district now begins to exhibit the distinguishing characteristics of the *Maremma*: a world of its own, consisting of forest and swamp, in summer poisoned by malaria. During the Etruscan period the *Maremma* possessed considerable towns: *Populonia* (see below), *Vetulonia* (p. 4), *Rusellæ* (p. 4), *Cosæ* (p. 5). On the decline of agriculture in Italy and the conversion of the farms into pasture-land, the desolation of the coast-district made rapid progress. It was not until the 19th century that the first successful attempts to counteract the malaria were made by draining and

filling up the swamps and establishing new farms (especially near the railway-stations); but the evil is still very great.

64 M. *Follonica*, on the sea, possesses considerable smelting-foundries for the iron from Elba. Beautiful view to the right of the promontory of Piombino and Elba, to the left of the promontory of Castiglione with a lighthouse, and the small, grotesquely shaped island of Troinaia.

A narrow-gauge railway runs, in 1 hr 10 min., viâ (5 M.) *Cara Fiume*, (9½ M.) *Valpurga*, and (12½ M.) *San Casciano*, to (16 M.) *Maremma Marittima* (1310 ft.; *Ab. del Sole*, fair, H. 1½ fr.), one of the largest towns of the Maremma, with 8719 inhabitants. The Cathedral (*S. Carsem*), of the 12th cent., contains a font by Girolamo da Lugano (1.65) and a reliquary by Gregorio da Siena (1323). In the vicinity are extensive mines (copper pyrites and argentiferous galena), with many German officials.

The train again quits the coast and skirts the *Promontory of Castiglione*.

73 M. *Gavorrano*, the station for the place of the same name, situated on the hill (806 ft.), to the right. At (78 M.) *Gianonrico* we see, also on a hill to the right, *Vetulonia* (1130 ft.), the ancient name (resumed since 1887) of the village of *Colonna*. It was from *Vetulonia* (the Etruscan *Vetluna*) that the Romans took their magisterial insignia: the fasces of the lictors, the curule chair, the purple toga, and the brazen trumpets. Numerous graves have recently been excavated here (see below). In the distance, at the mouth of the *Bruna*, the small fortified harbour of *Castiglione della Pescaia* is visible. Here wood and charcoal are the chief exports.

82½ M. *Montepescali* (726 ft.), junction of a branch-line to *Siena* (see p. 41). The village is picturesquely situated on a hill to the left.

90½ M. *Grosseto* (38 ft.; *Rail. Restaurant*, very fair, *Stella d'Italia*, with a good trattoria; *Giappone*, at the entrance of the town, clean), the capital of the Maremma, a pleasant town with 5858 inhabitants. The Cathedral, begun in 1294, was restored in 1855. The Municipality contains a collection of Etruscan urns, a room with vases and bronzes found in tombs at *Vetulonia* (see above), sarcophagi, and other antiquities. Near the *Badia* is a prehistoric tomb. — Branch-line to *Asciano* (*Siena*), see p. 40.

About 3¼ M. to the N.E. of Grosseto (carriage-road) lie the sulphureous *Segni Rosellani*, whence the ruins of *Rusellim* are reached in ½ hr. (guide necessary). *Rusellim*, anciently one of the twelve capitals of the Etruscan confederation, has been deserted since the middle of the 12th cent. and is thickly overgrown with underwood. The walls, which are nearly 2 M. in circumference, and in most places accessible, consist partly of horizontal courses, partly of polygonal blocks (8-6 ft. high, 8-12 ft. long).

Around Grosseto, and to the W., in the direction of *Castiglione della Pescaia*, extends a considerable pasture land, reclaimed from what was once a malarial swamp, and, still earlier, the *Lacus Fretus* of *Cicero*.

Beyond Grosseto the *Ombro* (the ancient *Umbro*) is crossed. 95½ M. *Alberese*. The line skirts the wooded *Monti dell' Uccellina* (1360 ft.); towards the S. the imposing *Monte Argentario* (p. 5) is visible.

105 M. *Talamone*. The village lies at the end of the promontory, 2 M. to the W., and possesses an anchorage sheltered by the island of Giglio and the Monte Argentario (steamer to Elba, p. 13). The ancient *Telamon*, where, in B.C. 225, the Roman legions landed and defeated the Gauls, who were marching against Rome, lay 1 M. to the S. of the railway-station, on a hill (Torre di Talamonacelo; 344 ft.) at the mouth of the little river *Osa*.

The train crosses the *Osa*, then the more important *Albegna* (the ancient *Albina*), at the mouth of which are salt-works. 109 M. *Albegna*.

A carriage-road (diligence once daily to Manciano in 5 hrs., to Pitigliano in 7 hrs.; fares 4 and 5 fr.) runs to the N.E. from Albegna viâ (8 M.) *Martellana* (394 ft.), the finely situated (20 M.) *Manciano* (144 ft.), and (34 M.) *Pitigliano* (1077 ft.), to (37½ M.) *Soriano* (the ancient *Sutrin*). From Manciano a carriage-road runs to the N. viâ *Montemerano* to (8 M.) *Sutrin* (508 ft.), a fortified village on a precipitous height, whose site and name have remained unchanged from Etruscan times, while traces of its old walls and towers are still visible.

114 M. *Orbetello* (*Albergo Rossa*, *Albergo Nazionale*, both unpretending, 2 M. from the station; omn. 1 fr.; **Rest. Restaurant*, 66). 2. D. 3-5 fr., incl. wine), a maritime fortress, with 4188 inhab., is situated at the extremity of a promontory, near the foot of *Monte Argentario* (see below), which rises immediately from the sea. The latter is connected with the mainland by two narrow tongues of land (Tomboli), whereby a large salt-water lagoon is formed, from the midst of which the town rises. The lagoon, which abounds in fish, nowhere exceeds 6 ft. in depth. The only object of interest is the polygonal wall on the sides next the sea, which testifies to the great antiquity of the town, although its ancient name is unknown.

The *Monte Argentario*, with its two peaks, an isolated outlier of the mountain-system of Central Tuscany, was once an island. From Orbetello a carriage-road runs along the embankment across the lagoon, then turns to the N. to *Porto San Stefano* (steamerboat to Elba, see p. 13; Lloyd's agent, *P. Bonetto*), and to *Porto Ercole* (the ancient *Portus Herculis*) on the S. side. The ascent of the S. peak (*Piazzale*; 2015 ft.) is very interesting (from Orbetello, 2-3 hrs.; guide). The view embraces the coast of Tuscany and the Roman highlands to the N.E. as far as *Monte Amiata*, and (on the W.) the sea with its numerous rocky islands as far as *Sardinia*. Halfway up the height, 3 M. to the N., is a monastery of the *Passionists* (858 ft.). If time is limited, the first and lower eminence, ¾ hr. from Orbetello, with a picturesque view of the coast, should be visited.

Orbetello is the most convenient starting-point for an excursion to the (4½ M.) interesting ruins of the ancient *Cosa* (374 ft., the present *Acquedotto*), situated to the S.E. (carriage there and back, including stay of 5 hrs., 5 fr.). *Cosa* was an old Etruscan town, deserted since the 6th century A.D. The polygonal walls (1600 yds. in circumference) with their towers are admirably preserved. A beautiful prospect is enjoyed hence.

The train soon enters the former Papal territory, and traverses the Roman *Maremma*. 121½ M. *Capalbio*; 126 M. *Chiancrossa*. It then crosses the *Fiore* (ancient *Arminia*).

135½ M. *Montalto di Castro*.

About 7½ M. above *Montalto* the *Fiore* is crossed by the ancient *Ponte dell'Abbadia*, and 1 M. to the S. of the latter, on the right bank, is the site of *Vulci*, where thousands of Etruscan vases have been discovered since

1826. The ancient Etruscan city itself, the circumference of which is ascertained to have been 5 M., has disappeared with the exception of its tombs. — *Toscanello* (p. 101) lies about 15½ M. to the E.

Beyond Montalto the country is undulating. We cross the small rivers *Arrens* and *Marta* (p. 93).

144 M. *Corneto*. On a chalky plateau overlooking the *Marta*, 2 M. to the left of the station (seat in a carriage ½ fr.), is the antiquated town of —

Corneto (490 ft.; *Alt. & Dist. Giudizi*, *Via dell' Indipendenza*), with numerous towers and a population of 5273. The town sprang up in the early middle ages near the town of *Tarquiniæ* (destroyed by the Saracens), to which fact it owes its official name of *Corneto Tarquinia*.

Tarquiniæ was anciently one of the twelve Etruscan capitals, and remarkable for the influence which it exercised on the development of the national religion of Etruria. It participated in the war of the Etruscan confederation against Rome, but was compelled to surrender after the Samnite war and to receive a Roman colony, which continued to flourish during the empire. Its ancient necropolis, discovered in 1823, is the chief object of interest at *Corneto*.

The handsome but unfinished Gothic *Palazzo Vitelleschi*, in the main street, near the gate, was enlarged by Cardinal Vitelleschi in 1459. The old part is lighted by rich Gothic windows; the more modern colonnaded court has two stories, from the loggia on the upper of which a fine view is obtained; remains of frescoes may be seen in the chapel. The custodian shows the tombs (p. 7). — On the N. buttress of the plateau on which the town stands is the imposing *Castello* of Countess Matilda, containing the church of *Santa Maria in Castello*, begun in 1121, with a façade dating from 1200, recently restored. This interesting church (key in the Museo, see below) contains a tabernaculum of 1166 and a pulpit of 1209.

In the *Cathedral* are some interesting remains of frescoes by Ant. da Viterbo, a pupil of Pinturicchio (1509). — The smaller Romanesque churches of *Sant' Anastasia*, *San Salvatore*, *San Martino*, and *San Pancrazio* have all been more or less restored. Adjoining the last is the old *Palazzo Municipale*, with three of its original eight towers. On a height above the town is the Gothic church of *San Francesco*.

The lower story of the **Museo Municipale* (adm. 1 fr.) contains a number of sarcophagi, the most interesting of which is the so-called 'Sarcofago del Magnate', embellished with polychrome reliefs (battles of Amazons) and with handsome figures on the lid. On the upper floor are smaller antiquities, vases, gold ornaments, weapons, etc. Among these are an antique set of false teeth (3rd room), and a fine bowl with red figures, which bears the names of *Oltos* and *Euxitheos* as the artists and represents the Arrival of *Bacchus* in *Olympus*, the types of the deities recalling

the character of pre-Phidian art. The last rooms contain the products of the excavations carried on since 1881 in the oldest part of the Necropolis. The pottery is of the rudest description and was evidently produced without the aid of a wheel. Four cinerary urns in the form of huts give us an idea of the Italian dwelling of the period. The conical helmets, with bars at the top, were evidently imported; their type seems to have served as a model for the 'Apices', or caps of the Roman priests. Among the remaining contents are Carthaginian scarabs and idols in vitreous paste.

The *Palazzo Bruschi* contains a fine collection of Etruscan antiquities, and a few Etruscan and Roman relics are also preserved in the *Giardino Bruschi*, outside the town. — Corneto commands a fine view of the sea with Monte Argentario (p. 6) and the neighbouring islands, and also an interesting survey of the bleak environs.

On the *Turchina*, a stony hill opposite (N E), separated by a ravine from *Montarossi*, the hill of the tombs, lay *TANQUINN*, a town with walls about 5 M. in circumference. Its last remains were destroyed by the inhabitants of Corneto in 1307. No ruins are now visible save scanty vestiges of walls and substructions.

The **Necropolis* spreads over a great part of the hill upon which the town itself stands. The fee for a guide (see p. 6) should not exceed 5 fr. Hurried visitors may take a carriage (one-horse 3-5, two-horse 8-10 fr., according to time occupied). The most distant tombs are 2 M. from the town. The tumuli which distinguished the tombs externally have been entirely destroyed, the subterranean rock-hewn chambers now alone remain. Even in ancient times the tombs were frequently plundered for the sake of the precious trinkets they contained, and modern excavations have despoiled them of every movable object that remained. Nevertheless, owing to their arrangement and the good preservation of their paintings, a visit to them is extremely interesting to those who desire to form an idea of the civilisation, art, and religion of the Etruscans. The decoration is in a style that was prevalent chiefly in the towns of southern Etruria, and indicates a close relationship to Hellenic art. — The following (especially Nos. 7, 11, 14, and 19) are the most interesting tombs. —

No. 4. *Grotta della Caccia del Cinghiale* (boar-hunt), or *Grotta Querciolo*. The faded paintings, copied in the Museo Gregoriano (p. 384), represent a banquet with music and dancing, and a boar-hunt. — Opposite to this tomb —

No. 7. *Grotta del Conzeto Funebre*, or *dei Triclinio*, also with the representation of a banquet. The admirable drawing bears witness to the influence of the best period of archaic Greek art. The men here, as in the others, are coloured dark red, the women sketched in outline on the walls in whitish colours.

No. 10. *Grotta del Morte*, small; mourning for the deceased, and dances.

No. 11. *Grotta del Tyche*, more extensive, supported in the centre by a pillar, on which are Typhons, or winged genii of death terminating in serpents. The sarcophagi bear Latin as well as Etruscan inscriptions, a proof that they belong to a comparatively recent epoch. To the right on the wall are souls escorted by genii; below them is Charon with the hammer.

No. 12. *Grotta degli Studi* or *delle Quattro Muse*, with banqueting scenes.

No. 13. *Grotta del Cardinale*, the most spacious tomb at Tarquinii, supported by four pillars, opened in the 18th century; colours almost entirely faded.

No. 14. *Grotta dell' Orco*, or *del Polifemo*: in the anterior chamber, a banquet; in the one beyond it, a scene from the infernal regions, with Pluto, Proserpine, Geryon, Tiresias, Agamemnon, Memnon, and Theseus; in a niche is Ulysses blinding Polyphemus. — The paintings here exhibit unmistakable Greek influence.

No. 15. *Grotta dei Fanci Dipinti*, and No. 16. *Grotta del Vecchio*, with banquets and dances, both not later than the first half of the 5th cent. B. C.

No. 18. *Grotta delle Iscrizioni*, so called from the numerous Etruscan inscriptions, with warlike trials of skill.

No. 19. *Grotta dei Baroni*, so called from the Hanoverian ambassador Baron Kastner, by whom it was opened, contains warlike games, riders, etc., partly in the archaic style; colours well preserved.

No. 20. *Grotta delle Bighe*, discovered in 1827 by Baron Stackelberg. A copy of the paintings (funeral games and dances) in the Vatican.

No. 23. *Grotta degli Anguri* (with funeral games; a criminal with veiled head fighting with a large mastiff, hounded on by a figure in a mask), of the same date as Nos. 15 and 16.

Tuscanella (p. 101; carriage 8 fr.) lies about 18½ M. to the N.E. of Corneto.

The train skirts the foot of the hill of Corneto, which remains visible for a long time. To the right, farther on, is the insignificant *Porto Clementino*, which is entirely abandoned in summer on account of the malaria. This may be the ancient *Gravisense*, the seaport of Tarquinii. The horizon is bounded inland by the mountains of *Tolfa* (see below). The line crosses the *Mignone* (the ancient *Minto*).

158½ M. *Civita Vecchia*. — Hotels. *ALBERGO TERNALE TRIANO*, Viale Garibaldi, on the sea, with baths, R. 3, B. 1½, pens 9 fr., well spoken of; *ALBERGO D'ITALIA*, also on the sea. — *Railway Restaurant*, good. — British Consular Agent, *L. Sperandio*; American, *James B. Inglis*; Lloyd's Agents, *A. Bellisneri & Co.* — Steamer to *Elba*, see p. 13; to *Golfo Aranci* in Sardinia once daily, see *Baedeker's Southern Italy*.

Civita Vecchia, the seaport of Rome (sea-bathing), with 11,941 inhab., is the ancient *Centum Cellae*, whose harbour was planned by Trajan. It was destroyed by the Saracens in 828, but in 854 the inhabitants returned into the 'ancient city'. The fortifications, built in the 16th and 17th cent., were restored in the 19th cent. by the French. The entrance to the harbour (217 acres in extent), in front of which lies a small fortified island with a lighthouse, is defended by two towers.

A good road leads to the N.E. from *Civita Vecchia* past the (3 M.) ruins of some ancient baths (*Aquae Tiveri*), and by (3 M.) *Altemio*, to (10 M.) *Tolfa* (1820 ft.; diligence once daily in 4 hrs., returning in 3 hrs.; fare 2½ fr.), the chief place among the volcanic mountains of the same name (2010 ft.). Although extinct, they still emit vapours which deposit sulphur and alum. The mines are no longer of great importance, but the scenery is picturesque.

The line traverses a dreary tract, running parallel with the ancient *Via Aurelia* near the sea-coast as far as Palo. On clear days the Alban and Volcanic Mts. are visible, and still farther off the *Monte Circeo* (p. 447). The best views are on the right till Rome is approached, and then on the left.

The train passes near *Cape Linaro*, where the *Torre Chiaruccia*, now a signal-station, indicates the site of the ancient *Castrum Novum*. — 164 M. *Santa Marinella*, with a castle of the Odescalchi (1581-80), on the site of the ancient *Punicum*. — 169½ M. *Santa Severa*, a picturesque baronial castle, now the property of the Santo Spirito Hospital at Rome (p. 317). Here in ancient times lay *Pyrgi*, the harbour of *Caere* (p. 433). Important remains of the ancient polygonal walls may still be seen; the once celebrated temple of *Eileithyia* was destroyed by Dionysius I. of Syracuse in B.C. 384.

171 M. *Furbara*. The solitary towers on the shore were erected in the 16th cent., for protection against the dreaded Turkish corsairs.

177 M. *Pala*, with a château and villa of the Odescalchi, occupies the site of the ancient *Alsiu* (p. 433), where Pompey and Antoninus Pius possessed country-residences. A short branch-line runs hence to the frequented sea-baths of *Ladispoli*, founded by Prince Odescalchi (fine beach; special trains from Rome on Sun. and Thurs.). — 181½ M. *Palidoro*.

The line now turns to the right, towards the groves of (185½ M.) *Maccarese*, the ancient *Fregene*, on the *Arone*, the *Arco* of the ancients (p. 104). We then skirt the former *Stagno di Maccarese*, which is now being reclaimed (*Bonifide di Maccarese*, comp. p. 438).

193 M. *Ponte Galera*, whence a branch-line diverges to *Fiumicino* (p. 435). Near (197 M.) *Magliana* the *Tiber* becomes visible, and the line follows its course (comp. Map, p. 380). A freer view is now obtained of the extensive *Campagna*; to the right, in the background, the *Alban Mts.* (p. 407; comp. panorama, p. 378), and to the left the *Sabine Mts.*; in the foreground is *San Paolo Fuori le Mura* (p. 397).

201 M. *Roma San Paolo*, outside the *Porta Portese* (change carriages for *Trastevere*, comp. p. 135). The train crosses the *Tiber* and skirts the S.E. walls of Rome. To the left are seen the *Monte Testaccio*, the *Pyramid of Cestius*, the *Aventine*, the *Lateran* with the statues crowning its façade, and finally, just before the station is entered, the so-called *Temple of Minerva Medica*. — 205 M. *Roma Tuscolana*.

206½ M. *Rome*. — Arrival, see p. 135.

2. From Leghorn to Volterra.

RAILWAY via Cecina to Volterra station, 60½ M., in 3¼ hrs. Express to Cecina (no through-connection) 6 fr. 65, 4 fr. 85 c.; ordinary trains 6 fr. 6, 4 fr. 26, 2 fr. 76 c.; from Cecina to Volterra station 3 fr. 60, 2 fr. 45, 1 fr. 80 c. — DILIGENCE from the station to Volterra (7 M.) in 1½ hrs. (fare 1½ fr.; one-horse carr. 4, two-horse 6 fr.). Luggage may be left at the station at Cecina.

Volterra may also be reached from *Portoferra*, a station on the Florence and Pisa line, by driving up the valley of the *Era* (6-6 hrs.). A private diligence (fare 3 fr.) performs the journey thrice weekly.

Leghorn, see *Baudouin's Northern Italy*. To (31½ M.) *Cecina*, see p. 8. The branch-line ascends hence on the right bank of the *Cecina*, traversing a district of great mineral wealth (copper, alabaster, and serpentine). — 5½ M. *Riparbella*; the village lies 2½ M. to the N.; 10½ M. *Casino di Torre*, 14½ M. *Ponte Ginori*.

19 M. *Volterra*. The station is situated at the foot of the lofty hill on which the town lies. The extensive salt-works (*Saline*) in the vicinity supply the whole of Tuscany. The rock-salt, resembling that of the *Wieliczka* mines in Galicia, is found in lenticular form, embedded in a tertiary deposit of marl.

The following excursion, which may be accomplished either by diligence or carriage (carr. from Volterra station to Larderello and back 10, with two horses 15 fr.), is interesting to geologists. Beyond *Pomaranco* (1204 ft., diligence in 2 hrs., fare 1½ fr.), a pleasant town, with a large chateau of Count Larderello, we drive on to (3 hrs.) *Larderello* on the *Monte Cervello*, the central point of the boracic acid works belonging to the Larderello family. The vapour of the volcanic gas-springs (*soffioni*) is passed through water-tanks (lagoni), depositing its content of boric acid (*acido borico*) in the water, which is afterwards evaporated. The entire output of these works is sent to England, where it is chiefly used in potteries as an ingredient in the production of glass. — The excursion may be extended towards the S., via *Sasso di Morbo* (with springs, good for gout, used perhaps by the Romans, and called by them *Aguas Volcanarum*), *Castelmare di Val di Cecina* (1880 ft., diligence from Pomaranco in 2½ hrs., fare 1½ fr.), *Sasso*, and *Monterotondo*, to *Mare Marittima* (p. 4), a drive of 8 hrs. more. Near *Sasso* and *Monterotondo* in particular the country is covered with clouds of steam and the hot surface of the earth with incrustations of sulphur, sulphate of iron, etc. Near *Monterotondo* is the hot *Lago Solfereo*, with evaporation-works belonging to a French firm.

The road from the station to (5 M.) *Volterra* ascends (diligence and carriage, see p. 10). The country, owing to the barren clay soil, worn into channels by the rain, presents a peculiarly bleak appearance.

Volterra. — ALBERGO NAZIONALE (Pl. a), Piazza del Popolo 1, R. 1½-2 fr., very fair. — *Caffè Bardole*, Piazza Maggiore. — POST & TELEGRAPH OFFICE, in the Palazzo Pretorio (Pl. 18).

The celebrated *Alabaster Works* of Volterra have lately lost in importance. The ordinary kinds of alabaster are found in the vicinity, the more valuable in the mines of *Castellina Marittima*, on *Monte Viatrice* (2210 ft.), 5½ M. from *Riparbella* (see above). The traveller should visit the interesting workshops, where the prices are lower than at Florence or Leghorn.

Volterra (1784 ft.), an episcopal residence with 5522 inhab., is one of the most ancient Etruscan cities, commanding in clear weather charming prospects as far as the heights of Pisa, the Apennines, and the sea with the islands of *Gorgona*, *Elba*, *Capraia*, and *Corsica*.

Volterra (the Etruscan *Velathri*, the *Volaterrae* of the Romans) was one of the twelve ancient confederate cities of Etruria, and was so strongly fortified that during the civil wars it withstood a siege by Sulla's troops for two years. It afterwards became a Roman municipium, but gradually fell to decay and was totally destroyed in the 10th century. It was re-erected under the Ottos, but does not now cover one-third of its ancient area. In the middle ages it was a free town, and from this period date the best buildings; but it became subject to Florence in 1301. The last revolt

of the inhabitants against the Florentines terminated in 1472, when the town was taken and ruthlessly pillaged. It is the birthplace of the satirist *Persius* (14-62 A.D.) and of the painter *Daniele da Volterra* (see below).

Among the antiquities the ancient **Town Walls**, 7080 yds. or about $4\frac{1}{2}$ M. in circumference, and nearly three times as extensive as those of Fiesole and Cortona, are especially worthy of notice. Their dimensions (40 ft. in height, 15 ft. in thickness) and construction in horizontal courses of rectangular limestone blocks ('*panchina*') are best inspected on the S.W. side of the present town (near Santa Chiara, outside the Porta San Francesco, to the left), and outside the Porta Fiorentina (N.). One of the ancient gateways, the **Porta all'Anco**, 20 ft. in height, is also still in existence. The corbels are adorned with unrecognizable heads. *Il Portone*, another ancient gateway, outside the Porta Fiorentina, has been much altered. Outside the same gate, below the burying-ground, is situated the ancient *Necropolis*, about halfway up the hill, at the place now called *San Marmo*. All the tombs have been closed up again.

The **Palazzo dei Priori** (Pl. 19), now the *Municipio*, in the *Piazza Maggiore*, a handsome edifice, was begun in 1208 and completed in 1257, the exterior is adorned with medieval coats-of-arms. The first floor contains a collection of pictures, among which are *Luca Signorelli*, *Madonna with six saints and two angels*, 1491 (much injured), *Don Ghislandajo*, 83, *Actinae and Graeciana*.

Adjoining, to the right, is the entrance to the **CATHEDRAL** (Pl. 8), consecrated in 1120 by Pope Calixtus II., and said to have been enlarged in 1254 by *Niccolò Pisano*.

Interior. To the right and left of the entrance are reliefs from the life of St. Regulus and Octavianus (14th cent.); the pulpit is adorned with sculptures of the early 13th century. The two angels with candelabra on the high-altar are by *Uino da Fiesole*. The sarcophagus of St. Octavianus is by *Raffaele Cloli* (1522), the elaborate roof by *Fr. Capriani* (1570) — in the S. transept is a fine wooden group (13th cent.) of the Descent from the Cross. The chapel of San Carlo, opposite, contains on the left an *Annunciation* by *Signorelli* (1491), of rich colouring and attractive grace; on the right, *Sanmario di Giovanni*, *Nativity* (1470), and *House of David*, *Descent from the Cross* (unfinished); *Teddeo di Bartolo*, *Altar-piece* (1411); *Leonardo da Vinci*, *Madonna*, with four saints (1516).

Opposite to the cathedral rises the baptistery of **SAN GIOVANNI** (Pl. 6), an octagonal church, erected in the 13th cent., supposed to occupy the site of an ancient temple of the sun. The fine arch of the high-altar is by *Balsinelli da Settignano* (16th cent.), the octagonal font by *Andrea Sansovino* (1502), and the ciborium by *Mino da Fiesole* (1471).

SAN LEO (Pl. 13), a church founded in 1480 by *Raffaele Maffei*, contains the tomb of that scholar, with a recumbent statue by *Silvio da Fiesole* (1523).

In the *Via Rucellai* is the house in which *Daniele da Volterra*, the celebrated pupil of Michael Angelo, was born in 1500 (he died at Rome in 1566). The house still belongs to the family of Rucellai, who possess a fine *Ellas*, by the artist.

SAN FRANCESCO (Pl. 10) contains the Gothic *Cappella della Croce* of 1315, with frescoes from the life of the Saviour and the legend of the Cross by Cimabue Cennini (1410).

The most interesting object in Volterra is the *MUSEO GUARNACCI* (Pl. 20), in the *Palazzo Tognacci*, containing a valuable collection of inscriptions, coins, bronzes, statues, and vases. Director, Dr Ezio Solmi. Admission 0 to 3, 4, or 5, 1 fr. Free cards of admission, entitling to a half-hour visit, are issued on Sun., 9-1, at the *Ufficio di Polizia Municipale*, in the Municipio (p. 11).

The museum, established in 1781, and greatly enriched by the collections of the erudite *Mario Guarnacci* in 1781, was in 1878 admirably arranged by *Cassiere S. Mayer*. Seven rooms on the lower floor and as many on the upper are occupied by the collection of *Chamorro Vase* (upwards of 600). These are generally about 3 ft. in length, and date from the latest period of Etruscan art, i.e. the 3rd or 2nd cent. B.C. The subjects are more interesting than the execution, which is for the most part very mediocre. A few of the vases are made of terracotta and sandstone, but most of them are of the alabaster of the environs. On the lid is the greatly reduced recumbent effigy of the deceased, the sides are adorned with reliefs, and some of them bear traces of painting and gilding. The representations on the vases are partly derived from the peculiar sphere of Etruscan life, partly from Greek mythology. From the former, parting scenes are the most frequent, the deceased equipped as a rider, is escorted by a messenger who bears a long sack containing provisions for the journey or is accompanied by Charon with the hammer. Sacrifices and funeral processions occur frequently, as well as banquets, races, contests of skill, etc. Greek mythology has supplied an abundant selection of subjects, e.g. *Ulysses with the Sirens* and with *Circe*, the abduction of *Helena*, death of *Clytemnestra*, *Orpheus and the Furies*, the *Seven against Thebes* (the gate a copy of the *Porta all'Arco*, p. 11), *Polynices and Menoece*, *Oedipus and the Sphinx*, *Oedipus slaying his father*. There is a singular blending of luxuriance and melancholy in the subjects and treatment of these works, and the same peculiarity is often observed in the subsequent development of Etruscan art. — Five other rooms contain marble sculptures (archaic relief in tale of a warrior) vases (mostly of a later style), coins, bronzes, stones, gold ornaments, and fine glass vessels. — In the third story are the *Archives* and the *Library* containing 2,400 vols., and a collection of coins and seals. On the staircase are a frieze in relief from *San Giusto* (see below) and other medieval sculptures.

The *CITADEL (Fortezza)* now a house of correction, and shown only by permission of the *Sotto-Prefetto*, consists of two parts, the *Rocca Antica*, erected on the ancient town-walls in 1343 by *Walter de Brienne*, Duke of Athens, and the *Rocca Nuova*, built by the *Florentines* after the capture of the town (see p. 11). At the same time the latter constructed the tower *Il Mastio*, which was used as a prison for political offenders. Not far off, to the W., is the *Piscina*, an ancient reservoir, with a vaulted roof supported by six pillars.

Outside the *Porta San Francesco* is the ruined Romanesque church of *Santa Stefano*, none of which in what used to be called the *Porta Marzia*, are a fountain and a Roman portrait-statue. — Farther from the town, between the churches of *San Giusto* (18th cent.) and *La Badia* (10th), spoiled, lies a deep ravine called *La Badia* which was comparatively recently formed by erosion and continues to widen. The old church of *San Giusto* was swallowed up by it in the 17th cent., and the celebrated Camaldulensian abbey of *San Salvatore*, founded in the 11th cent., is threatened with the same fate.

About $\frac{1}{2}$ M. to the N.E. of the Porta a Sola is the convent of San Girolamo, the vestibule-chapels of which contain terracotta altarpieces from the studio of the Robbia's, one representing St. Francis with St. Clara and Louis, another the Last Judgment (1501). In the church is an Assumption by Benvenuto di Giovanni (1488). — Further on are the Villa Amphitruo and an Etruscan Tomb, in which the burial-urns are still in situ (the gardener supplies a light, $\frac{1}{2}$ fr.).

A pleasant excursion may be made to the copper-mine (*miniere di rame*) of Capertubo, to the W. of Montecatini di Val di Chiana, 10 M. to the W. of Volterra (diligence in 2 hrs., fare $1\frac{1}{2}$ fr.; returning in $1\frac{1}{2}$ hr., 1 fr.; one-horse carr. 8, two-horse 10 fr.). The carriage-road leads across the hill of *Le Buschettine* to Montecatini, on the summit of the *Sclapitz*, a mountain of volcanic origin. The square tower of the old castle commands an extensive prospect. The mine has been worked since the 15th cent., and the operations were successful till within recent years. The present proprietor is Count Buterlin. The mineral is found in pockets or clusters, between serpentine, known here as *gabbro verde*, and rugged masses of *gabbro rosso* or red trachyte. A number of peaks, such as *Monte dell' Abate*, *Poggio Croce*, and *Monte Massi*, which were upheaved during the tertiary period through the surrounding sandstone and limestone consist of gabbro rocks. The view from *Monte Massi* (2000 ft.) or from *Poggio Croce* (1942 ft., $\frac{1}{2}$ hr. from Montecatini) extends from the heights near Massa and Carrara towards the N. to Monte Amiata on the S., and embraces the sea with the islands of Elba, Capraia, and Corsica.

From Volterra to Colla di Val d'Elsa, 18 $\frac{1}{2}$ M., diligence once daily in 3 $\frac{1}{2}$ hrs (fare 3 fr.; one-horse carr. 8, two-horse 14 fr.). The highroad leads through an undulating district. To the left is seen *San Gimignano* (p. 10), to which a good road (fine views) diverges after $7\frac{1}{2}$ M. (reaching it after 11 M. more, pedestrians may take a short-cut, diverging $3\frac{1}{2}$ M. further on, *via Ronco* and *San Donato*). To the right lies Pomarance (p. 10). *Colla di Val d'Elsa*, see p. 10.

3. Elba and the Tuscan Islands.

A visit to Elba is strongly recommended to the lover of nature. From *Piombo* (p. 3) steamers of the *Navigazione Generale Italiana* ply twice daily in $1\frac{1}{2}$ hr. On Sun. morning on the return-voyage, they call at Rio Marina and Porto Longone. — From Livorno (p. 3) a steamer of the same company starts on Tues. morning; it touches at Gorgona, Capraia, and Marciano, reaches Portoferraio (18 fr. 5 or 10 fr. 70 c.; fee for embarking or disembarking 3 c.), and goes on next morning to Piombino (see above), Rio Martino, Porto Longone, and Marina di Campo in Elba. Pianosa, Talamone, and Porto Santo Stefano on the coast of Tuscany. On Thurs. night it goes on to Civita Vecchia (p. 6). On the return to Leghorn it leaves Civita Vecchia at noon on Thurs. Porto Santo Stefano on Frid. night, and Portoferraio on Sat. morning. Another steamer, starting on Frid. morning, follows the same route to Pianosa and lies to for the night in Porto Longone; it returns from Pianosa on Sat., from Portoferraio on Mon. morning.

About 4 M. to the W. of Leghorn rises the cliff of *Meiorin*, where the Pisans were so signally defeated by the Genoese in 1284 that they never regained their former supremacy. Farther to the W. (21 $\frac{1}{2}$ M. from Leghorn) is Gorgona (836 ft.), a sterile island, inhabited by fishermen. Between the latter and Elba lies (40 M.) Capraia (1486 ft.; 12 sq. M. in area), called by the ancients *Capraria*, 'island of goats', with 560 inhab., where wine is produced.

Elba, a rocky island with steep cliffs and 25,043 inhab., is about 10 M. long, 3 $\frac{1}{2}$ M. broad, and 140 sq. M. in area. It lies 5 $\frac{1}{2}$ M.

to the S.W. of Piombino (p. 3), beyond the islets of *Palmatola* and *Corboli*. Like *Giglio* and *Monte Cristo* (p. 15), it forms part of a sunken mountain range that stretches from Tuscany towards Corsica and Sardinia, and is mostly of granite formation, supporting strata of schist and limestone. The iron ores (iron-glance) which are found embedded in the limestone both in pockets and in layers, though of earlier origin, are probably also Tuscan. The mining and export of iron has from time immemorial formed the principal occupation of most of the islanders, others being supported by the tunny and sardine fisheries. In 1898 ore to the amount of 183 652 tons was extracted, of a value of 106,500 l. (for the whole of Italy the amount was 190,110 tons, value 109,800 l.). The highest point of the island is *Monte Capanne* (3340 ft.), on the W., an imposing mass of granite with a superficial covering of slate at the base, and containing veins of porphyry and rare minerals. The slopes facing the mainland produce admirable wine and fruit, especially near *Capolivori*, at the foot of *Monte Calamita* (1355 ft.).

Elba, Lat. *Ilva* Greek, *Aethalia* (soot island) was subject to the Pisans after the 10th cent., then to Genoa (1280), to Lucca, and to the Appian of Piombino, and was finally presented by the Emp. Charles V. to Duke Cosimo I. of Florence. On the deposition of Napoleon I. the island was ceded to him with full sovereign rights, and he resided there from May 5th, 1814, to Feb. 26th, 1815 (see below). The Congress of Vienna and the second Treaty of Paris restored *Elba* to Tuscany, along with which it was annexed by Piedmont in 1860.

The steamer from Piombino rounds the *Capo della Vite* and enters the beautiful bay of *Portoferraio* (*Albergo L'Ape Elbana*, fair, Brit. vice-consul, G. Tonietti, Lloyd's agent, G. Darmanin), the capital of the island (5970 inhab.), which is enclosed by an amphitheatre of mountains. Halfway up the hill, above the harbour, in a garden between the *Forti Stella* and *Falcone*, which were erected by Cosimo I. in 1548, stands the former *Palace of Napoleon*, commanding a view of the bay in front and of the sea in the direction of Piombino at the back. Below, on the harbour, is the prison for galley-convicts (*Bagno penale*). About 4 M. to the S.W. of Portoferraio, on the slope of *Monte San Martino* (1214 ft.) is the *Villa Napoleone*, which was used as a residence by the Emperor, and is now carefully kept in repair by its present proprietor, Signor Pilade de Buono (the Egyptian hall should be noticed). The contents of the museum built by Prince Demidoff opposite the villa have been sold, the building now contains a natural history collection. There is a third house of the Emperor, still less pretending, near the chapel of the *Madonna del Monte* (2056 ft.), on the N. slope of Monte Capanne (see above).

An excursion to the iron-mines ($\frac{1}{2}$ day) is best made from Portoferraio by taking a boat to *Marassetto*, and walking or riding thence (horse there and back 3 fr.) past the ruined fortress of *Vulturno* (above on the right), then over the hill to *Rio dell' Elba* and on to *Rio Marina* (inn; Lloyd's agent, J. Papucci), where a guide to the mines (scarcely necessary) may be obtained. The ferriferous strata lie on the sea and are recognised at a distance by the reddish-black appearance of the hills. The *Forno del Gioco* (1156 ft.; view) rises 2 M. to the N. of Rio Marina. About $5\frac{1}{2}$ M. to the

S. of *Isola dell' Elba*, in a deep bay, lies the picturesque stronghold of *Porto Longone*, founded by the *Spiniards*.

About $7\frac{1}{2}$ M. to the S.W. of Elba lies the island of *Pianosa* (6 M. in area), the ancient *Pianosa*, which, as its name indicates, is perfectly flat. To this island *Agrippa Postumus*, grandson of Augustus, was once banished, and to him are referred the considerable Roman remains which still exist here. — Farther to the S. (20 M. from Elba) rises *Monte Cristo* (2120 ft., 6 M. in area; the ancient *Oplisa*), consisting like Elba and Giglio, of granite rock. *Victor Emmanuel III.* has a shooting lodge here, and the islet also contains the ruins of a *Camaldulensian* monastery founded in the 12th and destroyed by pirates in the 18th century. The name of the island has acquired world-wide fame owing to the novel '*Le Comte de Monte Christo*' by the elder *Dumas* (1844-45). — About 9 M. to the W. of the *Monte Argentario* (p. 5) is *Giglio*, Lat. *Ipitium* (1681 ft.), a considerable island (2500 inhab.) containing granite-quarries and vineyards. Near the harbour, *Porto*, are vestiges of a Roman palace. A steamer plies every morning, except Sun., from *Porto Santo Stefano* (p. 5) to *Giglio*, returning in the afternoon.

4. From Florence to Siena via Empoli.

60 M. RAILWAY in 2-3 $\frac{1}{4}$ hrs. (fares 11 fr. 5, 7 fr. 75, 5 fr.). No quick trains, through-carriages by some trains. — From Florence to Siena by Road, 45 M., a delightful drive of 9-10 hrs. (curr. and pair 60-70 fr.), via *San Casciano in Val di Pesa* and (25 M.) *Poggibonsi* (p. 16).

Florence, see *Baedeker's Northern Italy*. — 6 M. *San Donnino*; the valley of the Arno expands. 7 M. *Signa*, with its grey pinnacles and towers, is famed for its straw-plaiting. The line crosses the *Ombrore* and enters the defile of the *Gonfolina*, between the middle and the lower valley of the Arno. We cross the Arno. 16 M. *Monte-lupo*. Farther on we cross the small river *Pesa*.

20 M. *Empoli* (*Alb. del Sole*; *Rail. Restaurant*, poor), a town with 20,300 inhab., with antiquated buildings and narrow streets, situated in a fertile district. Halt of 5-25 min., passengers for Siena have often to change carriages. The main line pursues a W. direction towards Pisa and Leghorn; see *Baedeker's Northern Italy*.

The line to Siena ascends the fertile valley of the *Elsa*, on the right bank of the stream. To the right, on the hill, *San Miniato al Tedesco*, once an imperial palace of Frederick Barbarossa. 22 $\frac{1}{2}$ M. *Ponte a Elsa*, 26 M. *Granaiole*. 30 M. *Castel Fiorentino*; the town, on the slope (354 ft.) to the left, is the principal place in the *Val d'Elsa*.

35 M. *Certaldo* (426 ft., *Albergo della Stazione*, Via Umberto Primo, near the station, R. 1, dej. 1 $\frac{1}{2}$ D. 2 fr.), with 4522 inhab., lies on the hill to the left. It was the family-home of *Giovanni Boccaccio*, who was born at Paris in 1313, and died here in 1375. A statue of him, by *Passaglia*, was erected in the principal square in 1875. His tomb in the church of *Santi Michele e Jacopo*, erected in 1503, was removed in 1783, and its remains may now be seen in the *Casa di Boccaccio*, close by, which was restored in 1823 by the Marchesa *Carlotta Lenzi-Medici*, and furnished with old household-effects. The tower commands a pretty view. The *Palazzo Pretorio*, which is adorned with coats-of-arms and contains some defaced frescoes, is now a 'national monument'.

A carriage-road leads from Certaldo to (7 M.) *San Gimignano* (see below; one-horse carr. 1 pers. 3, 2-3 pers. 4, there and back with 5 hrs. stay 5 or 6 fr.; two-horse 8 or 12 fr.).

As the train proceeds, *San Gimignano* is visible for a short time on the right.

43 M. *Poggibonsi* (*Aquila*, opposite the station, very fair); the town (7866 inhab.) lies to the right. On the hill 1 M. to the S. rise the old *Fortress* and the monastery of *San Luce*. In the church of the fortress is an altar-piece (*Noli me tangere*) and in the former refectory are frescoes by *Gerino da Pistoja*.

From *Poggibonsi* to *Colle di Val d'Elsa*, 6 M., railway in 18 min. (75, 45 c.). — *Colle di Val d'Elsa* (Ab. *dei Santi Sapp'orne*, tolerable) is an old town (8982 inhab.) and the seat of a bishop. In the lower town (*Colle Bajo*) there are iron and glass works. The upper town (*Colle Alto*) contains some old palaces, including the *Palazzo Caccerali*, by *Ant. da Sangallo* the Younger (16th cent.), the house of *Arnolfo di Cambio* (1212-1301), the first architect of the cathedral at Florence, and the Cathedral. The last, dating from the 13th cent., with a façade modernised in bad taste, contains a marble pulpit (of which the lower part belongs to the 13th cent., and the upper part, with reliefs of saints, to the 16th), and carved choir-stalls of the 17th century. — From *Colle di Val d'Elsa* to *Volterra*, see p. 18.

From *Poggibonsi* to *San Gimignano*, 7½ M. Carriages may be hired at the station (2 pers. 2, 2 pers. 3 fr.), with allowance for stay in *San Gimignano* according to bargain. An omnibus plies twice daily (in 2 hrs., returning in 1½ hr.), starting at 8.45 a.m. and 7.30 p.m., and returning at 8.30 a.m. and 5.45 p.m. (fare 1 fr.) — It is possible to drive on the same day to *Volterra* (8½ hrs., comp. p. 18; fare from *Poggibonsi* ca. 30 fr.).

San Gimignano (1089 ft.; *Albergo Centrale*, *Piazza Cavour* 12, pens. 4-6 fr., well spoken of; *Albergo Leon Bianco*, *Via San Matteo* 80, near the gate, R. from 1¼, pens. 4½ fr., good cuisine), an ancient and loftily situated town, with 4060 inhab., was a prosperous and independent place in the 13th and 14th cent., but in 1353, after having suffered terribly in consequence of the dissensions of the leading families of the *Salvemini* (*Ghibellines*) and *Ardinghelli* (*Guelphs*), it became subject to Florence. Its walls, its towers (whence the name '*San Gimignano delle belle torri*'), and its streets all carry us back to the middle ages. Perhaps no other town in Tuscany presents so faithful a picture of Dante's time.

In the centre of the town is the *PIAZZA VITTORIO EMANUELE*, with several important buildings.

The Gothic *PALAZZO COMUNALE* was erected in 1288-1323.

The *SALA DEL CONSIGLIO*, on the second floor, contains frescoes of 1201, also a *Madonna* with saints and angels, and the kneeling donor *Podestà Nello dei Tolomei* (1317), and frescoes by *Lippo Memmi* of Siena, restored and completed by *Benozzo Gozzoli* in 1467. It was in this hall on May 7th, 1300 (or 1299), that Dante, as ambassador from Florence, requested that representatives should be sent to an assembly of the *Guelphs*. — The municipal *Museo*, on the third floor, contains pictures from suppressed monasteries in the neighbourhood, by *Rob. Maestardi* (an assistant of *Dom. Ghirlandajo*), *Flippino Lippi* (two round paintings with the *Annunciation*, 1485), *Fra Pintoricchio*, *Pintoricchio* (? *Madonna* with two saints, about 1501), *Guido di Barnolo* (architectural details from *San Gimignano*), and others; also painted choir-stalls. Fine view of the surrounding country. — To the left

of the exit into the court is the *Cappella delle Casce* (now the *Stanza del Casiere*, divided by a modern wall), containing a scene from the legend of St. Yvo (d. 1178), and allegorical figures of Truth, Prudence, and Falseness, the frescoes by Sodoma (?). There are traces of frescoes in other rooms also.

The *Torre del Comune* (174 ft.) is the highest of the 13 existing towers of the town. The largest of its three bells dates from 1328.

Adjacent is the cathedral, usually called *La Collegiata*, of the 12th cent., enlarged after 1406 by *Giuliano da Majano*. It contains frescoes of the 14-15th centuries.

On the entrance-wall, *Martyrdom of St. Sebastian*, a fresco by *Benozzo Gozzoli*, 1460; *Annunciation*, two wooden figures (14th cent.) by *Martino Bartolomeo* of Siena. Above the St. Sebastian and the adjoining arches of the nave, the *Last Judgment*, *Paradise*, and the *Inferno*, by *Taddeo di Bartolo*, 1388. — In the N aisle, scenes from the Old Testament by *Bartolo di Fredi* of Siena, 1356; in the S aisle, *Life of Christ* by *Barra da Siena*, 1380. — The visitor should particularly notice the last side-chapel to the right, the *Cappella di Santa Fina*, which contains the bones of this local saint, who died at the age of 15 years. The chapel was designed by *Giuliano da Majano* (1406), the altar by *Benvenuto da Majano*. The frescoes on the side-walls, representing the vision of the saint and her burial, painted by *Dom. Ghirlandajo* before 1475, are the earliest and among the finest works of that master, and combine a fresh and lifelike style with impressive gravity (restored in 1892). — In the centre of the right wall of the Choir, *Coronation of the Virgin*, an altar piece by *Piero del Pollaiuolo* of Florence, 1478, to the right of this, *Madonna and four saints*, by *Benozzo Gozzoli*, 1460; on the left wall, *Madonna* by *Fino Fiamini*, adjacent, *marquetry* ('*isotaria*') choir-stalls of 1480. — The *Oratorio San Giovanni* contains an *Annunciation* by *Dom. Ghirlandajo*, 1472 and a font of 1379. — In the *Sacristy* are a ciborium by *Benvenuto da Majano* (a smaller reproduction of that at San Domenico in Siena, p. 36) and an altar-piece by *St. Marmiroli*.

Opposite the cathedral is the *Palazzo del Podestà*, of the 13-14th cent., now a theatre (*Teatro del Leggeri*), with an imposing loggia. It is surmounted by the *Torre dell'Orologio*, which indicates the height (167 ft.) beyond which private individuals were prohibited from building.

The *Via San Matteo* descends from the Piazza, passing the two towers of the *Salvucci*, to an ancient gateway, which marked the limits of the town until the 18th century. Immediately to the right in this street is the *Biblioteca Comunale* (librarian, Prof. Ugo Nomi-Pasciolini), which contains 30,000 vols. and a small museum. Farther on are *San Bartolo* (originally *San Matteo*), with a 13th cent. facade, and the *Palazzo Pasciolini*. — In the *Via Verru Serravalle* (formerly *Via Nuova*), which diverges to the right, are the church of *Santa Chiara* on the left, and farther on, on the right, the *Hospital* and the church of *San Girolamo* (behind the high-altar, *Madonna and saints* by *Vinc. Tamagni*, 1522, with a glory by a later painter), and finally, to the left of the gateway, *San Jacopo*, a former church of the *Knights Templar*, of the 12th cent., with frescoes by a Sienese master of the 13th or 14th century. Just outside the gate we obtain a charming view of the town with its numerous towers and of the surrounding country.

The Via delle Romite, diverging to the left from the Via Venti Sottombro near Santa Chiara, leads to the church of Sant' Agostino, built in 1280-98 and containing famous *Frescoes by *Bonaccio Gossoli* (1483-87), the pupil of Fra Angelico, which alone would repay a visit to San Gimignano. The agrarian lives in the adjacent 'Palazzo della Vergine' (just below the Via Venti Sottombro).

In these frescoes, which are in the Choir, *Bonaccio Gossoli* has portrayed the life of St. Augustine in 17 scenes, from his school-days to his death. The finest of these pictures, which are neither of uniform excellence nor in equally good preservation, are St. Augustine as teacher of rhetoric in Rome (No. 6), Death of St. Monica (18), St. Augustine on the bier (17). — The Cappella di San Guasparino, to the right of the choir, contains a Nativity and Death of the Virgin, by *Bartolo di Fredi*, in which are several attractive touches of real Italian life. — To the left, in the Cappella del Santissimo Sacramento, are interesting frescoes by *Vinc. Tamagni*. — On the N. side of the church, St. Geminianus and three worshippers, a fresco by *Seb. Mainardi*; farther on, St. Sebastian, the deliverer from the plague, the efforts of which are symbolised by flashes of lightning, by *Bonaccio Gossoli*, 1484, of less importance than the frescoes in the choir. To the right of the principal entrance, in the Cappella di San Bartolo the beautiful altar of St. Bartolomew, one of the chief works of *Benedetto de Majano*, with well-preserved colouring (1484); also, frescoes by *Seb. Mainardi*, representing three saints (1500); majestic flooring of the 16th century.

From Sant' Agostino we return to the market-place, which is adjoined by the Piazza Cavour (formerly Piazza della Cisterna), with the Palazzo Priami, and the two low towers of the *Ardinghelli*. The Via del Castello leads to the left to the former church of San Lorenzo in Ponte, with a portico, now built up, of the 13th century. — The terracotta ornamentation of the house-windows, many of which are in the form of a horseshoe, should be observed.

From the Piazza Cavour the Via Giovanni descends to the right to the Palazzo Pratesi, in which the principal saloon of the upper floor contains a Betrothal of St. Catharine with saints, a fresco by *Vinc. Tamagni* (1528). Farther on, in the street, is a figure of the Madonna, by *Mainardi*.

The Rocca (1363), or the highest part of the old fortifications (ascend to the right from La Collegiata), in a private garden, commands a fine view of the town and neighbourhood.

About $1\frac{1}{2}$ M. to the S., outside the Porta San Giovanni, is the former monastery of *Monte Oliveto*, with a Crucifixion by *Bonaccio Gossoli* (in the cloister). — Beyond the Porta San Matteo (about 2 M. to the N.W.) is the venerable church of *Pieve di Colliori*, or *Colliola*, consecrated in 1207, containing remarkable capitals and curious ornamentation on the apse. Fine view.

Beyond Poggibonni the RAILWAY begins to ascend considerably. We now leave the late-tertiary or pliocene formations, and enter the irregular fissured tract of Central Tuscany, with the wooded limestone group of the *Montagnaola Senese* (2200 ft.) This is honey-combed with caves, and local earthquakes are often caused by the washing away of parts of its interior. To the right, *Staggia* with a mediæval château. Near ($50\frac{1}{2}$ M.) Castellina in Chianti (7 M. to



.

.

the N.E. of the station), also to the right, is the picturesque château of *Monte Biggioni* (755 ft.; 13th cent.); of the towers mentioned by Dante (*Inferno* xxi, 40) four only are still standing. The line crosses the watershed and, threading a tunnel 1 M. long, emerges in the district of Upper Arbia.

50 M. *Sienna*, see below.

5. *Sienna*.†

Hotels. **GRAND HÔTEL CONTINENTAL* (Pl. b; C, 4), Via Cavour 15, opposite the post-office, with electric light and baths, R. from 3½, B. 1½, 44j. 5½, D. incl. wine 5, pens. 8-12, omz. 1 fr. (fine view from the windows on the rear); *GRAND HÔTEL ROYAL DE SIENNA* (Pl. a; C, 5), Via Cavour 59, with its back to the *Lizza* (p. 26), with electric light and baths, R. from 4, B. 1½, 44j. 4, D. 5½, incl. wine, pens. 8-12, omz. without luggage 1½ fr.; *Aquila Nera* (Pl. c; C, 5), Via Cavour 8, in the Italian style, with restaurant, R. 2½-5, B. 1½, pens. incl. wine 8-8, omz. ¾-1 fr., very fair. — The following are good second-class houses, with trattoria: *La Scala* (Pl. d; C, 5), Piazza San Giovanni, opposite San Giovanni (p. 26), R. 2 fr., very fair; *La Toscana*, Via del Re 4, R. 1½-2, pens. 4½ fr.; *La Patria*, Via del Termini 4, R. 1½ fr.; *Ten Mori*, Via Garibaldi and Piazza Cairolì (Pl. C, 8), R. 1-2 fr., clean.

Pensions (generally well spoken of and much patronised by English visitors). *Chiusarelli*, Viale Curtatone 3, prettily situated, pens. 5-6 fr.; *L. Gatti*, Via de' Servi 1, pens. 5 fr.; *Santa Caterina* (*Lucchetti*), Via delle Belle Arti 81, with 5 rooms only, pens. 5-6 fr., fine view, *Romualdi*, same street No. 19, pens. 5 fr.; *Sacco*, Via Ballustio Bandini 19, pens. 5-6 fr.; *Quintè-Bigoni*, Via Lucherini 12, pens. 5-6 fr.; *Martini*, Via Cavour 12; *Mirelli*, Via Cavour 58, 3rd floor, pens. 3½-4 fr.; *Gabrielli*, Via Franciosa 58, pens. 4 fr., both unpretending.

Restaurants. *Eden* (p. 37; also rooms), outside the Porta Camollia (Pl. B, 1), with view-terrace; *Centrale*, *P. Bonfanti*, both Via Umberto Primo; *Trattoria del Reame* (also rooms), Via Cavour, near the post office.

Cafés. *Café Greco*, Via Umberto Primo, opposite the *Cardo de' Nobili* (p. 23); *Pasticceria Mosca*, in the *Aquila Nera* (see above). *Panforte* is a kind of gingerbread popular here. — *Beer* at *Seder's*, on the *Lizza* (p. 26).

Oak Tariff:	By Day		At Night	
	one-horse	two-horse	one-horse	two-horse
<i>In the town:</i> to or from the station	1 fr. —	1 fr. 50	1 fr. 30	1 fr. 80
— first half-hour	— 80	1 —	1 —	1 30
— each additional ½ hr.	— 50	— 80	— 60	— 70
<i>Beyond the town:</i> first half-hour	1 20	1 50	—	—
— each additional ½ hr.	— 70	— 80	—	—

Each trunk 30, bag 20 c.

Carriage Hire. Via Cavour 23 and Via Ricasoli 30; carriage per day 25 fr., half-day 8-10 fr. — Saddle-horse per day 3 fr., half-day 5 fr. — *Bigolles* on hire, Via delle Belle Arti 15.

Post and Telegraph Office. Via Cavour 15, in the Palazzo Spannocchi (Pl. C, 4).

Baths. Swimming-bath near the Fontebranda (p. 25; poor; water cold); warm baths at *Masini's*, Via Dupré 45.

English Church Service in spring, in the Chiesa Cristiana Evangelica, Viale Curtatone.

† The town of *Sienna* is situated on three ridges (p. 20) and thus falls naturally into three parts: the *Torre di O'ia* on the S.W., the *Torre di San Merito* on the S.E., and the *Torre di Camollia* on the N. hill. — The narrow, steep side-streets are called *costarelle*.

BOOKSHOPS, Forini, Via Cavour 8 (also ancient art works). — **PHOTOGRAPHS** of Lombardi's, Via Umberto Primo 8. — **Canvas Work:** Gubbé, Via Umberto Primo 35; Corini, Via del Capitano 5, near the cathedral, and others. — **Mount Cassens** Crested, Via Cavour 12.

Theatres. Teatro dei Mannocelli (p. 24), in the Palazzo Pubblico; Teatro del Reccé (Pl. C. 5), Via delle Terme 2.

Principal Attractions (1½-7 days) 1st Day. In the morning, Via Cavour (p. 22) and Piazza Vittorio Emanuele with the Palazzo Pubblico (p. 25); San Giovanni (p. 25); Cathedral Museum (p. 26); in the afternoon, Cathedral (p. 26); Palazzo Vecchiogio (p. 26). — 2nd Day. Palazzo Accademico (p. 27); Oratorio di San Bernardino (p. 28); Accademia di Belle Arti (p. 28); San Domenico (p. 28); Luca (p. 28); Protopia (p. 27).

On 2nd July (Visitation of the Virgin) and 16th August (the day after the Assumption) picturesque processions, arranged by the 17 Contrade (or wards), march through the streets, and horse-races called *il Palio* (from the banner given as prize), take place in the Piazza Vittorio Emanuele, presenting a very attractive scene; seat in a balcony (*posto di ringhiera*) from 2 fr., less in the wooden galleries below. Comp. W. Heywood, 'Our Lady of August and the Palio' (Sienna, 1898, 4 fr.). Visitors interested in Sienna may consult also the 'Guide to Sienna', by William Heywood and Lucy Green (1893); 'A Pictorial Chronicle of Sienna', by William Heywood (1894); 'A History of Sienna', by Langton Douglas (1897); and 'The Story of Sienna', by E. U. Gardner (1897).

Sienna (1045 ft.), the capital of the province of that name, with 25,567 inhab., the residence of an archbishop, and the seat of a university which was in high repute as early as the 14th cent., though it now possesses faculties of law and medicine alone, is picturesquely situated 31 M. to the S. of Florence, on three connected hills. It is now a busy trading and manufacturing place (weaving, etc.); it also is one of the pleasantest towns in Tuscany, suitable for a stay of some duration. The climate is healthy, the atmosphere in summer being tempered by the lofty situation, and the drinking-water is good; the language and manners of the inhabitants are pleasing and prepossessing. Most of the streets are narrow and crooked, but they contain many palaces and handsome churches. Next to Rome, Florence, and Venice, Sienna is the most important town in Italy for the study of the art of the 13-16th centuries. The brick-clay of the district has been extensively used in the local buildings.

Sienna, the ancient *Sarna*, or *Cadmus Julia Sarna*, is said according to an ancient legend, to have been founded by Senus, son of Remus, the brother of Romulus; others maintain that it was founded by the Senonian Gauls and converted into a Roman colony by Augustus. At any rate it has the same arms as Rome, viz. the she-wolf and the twins. The only Etruscan antiquities here are a few tombs which were discovered in 1864 near the Porta Camollia. The town attained to the height of its prosperity in the middle ages. After the death of the Countess Matilda (1115) her extensive dominions were dismembered, and the citizens of Sienna, as well as those of Pisa, Lucca and Florence, succeeded in establishing their independence. The government then fell into the hands of the nobility, but was wrested from them by the people. The ensuing conflicts, however, terminated in favour of the nobles, and Sienna became the leader of the Ghibelline party in Central Italy, while Florence was the stronghold of the Guelph faction. From the beginning of the 12th cent. war was continually being waged with the neighbouring Florentines. Farinata degli Uberti and the Ghibellines from Florence were welcomed in Sienna, and on 4th Sept., 1260, a great victory over the Guelphs, the bloodiest recorded in the annals of Tuscany, was gained near *Monte Aperto* (p. 29), with the

aid of the German troops of King Manfred of Naples. Ten years later Charles of Anjou succeeded in establishing his influence at Siena, which had shortly before received the young Cupredin of Substantino with open arms, and incorporated it as a member of the Tuscan Empire confederation of towns. The city, however kept a jealous watch over its privileges, and, notwithstanding several attempts on the part of the nobility to re-assert their authority, its constitution remained unchanged. In the 14th and 15th centuries Siena is said to have numbered 100,000 inhab., and vied with Florence in wealth and love of art. At length the supremacy was usurped by tyrants, such as (about 1407) the art-loving *Pandolfo Petrucci*, surnamed *il Magnifico*, whom Machiavelli represents as a picture of a despot. In 1494, when Charles VIII. of France arrived in Italy, Siena concluded an alliance with him, and during the truchies of the first half of the 16th cent. the citizens for the most part sided with the French, by whom the town was usually garrisoned. In 1555 the French garrison was expelled by families so capitalists to the Spanish besiegers, by whom *old Duke Cosimo I.* of Tuscany succeeded in gaining permanent mastery of the place.

History of Art. The bitter political fate which overtook Siena, converting the mighty rival of Florence into a quiet provincial town, will strike the antiquarian as a very fortunate circumstance, for here are still preserved many monuments and reminiscences of medieval life comparatively unaffected by the vicissitudes and the progress of subsequent ages. The conservative character of Siena has not, however, been pondered as in the case of Bruges by the withdrawal of the stream of history, for even when at the height of its power, particularly as compared with Florence, it manifested a preference for old established rules and a dislike for innovations. The best period of Sienese art still belongs to the middle ages, when the towns of Italy had begun to give themselves up to their practice of art, but before the pedantic element had given way to the pure sense of the beautiful. There is no town in Italy which presents such instructive examples of the Italian Gothic Architecture of the 13th and 14th centuries as Siena, where we find magnificent stone buildings vying with graceful structures in brick. If the Cathedral had been built according to the intentions of the citizens, it would have been one of the largest and most imposing churches in existence, and even in its reduced proportions it is one of the finest in Italy. In the secular buildings (of which perhaps the *Palazzo Pubblico* in the *Scint* exemplifies the pointed style predominates, the windows are generally divided by small columns, and the whole edifice is crowned with pinnacles. In the 16th cent., when the motive of the capitalised mansion was clothed with Renaissance forms, Siena was not slow to imitate the example of Florence, and in fact, borrowed her rivals architects for the designs of her most important palaces (*Palazzo Spaldoni, Spaldoni, Nerves*). The most interesting of the Renaissance churches is the small round church of *San Sebastiano*, usually known to art-illustrators as the *Chiesa degli Innocenti*.

In Sculpture too, Siena gave free scope to foreign masters. *Donatello* and *Stefano Pisan* were the predominant influences in the vigorous evolution of the Sienese School of Sculpture from the 14th cent. onwards, the masterpieces of which was the decoration of the facade of *Orvieto Cathedral* (p. 10). *Jacopo della Quercia* (1374-1438) was a native of Siena and took part in the memorable competition for the decoration of the doors of the Baptistery in Florence. He was one of the founders of Renaissance sculpture, and his somewhat austere style akin to that of Michael Angelo is well represented in the fountains of *San Giovanni* and the *Ponte Galea*. He was succeeded by *Luca di Piero* surnamed *il Vecchio*, *Antonio Pisan*, *Francesco di Domenico* who was also a famous architect, *Gregorio Corbelli*, and *Luca di Mariano*, surnamed *Rastrelli* (1576-1634) the most notable sculptor of the advanced Renaissance style that Siena has known. The school of Wood Carving, which flourished here more especially in the 15-16th cent., also counted several artists of renown including *Donatello di Nicolo*, *Antonio* and *Giovanni Bassi*, *Bartholomew Nanni*, called *il Rosso*, and others.

Painting was the favourite art of the early Siennese. As early as the beginning of the 13th cent. they could boast of Duccio in Buonaiuti, a painter whose works far surpass those of Cimabue in beauty and grandeur. On his completion in 1310 of the *Maestà* or Triumphant Madonna for the high altar of the cathedral of Siena the picture was carried to the church in solemn procession (p. 24). An equally important master was Sassetta (1325-1365) who has been immortalised by a sonnet of Petrarca, and who like his contemporary Giotto practised his art and increased his influence far beyond the limits of his native city. Works by his hand are still to be found at Naples, Orvieto, Assisi and Avignon, as well as in the Palazzo Pubblico at Siena. So famous indeed was his name that it was usual to attribute to him all the best works of his period. His compositions are of a very primitive character but he certainly possessed great skill in his rendering of tender sentiment. Closely akin to these two masters was Lippo Lippi who executed large frescoes with the same elaborate care as meticulous in execution. The easy narrative style and the imaginative allegory were cultivated by the brothers Piero and Ambrogio Lorenzetti both of whom probably died at the plague in 1348, and the approach of the Siennese school to that of Giotto was thus accomplished. A little later however the works of Bartolo di Fiesole (1320-1340) fell short of those of his predecessors and this was still more the case with those of Tuccio di Bartolo (c. 1335-1355) who was far inferior to his Florentine contemporaries. For a time all artistic progress at Siena seemed to be at an end and throughout the 14th cent. the city did not give birth to a single master of note. The painters Domenico di Bartolo, Sassetta, Piero, the above named Vanni, Bartolo and Ambrogio Lorenzetti and others of this period adhered tenaciously to the limited methods of their predecessors from whose influence they were unable to emancipate themselves. At the close of the century owing to contact with neighbouring schools whose representatives were frequently invited to Siena, and to the introduction of the study of Florentine, Umbrian, and Lombard masters, the tide of progress at length began to set in. The most distinguished Siennese masters of this period, far surpassing their contemporaries Bernardo Rosselli, Giotto da Fabriano, Francesco di Jacopo and others were Baldassare Pinturicchi and Giovanni Antonio Bazzi (surnamed il Sodoma, Pinturicchi 1494-1507) who was antedated with Raphael at Rome was endowed with an admirable perception of beauty of proportion and was famous both as an architect and a decorative painter but Siena now possesses little of his work. Sodoma ca. 1477-1540 on the other hand may be thoroughly studied at Siena. A Lombard by birth he brought to Siena some traces of Leonardo da Vinci's style, but instead of cultivating this he seems to have trusted to his own natural ability and with such success that in one respect he vies with Raphael himself. In the delineation of beautiful and youthful figures he is unsurpassed and his technical skill in fresco-painting and his fertility are marvellous but in spite of his strong sense of the beautiful his works are apt to pall upon the taste owing to the superfluity of their composition. With Don Baccio (1494-1566), who frequently altered his style begins the period of decline.

From the station (Pl. D. 2) the winding Via Garibaldi (Pl. D. C, 2, 3) ascends to join, near the Lizza (p. 26) the Via Cavour (Pl. C. 3 b), the handsomest and busiest street in Siena.

Halfway up, on the right, is the small church of *Santa Maria delle Venti* (Pl. C. 4), with an early Renaissance façade and an altarpiece by Matteo di Giovanni (1477). Farther on in the Piazza Salimbeni stands a monument by Sarraceni (1897) in memory of *Salustiano Bandini* (1077-1706), who drained the Siennese marshes. On the E. side of the piazza is the crumbled *Palazzo Salimbeni* rebuilt in 1870 and now occupied by a loan-society (*Monte dei Paschi*).

The beautiful **Palazzo Spannocchi** (Pl. C, 4), begun in 1473 by the Florentine *Giuliano da Majano*, is an early-Renaissance structure (the exterior restored), with a court surrounded by boldly constructed colonnades. It is now used as the Post & Telegraph Office, while on the 3rd floor is the unimportant 'Galleria Succursale' of the Accademia di Belle Arti (p. 33). — Farther on, near the *Via dei Ronsi* (p. 33), rise the *Palazzo Gori* (1677), *Bichi* (1620), with modern paintings in the loggia in the court, and *Palmieri* (1540). The small *Piazza Tolomei* contains the early-Gothic *Palazzo Tolomei* (Pl. C, 5), dating from 1205, and the church of *San Cristofano* (Pl. C, D, 5), built in 1100 and restored in 1800, with a finely painted altar-piece by *Girol. del Pacchia* (Madonna with SS. Luke and Raymond).

Between the *Via Umberto Primo*, the continuation of the *Via Cavour*, and the *Piazza Vittorio Emanuele* (see below) is the *Casino de' Nobili* (Pl. C, 5; now the *Circolo degli Uniti*), once the seat of the commercial tribunal (*Loggia dei Mercanti*); it was built by *Sano di Matteo* and other architects in imitation of the *Loggia de' Lanzi* of Florence in 1417, but the upper story is later. The sculptures are by Siennese masters of the 15th cent., such as *Ant. Federighi* (who executed the figures of SS. Ansano, Savino, and Vittore, and the stone bench on the right), *Urbano da Cortona* (stone bench on the left), and *Vecchiella* (figures of SS. Paul and Peter). — A little to the N.W. is the little *Piazza dell'Indipendenza* (Pl. C, 5), with a *Status of Italia* by *Sarrocchi* (1879).

In the centre of the town, at the junction of the three hills on which it stands, is the picturesque **Piazza Vittorio Emanuele* (Pl. C, 5), formerly called the *Piazza del Campo*, which is mentioned by Dante (*Purg.* xi 134). It is semicircular in form and depressed towards the centre, resembling an ancient theatre. The popular assemblies and festivals of the ancient republic took place here, and it is here that the *Palio* horse-races (p. 20) are now held.

The massive Gothic *Palazzo Sansedoni*, on the N. side of the *Piazza*, with its pinnacles and half-ruined tower, dates from the 13-14th century. On the diameter of the semicircle rises the —

**Palazzo Pubblico* (Pl. C, D, 6), a huge four-storied edifice built of brick and travertine in 1289-1305, with pointed windows divided by small columns, and wings lower than the central part of the building. (The second floor of the wings dates from the 17th cent.; comp. p. 27.) Adjacent rises the slender **Torre del Mangia* (385 ft.), one of the noblest towers in Italy, begun in 1325, and finished about 1345, so named after the stone figure of a man which used to strike the hours (a popular figure resembling the Roman *Pasquino*, p. 225); fine view from the top (412 steps, 1½ fr.). 'When once you have seen the Mangia, all other towers, obelisks, and columns are tame and vulgar and earth-rooted; that seems to quit the ground, to be not a monument but a flight' (*W. D. Howells*). At the

front of the tower is the Cappella di Piazza, in the form of a loggia, begun after the cessation of the great plague of 1348 which is said to have carried off 30 000 persons, and completed in 1378. The elegant Renaissance upper story was added in 1400 by Ant. Federighi in place of the original simple roof. The faded fresco on the altar wall is by Sodoma. The side-wall on the column in front of the right wing, the arms of Siena (p. 20), is by Giovanni di Turino (1429).

The interior (containing 51 ft., but some 10 ft.) is embellished with numerous frescoes of the fifteenth century. Among these on the ground floor are a Coronation of the Virgin, by Simone di Pietro 1445, a Madonna with St. Anne and St. George, and another with St. Leonard, both by Sodoma. Madonna with child by Vecchiotto, a Slave Christ, by Sodoma, 1445-7, in the room of the Stanzas. — The Palazzo dei Priori, lately rebuilt by Ant. Gatti da Urbino in 1705, is the old Sala del Gran Consiglio.

On the first floor we begin with the Sala dei Magnifici (formerly Sala delle Rinfresche), adorned with large frescoes. Madonna and Child under a canopy borne by saints, by Simone Martini, 1315, a composition with numerous figures somewhat stiff but with beautiful details opposite, Equestrian portrait of the Genoese commander Guiderotto, by Simone Martini (1315), freely restored; beneath Madonna (retouched) by Guido da Siena the date of which 1221 appears to be spurious, prob. 1294, formerly in San Domenico, to the right and left, Saint Agnes and San Vittore and, on the other wall to the right, San Bernardino Tolomei, by Andrea, then San Bernardino by Simone di Pietro and Santa Caterina by Vecchiotto. The vestibule of this hall is adorned with frescoes by Puccio di Bartolo representing various scenes: Judas Macabreus and St. Christopher and other scenes (1441). The vault of the archway is occupied by a curious view of Siena. — A beautiful iron railing (1445-60), in the Gothic style, in front of which is a holy water basin by Gino di Forno, separates this vestibule from the Court or Piazza. The handsome benches carved by Domenico di Bartolo (1445-50) have some of these details in the Renaissance style. The frescoes (left) of the Death and Assumption of the Virgin are by Puccio di Bartolo. The altar-piece is a Holy Family by Sodoma, on the right is an organ by G. Fyffe and Gino di Forno (1521). To the right of the Sala dei Magnifici is the —

Sala della Pace or Sala dei Nani with celebrated "Frescoes" by Ambrogio Lorenzetti painted in 1337-45 representing Good and Bad Government. These pictures which are indispensable to those who desire an insight into the disposition of the proud citizens of Siena in the middle ages. The allegories and allusions of a more or less obscure character which they contain are at least interesting as being of a much more homely kind than those customary in modern times. One of these mural paintings represents the ideal of a state under the guidance of wisdom, justice, and other virtues, while the two others portray in a realistic style the consequences of good and bad government. The preservation is imperfect, but the spectators will not fail to admire the heads of Peace, Justice, and Concord, and the portraits of the magistrates in the feet of the virtues. — Adjoining is a room with portraits of the eight popes and thirty-eight cardinals to whom Siena has given birth. — Another Room contains some frescoes recently transferred from other buildings: a Madonna by Matteo di Giovanni da Siena 1484 and San Bernardino preaching to the Campo (p. 24), by Simone di Pietro, interesting for its representation of the plague in that period. — The adjoining Sala or Hall, on the right, is adorned with illustrious frescoes from the history of Pope Alexander III. by Spinello Aretino 1415, including a naval victory of the Venetians, and the Emp. Frederick Barbarossa and the Doge San Eliani leading the Pope's horse. In the centre of the room are two chests, one (with the sky wall) finely carved by Ant. Smith, the other adorned with paintings and modern gilding. The San Antonio door is by Dom. di Bartolo. — The next room

is the *SALA VITTORIO EMANUELE*, decorated in 1866-67 by *Aldi*, *Cassetti*, *Car. Marconi*, and others with fine frescoes from the life of Victor Emmanuel II and the recent history of Italy, unveiled in 1890 — The last room, to the left of the corridor, is the *SALA DEL CONCISTORO*, with ceiling paintings (scenes from Roman history) by *Dom. Beccafumi*, a fine marble doorway by *Jacopo della Quercia* (above which is the Judgment of Solomon by *Luca Giordano*), Florentine tapestries (the five smaller ones of the 16th cent.) on the walls, and modern busts of illustrious citizens of Siena.

The rear of the palace, abutting on the *Piazza del Mercato* (Pl. C, D, 6), or vegetable-market, is also very picturesque. The piazza commands a good view of the environs with Monte Amiata (p. 41) in the distance.

The marble *Fonte Gaia* (Pl. C, 5), the masterpiece of *Jacopo della Quercia* (1408-19), which rises in the *Piazza Vittorio Emanuele*, was freely restored by *Tito Sarrocchi* in 1868. The original reliefs, in a very damaged condition, are preserved in the *Opera del Duomo* (p. 28). A subterranean conduit, 16 M. in length, has supplied the fountain with excellent water since 1844.

Leaving the *Via Umberto Primo* (p. 29), which is especially thronged in the evenings, we turn to the right, just beyond the *Via Fontebranda* (p. 35), and ascend the *VIA DEI PELLICCIANI*, which ends at the small *Piazza San Giovanni*. Here, at the corner to the left, is situated the *Palazzo del Magnifico* (Pl. C, 5), erected in 1508 for the tyrant *Pandolfo Petrucci* (p. 21), from designs by *Giacomo Cozzarelli*, in the early Renaissance style. The bronze ornaments and flag-brackets on the outside are admirable. In front of the house No. 5 is a bronze bust of *Francesco di Giorgio* (p. 21), unveiled in 1902.

In a straight direction we see the choir of the loftily-situated cathedral, under which is the old baptistery, now the church of *San Giovanni* (Pl. B, C, 5), built after 1317, with an unfinished Gothic **Facade* by *Giac. di Mino del Pellicciaio* (1382, restored in 1900).

INTERIOR. The chief adornment here is the marble **Font*, designed by *Jacopo della Quercia*, executed in 1417-30 and adorned with bronze figures. The statuette of John the Baptist (on the top), the marble reliefs of the five prophets, and one of the six beautiful bronze-gilt reliefs from the history of John the Baptist (Zacharias in the Temple, 1419, cast in 1430) are also the work of Quercia. The others are by *Lorenzo Ghiberti* (Baptism of Christ and John the Baptist brought before Herod, 1427); *Donatello* (Head of John the Baptist brought before Herod and his guests, 1425, a work full of passionate life); and *Turino di Sano* and his son *Giovanni di Turino* (Birth and Preaching of John the Baptist). The last also executed the figures of Charity, Justice, and Prudence; the charming figures of Faith and Hope are by *Donatello*; that of Fortitude is by *Goro di Neroccio*. The four puits (two others are missing) on the cornice are by *Donatello* and the *Turtoli* — Over the high-altar is a Baptism of Christ by *And. Pisanello*, surnamed *Il Bresambiano*.

From the *Piazza San Giovanni* we may either follow the street to the right, past the *Palazzo Arcivescovile* (Pl. B, 5), or we may ascend the steps to the left. By either way we reach the *Piazza del Duomo*.

The **Cathedral*, or *La Metropolitana* (Pl. B, 5, 6), occupying the highest ground in the town, is said to stand on the site of a

temple of Minerva, which was succeeded by a church of Santa Maria Assunta. The present building, modelled on San Galgano (p. 38), was begun early in the 13th cent.; the dome was completed in 1264, and about 1317 the choir (which terminates in a straight line) was prolonged to the E. over the church of San Giovanni (p. 25). Owing to certain structural defects, to which the present irregularity of the edifice is still perhaps partly due, it was resolved in 1339 to erect a huge nave, of which the present cathedral was to form the transept only, according to a plan preserved in the Opera del Duomo (p. 28). Remains of this building, which was of the most noble design, still exist on the S. side of the cathedral. After the plague of 1348 this ambitious plan was abandoned, and the original structure was then completed. (Length 97 yds., width $26\frac{1}{2}$ yds., length of transept 55 yds.) The *FAÇADE*, completed in 1380 from a design by Giovanni Pisano (?), is composed of red, black, and white marble, and richly decorated with sculptures representing prophets and angels (mainly reproductions dating from the restoration of the cathedral in 1869, the weather-beaten originals in the Opera del Duomo, p. 28); the Venetian mosaics were added in 1876 after designs by Mussini and Franchi. On each side of the steps is a column bearing the she-wolf of Siena (p. 20). The campanile, which dates from the end of the 14th cent. and consists of six stories, does not taper towards the top. The façade is best seen by moonlight, 'when disagreeable details are unapparent and the great mass of black and white marble becomes a gleaming vision' (Olcott).

The interior consists of a nave and aisles extending to the choir and intersected by a double transept, with an irregular dome (twelve angles above and six below) over the centre. The horizontal bands of colour, the cornice with the busts of popes (in terracotta; about 1400), and the pillars with the half-columns will at first produce an unfavourable impression, but the pleasing ornamentation in marble compensates to a great extent for organic defects.

The stained glass in the large circular window in the wall of the entrance was designed by *Pyrm del Fogo* and executed by *Federico Micheli* in 1610. Over the entrance is a graceful tribune of 1425, borne by two columns. The fine basins for holy water are by *Ant. Federighi* (1462-63).

The marble 'Pavement' is quite unique, being covered with 'Grafitti' representations from designs by eminent artists: scenes from Old Testament history, Moses, Samson, Judas Maccabæus, Solomon, and Joshua by *Donatello di Niccolò* (1425); Absalom, by *Pietro del Pollaiuolo*; the Massacre of the Innocents, by *Matteo di Giovanni* (1481); Abraham's Sacrifice, Adam and Eve, Moses on Mt. Sinai, etc., by *Beccafumi*, the symbols of Siena and the towns allied with it, Hermes Trismegistus, Socrates and Cato, the Sibyls (1482-83), and other figures by artists of the 14-16th centuries. The execution varies. The oldest scenes are simple outlines engraved on the white marble and filled with black stucco. Shading was then introduced by the use of grey and also of coloured marble, so that the graffiti gradually developed into an elaborate mosaic. Most of the pavement is generally protected by a wooden floor, which is, however, removed for a few weeks after Aug. 15th (Feast of the Assumption). Some of the original works are now in the Opera del Duomo (p. 28), being replaced by copies in the cathedral. Comp. 'The Pavement Masters of Siena', by E. H.

'short Cut'

Left Aisle. At the entrance-wall statue of Pope Sixtus II., by *Don. Casag.* — 4th Aisle (of the Pienestinesi, presented by Cardinal Francesco Pienestinesi, p. 21) with sculptures by Andrea Bregno of Lugano (1485) and statues of St. Peter, St. Gregory and James, by *Michael Angelo* and St. Francis begun by *Perugino* and completed by *Michael Angelo* (about 1500?). — To the left of the entrance of the Libreria is the coat-of-arms of Bandone Bandini, with the Queen Christ and angels, attributed to *Michael Angelo* (?).

The **Presbytery** octagonal in form and constructed of white marble, borne by six granite columns, some of which rest on lions, and adorned with admirable reliefs from the New Testament, is by *Strozz* *Plano* his son *Strozzi* and his pupils *Arnolfo di Cambio*, *Lupo*, and *Donato* (1385-90). The flight of steps was designed by *Bart. Nerone*, surname *Il Rosso* (1510).

The **Left Transept** contains the beautiful *Capella del Crocifisso*, in the early Renaissance style, by *Giov. di Stefano* (1480), with a 'Paradise' by *Leo di Martino*. In the interior are a bronze statue of John the Baptist by *Donatello* (1407), a marble statue of St. Catherine by *Bernardo di Rossellino* (1477), one of St. Agnes, by *Giov. di Stefano*, a font by *Ant. Federighi*, eleven enrichments on the walls by *Ad. Cymerus* and *Gas. Jacobi* (1588), and five small frescoes by *Pontormo* (three being copies from the life of *Liberto Aretin*), the donor. A silver casket, by *Francesco di Antonio* (1485), contains an arm of John the Baptist. — Further on to the same transept are the elaborate Gothic mural tomb of Cardinal *Riccardo Petroni* (d. 1415) and statues of Pope Sixtus II. and Sixtus III. by *P. Bontasini* and *O. Marconi* respectively. The chapel to the left of the choir contains a relief dating from the end of the 13th cent., representing the Annunciation, the Nativity, and the Adoration of the Magi, removed hither from the old church of *Santa alla Spina* (p. 20). The bronze relief in the pavement is from the work to be by *Donatello*, and marks the tomb of Bishop *Giovanni Petroni* (d. 1420).

The **Choir** contains a high altar executed from a model by *Michelozzo Peruzzi* (1480), behind it richly carved choir-stalls, reading desk, etc., by *Artolomeo Nerone* surname *Il Rosso* (1507), and intail work (interior) by *Antonio da Verona* (1510). The two bronze tabernacles in by *Francesco* (1485-7), the angels, holding candles, are by *Giovanni di Stefano* and *Francesco di Stefano* (1490), the front row of stalls and the roof left by *Lucretio da Brescia* (1500). The transepts originally by *Bernardo* (1484) were entirely renewed and altered after 1502. — By the pillars of the dome are two flagstones from the standard wagon (carrozza) used at *Monte Aperto* in 1300 (p. 20) by the victorious *Monaco*. — To the left of the high-altar is an organ left by the two *Bartol.* (1511), above the entrance to the sacristy, which contains (to the left) a hot-water basin by *Giov. di Verona*. In the sacristy is a 15th cent. painting perhaps by *Simone di Pietro* with a view of the original *Palazzo Farnesio* (p. 33).

In the chapel, to the right of the choir are reliefs of the Evangelists and St. Paul, by *Francesco da Jacobi* and *Giov. di Pietro*. The last monument of Bishop *Carlo Bartoli* (d. 1444) was executed by *Ant. Federighi* from the design of *Piero del Pollaiuolo*.

The **Right Transept** contains statues of Pope Alexander VII. (by *Strozz* *Ferrucci*) and Alexander III. (by *Ant. Angeli*). — The *Capella del Voto*, belonging to the *Chigi*, built for Alexander VII. (Pope Sixtus of Rome, papal senate at the Peace of Westphalia in 1646, pope in 1655-67) in 1651 by *Sim. Biondini*, is richly adorned with local marble, and gilding and contains a picture of the Virgin (*Madonna delle Grazie*), and statues of St. Jerome and Mary Magdalen (said originally to have been an *Andromeda*) by *Bernini*.

Right Aisle. Next the transept is the tomb of Bishop *Tommaso Pienestinesi* (d. 1453) by *Nerone* *di Bernardino*. At the other end is a statue of Pope Paul V., by *P. Signorini*.

The 3 side-entrances of the cathedral is surmounted by a fine relief of the Madonna attributed to *Michelozzo*.

In the left aisle, as already mentioned, is the entrance to the celebrated

Library of the Cathedral (*Livreria*; best light in the afternoon, the 2-30 a.), formerly the *Sala Piccolomini*, one of the finest and best preserved structures of the early Renaissance period, erected by order of Cardinal Francesco Piccolomini, afterwards Pope Pius III. in 1499. The exterior of the entrance-wall is adorned with beautiful marble sculptures by *Lor. di Martino* (1497). Over the door is a fresco by *Platone* (Coronation of Pius III., who reigned 27 days only, in 1503). The interior, with its fine tiled floor, its mural paintings, and its frescoed vaulting, executed in 1506-7 by *Platone* and his pupils, with the scenes (according to Vasari) of Raphael (7), is a marvel of harmonious decoration. The ten frescoes on the walls represent scenes from the life of *Aeneas Sylvius Piccolomini* of Pienza (p. 45), Archbishop of Siena (1490-97), and afterwards *Pope Pius II.* (1458-64): (1) Departure of *Aeneas Sylvius* for the Council of Basle; (2) *Aeneas Sylvius* in presence of King James I. of Scotland, to whom he had been sent by the Council; (3) His coronation as a poet by Emperor Frederick III. at Frankfurt in 1466; (4) *Aeneas Sylvius* doing homage to Pope Eugene IV. in the name of the Emperor; (5) Retrospect of Emperor Frederick III. to Elzabeta of Portugal at Siena by *Aeneas Sylvius*; (6) *Aeneas Sylvius* created a cardinal by Pope Callixtus III.; (7) *Aeneas Sylvius* elected Pope Pius II.; (8) Pius II. at the diet of princes in Mantua; (9) Condemnation of Catharine of Siena; (10) Death of Pius II. at Ancona while preaching a crusade against the Turks. The dainty grotesques in the spandrels near the entrance are especially well preserved. Designs for these frescoes are now preserved in the Uffizi (that of No. 1), in the Brera at Milan (No. 2), and by the Duke of Devonshire at Chatsworth (No. 4). — The mosaics embellished with beautiful miniatures, also deserve attention. No. 5 and No. 6 by *Lodovico de Verona*, No. 12 by *Girolamo de' Grassano* (all dating from 1467-73), and No. 11 by *Amo di Piero*. — On a fine Renaissance pedestal stands a famous antique "Group of the Graces" (much mutilated) found at Rome about 1460 in the reign of Pius II. and presented by him to the cathedral library. From this work Raphael is said to have made his first studies from the antique (drawing at Venice).

Opposite the S. side of the cathedral, in the corner where the steps ascending from San Giovanni terminate under the arches of the uncompleted nave (p. 26), is the former *Opera del Duomo* (Pl. C. 6), now the Cathedral Museum, which contains several interesting works of art. In the entrance-passage is the custodian's bell ($1\frac{1}{2}$ ft., best time 10-4).

The hall on the Ground Floor contains "Sculptures from the Fests Gate" (p. 26) by *Jacopo della Quercia*, representing a Madonna, the Christian Virtues, the Creation of Man, and the Expulsion from Paradise, which are among the master's finest works (unfortunately much damaged; compare the restored casts adjoining); a figure of Moses by *Amo di Piero*, from the *Fam. degli Ebrei*; in the Châtel; and a painted terracotta figure of St. John the Evangelist, by *Neroccio di Bernardino* (?). "Sculptures from the Cappella di Pius II." (p. 25) and others from the façade of the cathedral before its restoration. — Antique sarcophagus with sea-gods. — "Ornament from the Cathedral Pavement" (comp. p. 26). — On the First Floor is a reduced copy of the entire cathedral pavement. — On the Second Floor several interesting plans for the cathedral, handsome embroideries, crosses, ring of Pius II. Also several early Sienese paintings, the chief of which is the large "Picture by Duccio di Buoninsegna" on the left the Madonna enthroned, with the Child and saints the once highly revered "Majestas" which was placed over the high-altar in 1310 (p. 72) with the inscription *Mater Sancta Dei ac sancta Sancti regis, ac Sancti regis, et regis sancti etc.* On the left is the Life of Christ, in 26 sections, which originally formed the back of the *Majestas*. Also four saints by *Amo di Piero* a Byzantine Madonna of the 12th cent.; a Nativity of the Virgin (c. 1312), in a life-like genre style; a story of the Cross in terra.

Adjoining the Cathedral Museum is the *Palazzo Reale* (Pl. B, 6), erected by Barn. Buontalenti, now the seat of the prefecture. Beyond, in the *Via del Poggio*, are the *Regie Scuole*, the church of which contains a (repainted) wooden *Statue of St. Nicholas of Bari, by Neroccio di Bartolomeo (?).

Opposite the façade of the cathedral are the church and hospital of *Santa Maria della Scala* (Pl. B, 6), of the 13th century. Over the high-altar of the church is a Risen Christ, a statue in bronze by Vecchiotta (1466). The choir-stalls are by *Ventura di Giotto*, the organ by *B. Peruzzi* (?). Adjoining the entrance-hall of the hospital, with its handsome Renaissance coffered ceiling, by *Guidosio d'Andrea*, is a large sick-room called 'Il Pellegrinaio', adorned with frescoes from the history of the monastery by *Domenico di Bartolo* (1440-43) and others. Pleasing view from the windows (fee 1/2 fr.).

The *VIA DEL CAPITANO* (Pl. B, 6) leads from the S. corner of the *Piazza del Duomo* to the quarters of the town situated on the S. W. hills. Immediately on the right is the *PALAZZO GROTTANELLI* (formerly *Pal. Pecci*), a Gothic building of the 13th cent., originally the official residence of the *Capitano di Giustizia*, or chief judicial functionary, and of the *Capitano di Guerra*, or military commander. In 1457 it was acquired by the jurist *Tomm. Pecci*, and in 1854 et seq. it was restored in the original style by G. Rossi. — Farther on, also to the right, at the corner of the small *Piazza Postieria*, is the *Palazzo Chigi*, now *Piccolomini*, which contains two saloons adorned with frescoes by *Barend van Orley*, a Fleming who joined *Raphael's* school at Rome. The column with the she-wolf in the piazza dates from 1487. — Not far off, in the *Via Umberto Primo* (p. 29), which diverges here to the left, is the *Palazzo Nerucci* (No. 20, Pl. C, 6), erected after designs by *Bernardo Rossellino* in 1469 for *Catharine*, the sister of *Pius II.*, and now occupied by the *Banca d'Italia*. Beyond it, to the right, is the Gothic *Palazzo Savacini* (formerly *Marescotti*; 14th cent.), the vaulting in the court of which is tastefully painted. Within are paintings by *Andrea Vanni*, *Neroccio di Bartolomeo*, *Vecchiotta*, *Girol. del Padchia*, *Boccassini*, and other masters. Opposite stands the *Palazzo Marsili*, rebuilt in 1459 and restored in 1876. — In the *Via di Stalderoggi*, diverging from the *Piazza Postieria* to the right, is a corner-house (No. 2 *Via di Castelvecchio*) in which is preserved a fresco by *Sodoma* ('*Madonna del Cervo*').

On the left, in the *VIA SAN PIETRO* (Pl. B, C, 6, 7), the continuation of the *Via del Capitano*, is (No. 11) the **Palazzo Buonignori*, a handsome Gothic edifice of the 14th cent., in brick, with a rich façade, restored in 1848. The vestibule and court are in the early-Renaissance style. — The church of *San Pietro alle Scale* (Pl. C, 7) contains paintings by *Sano di Pietro*, *Salimbeni*, *Rutilio Manetti* (*Flight into Egypt*, at the high-altar), and others. — Passing under an archway, we enter the *Piazza GIORDANO BRUNO* (Pl. C, 7), with

the *Reale Collegio Tolomei*, formerly a convent and now a grammar-school (Liceo), and the church of —

Sant' Agostino (Pl. C, 7), remodelled by *Vannitelli* in 1755, the entrance to which is in the Liceo, to the left.

Over the 2nd altar on the right, a Crucifixion by *Pietro Perugino* (before 1508). Massacre of the Innocents by *Melozzo da Siena* (1483), in a chapel on the right. Statue of Pius II. by *Dupré*. Altar-piece, an Adoration of the Magi by *Sodoma*. At the back of the choir, on the left, the Legend of Sant' Agostino Novello in three sections, by *Lippo Memmi* (more probably by *Simone Martini*). In the left transept, painted terracotta statue of San Niccolò da Tolentino, by *Giac. Coszarrelli*. In the second chapel to the left of the choir, Temptation of St. Anthony, by *Enrico Manetti*. Also pictures by *Salimbeni* and others.

In the Via dei Tufi, which leads hence to the Porta Tufi (Pl. C, 8), is, on the right, the entrance to the *Botanic Garden* (adm. 10-12 and 2-6; fee 50 c.; visitors ring). — The *Cimitero della Misericordia*, just outside the gate, contains among its monuments a good Plinth by *Dupré* and several statues by *Sarrocchi*, *Pegni*, and others; finest view in the morning and evening (fee 30-50 c.).

In returning, we follow the Via della Cerechia (No. 3 in which is the small *Palazzo Finetti*) to the W. of Sant' Agostino, and then the Via Baldassare Peruzzi, on the left side of which are the suppressed monastery (now a barrack) and church of —

Santa Maria del Carmine (Pl. A, 7), a handsome brick edifice, with campanile and cloisters, ascribed to *Baldassare Peruzzi* (open 10-12 on week-days). On the right is the Cappella del Sacramento, with a Nativity of Mary by *Sodoma*; 4th altar on the right, Ascension by *Pacchiarotto*; 5th altar on the left, St. Michael by *Beccafumi*. In the beautiful sacristy is a statue of St. Sigismund by *Coszarrelli*.

Opposite is the *Palazzo Pollini* (Pl. B, 7), formerly *Celsi*, attributed to *Peruzzi*. — We now proceed straight on through the Via del Fosso di Sant' Ansano to the early-Renaissance church of **San Sebastiano** (Pl. B, 6; we ring at the door of No. 58), the exterior of which is quite unfinished. The charming interior (1490?), which is in the form of a Greek cross, was planned by *Giov. Ponsi*. — We may now either return by the steps on the right to the Piazza del Duomo, or proceed through the Via Vallepiazza (left) to the Fontebranda (see p. 35).

Outside the *Porta San Marco* (Pl. A, 8) there is a fine view.

From the E. angle of the Piazza Vittorio Emanuele (p. 23) the short Via Rinaldini leads to the *Palazzo Piccolomini* (Pl. D, 5), now the *Palazzo del Governo*, one of the most imposing private edifices of the early-Renaissance style in Siena, erected for Nanni Piccolomini, father of Pius III. (p. 27), after 1469, probably from a design by *Bernardo Rossellino*. The principal façade with the arms of Pius II. and Pius III. and its tasteful decorations in wrought iron (horses' heads, etc.) looks towards the Via Ricassoli. The

courtyard (spoiled by additions) contains graceful capitals by *Lov. di Mariano* (1509). Since 1850 the palace has been the repository of the *Municipal Archives*, one of the most important collections of the kind in Italy (adm. daily, except Sun., 10-3), entrance in the court on the left (third story).

Parliament Charters, 62,000 in number, the oldest dating from 728, and including the imperial charters from the time of Otto III. Some of these documents, as well as *Autographs* of celebrated men (Pius II., Leo X.) and *Miniatures* (including a beautiful Assumption, by *Nic. di Ser Jacopo Pagliucci*, of the 15th cent.), are exhibited under glass. The student of Sienese painting will be interested in the valuable collection of *Fascetti*, or book-covers, the oldest specimens (1207-1456) being those of the *Municipal Treasury Registers*. Among them are the covers of the books of the *Biccherna* (the office for the receipt and disbursement of revenues) and the *Caballa* (or tax-collector's office), with portraits of officials, scenes from sacred and profane history, etc. They include works by *Ambr. Lorenzetti*, *Giuseppe di Paolo*, *Francesco di Giorgio*, *Matteo di Giovanni*, and *Simone di Pietro*. The collection has unfortunately been much reduced by sales to foreigners.

Opposite the *Palazzo del Governo* rises the recently restored *University* (Pl. D, 5, comp. p. 20), which has about 60 lecturers and 230 students. In the court is a war-monument in memory of 1848. In the corridor to the right is the monument of the celebrated jurist *Niccolò Ardinghieri* (1374), with a bas-relief representing the professor in the midst of his audience.

The graceful *Loggia del Papa* (Pl. D, 5), in the neighbouring *Piazza Piccolomini*, was erected in 1480-83 by *Antonio Federighi* by order of Pius II., and dedicated by the pope 'gentilibus suis'.

Adjacent is *San Martino* (Pl. D, 6), dating from 1537; the facade by *Giov. Fontana* (1613).

Over the 2nd altar on the right, a *Presentation* in the Temple by *Guido Reni*. At the 3rd altar on the left are ornamental sculptures in marble by *Lorenzo di Mariano* (1627), and a *Nativity* of Christ by *Beccafumi*. The choir contains gilded wooden statues of the Madonna and four saints, by a follower of *Jacopo della Quercia*.

The *Via Ricasoli* (Pl. D, E, 5, 6) traverses the crest of the S. E. hill and leads to the *Porta Pisini* and the *Porta Romana* (14th cent.), the two S. E. gates. — Immediately to the right in this street is the *Ponte de Pontaneto*, dating from 1352, restored in 1867. — To the left, a little farther on, the *Via di Follonica* descends to the *Fonte di Follonica* (Pl. E, 5), constructed in 1239 and charmingly situated in a garden far below. — After 5 min. more, beyond the church of *San Giorgio* (Pl. E, 6), the *Via de' Pisini* diverges to the left, in which we first reach the old convent-church of —

Santo Spirito (Pl. E, 6), with a dome dating from 1508, and a portal from 1519, the latter designed by *Baldassare Peruzzi*.

Entrance. Above the entrance-door is a *Crucifixion* by *Simone di Pietro*. The 1st chapel on the right (*Cappella degli Spagnuoli*) contains, above a *St. Rom. of Viterbo* (p. 100), the following admirable paintings by *Sodoma* (1580), Madonna presenting the gown of the Order of the Dominicans to St. Alfonso, in the presence of St. Octavia and Lucia; to the right and left St. Sebastian and Anthony the Abbot; at the top, St. James of Compostella on horseback (fresco). To the right is an *Adoration of the Shepherds* in terracotta by the Florentine *Fra Ambrogio della Robbia* (1501). — By the 2nd altar to

the left, Virgin between SS Francis and Catharine, by *Matteo Balducci*. Over the 3rd altar to the left, Coronation of the Virgin by *Gerol del Paolista*, an early work. — In the Sacristy, Coronation of the Virgin, by *Scorinacci*. — The beautiful Cloisters (sagrestano 20-30 c.) are unfortunately disfigured by modern additions; they contain a Crucifixion by *Fra Paoletto* of Pistoja (1516).

The *Fonte de' Pispini* dates from 1634. On the neighbouring *Porta Pispini* is a damaged fresco (Nativity) by Sodoma (1531).

Opposite Santo Spirito we enter the *Vicolo del Sasso*, follow the *Via San Girolamo* to the right, pass a column with the she-wolf, and reach *San Girolamo* (Pl. E, 7), belonging to a former nunnery (3rd altar to the left: Madonna with saints, by Matteo di Giovanni, framed in marble by Lorenzo di Mariano). On the left we next reach the church of the —

Servi di Maria (Pl. E, 7), or *Santissima Concezione*, re-created in 1471-1623, with a beautiful interior attributed to *Bald. Peruzzi* (?).

First altar to the right: Madonna, by the Florentine *Coppo di Marco* (c. 1281). Fourth altar to the right: Massacre of the Innocents, by *Matteo di Giovanni*, 1481; above, Adoration of the Shepherds, by *Taddeo di Bartolo*. — In the right transept, above the sacristy door 'La Vergine del Popolo', by *Lippo Memmi*. — The Coronation of the Virgin is the masterpiece of *Bern. Ponzio* (1500). — The chapels to the right and left of the high altar contain (restored) frescoes by *Ambr. Lorenzetti* (?) Massacre of the Innocents, Daughter of Herodias, Death of John the Baptist. By the 2nd altar to the left, Madonna del Belvidere by *Giuseppe di Mico del Pollicciaio* (p. 28; 1368). — In the sacristy is the 'Madonna del Manto' (1436), by *Giuseppe di Paolo* (freely restored).

The *Porta Romana* (Pl. E, 8) has a damaged fresco (Coronation of the Virgin), begun by *Taddeo di Bartolo* and finished by *Sano di Pietro*. — About 1/2 M. beyond the gate is the church of *Madonna degli Angeli*, the choir of which contains a Madonna with saints, by *Raffaello Carli*, 1502.

Opposite the N. side of the Palazzo Piccolomini (p. 30), beside the University (p. 31), begins the *Via SAN VIGILIO*, leading to the church of the same name (Pl. D, 6), which is adorned with sculptures of the 18th century. Farther on, we pass the church of *Santa Maria di Provenzano* (Pl. D, 4; 1594), traverse several narrow streets, and reach the *PIAZZA DI SAN FRANCESCO* (Pl. D, E, 4), in which rises the convent-church of San Francesco and the Oratorio di San Bernardino. The N. side commands a fine view of the Osservanza monastery (p. 37) and of the Chianti mountains.

San Francesco (Pl. E, 4), a Gothic church without aisles (1256-1326), modernised after the fire of 1655, was restored in the original style in 1885-92. Above the portal is a statue of St. Francis, ascribed to *Ramo di Paganello* (?).

INTERIOR. The modern stained glass is mostly by *Settler*, of Munich. — The new high-altar is by *Gius. Fortini* (1892). Adjoining it, on the wall to the left, are marble medallions of Silvio Piccolomini and Vittoria Forteguerri, the parents of Pius II. (p. 28). — In the 3rd and 1st chapels to the left of the choir are frescoes by *Ambr. Lorenzetti*, from the chapter-house of the convent: Innocent III. confirming the rules of the Order;

Death of the martyred Franciscan monks at Oute in Morocco; Crucifixion, the last two probably studio-works. — In the 2nd chapel to the right of the choir: Tomb of Cristoforo Pellai, by *Orsano da Goro* (14-6) — The new winged altar-piece in the 3rd chapel is by *Arnolfo di Cambio*, that in the 2nd chapel (left) by *Masso*. — The modern altar-piece in the Cappella del Santissimo Sacramento is by *Chi. Mazzoni*; the old graffiti on the floor are by *Leo. di Mariano* (1504).

The church is adjoined by two fine early-Renaissance Cloisters, with remains of tombs of the nobles (14th cent.), which were destroyed by the fire of 1655. — To the left of the entrance to the seminary (formerly the convent) is a relief of the Madonna by *Giac. Casarotti*. The chapel contains a Madonna and Child, by *Andr. Lorenzetti* (high-altar), and a Madonna and saints, by *Berna* (left wall).

The Oratorio di San Bernardino (Pl. E, 4) possesses admirable *Pictures by Sodoma (1518-32) and others. Afternoon light best. The 'custode' lives at No. 6, adjoining (see 30-50 c.)

LOWAN ORATORIO. Scenes from the life of St. Bernardino of Siena (1380-1444), of the close of the 16th century — UPPER ORATORIO (much more important paintings) Events in the life of the Virgin (frescoes); on the left wall, opposite the entrance, *Ortol. del Puccino*, Nativity of the Virgin; *Sodoma*, Presentation in the Temple; *Don. Baccio*, Marriage of the Virgin. On the altar wall: *Ortol. del Puccino*, Annunciation; the altar-piece is by *Baccio* (1557) On the right wall: *Sodoma*, Visitation; *Baccio*, Death of the Virgin; *Sodoma*, Assumption. On the window wall: *Sodoma*, Coronation of the Virgin. In the corners: **Sodoma*, SS. Anthony, Bernardino, Louis, and Francis. The admirable enrichments of the ceiling, the frieze, etc., executed by *Fabrizio di Ser Giuliano Turpin* after 1400, are among the most tasteful of early-Renaissance works. In the vestibule is a relief of the Madonna, by *Giovanni di Agostino* (1511).

The Via del Rossa leads back from the Piazza San Francesco to the Via Cavour (p. 22).

To the left of the Via Cavour diverges the VIA DELLE BELLE ARTI (Pl. C, B, 4), which leads past the Accademia and the Library straight to the church of San Domenico (p. 36).

The Accademia delle Belle Arti (Pl. C, 4), contains the *PINACOTHECA, founded in 1816, a valuable collection of about 700 pictures, chiefly works of the older Sienese school, most of which were procured from suppressed monasteries and from the Palazzo Pubblico. The collection is chronologically arranged. The names of the artists are given on the frames. Keeper, *Sig. Arnaldo Prunai*. Adm. 9-9 daily (1 fr.), except on Sundays and holidays (bell below, to the right). New catalogue (1903; 1 fr.).


At the entrance, Reliefs of little value. The first door on the right leads to the large Room X (see p. 84), the second to the —

I. CORARION (13-14th cent.) 1-13. Pictures of the 13th cent., still in the Byzantine style; 1. *Margheritone d'Arezzo*, St. Francis; 16. *Guido da Siena*, Madonna; 20, 22, 24, 35, 47. *Duccio di Buoninsegna*, Altar-pieces; 48. *Niccolò di Segna*, Crucifixion (1316); 51. *Lippo Memmi*, Madonna and four saints.

II. CORARION (14-15th cent.) 65. *Ambrogio Lorenzetti*, Madonna; 61, 80. *Pietro Lorenzetti*, Madonna; 81. *Lippo Memmi*, 88. Michael, Jerome, and John the Baptist; 88. *Ambrogio Lorenzetti*, Annunciation (1314); *Barile di Fredi*, 100. Four scenes from the life of the Virgin. 101. The Magi; 107. *Freddo Gaddi*, Madonna (1355); 119, 125. *Spina di Antonio*, Coronation and Death of the Virgin; 127, 128, 130-132, 134, 135, 143, 144. *Freddo di Bartolo* (1351. Annunciation).

III. CORRIDOR (14-15th cent.): Pictures by *Giovanni di Paolo* (No. 173 dated 1453, No. 200 dated 1440). Also: 14^o-152. *Unknown Master*, Triumph of Death, Chastity, Love, and Fame (after Petrarch), 164. *Domenico di Barisio*, Madonna with angelic musicians (1483); 208 *Pietro di Giovanni*, San Bernardino; 206, 210. *Vecchiatta*, San Bernardino, Madonna with saints.

Rooms IV (to the right) and V are devoted to the works of *Sano di Pietro* (1406-81), the 'Sienese Fra Angelico', chiefly large altar-pieces. Room IV: 215. Altar-piece of 1444. Above the entrance to Room V: 241. Madonna and St. Calixtus; in Room V 17 Coronation of the Virgin. — VI. Room (15-16th cent.) 272, 273. *Sano di Pietro*; 279. *Pietro di Domenico*, Adoration of the Shepherds, with St. Gallanus and Martin. Also works by *Matteo di Giovanni* (No. 286 dated 1470), *Neroccio di Bartolomeo* (No. 282 dated 1476), *Francesco di Giorgio* (No. 288), and *Guido Cossarelli* (No. 286, St. Sebastian, dated 1496). — A narrow passage leads hence to the right to Room VII, which contains paintings of the 13-16th cent., most of them damaged, some old Italian engravings, and a few woodcuts after Dürer. — We now return, cross the entrance-passage diagonally, and enter the small —

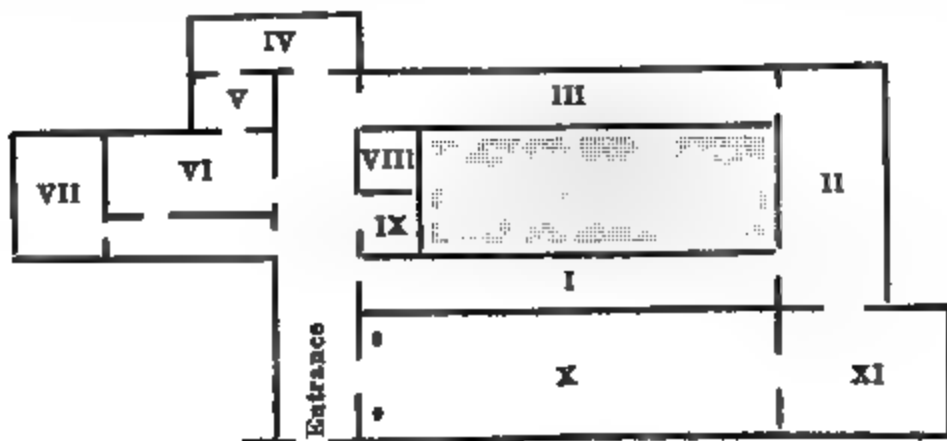

VIII. Room (14-16th cent.) *Sodoma*, 326. Madonna, 327. Two guild-brothers adoring the Cross; *Girol. Genga*, 333. Ransoming of prisoners, 334. Flight of Aeneas, *Sodoma*, 352. Scourging of Christ (remains of a fresco taken from San Francesco), 354. Judith, 357. St. Catharine 360. Madonna, 361. Dead Christ supported by two angels. The elegant wooden pilasters by *Antonio Barili* in this and the following room should be observed; they were formerly in the Palazzo del Magnifico (p. 27). — IX. Room (15-16th cent.). 368. *Andrea di Niccolò*, Crucifixion, with saints (1502); 386. *Pinturicchio*, Holy Family. — From the entrance-passage we now enter, to the left, the —

X. LARGE HALL (15-16th cent.). On the upper part of the walls are six cartoons for the pavement of the cathedral, by *Beccafumi* (much damaged). To the right and left of the entrance, 401. *Sodoma*, Christ on the Mt. of Olives (fresco from Santa Croce), 407. *Pinturicchio*, Holy Family. — To the right 410. *Girol. del Pacchia*, Annunciation and Visitation (after the picture by Albertinelli in the Uffizi); 413. *Sodoma*, Descent from the Cross; 414. *Girolamo di Benvenuto*, Madonna enthroned, with saints (1508), the Nativity in the lunette by *Matteo di Giovanni*; 420. *Beccafumi*, St. Catharine; 422. *Paoletto*, Ascension. — To the right and left of the exit, *Paoletto*, 424. Madonna with St. Euphrasius and Bartholomew; 426. Visitation, with St. Michael and Francis; 427. *Beccafumi*, Christ in Purgatory. On the left wall: 423. *Beccafumi*, Downfall of the Angels; 428. *Franc. di Giorgio*, Crucifixion; 431. *Bern. Fungai*, Madonna and saints (1512); 432. *Matteo di Giovanni*, Madonna enthroned, with angels and saints; *Benvenuto di Giovanni*, 434. Assumption, 436. Madonna with angels and saints (1476); *Francesco di Giorgio*, 437. Nativity, 440. Coronation of the Virgin, 441. *Fungai*, Assumption; 443. *Sodoma*, Christ in Purgatory (fresco from Santa Croce), 444, 447. *Bartolomeo eroni (Il Riccio)*, Coronation of the Virgin, with predella.

XI Room (16-17th cent.). To the right 481 *Pro Bartolomeo*, Mary Magdalen; 512 *Bedone*, Nativity; 482 *Altierfer*, Martyrdom of St. Quirinus; 485 *Sart de Bruno*, Portrait; 486 *Altierfer*, Scene from the legend of St. Quirinus; 504, 498 *Andorger*, Charles V (copies); 495 *Pincherone*, Holy Family; 500 *Pincherone*, Madonna; 501 in the style of *Altierfer*, *Borer*, Portrait; 503 *Domenichino*, Landscape; 507 *Luomo Ormest*, Lucretia; 514 *Fazio Bordone*, Annunciation; 506 *Pro Bartolomeo*, St. Catharine.

On the first floor are casts and modern paintings, and prize-works by pupils of the Academy and others.

The Biblioteca Comunale (Pl. C, 4), Via delle Belle Arti 9, containing 75,000 vols. and 4971 MSS., was founded in 1663 (open daily, 10-2, and 5 or 6 to 8). In the 17th cent. Siena possessed sixteen libraries, and in 1654 even one for women.

The chief objects of interest are the Greek Gospels, formerly in the chapel of the imperial palace at Constantinople, of the 11th cent., originally bound in silk, with pictures in enamel mounted at a later period in silver-gilt; Treatise on architecture by *Francesco di Giorgio* with sketches and drawings by the author; sketch books of *Salimbeno Peruzzi* and *Offidiano da Sangallo*; letters of St. Catharine.

Beyond the library, to the left, we descend the Via Costa Sant' Antonio, and enter the first side-street to the right, which leads straight to the upper entrance of the House of St. Catharine (Pl. B, 4). 'Sponsam Christi Katherine domus'. Visitors ring at the door to the left ($\frac{1}{2}$ fr.). St. Catharine of Siena (1347-80), the daughter of a dyer named Benincasa, took the veil at the age of eight, and having become celebrated for visions, she prevailed on Pope Gregory XI. to retransfer the papal throne from Avignon to Rome (1377). She was canonized in 1461. The best-known vision is that of her betrothal to the Infant Christ, a favourite theme with painters. Her festival is on 29th April.

The different rooms in the building have been converted into small chapels or Oratories, which belong to the *Confraternità di Santa Caterina*. Above the altar is one of the *Uffizi Oratorio*, once a kitchen, is a portrait of the saint, by *Bero Fungai*, the other pictures are by *Fabrizio Salimbeni* and *Fr. Vanni*. Attention should also be paid to the beautiful ceiling and the pilasters in the early Renaissance style (the pavement of gilded tiles is now covered). — The pretty little court is attributed to *Salimbeni*. — The Oratorio del Crocifisso contains the wonder-working Crucifixion, a painting (by *Giulio Paoletti*?) from which St. Catharine, according to the legend, received the stigmata at Pisa in 1375. — Below is the Church (key kept by another custodian), containing the following: 'Procession *Orto del Paoletti*, St. Catharine healing Matteo di Ceusi of the plague, St. Catharine rescuing Dominicans from murderers, The dead body of St. Agnes of Montepulciano stretching out her feet to be kissed by St. Catharine. The fourth picture, representing the saint being attacked by Florentine soldiers, is by *Fabrizio Salimbeni*, 1604. Over the altar, fine statue of St. Catharine by *Ferdinando di Bartolomeo*, 1465, above, Angel by *Bedone*.

On leaving the church we come to the Via Benincasa (formerly Via dei Tintori, Pl. B, C, 5), which is still inhabited, as in ancient days, by dyers and fullers. Over the door of the house on the left is a bust of St. Catharine by *Consarrelli*. — Not far off is the celebrated fountain of Fontebranda (Pl. B, 5), picturesquely situated at the base of the hill of San Domenico, mentioned as early as 1081, renovated in 1108, and covered with a Gothic colonnade of three arches in

1242. — The Via di Fontebranda ascends S.E. to the Via Umberto Primo (p. 23).

The Via delle Belle Arti ends at the Piazza MARINI (Pl. B, 4), near the church of —

San Domenico (Pl. B, 4, 5), a lofty brick edifice in the Gothic style (1203-1301), the massive substructures of which, resting on the slope of the hill, are now used as a cavalry barrack.

The interior is destitute of aisles and has a transept and open roof. Immediately to the right of the entrance is the *Cappella della Volta* (closed), containing an altar-piece of St. Catharine by Andrea Fanni. — Further on, to the right, Tomb of the mathematician *Sine Plangioni* (d. 1557), by Bechovani. — Third altar, St. Peter the Martyr by *Arampio Salmassio*, 1579. — The adjacent *Chapel of St. Catherine* closed by a railing, contains the head of the saint preserved in a shrine by *Guo di Simone*, 1455, and is adorned with admirable frescoes by *Andema*, 1525, best light about midday, too D-D's. On the wall near the altar, St. Catharine is seated, supported by two sisters (the so-called *Avvenimenti*, or *sworn*) and an angel bringing her the host, on the wall to the left, The prayer of the saint saving the soul of a decapitated culprit, to the right, Healing of the possessed, by *Francesco Fanni*, 1603. The two saints on the right and left of the entrance are by the same master, while the grotesques on the entrance-arch and the pilasters, together with the charming pulpit, are the work of *Andema*. The pavement of the chapel is richly decorated with grottesco representations on marble. — Last altar to the right, Nativity of Christ by *Frans di Giorgio* executed under the influence of Luca Signorelli; the lunette is probably by *Matteo di Giovanni*.

Choir. The beautiful marble "Ciborium at the high-altar, with the graceful figures of two light-bearing angels, is the work of the Florentine *Amadeo de Mayano*. A beautiful view of the lofty and imposing cathedral may be obtained from the window at the back of the high altar. — The two *Chapels* to the left of the high-altar contain to the right *St. Barbara, Mary Magdalen and Catharine*, by *Matteo di Giovanni*, 1479; to the lunette, an *Adoration of the Magi*, by the same, to the left, *Madonna with saints*, by *Benvenuto di Giovanni* (1488). *Two Chapels, Madonna with John the Baptist and St. Jerome*, by *Matteo di Giovanni*. — The two *Chapels* to the right of the high-altar formerly belonged to the "German Nation" of students at the university and contains numerous tombstones of the 16th and 17th centuries.

The pretty *Viale Curtatone* (Pl. B, 4, 5) leads to the N. from the Piazza Marini to the *Lizza* (Pl. B, 5), a small promenade, much frequented on Sun. and Thurs., which was laid out in 1779 near a riding-school. It contains a *Monument of Garibaldi*, by *Romanelli* (1896), and commands good views of San Domenico and the cathedral. These walks extend as far as the entrance to the former *Forte Santa Barbara* (Pl. A, 3), built by Duke Cosimo I. in 1560, commanding a fine view.

The short *Via dei Gazzani* leads from the N.E. corner of the *Lizza* to the *Via di Camollia* (Pl. C, B, 2, 1), the N. continuation of the *Via Cavour* (p. 22). The *Via di Campanai*, opposite, leads to the old *Convento di Campanai* (Pl. C, 2, No. 8). The monastery, now a poorhouse (*Ricovero di Mendicanti*), is adorned with frescoes by *Matteo Balducci* (Assumption, in the cloister), *Sano di Pietro* (Annunciation), *Benvenuto di Giovanni* (Noli me tangere), and *Barocchini* (Madonna and saints). Handsome baroque church.

We follow the *Via Camollia* for some minutes more; nearly opposite a small piazza we turn to the left under an archway and, descending the *Via Fontegiusta*, arrive at the little church of —

Fontegiusta (Pl. B, 2; if closed, ring the bell in the corner to the right), belonging to a brotherhood and built by *Francesco Fedeli* of Como in the early Renaissance style in 1484-89. Above the entrance (outside) is a small relief of the Madonna by *Neroccio di Bartolomeo* (1489). The vaulting, borne by four marble columns, dates from 1482; the N. portal from 1489. The beautiful *High Altar by *Lor. di Mariano* (1509-19) is one of the finest Renaissance sculptures of its kind. The bronze holy-water basin is by *Giov. delle Bombarde* (1430). The 3rd altar to the right has a Coronation of the Madonna by *Bern. Fungai*; the 2nd to the left a fine fresco (freely restored) by *B. Peruzzi*, the Sibyl announcing to Augustus the Nativity of Christ (ca. 1528). Over the entrance are a sword, helmet, shield, and some bones of a whale, said to have been presented by Columbus.

Farther on in the *Via Camollia*, to the right, No. 48, opposite the small Templar church of *San Pietro alla Magione* (Pl. B, 1; fine early-Renaissance façade), is the modest house of *Baldassare Peruzzi* (p. 22), indicated by an inscription.

A pleasant WALK may be taken by a road skirting the town walls to the right, outside the *Porta Camollia* (Pl. B, 1), with fine views of the Tuscan hills. On a height opposite, beyond the railway station, lies the monastery of *Osservanza* (see below); in the valley below, a little short of the *Porta Ovale* (Pl. D, 3), is the picturesque *Fonte Ovale*, in the Gothic style. In about $\frac{3}{4}$ hr. we reach the *Porta Pispini* (comp. Pl. F, 6; p. 32).

Not far from the *Porta Camollia*, near the *Piazza d'Armi* (Pl. A, 1), is a column commemorating the meeting of the Emp. Frederick III. with Queen Eleanor of Portugal (comp. p. 28). — About $\frac{3}{4}$ M. beyond the *Porta Camollia* stands the *Palazzo del Turco*, generally known as the *Pal. dei Diavoli*, a fine brick building, with a chapel, 'a jewel of the early-Renaissance' (Burckhardt), by *Ant. Federighi* (1460). Near by is the *Eden Restaurant* (p. 19).

Excursions (most of them best made by carriage). — About $1\frac{1}{2}$ M. (car. there and back 8 fr.) to the N.E. of the *Porta Ovale* is situated the suppressed Franciscan Convento dell' *Osservanza* (1050 ft.). The road keeps to the left at the fork immediately before reaching the railway to Chiusi, passes under the line, and ascends straight on. The monastery-church, founded by San Bernardino in 1423 and enlarged by *Giac. Cossarelli* in 1485, is a noteworthy early-Renaissance work; its arches and vaults are adorned with terracotta reliefs by *Francesco di Giorgio*. At the 2nd altar on the left is a fine Coronation of the Virgin, by *Andrea della Robbia*. On the 1st and 3rd altars on the left are good examples of *Stato di Pietro*; the predella of the 4th altar is also by him, the main painting by *Taddeo di Bartolo*. Beneath the high-altar is preserved the silver reliquary of San Bernardino, by *Francesco d'Antonio* (1480). In the choir, SS. Bernardino and Elizabeth, by *Pietro di Giovanni* (1439). In the sacristy, an excellent terracotta group (Pieta), by *Giac. Cossarelli*. Beneath the

church is a vault with the cell of San Bernardino and the tomb of Pandolfo Petrucci (d. 1469; p. 21).

The *Oratorio di Fontignano* (carry there and back 12 fr.), 5 M. from the Porta Orto, was founded in 1510, fortified in 1670, and suppressed in 1810. The church was modernized in the 17th century. View from beside the Parrocchia.

Santa Colomba, Colan, and Marmorate are most conveniently visited on horseback there and back, with stay, 6½ hrs.; horse 7 fr.; one-horse carriage (carrozzino) 10 fr. For larger carriages the road is good only as far as Santa Colomba (10 fr.). — Leaving the Porta Camollia and passing the Palazzo del Torco (p. 87), we follow the highroad for 2½ M. and then diverge to the left by the road descending between two cypresses into the valley. This road leads past halfway the *Ponte del Lago*, a dried-up lake, probably formed by a subsidence of the soil, and brings us to the villa Santa Colomba (4½ M.), formerly the property of the Collegio Tolomei (p. 80), with a handsome spiral staircase attributed to *Soldi* (p. 17) and a fine view from the balcony. — After descending from Santa Colomba we continue to follow the road by which we arrived, which leads through beautiful woods to Colan (3½ M. from Santa Colomba), a castellated villa, designed by *Soldi* (p. 17) where *Mino Colai*, a defender of the doctrine of Luther lived at the beginning of the 16th century. View from the highest story (refreshments sold by the farmers of the villa). — About 2½ M. beyond Colan is Marmorate where on 7th Sept. 1157, peace was concluded between the Republic of Siena and Bishop Hugo of Volterra. The piazza in front of the church affords a fine view of the Elba valley and Colle di Val d'Elba, with San Gimignano beyond and Volterra in the distance (M. E.). — The *Poggio degli Scherati* (200 ft.), from the top of which the sea and the Apennine Alps are visible, may be reached from Marmorate in ½ hour.

The *Abbadia di Sant' Eugenio*, 2½ M. to the S. of the Porta San Marco, commonly known as *il Monastero*, is an ancient Benedictine monastery said to have been founded by Wernfried, a Lombard, in 1231, fortified in 1600 by Pietro Strozzi and secularized in the 18th century. The buildings are thoroughly modernized. The church contains several pictures (some of which have been ruined by restoration) of the *Siennese School*. View from the garden. The return should be made through the Porta Fontebranda.

The highroad just leads to the *Oratorio delle Velle*, about 5 M. beyond the Porta San Marco, whence a road diverges to the right to the (1¼ M.) ancient church of San Giovanni di *Ponte alle Asine*, dating from the first half of the 11th cent., and to (4 M.) Cetinale, a villa erected in 1680 by Flavio Chigi, a nephew of Pope Alexander VII. from designs by Carlo Fontana. With the villa is connected the *Theriacal park*, embellished with sculptures and containing fine old timber. View from the hill (*Romitorio*) above the villa. Permecci in the Palazzo Chigi at Siena, Via di Città. — Carry from Siena to Cetinale and back, 14 fr.

About 4½ M. beyond the *Oratorio delle Velle* is Sano, the church of which contains a font of 1312. We may then proceed to (2 M.) Torvi or *Santo Spirito a Torvi* in *Val di Merse*, an old monastery belonging to the Vallombrosians, possessing a church, consecrated in 1180, and a fine Romanesque cloister, now used as farm buildings.

About ½ M. to the S. W. of Rustia (along the road to Santa Bartolotta, and then to the left) lie the ruins of the Cistercian monastery of San Galgano, founded in 1201 by Ubaldo Pannocchieschi Bishop of Volterra. The Gothic Church a building of travertine and brick erected in 1400-05, is imposing even in its ruins. The only relics of the original architecture in the secular buildings, now used as a farm, consist of a few windows. The monks were distributed among other monasteries in 1662 and in 1780 the church, which had been injured by lightning, was closed.

The abbacy of Rustia, to the W. of Porta Fontebranda, reached by carriage (8 fr.) in 1½ hr., commands a splendid view of Siena and its sur-

rons. It was begun by Bald. Peruzzi for the Taramini family on the site of a medieval castle, and was modernised in the 18th century. On the ground-floor is a ceiling-painting by Peruzzi: Judgment of Paris. The frescoes in the chapel, by the same master, have been sadly injured by restoration.

6. From Siena to Chiusi.

55 M. RAILWAY in 2 $\frac{3}{4}$ -4 $\frac{1}{2}$ hrs.; fares 10 fr. 25, 7 fr. 15, & fr. 80 a. — No express trains.

Siena (p. 19) is a terminal station. The train returns part of the way to Empoli and then diverges at an acute angle towards the S.E. We traverse the hills which form the watershed between the Ombrone and the valley of the Chiana. — 5 $\frac{1}{2}$ M. *Arbia*.

About 2 M. to the N.E. lies *Sant'Ansano a Delfino*, the parish-church of which contains a Madonna by Bald. Peruzzi, to whom also is due the brick erection of the Martirio di Sant'Ansano (key at the parsonage). A pyramid surrounded by cypresses on the opposite (E.) ridge of hills marks the site of the castle of Monte Aperto, whence Farinata degli Uberti (p. 20) issued to the battle of 1260.

10 M. *Castelmoro Bernardona*, in a bleak district of barren clay-hills, deeply furrowed by rain-courses.

19 $\frac{1}{2}$ M. *Asciano*; the pleasant little town (656 ft.; *Alb. del Sole*, clean and comfortable; 3620 inhab.), 1 $\frac{1}{2}$ M. to the right of the station, possesses fortifications constructed by the Siennese in 1351, a handsome fountain, and several old churches. The church of *San Francesco* contains a tasteful font, a painted terracotta altar-piece with SS. Raphael and Christopher, of the school of the Bobbia, and a Madonna by Lippo Memmi. In the *Collegiata* are a Birth of the Virgin by Bassetta, an Ascension by Giovanni di Paolo, with wings by Matteo di Giovanni, and frescoes by Taddeo di Bartolo. In *San Sebastiano* is a fresco by Benvenuto di Giovanni. The altar-piece of *Sant'Agostino* is by Domenico di Bartolo (1437).

Asciano is a convenient starting-point for a visit to the famous, but now suppressed, Benedictine convent of *Monte Oliveto Maggiore* (6 M.; carriages at the station, at Bucciarelli's, or the *Alb. del Sole*, 8-10 fr.; the bargain with the driver should be made in the presence of the landlord as witness; a drive of 2 hrs. by the highroad, or 1 $\frac{1}{2}$ hr. by the picturesque direct route suitable for light vehicles only).

Visitors who desire to spend the night at the convent must apply beforehand to the 'ispettore' of the Accademia delle Belle Arti at Siena (p. 26), from whom they receive a 'permesso' to present to the 'Soprintendente del già Arcivescovo di Monte Oliveto Maggiore'. Those who have not time to send this two days in advance should provide themselves with provisions for one day. Ordinary visitors are not allowed to stay more than two days at the convent (pens. 5 fr.).

The convent, founded in 1220 by Bernardo Tolomei and afterwards greatly enriched by donations, still affords an excellent idea of a great establishment of the kind. The monks must have been wonderfully energetic to have been able to transform the sterile chalk-soil here into a smiling oasis. *Monac Sylvius Piccolomini* (Pine 11; p. 28) gives an interesting description of the monastery in his 'Commentaria'.

Over the entrance are placed two small groups of the Madonna with angels and St. Benedict in the act of blessing.

The walls of the large Monastery Court are adorned with celebrated frescoes by Luca Signorelli (1497-1500) and Ant. Rosselli, called Sodoma (1500), representing scenes from the legend of St. Benedict, explained by inscriptions beneath the paintings. The order of the pictures does not correspond with the date of their execution. The series begins with the first picture on the wall adjoining the entrance to the church representing St. Benedict's departure from home by Sodoma. The earliest part of the series are the eight frescoes by Signorelli on the wall to the left of the entrance. Totius kneeling to the saint. Soldier in disguise, attempting to deceive the saint. Temptation of the fasting monk; Punishment of two monks addicted to debauchery; Resurrection of a dead man whom Satana has thrown from a wall; Exorcism of Satana (overthrow of the idol). Punishment of Plurimum. — The 'Sounding Forth of Hymnaster' on the left of the corner to the right, is by Sodoma, a pupil of Sodoma, but all the other pictures are by Sodoma, whose sense of beauty is everywhere apparent though he is doubtless far inferior to Signorelli in depth and excellence of conception and execution. In the first pictures by Sodoma we can trace a resemblance to the frescoes of Pinturicchio in the cathedral library at Siena, and in the others features that recall Leonardo da Vinci. — The entrance to the left of the monastery court, which was modernized in the 18th century, contains little to detain us beyond the handsome choir-stalls and reading desk, in inlaid work, by Fra Ottavio da Verona (1635). The marble statue of the Virgin in the vestibule is also by Ottavio da Verona. — In the library are a door and a cabinet, also beautifully inlaid by the same master (1637). — The library, library and some of the other rooms contain frescoes by Antonio da Sestegno and by Niccolò di Napino. — The extensive stables (much altered) at the back of the monastery contained different sections bearing tablets with the names of the chief towns of Italy.

The Emperor Henry VII died in 1313 at Montemontorio, 3 1/2 M. to the S.W., on the Arno. The churches contain a few ancient pictures of the Sienese School.

From Montemontorio to Buonconsiglio 10 M., branch line to 1-1/2 hrs (fare 11 fr. 14. 7 fr. 10 fr. 8 fr.) — 8 M. San Giovanni d'Arce (tolerable inn). The Canonica contains six small and ancient paintings of the Sienese School. Via Civitella is reached hence on foot in 1 1/4 hr. or (better) by carriage (p. 20). — 14 M. Buonconsiglio (34 fr.) on the old road from Siena and Buonconsiglio (see above), via San Quirico, Montemontorio, and Bolzano (p. 20), to Roma.

(About 6 1/2 M. to the S.W. of Torrenieri) (omitted twice daily, fare 11 fr. 14 fr.) lies Montemontorio 1076 ft., *Albergo del Orto*, tolerable, a town (1879 inhab.) which early in the middle ages belonged to the abbey of San Antimo (see below) and afterwards to Siena. In the Palazzo Municipale is the Cappella delle Capone which contains a small collection of pictures from suppressed monasteries including a Unigenita from the 15th cent. (1500) and a Coronation of the Virgin 1500 by Bartolo di Fredi. The cathedral was begun in 1518. The Franciscan Monastery is now a hospital. Over the chief entrance of the church belonging to it is a group of the Madonna, John the Baptist, St. Peter, and St. Sebastian of the school of Della Robbia (1507). A room adjoining the apse is adorned with frescoes of the latter part of the 15th cent. and the monastery court contains others dating from 1400. Fine view from the modern church of the Madonna, on the E. side of the town. The railway station of Santa Antina p. 41 lies about 8 M. to the S.E. of Montemontorio. To the N. (1 1/4 M.) of Montemontorio dell' Abate, within about 2 1/4 M. of Monte Antina, is Santa Antina, which was an independent abbey house in the 13th century. The handsome church was built of white alabaster and travertine in the 15th cent., and its rich portal dates from 1520.

About 4 M. to the S.E. of Torrenieri (diligence twice daily in 1 1/4 hr., fare 3 fr. 6 fr.) lies San Quirico d'Orto (*Albergo delle Lave*, tolerable, bargaining advisable), which was the residence of an imperial governor during the

Hohenstaufen régime and was modified by Siena in 1473. The handsome Collegiate Church, in an elegant Transition style, was founded in the 15th cent., but the present building dates from the 17th. Of the ornate porches the oldest is on the W front; another, on the right transept, bears the date 1506 and a third, specially fine, on the right aisle, is Gothic with Renaissance forms. The interior was disfigured in the 17th cent., when stalls of the 16th century. The adjacent *Museo* church contains a high-altar piece by Sodoma. The *Palazzo Chigi* erected in 1690-97, and the *Ora Leonini*, a neglected park of the 16th cent., deserve a visit (bays of both at the *Pattoria Chigi*) — From San Quirico to Pienza (p. 40) 4½ M.; diligence once daily in 2, returning in 1 hr.; fare 30 c.

31 M. (from Asolano) *Monte Amiata*, the starting point for a visit to the mountains of that name, the highest in Tuscany, lies 7½ M. to the S E of Castelnuovo dell'Abbate (p. 40) — (By omnibus 1½ fr.) in 2½ hrs. to Castel del Piano (Locanda *Amiatina*, mediocre), where a guide may be obtained at the Municipio, thence on horseback in 2½ hrs., or on foot in 4½ hrs. to the summit of the *Monte Amiata* (5570 ft.), which affords an admirable survey of the whole country between the Tyrrhenian Sea, the Apennines, and the Cimino Forest (p. 301). The dome-shaped mountain is an extinct volcano, which as late as the tertiary epoch was still surrounded by the sea. It is of trachyte formation, and not far off (at *Radicefonti* 7½ M. to the N) imposing masses of basaltic rock also occur. Copper and quick-silver, both volcanic products, are worked in the neighbourhood and are still deposited in the numerous sulphur springs. A pleasant return route leads through beautiful woods to (1 hr.) *Vico* (4200 ft.), a suppressed Camaldulensian monastery, now the property of Count Caracciolo. Hence to *Castel del Piano* 11 M., or to *Torrenieri* 17 M. The latter road leads via *Campagna d'Oro*, the hot Baths of *Pignone*, now neglected, and *San Quirico d'Orcia*. — The road from *Monte Amiata* station to Castel del Piano continues towards the S past (1½ M.) *Ardisio* (3100 ft.) to (3¼ M.) *Santa Piero* (2000 ft.), prettily situated at the S W foot of *Monte Amiata*, with a church containing an altar piece by Andrea della Robbia (*Madonna della Infanzia*).

32 M. *Sant'Agata Orsippese*. The train follows the right bank of the *Orcia*, the S. affluent of the *Ombrone*, and crosses the latter — 31½ M. *Monte Amiata*. At (3¼ M.) *Paganico* the train quits the *Ombrone*. 43 M. *Montepulciano*, the village, on a trachyte outcrop (1000 ft.), lies 5 M. to the N, 47 M. *Siena*. 62 M. *Montepulciano*, on the *Marone* Railway (p. 4).

23 M. *Rapolano*. The village, to the right, possesses baths. The country becomes more attractive — 31 M. *Larcignano*, the mediæval village lies on the hill (1036 ft.) 3 M. to the N E. The improving cultivation of the soil indicates the proximity of the charming valley of the *Chiana*. To the left, in the distance, the chain of the Apennines. — 35 M. *Stinango*, on the right the village, where Garibaldi was captured on his march to Rome, 24th Sept., 1867 — 36½ M. *Torrita*. *Montepulciano* becomes visible to the right.

43½ M. *Montepulciano* (800 ft.), the station is 6 M. from the town (omnibus in 1½ hr., fare 1½ fr.). Near the station is a sugar-refinery.

Montepulciano. — *Hotel. ALBERGO HANNOCO*, Via Garibaldi, R. 1½-2 fr., good; the view from the back rooms extends to Lake Trasimene. — *Caffè Pulcinella*, Via Cavour 2. — The Wine of Montepulciano is justly celebrated. The red wine is strong and somewhat rough. Fine estate is a sweet white wine (2 fr. per bottle). *Fornenti* is a white wine flavoured with fragrant herbs and wormwood.

Montepulciano (1061 ft.), a picturesque town with 6200 inhab., surrounded by mediæval walls, lies conspicuously on a height belong-

ing to the Monte Cetona range (p. 44). It was the birthplace of the scholar and poet *Angelo Ambrogini* (1454-94), surnamed *Politianus* after his native place ('*Respublica Politiana*'), the friend of Lorenzo il Magnifico and preceptor of his children. *Cardinal Roberto Bellarmine* (1542-1621), the strenuous opponent of the Reformation, was also born here. The situation as well as the monuments of the place repay a visit. The sights may be inspected in 4-5 hours.

At the beginning of the main street, the *Via Garibaldi*, where the omnibus stops, is a column bearing a heraldic lion (*Marzocco*). No. 32, on the left, is the *Palazzo Torugi*, built by Vignola. Opposite, Nos. 35-37, *Palazzo Avignanesi*, dating from the latter half of the 16th century. Then, also on the right, No. 29, the *Palazzo Buccelli*, with Etruscan urn-reliefs and inscriptions built into the walls, and *Sant'Agostino*, distinguished by a fine Renaissance façade (finished in 1509), with curious touches of Gothic. In the tympanum above the main portal is a relief of the Madonna with John the Baptist and St. Augustine. — The street now assumes the name *Via Cavour*. On the right is the *Mercato* (market-halls) by Vignola, and on the left the round *Chiesa del Gesù*, with florid baroque ornamentation (1714) and an unfinished façade. — The continuation of the street is called *Via Poliziano*; on the left, No. 1, is the house in which *Angelo Poliziano* was born, a brick building of the 14th cent., with several inscriptions.

We next reach the *PIAZZETTA DI SANTA MARIA*, with the small church of *Santa Maria* (handsome portal of the 13th cent.), which commands an admirable view. — A road hence descends to the right, past the old cemetery, in 10 min. to the —

**MADONNA DI SAN BIAGIO* (1620 ft.), in the valley, designed by *Antonio da Sangallo the Elder* and built in 1518-87 on the site of an old church of St. Blasius. The church consists of an imposing central edifice, showing the influence of Bramante's design for St. Peter's (p. 320). The towers are detached from the church, the unfinished S. tower not rising higher than the first story. The marble decoration of the high-altar, by *Giovannino* and *Lisandro Albertini*, dates from 1584.

In the square beside the church is *Sangallo's House* (1518), with a loggia of two stories. A street to the right of the house leads back to the town in about $\frac{1}{4}$ hr.; to the left, near the gate (entrance in the *Via Poggiolo*) is the *Oratorio della Misericordia*, which contains a God the Father with angels, above the high-altar, and an Annunciation of the school of the Della Robbia.

The *Via Ricci* (on the left the *Palazzo Bombagli*, a Gothic brick building, now a court of assize) ascends hence to the *PIAZZA VITTORIO EMANUELE* (formerly *Piazza Grande*), in which rises the cathedral and several sumptuous mansions. To the left is the *Palazzo Nobile*, by Ant. da Sangallo the Elder, and adjoining is the *Palazzo Contucci* or *del Monte*, designed by the same architect but finished by Peruzzi.

In the centre stands a *Memorial Fountain*, with bronze medallions of Victor Emmanuel I., Cavour, Garibaldi, and Mazzini (1894).

The **PALAZZO MUNICIPALE** (14th cent.) contains a few pictures and the municipal library.

Anti-chamber of first floor: Madonna, John the Baptist, and saints, of the school of Della Robbia. — **PICTURE GALLERY** on the second floor: *Madonna da Siena* (?), Madonna, S. Job *del Piombo* (?), Pope Paul III (or more probably Rob. Ballarmino), S. Pancratius, Madonna; S. Ambrose *Subot* (ascribed to Raphael), Fine portrait of a lady.

On application to the 'custode' of the Palazzo Municipale visitors are admitted to the hall of the *Prefettura*, adjoining the Palazzo Nobili (p. 42), which contains an altar-piece by Della Robbia (Coronation of the Virgin).

On the W. of the piazza is the **CATHEDRAL**, built by Bart. Ammannati and Ippol. Scosia and restored in 1888 (facade unfinished).

In the lunette, over the high-altar are the Death, Assumption, and Coronation of the Madonna by *Teodoro di Barile*. The church was once adorned with an imposing monument to Bartolomeo Aragona, secretary of Pope Martin V., erected in 1427 by the famous architect *Michelozzo*. It was taken down, however, during the 15th century, when several parts of it were lost. Among those preserved are to the left of the principal entrance, the recumbent statue of the deceased (or of his father); by the two first pillars, two allegorical reliefs; in the right transept, Christ bestowing a blessing; by the high-altar, marble group of shepherds with garlands, forming the base of the monument. A sketch in the margin shows the original form of the monument.

From **MONTECATINI** to Pienza, about 9 M., diligence once daily in 2½ hrs., fare 1½ fr. (one-horse carr. there and back 30, two-horse 20 fr.). Comp. p. 41.

Pienza (1610 fl., *Leonardo Latini*), a small town with about 2730 inhab., was originally called *Coriginone*, but subsequently named the 'town of Pius' after Pius II. (*Æneas Sylvius Piccolomini*) p. 26, who was born here in 1405, and adorned the town with very handsome buildings, chiefly designed by the Florentine *Bernardo Rossellino*. As all these buildings date from about the same period (1460) and are situated in the same piazza (*del Duomo*), they afford a more compact survey of early Renaissance architecture than is to be obtained in most Italian towns. The chief edifices are the Cathedral (see below), to the right of it the *Episcopio* or episcopal palace, opposite the cathedral the *Palazzo Pubblico* with a colonnade, to the right the finest of all the *Palazzi Piccolomini* which like the *Palazzo Rucellai* at Florence exhibits the rustic style in combination with pilasters (handsome court and colonnade and interesting traces of old frescoes); in front of the palace is a charming *Fountain of 1462*. — The right transept of the Cathedral (recently restored) contains a Madonna with four saints by *Matteo di Giovanni* of Siena; the choir-stalls, carved in the Gothic style, date from 1462, in the chapel to the left of the high altar is an Assumption of the Virgin by *Vecchiotta*. In the left transept a Madonna and four saints by *Gano di Pietro*. The font is a Renaissance work. The choir-books are richly adorned with miniatures. — The Museum, adjoining the cathedral, contains ecclesiastical vestments, including those of Pius II., and Alexander Piccolomini, one of which is of Pienese the other of Italian workmanship, a large Madonna by *Bartolo di Fredi* (1304), the mitre of Pius II., adorned with pearls and enamel ling; old tapestry (including some German & 4 Flemish pieces of the 14-15th cent.); even the richly carved, silver gilt ewer with enamel decoration; a Pax vohi cum, a silver ewer in the Gothic style. — A walk round the town-wall takes 12 minutes. — The church of *Sant'Anna de Comprens*, 2½ M. from Pienza, contains frescoes by *Andrea*.

DRIVE FROM MONTAPULCIANO TO CHIUSI, a very attractive excursion (ca. $3\frac{1}{2}$ hrs.; one-horse carr 16 fr.). Beyond the Madonna di San Biagio (p. 42) the road passes the ($\frac{1}{2}$ hr.) sulphur-springs of *San' Albano* (1685 ft.), and leads through ($\frac{1}{2}$ hr.) Chianciano (see below), ($1\frac{1}{4}$ hr.) Sarteano (p. 88), and ($\frac{1}{2}$ hr.) Cetona (p. 88).

CONTINUATION OF JOURNEY. To the right we soon observe the *Monte Cetona* (3160 ft.), a secondary chain of the Apennines. To the left stretches the *Lake of Montepulciano* (815 ft.), beyond which is the *Lake of Chiusi* (825 ft.), connected with the other by a canal. The district is unhealthy in summer.

49 M. *Chianciano*; the village (1500 ft.), frequented in summer for its mineral springs, lies $4\frac{1}{2}$ M. to the W. — 55 M. *Chiusi*, see p. 88.


7. From Florence to Perugia via Arezzo, Cortona, and Terontola (*Chiusi-Rome*).

103 M. RAILWAY. Express (slow beyond Terontola) in $3\frac{1}{2}$ - $4\frac{1}{2}$ hrs. (fares 20 fr. 60, 14 fr. 40, 9 fr. 35 c.); ordinary trains in $6\frac{1}{2}$ -7 hrs. (fares 19 fr. 15, 13 fr. 40, 8 fr. 65 c.). — To *Arezzo*, 54 $\frac{1}{2}$ M., in $1\frac{1}{2}$ -4 hrs. (fares 11 fr. 25, 7 fr. 90, 5 fr. 15 c., or 10 fr. 25, 7 fr. 15, 4 fr. 60 c.); thence to *Cortona*, 17 $\frac{1}{2}$ M., in $\frac{1}{2}$ -1 hr. (fares 3 fr. 25, 2 fr. 80, 1 fr. 60 c.). — Those who wish to see Arezzo and Cortona and arrive at Perugia in one day, had better leave Florence in the afternoon or evening and sleep at Arezzo.

The Express to Rome quits the Perugia line at Terontola (see E. 11), where passengers for Perugia generally change carriages. — Best views to the left.

Florence, see *Baedeker's Northern Italy*. — The train describes a curve round the town to (3 M.) *Campo di Marte*. It then runs along the N. bank of the Arno. Fiesole is seen on the height to the left. The valley contracts before reaching (8 M.) *Compiobbi*. 13 M. *Pontassieve*, at the influx of the Sieve into the Arno (diligence to Forlì, see p. 108) — 16 M. *Sant' Elero* (hence to *Vallombrosa* by the rack-and-pinion railway, see *Baedeker's Northern Italy*). — We obtain a fine view to the left. The line curves to the S. and enters the valley of the middle Arno, passing through a short tunnel and then crossing to the left bank. From (18 M.) *Rignano* a pleasant excursion (a drive of $\frac{3}{4}$ hr.) may be made to the fine *Villa Sanmazzano*, belonging to Marchese Pauciatichi of Florence. The train passes through another tunnel and reaches (22 $\frac{1}{2}$ M.) *Inciisa*, with a conspicuous castle. The river forces its way here through the limestone rock, whence the name of the village. 25 $\frac{1}{2}$ M. *Figline*. The valley of the Arno near Figline, Montevarchi, and Arezzo, is very interesting to palaeontologists owing to the numerous fossil bones of the deer, elephant, rhinoceros, mastodon, hippopotamus, hyena, tiger, bear, etc., which have been found here. This basin seems to have once been filled with a fresh-water lake.

30 M. *San Giovanni Valdarno*, a small town to the left, the birthplace of the famous painter *Masaccio* (1401-28) and of *Giov.*

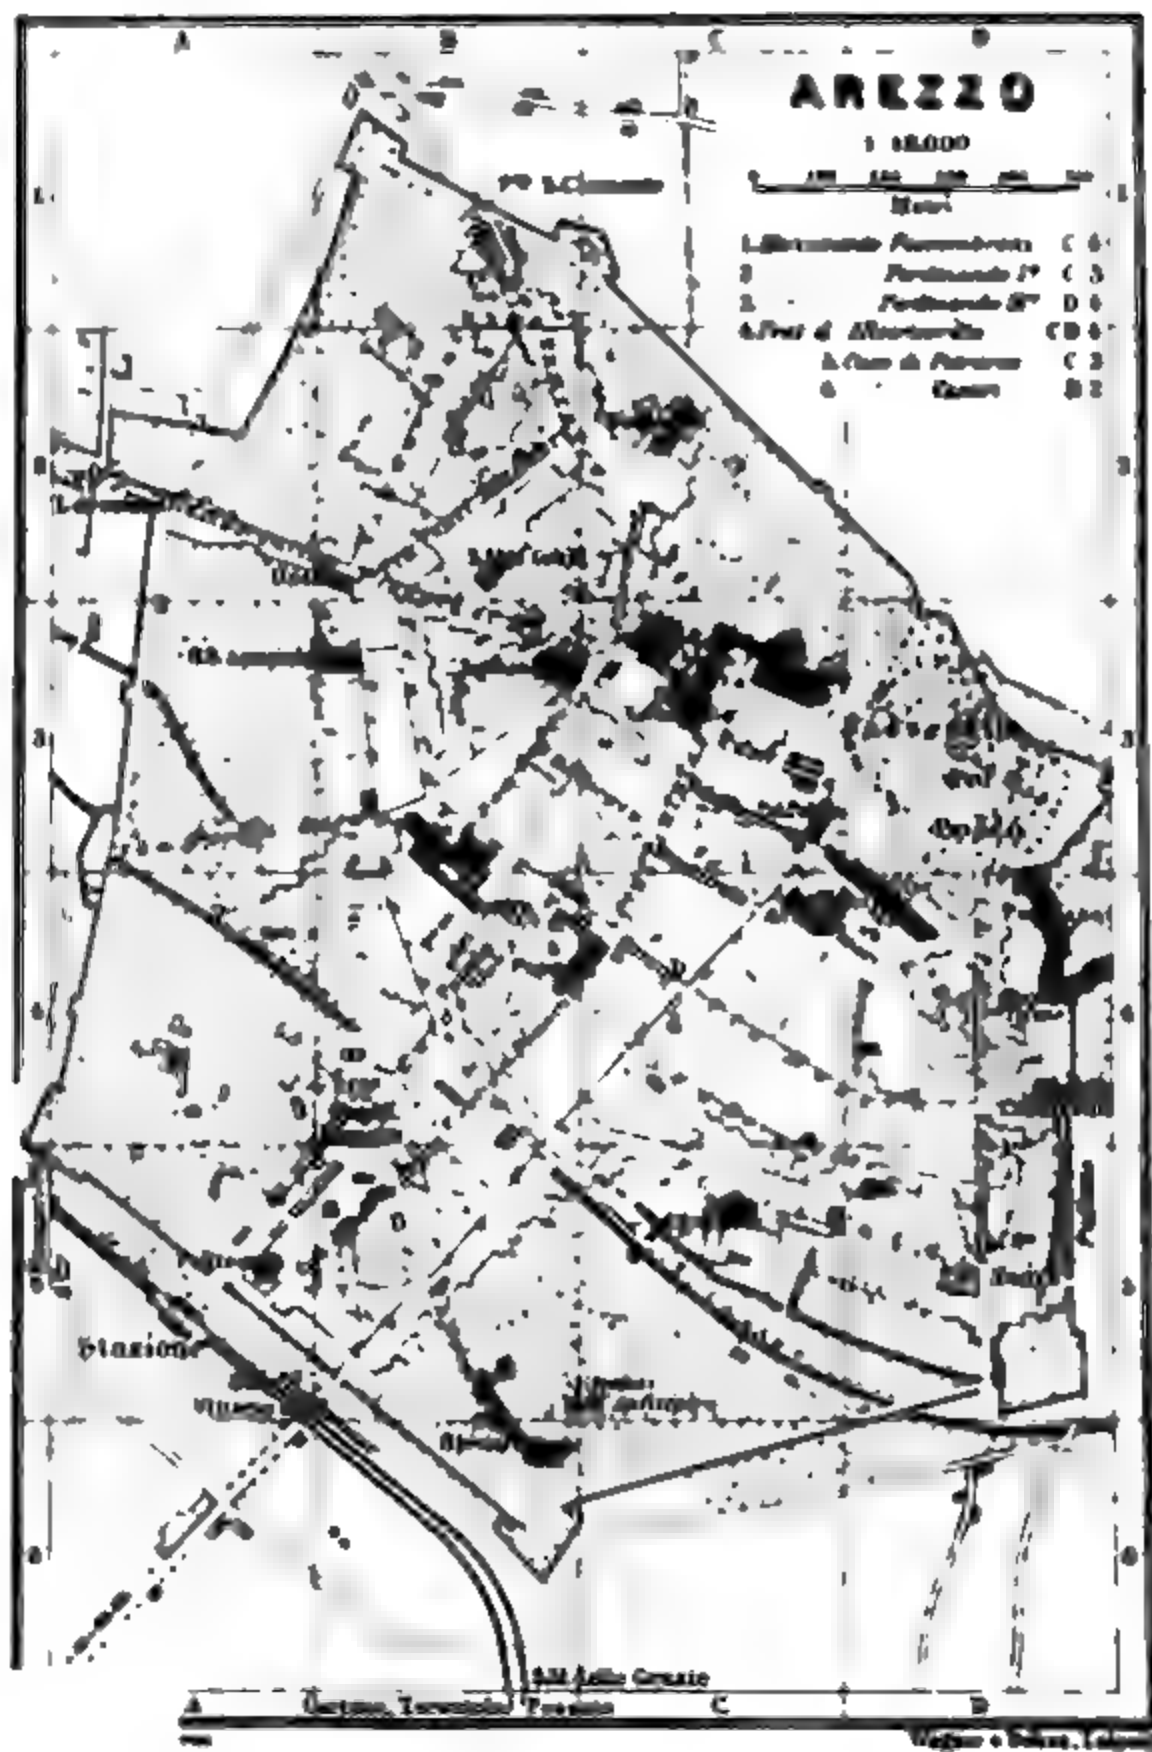

da San Giovanni, surnamed *Manoia* (1590-1636). The Cathedral contains pictures by the latter: Beheading of John the Baptist, Annunciation, etc. The sacristy of *Santa Maria della Grasse*, on the old town-wall, contains a Madonna, once ascribed to Masaccio, and other old paintings.

33½ M. Monteverchi (342 ft.; *Locanda d'Italia*, in the main street), with 5296 inhabitants. The loggia of the principal church in the piazza is embellished with an elaborate relief by *Della Robbia*. The *Accademia Val d'Arno* contains a valuable collection of fossil bones (see p. 44).

The train ascends, passing through three tunnels, to (38 M.) *Bucina*, a village on a hill to the right. Four more tunnels. 41 M. *Laterina*; 44½ M. *Ponticino* (840 ft.). The train now gradually ascends across the plain of Arrezzo, which was formed by alluvial deposits, to (54½ M.) *Arezzo*.

Arezzo. — Hotels. *Imperiana* (Pl. c, D, 4), Piazza Umberto Primo 1, with electric light and restaurant, R. 6-8, B. 1, omn. 1 fr.; *Vittoria* (Pl. b, C, 4), Via Cavour 4; *La Stella* (Pl. c, D, 5), Corso Vittorio Emanuele 67, R. & L. 1½ fr.; *Italia*, Piazza del Popolo, at the corner of the Via Guido Monaco; *Gioco* (Pl. d, C, 4), Corso Vittorio Emanuele, modest but well spoken of. — *Caffè dei Gesuiti*, Piazza Umberto Primo.

Cabs. Per drive 1 fr. (between 1 and 6 a.m. 1½ fr.), per hr. 2 fr., each addit. ½ hr. 75 c. Small luggage free, each trunk 20-50 c.

Theatres. *Teatro Petrarca* (Pl. B, 4), near the Piazza Umberto Primo; *Folliniana Arezzina* (Pl. A, 5), near the station. — Photographs at *Boncompagni's*. — Post Office (Pl. B, 5), Piazza Principe Amedeo.

Arezzo (840-970 ft.), the ancient *Arretium*, the seat of a bishop and a prefect, is a clean and pleasant town with 16,451 inhab., situated on the slope of a hill, in a beautiful and fertile district, abounding in historical reminiscences. A rapid visit to the sights occupies ½ day.

Arretium, one of the twelve confederate cities of Etruria, sought the help of Rome against the Gauls at the opening of the 3rd cent. and was an important ally of the Romans in the war with Hannibal. After the civil war (83 B.C.) *Arretium* received a Roman colony, which was restored in the time of Caesar (*Colonia Flavia Julia Arretina*). Its manufactures were red terracotta vases, of superior quality, and weapons. — In the middle ages the town suffered greatly from the Goths and the Longobards, and at a later date from the party-struggles of the Guelphs and Ghibellines. As leader of the Tuscan Ghibellines at the bloody battle of *Compignano*, in 1299, in which Dante also fought, it succumbed to Florence, then representative of the Guelph party. In the 14th cent. it was for a time subject to the rule of the *Torlati* (p. 47), and in 1337 temporarily, and in 1384 finally to that of Florence.

Arezzo is the birthplace of many distinguished men, of whom may be mentioned: *Cotus Cilnius Maccomus* (d. 9 A.D.), the friend of Augustus and patron of Virgil and Horace; the Benedictine monk *Guido Arezzino* or *Guido Monaco* (ca. 980-1050), the inventor of the modern system of musical notation (who, however, is said by other authorities to have been born near Paris); *Francesco Petrarca*, the greatest lyric poet of Italy, born of Florentine parents in 1304 (comp. p. 47; d. 1374); *Pietro Arezzino*, the satirist (1492-1556). — *Arezzo* has also produced several artists: *Margheritino* (1298?-1315), a painter and sculptor of no great importance; *Spinello Arezzino* (ca. 1335-1410), an able pupil of Giotto, whose style he steadily followed

and rendered popular (his best works are in San Miniato near Florence, in the Campo Santo at Pisa, and in the Palazzo Comunale in Siena); at a later period *Giorgio Vasari* (1512-74), the painter, architect, and biographer of artists. The town, however, never possessed a school of its own. Its requirements in the province of art, which were at their height in the 13-14th cent., were fulfilled by Florentine and Sienese masters, and Giotto, Lippo Memmi, Pietro Lorenzetti, and others were employed here.

Leaving the station (Pl. A, 5), we follow the *Via Guido Monaco*, which leads straight into the heart of the town. In the *PIAZZA GUIDO MONACO* (Pl. B, 4) is a statue of *Guido Monaco* (p. 45), by Salvini, erected in 1882. In the *Piazza del Popolo*, to the left, is a column erected in 1880 to commemorate the Italian struggles for independence.

A little farther on the *Via Guido Monaco* ends in the *Via Cavour*. Here, in the small *PIAZZA UMBERTO PRIMO* (Pl. B, C, 4), is a *Monument to Count Foscombroni* (Pl. 1), a native of Arezzo (1754-1844, comp. p. 60).

The church of *San Francesco* (Pl. B, C, 4), founded in 1322, at the corner of the piazza, contains fine frescoes of the 15th century.

On the entrance-wall is a fresco representing Christ at table with Mary Magdalen, by *Spinello Aretino*. The wheel window, by *Guillemus de Marcellis* (1820), represents St. Francis receiving the rules for his order. — The Chapel of St. Anthony of Padua, to the left, contains frescoes by *Lorenzo d'Arce*, sadly injured. At the end of the left wall is the tomb of *Antonio Rosselli* (d. 1467), by a Florentine artist. — At the end of the wall on the right is an *Annunciation* by *Spinello Aretino* (c. 1385).

In the Choir — Frescoes (some of them much damaged) by *Piero della Francesca* (ca. 1451), the master of Luca Signorelli (best light about midday and in the evening). They represent scenes from the legend of the Holy Cross: Death and Burial of Adam, on whose grave a seed of the tree of knowledge grows up to be a tree; the Queen of Sheba discovers the origin of the wood of a bridge built by Solomon, and afterwards used for making the Holy Cross; Her reception by Solomon; Beam removed from the bridge at command of Solomon; Search for the Cross in a stream; St. Helena finds the true cross and detects the painted one by putting it to the test; Cross brought to Jerusalem; Emp. Heraclius rescues the Cross in a battle with Chosroes the Persian; Angel promising the sleeping Constantine victory in the siege of the Cross; Victory of Constantine over Maxentius (p. 264). All these scenes are portrayed by Piero with great technical skill, in which respect, as well as in his appreciation of the nude, he surpassed all his contemporaries. His pictures, however, are stiff and destitute of gracefulness. — The Evangelists on the ceiling have been attributed to *Piero di Lorenzo*. — The chamber at the bottom of the tower, entered from the choir, also contains important frescoes by *Spinello Aretino*: Christ enthroned, St. Michael overcoming the dragon, and St. Michael appearing to Gregory the Great above the tomb of Hadrian (castle of Sant' Angelo) during the plague at Rome; opposite, Gregory distributing alms, St. Agélas hunting, the Mass of St. Gregory.

Following the *Via Cavour* to the S. E., and then ascending the *Conco VITTORIO EMANUELE* to the left, we observe on the right the interesting church of —

Santa Maria della Pieve (Pl. C, 4), founded at the beginning of the 11th cent., which retains the original choir (restored), seen from the *Piazza Vasari*. The tower and façade were added by Marchionne in 13, but the latter was left unfinished till 1330. Above the main

portal are a Madonna between angels, and figures of the months; and at the door to the right is a Baptism of Christ, of 1221. The interior consists of a nave and aisles with a broad apse, a crypt, and an open wooden roof above the crossing, all restored in the ancient style. On the entrance-wall is an alto-relief of the Adoration of the Child (11th cent.). The font in front (left) is perhaps of the same date. On the pillar to the left in front of the choir is a painting from the studio of Giotto (SS. Francis and Dominic). Behind the high-altar are a fine Madonna and saints, Annunciation, and other works by *Pietro Lorenzetti* of Siena (1320).

At the back of the church is the picturesque *PIAZZA VASARI* (Pl. D, 4), with a fountain and a *Monument of Grand-Duke Ferdinand III.* (Pl. 3), erected in 1822. On the N. side are the *Logge* (Pl. D, 4) built by Vasari in 1573. — Near the choir of Santa Maria della Pieve is the building of the *Fraternità della Misericordia* (Pl. 4; D, 4), now occupied by the law-courts, with a handsome façade, begun by Florentine artists in the Gothic style in 1375, and completed in the Renaissance style by Bernardo Rossellino and adorned with a Madonna (in the lunette above the portal) in 1493-96.

Passing under Vasari's Logge we now return to the Conso, which we reach just opposite the *Palazzo Pubblico* (Pl. C, 3). This edifice, built in 1322, and adorned with armorial bearings of the ancient Podestà, is now used as a prison. In the *Via degli Albergotti*, diverging to the left, is *Cavaliere Vincenzo Fungini's Museum* of porcelain, majolica, etc. (No. 3; interesting; adm. courteously granted on application).

A little farther on the *Via dell' Orto* diverges also to the left, near the entrance to which, No. 22, a long inscription indicates the house (Pl. 5) in which *Francesco Petrarca* was born (p. 45). A monument to the poet is to be erected here. Adjacent rises the cathedral, on the E side of which is the *Paseggio del Prato*, commanding an attractive view of the Arno valley and the mountains.

The Cathedral is a fine specimen of Italian Gothic, begun in 1277, with later additions. The façade is at present being completed by *Dante Viviani*.

The INTERIOR, which has no transept and is of handsome and spacious proportions, contains stained-glass windows, dating from the beginning of the 16th cent., by *Gillespie de Marillat*; the middle window in the choir is modern. G. de Marillat also painted the first three arches of the nave, and the first of the left aisle, the others being by *Sisto Castellani* (1688). In the RIGHT AISLE is the modest tomb of Gregory X, who expired at Arezzo, in 1276, on his return from France just after proclaiming a new crusade. Adjacent, an early Christian sarcophagus (11th modern). Above are a Renaissance tabernacle and a fresco of the Crucifixion by *Agostino di Duccio* (c. 1380). — On the HIGH ALTAR, marble sculptures by *Giovanni di Francesco* of Arezzo and *Betto di Francesco* of Florence, executed in 1369-75: Madonna with SS. Donatus and Gregory, and bas-reliefs from their lives. — In the LEFT AISLE, at the E end, is the tomb of Guido Tarlati di Pietramala, the warlike bishop of Arezzo (d. 1277), the work of *Agostino* and *Agnolo da Siena* (1330). The 16 sections represent the life of this ambitious and energetic prelate, who, having been elected

governor of the town in 1221, soon distinguished himself as a conqueror, and afterwards crowned the Emperor Louis the Bavarian in the church of Sant' Ambrogio at Milan — Adjacent is a *Magdalen*, a fresco by *Piero della Francesca*. The large *Chapel of the Madonna*, erected in 1798, contains five excellent terracottas by *Andrea della Robbia* — In the *Sacristy* is a terracotta relief of the *Annunciation* by *Bern. Rossellino* (1433), a fresco of *St. Jerome* by *Bart. della Gatta*, and predella by *Luca Signorelli*.

The *Marble Statue of Ferdinand de' Medici* (Pl. 2; C, 3) in front of the cathedral, by *Pietro Francavilla*, was erected in 1596. In the piazza is the *Palazzo Comunale* (Pl. C, 3), with armorial bearings. The *Sala del Consiglio* contains a portrait (damaged) of *Pietro Aretino* (p. 45), by *Seb. del Piombo*.

Above the door of *San Domenico* (Pl. C, 2) is a fresco of a *Madonna* by *Angelo di Lorentino* (c. 1480). The church contains a *Crucifixion* by *Parri Spinello*, and, on the right, a painted Gothic tabernacle, with coats-of-arms, by *Giov. di Francesco of Florence*.

In the *Via Ventì Settembre*, on the right (No. 27), is the *House of Vasari* (Pl. 6, B, 2; p. 46), containing works by the master (1st floor).

At the corner of the *Via Garibaldi* (entr. at No. 73) and the *Via San Lorentino* stand the *Municipal Museum* (Pl. A, B, 2; visitors admitted at any time on application to the custodian or in the library; small fee; director, *Comm. Gamurrini*).

First Floor. In the *Loose* are some ancient reliefs (St. Lady at her toilette). — Room I. Weapons and implements of the stone age found near Arezzo. A collection of coins (among them some good Etruscan specimens) occupies the centre. Cinerary urns. — R. II, III. Fragments of vases of red glazed terracotta (p. 45), and numerous moulds. — R. IV. By the windows, bronze statuettes; to the right, mediæval articles; in the first cabinet on the adjoining wall, ivory articles (St. Carved ivory casket of the 7th cent.); in the other cabinets admirable majolicas; in the middle, seals; above, Renaissance figure from a fountain; model in terracotta of the *Madonna* by *B. Rossellino* (p. 47). — R. V. Weapons, sculptures, architectural fragments, etc.; in the middle, bronze statuettes and a bronze reliquary by *Persico* (1485). — R. VI. Antique urns and reliefs and mediæval sculptures. — R. VII-XI. Natural History collections. R. VII and VIII contain a palæontological collection, chiefly from the *Val di Chiana* (p. 50).

The **Second Floor** contains the *Municipal Picture Gallery* (keeper downstairs). — Room I. Paintings of the 14-16th cent., beginning with three works by *Mascherone* (p. 45), to the right of the entrance. — R. II. Works of the 15th and early 16th cent., including a fresco of the *Madonna and Child*, attributed to *Tommaso Martini*, two pictures on panel of *St. Rochus* by *Bartolomeo della Gatta*, and two *Madonnas* by *Lorentino d'Angelo* (one dated 1482). — R. III. *Luca Signorelli*, Large altar-piece with the *Madonna*, *David*, *St. Jerome*, and the kneeling donor, the jurist *Niccolò Gamurrini* (1520); *Signorelli*, *Madonna on clouds*, with four saints; *School of Fra Bartolomeo*, *Madonna enthroned with saints*, another large work. — R. IV. Paintings by *Giorgio Vasari* and other works of the latter half of the 16th century. — R. V. Paintings of the 17-18th cent., by *Ricci*, *Vignoli*, etc. — R. VI. Works of the 18-19th cent.; portrait of *Tommaso Segricci*, by *Gérard*. — R. VII. Drawings and sketches. — R. VIII. Fresco by *Symonite Aretino* (p. 45). — R. IX-X contain a collection of paintings bequeathed by *Conti Puccinbroni* (p. 45).

The *Municipal Library*, in the same building (open 9-12 and 2-5) contains 480 MSS., the oldest dating from the 11th century.

In a small piazza adjoining the Via Garibaldi stands the church of *Santissima Annunziata* (Pl. A, B, 8), a handsome Renaissance structure chiefly by *Antonio da Sangallo the Elder*. In the interior, at the last altar on the right, Madonna in clouds with St. Francis, by *Pietro da Cortona*; above the side-door (right), the Evangelists by *Spinello Aretino*; stained glass of 1509.

We cross the square diagonally and enter the Via Cavour to the right. In this street, at the Piazza Principe Amadeo (entr. between the church and the post-office), is the *Badia di San Piero* (Pl. B, 9), which is now the seat of the *Accademia Aretina di Scienze, Lettere, ed Arti*. The library, formerly the refectory, contains the Feast of Ahasuerus by *Vasari* (1548). In the adjoining Church, built by *Vasari*, is a tabernacle by Ben. da Majano; the painted imitation-cupola is by Padre Pozzo. Giulio da Majano was the architect of the Convent Court.

At the lower end of the Corso, near the *Barriera Vitt. Emanuele*, begins the Via San Bernardo, leading to the church of *SAN BERNARDO* (Pl. B, 8). The frescoes in the anterior quadrangle (God the Father and the Evangelists) were painted by *Vasari* in his youth (1529); below is the Madonna appearing to St. Bernardino, by *Bartolomeo della Gatta*. In the sacristy is a Madonna by *Pecori* of Arezzo. The cloisters (bell) to the left contain some indifferent frescoes in monochrome (life of Guido Monaco and San Bernardino) and a view of medieval Rome. In the garden are the remains of a Roman amphitheatre.

About $\frac{1}{4}$ M. from the *Barriera Vitt. Emanuele* (outside which we take the avenue to the left, and then at the corner, after 3 min., the road to the right) is situated the church of *Santa Maria delle Grazie*, with an elegant early-Renaissance porch borne by columns, by *Benedetto da Majano* (?), and a handsome marble altar by *Andrea della Robbia* (ca. 1485).

Railway from Arezzo to Siena and Prato Vecchio, see *Baedeker's Northern Italy*; to Fossato, see R. 8.

FROM AREZZO TO MONTE SANSAVINO, 12 $\frac{1}{2}$ M., diligence (fare 1 $\frac{1}{2}$ fr.) twice daily, in 2 hrs., through the Chiana valley (p. 50). The small town 4500 (inhab.) of —

Monte Sansavino (1080 ft.; *Ab. del Sole*, by the Porta Fiorentina, tolerable) was the birthplace of the sculptor *Andrea (Contucci da) Sansavino* (1460-1529). — The church of *SANTA CHIARA*, in the principal piazza, contains (left) a statue of St. Anthony by the *Robbia* and a Madonna with four saints, by *Sansavino* (? 1525); on the right SS Sebastian, Lawrence, and Rochus, an early work by *Sansavino*; Adoration of the Shepherds by the *Robbia*; on the central pillars Sienese paintings of the 15th cent.; to the right and left of the high altar are prophets by *Vasari*. In the 'Ruga Maestra', or principal street, on the right, is the *Palazzo Municipale*, erected by Ant. Sangallo the Elder in 1520; the Sala del Consiglio contains a fine carved door of the 15th century. Opposite the town-hall is a *Loggia* by Ant. da Sangallo the Elder. On the right, farther on, is the church of the *Misericordia*, containing a monument of 1498. On the right we next observe *Sant' Agostino*, with a façade of the 14th cent., it contains an Assumption by *Vasari*; the monastery-court is by Ant. da Sangallo the Younger. The *Pal. Filippi*, on the left, No. 17, has fine balcony-railings and lantern-holders in wrought iron, of the 15th century. — About

1 M. from Monte Sansavino is the *Santuario della Vergine* (10th cent.), with a Madonna by *Margheritone d'Arezzo* (ca. 1280).

From Monte Sansavino to *Monteungu* (p. 41), $2\frac{1}{2}$ M.; or a pleasant sound may be made by *Fotano della Chiana* and *Detolle* to *Torrta*, another railway station (p. 41; one-horse carr. 8-10 fr.). — *Fotano della Chiana* (1033 ft.; *Alb. della Vittoria*, R. 1 fr., tolerable) is 5 M. from Monte Sansavino. On the right, about $\frac{1}{2}$ M. short of the entrance to the town, is *San Francesco*, with a fine loggia, dating from the end of the 15th cent.; in the interior are several works by the Robbia family. *San Domenico* and the *Collegiata* in the town contain similar works; the latter possesses a *Coronation of Mary* by Luca Signorelli (?). — At *Detolle* (1027 ft.) is the *Villa of Count Passerini*, containing a valuable collection of Etruscan antiquities (golden bracelet with rams' heads, huge vase with contests of the giants and Bacchic scenes, etc.). One-horse carr. to *Torrta* ($\frac{1}{2}$ hr.) $2\frac{1}{2}$ -3 fr.

On leaving *Arezzo* we notice on the left the chain of hills which separates the valleys of the Arno and Chiana (see below) from the upper valley of the Tiber. Beyond a tunnel the train runs straight across the plain to (62 M.) *Frassineto* and (66 M.) *Castiglione Fiorentino*, the latter on a hill (1132 ft.). Farther on, to the left, the dilapidated fortress of *Montecchia*. The high-lying *Cortona* next becomes visible to the left in the distance.

The Valley of the Chiana runs parallel to the main axis of the Apennines and forms the natural prolongation of the uppermost valley of the Arno. In prehistoric times the waters of the Arno flowed through it to the Tiber, as their fall, however, was but slight, the deposits from the neighbouring streams blocked the channel and changed the course of the river to a N.W. direction leaving the valley a fever-haunted swamp (*Dante, Inferno* xix, 46). Thus it remained until the middle of the 13th cent., its waters draining into two separate river-systems, a peculiarity of rare occurrence. The method was then adopted of allowing the detrital matter brought down by the mountain-streams to deposit itself on the bed of the valley. Owing largely to the efforts of Count *Fossombroni* (p. 46), the level was thus raised to its present height, and the district is now one of the most fertile in Italy. The ancient *Clanis* (the Lat. name for Chiana), after parting company with the Arno, flowed into the Tiber, but since then the watershed (877 ft.) has shifted to the S. The chief arm of the river, the Tuscan Chiana, pours its water into the Arno by means of the *Canal Maestro*, while only one arm, the Roman Chiana, which joins the *Foglia* at *Orvieto* (p. 89), reaches the Tiber.

72 M. *Cortona*. The station (834 ft.) lies near the village of *Omusaia*, at the foot of the hill on which the town is situated.

A carriage-road ($2\frac{1}{4}$ M., omnibus 75 c., at night 1 fr.) ascends to *Cortona*, passing *Santo Spirito* on the right. Pedestrians cut off the final windings by following the old road, which passes (near an Etruscan tomb, 'Grotta di Pitagora') to the W. of the church of **Santa Maria del Calcinaio* (a small early-Renaissance building by *Francesco di Giorgio* of Siena, 1485-1514, with a handsome altar of 1519), and by the *Borgo San Vincenzo* or S. suburb, and leads to the low-lying S.W. town-gate or *Porta Sant'Agostino* (p. 51).

Cortona. — Hotels. ALBERGO NAZIONALE (Pl. a), Via Nazionale, R. 2 $\frac{1}{2}$ -5, pens. 6-9 fr.; ALB. GARIBOLDI (Pl. b), Piazza Alberi, with good trattoria; ALB. DEL POPOLO (Pl. c), Via Guelfa, in the 16th cent. palace mentioned * p. 51.

Cortona (2100 ft.), a small, loftily-situated town with 8679 inhab., standing above the valley of the Chiana and not far from the Trasimene Lake, is one of the most ancient cities in Italy. Its situation and views, its Etruscan antiquities, and several good pictures of the 15th cent., render it well worthy of a visit.

It appears that the Etruscans, immigrating from the plain of the Po, wrested the place from the Umbrians, and constituted it their principal stronghold for the subsequent conquest of the country. Cortona was one of the twelve confederate cities of Etruria, and with them shared the fate of being converted into a Roman colony. After various vicissitudes and struggles it came under the dominion of Florence in 1411.

LOCA MOSCONELLI (b. after 1450, d. 1520), who has justly been called a precursor of Michael Angelo, was born at Cortona. Like his master Piero della Francesca (pp. 46, 54), he was a zealous student of anatomy; in the embodiment of the nude, in the conception of movement and foreshortening he surpasses all his contemporaries. On the other hand, his deficiency in refined pictorial sentiment forbids the full development of plastic vigour in his pictures. He therefore prefers extensive fresco paintings (see pp. 30, 40, 101) to panel-pictures as a suitable field for his abilities. His native town, where he held several municipal appointments, still contains a number of his works, none of which, however, are of much importance. — Cortona was the birthplace also of *Pietro Serotini*, surnamed *Pietro da Cortona* (1500-1600), the painter and decorator, who was chiefly employed at Rome and Florence.

The carriage-road from the station ends at the promenades of the *Giardino* or *Passeggio Pubblico*. At the entrance of the town proper is the *Piazza Garibaldi* (Pl. 2), a semicircular terrace on the left, with a monument to Garibaldi, and commanding an unimpeded view of part of the Trasimene Lake and the surrounding heights. On the right, at the entrance to the *Giardino Pubblico*, is the church of —

***SAN DOMENICO**, built in the early 15th cent. on the site of an older church, and containing some admirable paintings: on the high-altar an *Assumption* by *Bart. della Gatta*; on the right, *Madonna with saints and angels*, an early work of *Fra Angelico* (ca. 1414); at the 3rd altar on the right, *Madonna with St. Peter Martyr and St. Dominic*, by *L. Signorelli* (1515); on the left wall, *Coronation of the Virgin*, by *Lor. di Niccolò* (1440), presented by Cosimo and Lorenzo de' Medici.

The *Via Nazionale* leads hence straight to the *PIAZZA VITTORIO EMANUELE* (Pl. 1), where the *Municipio* is situated. Here, to the left, diverges the *Via Guelfa*, in which are situated, to the right, a beautiful palazzo of the 16th cent., and lower down the church of *Sant' Agostino*, with a *Madonna and saints* by *Pietro da Cortona*. At the end of the street, just outside the *Porta Sant' Agostino* (p. 50) is the *Palazzo Coschetti*, under which an Etruscan vault has been preserved.

Turning to the right from the *Piazza Vitt. Em.*, we reach the small *PIAZZA SIGNORELLI* (Pl. 3), where we observe, opposite to us, the *Palazzo Pretorio*, and on the left an ancient *Merzocco* (lion).

The *Palazzo Pretorio*, with numerous armorial bearings of old magistrates, is now occupied by various public offices, and contains

the *Accademia Etrusca*, founded in 1728, which possesses a *Museum of Etruscan Antiquities*, well worth visiting. (Fee $\frac{1}{2}$ -1 fr. to the custodian, who lives close by; open free on Tues., Thurs., & Frid. 10-1.)

The gem of the collection, of remote antiquity and perhaps imported from Greek Asia Minor, is a circular *Cradle-bed* (*lanapederie*), made to hold 16 lights; on the lower side in the centre a Gorgon's head, surrounded with a combat of wild beasts; then wave-like ornamentation; and finally eight ithyphallic satyrs, with dolphins below them, alternately with eight sirens; between each pair of lamps a head of Bacchus. An encaustic painting on slate, representing '*Polyhymnia*', was once thought to be ancient. Remarkable *Etruscan Bronzes*, a *Fetive Head* with numerous symbols, *Vases*, *Urns*, *Inscriptions*, etc. There are also a few Egyptian antiquities, including two mummies. — The *PUBLIC LIBRARY*, in the same building, possesses a *Sue MS.* of Dante.

The *Via Casali* descends from the *Palazzo Pretorio* to the —

**CATHEDRAL (Santa Maria)*, a handsome basilica, ascribed to *Giulio da Sangallo* (1458-1502), altered in the 18th cent. by the Florentine *Aless. Galilei*.

In the choir are several paintings by *Luca Signorelli*: an institution of the Last Supper, a very quaint composition (1512), a Descent from the Cross (1502), a Conception (1521), and a Nativity — To the left of the choir, an ancient sarcophagus, representing the contest of Dionysus against the Amazons, erroneously supposed to be the tomb of the Consul *Flaminius* (p. 56). In the S. aisle is a *Madonna* by *Pietro Lorenzetti*, and in the sacristy a second *Madonna* (studio-piece), by the same.

Opposite the cathedral is the *Baptistery (Il Gesù)*, of 1505, containing three fine pictures by *Fra Angelico da Fiesole* the Annunciation and two predelle, representing scenes from the life of the Virgin and St. Dominic.

Passing the colonnades of the theatre in the *Piazza Signorelli*, we follow the *Via Dardano* straight to the *Porta Colonia*, where we obtain the best survey of the **ANCIENT ETRUSCAN TOWN WALLS*, constructed of huge blocks, and for the most part well preserved, which surround the town in a circumference of about 2860 yds., and along the outside of which we may descend. Even the gateways are still recognizable.

Ascending the *Via Santa Margherita* from the *Piazza Garibaldi*, we reach (20 min.) the hill commanding the town, on which are situated the church of *Santa Margherita*, and a dilapidated fortress (see below). — About halfway up, the *Via delle Santucci* diverges to the left, leading in a few minutes to the church of *San Niccolò*, with a small entrance-court planted with cypresses. The entrance is on the W. side, opposite the custodian's house.

The interior ($\frac{3}{4}$ fr.) contains a freely-restored fresco and a good altar-piece, painted on both sides (in front the Body of Christ borne by angels and surrounded by saints; at the back, *Madonna enthroned*, with St. Peter and Paul), by *Luca Signorelli*. — The sacristan will point out a direct route, ascending hence by steps to *Santa Margherita*.

The church of *SANTA MARGHERITA* is a modern building occupying the site of a Gothic church (by *Giov. Pisano*?) erected in 1294, of which the handsome rose-window is the sole remaining trace. In

the high-altar is the tomb of the saint, by Angelo and Frano. di Pietro (1382); the silver front was presented by Pietro da Cortona. The platform of the Campanile commands a splendid *View. Below are the remains of Roman Baths, erroneously called a Temple of Bacchus. — The visitor should not omit to ascend somewhat higher to the old FONTANA (2190 ft., trifling fee; custodian sometimes difficult to find), from the walls of which the prospect is entirely uninterrupted, except at the back, where it is bounded by the mountain-chain (*Alta Sant' Egidio*, 3465 ft.).

The visitor may (by presenting a visiting-card) possibly obtain access to the private collection of *Sig. Forzetti* in the Palazzo Mansini, Via Nazionale 6 beautiful half-length picture of St. Stephen and a Nativity by *Lucas Signorelli*.

76 M. Terontola (*Buffet*), an unimportant place near the N.W. angle of the Trasimene Lake, is the junction of the lines to Chiusi, Orte, and Rome (see R. 11), and to Perugia and Foligno. Passengers in the latter direction change carriages here (views to the right).

The Lago Trasimene, the ancient *Lacus Trasimenus* (843 ft.), is 30 M. in circumference, and 8-14 M. across, and is surrounded by wooded and olive-clad slopes, which as they recede rise to a considerable height (ca. 2600 ft.). The lake, which abounds with fish, contains three small islands, the *Iscia Maggiore* with the Villa Guglielmi, the *Iscia Minore* towards the N., and the *Iscia Polvosa* towards the S.E., on the W. side an eminence abuts on the lake, bearing the small town Castiglione del Lago (p. 86). Until recently the only outlet for the waters of the lake was a drain (*emissarium*), constructed in the 15th cent., which ran into a tributary of the Tiber, but this gradually became choked up. A second *emissario*, near San Savino, was accordingly made in 1896-98, to regulate the height of the water, to increase the arable land on the shores, and to diminish the sway of fever. A project for draining it entirely, formed by Napoleon I., has been given up for the present.

The reminiscence of the imaginary victory which Hannibal gained here over the Roman consul C. Flaminius in B.C. 217, imparts a tinge of sadness to this lovely landscape. It is not difficult to reconcile the descriptions of Polybius (3, 53 et seq.) and Livy (22, 4 et seq.) with the present appearance of the lake. In the spring of 217 Hannibal quitted his winter-quarters in Gallia Cisalpina, crossed the Apennines, marched across the plains of the Arno, notwithstanding an inundation, devastating the country far and wide in his progress, and directed his course towards the S., passing the Roman army stationed at Arrezzo. The brave and able consul followed incautiously. Hannibal then occupied the heights which surround the defile extending on the W. side of the lake from Borghetto to Passignano, upwards of 5 M. in length. The entrance at Borghetto, as well as the exit at Passignano, was manly secured. Upon a hill in the centre (site of the present village of Tuoro, 1007 ft.) his principal force was posted. A dense fog covered the lake and plain, when in the early morning the consul, ignorant of the plan of his enemy, whom he believed to be marching against Rome, entered the fatal defile. When he discovered his error, it was too late: his entire left flank was exposed, whilst his rear was attacked by the hostile cavalry from Borghetto. No course remained to him but to force a passage by Passignano, and the vanguard of 6000 men succeeded in effecting their escape (but on the following day were compelled to surrender). The death

of the consul rendered the defeat still more disastrous. The Romans 15,000 men, while the remaining half of the army was effectually dispersed and the Roman supremacy in Italy began to totter. The memory of streams of blood which once discoloured the lake at this spot survived the name of *Sanguinato*, the village to the N.W. of Tuoro.

The line skirts the lake and passes through a tunnel. 80 M. *Tus* (p. 53); 83 M. *Passignano*, with an ancient keep. Two tunnels 85 M. *Magione*, with an old watch-tower of the time of *Fortebraccio* and *Sforza*; 87 M. *Ellera*.

103 M. *Perugia*, picturesquely situated on the hill to the N. see p. 59.

8. From Arezzo to Fossato di Vico.

83 M. RAILWAY (*Ferrovie Appennine Centrali*): two through-trains daily in 5½-8 hrs. (fares 5 fr. 30, 3 fr. 85 c.).

Arezzo, see p. 45. — The train diverges from the line to *Roma* (p. 50), and begins to ascend more rapidly towards the hills to the S.E. of *Arezzo*, affording a picturesque retrospect of the town and plain. It mounts as far as the *Scopetone*, the W. parallel chain of the Umbrian Apennines, separating the valleys of the Arno and the Tiber. This part of the line, the most interesting from an engineering point of view, traverses 20 tunnels and several viaducts. Beyond (11 M.) *Palazzo del Pero* (1325 ft.) we descend to the N. through the wooded valley of the *Cerfone*, a tributary of the Tiber — 19½ M. *Ville-Monterchi* (1023 ft.) in a hollow, from which steeper ascent leads to (20 M.) *Citerna* (1049 ft.). — 24½ M. *Angiari* (1109 ft.), a small town (1927 inhab.) picturesquely situated on a hill (1407 ft.). The train traverses the highly cultivated plain, once a lake-basin, crosses the Tiber, and reaches —

28 M. *San Sepolero* (1082 ft.; *Alb. Fiorentino*, Via Venti Settembre, R. & L. 1½ fr.), a little town with 4537 inhab. and old walls, at the foot of the *Alpe della Luna* (4769 ft.). It was the birthplace of *Piero della Francesca* (ca. 1420-92; comp. p. 46), who may be studied here to advantage, and of *Raffaello dal Colle* (1490-1540), a pupil of Raphael. Hurried travellers may see the points of interest in about an hour.

About 300 yds. from the station we pass through the Port of *Fiorentina* to the right into the Via Venti Settembre, which leads to the Piazza Vittorio Emanuele Secondo. The Via *Barbagliati* soon diverges to the right to the Piazza *Santa Chiara*, where the church of *Santa Chiara* contains an Assumption ascribed to *Piero della Francesca* and a fine Nativity in the style of the *Robbia*.

The Piazza Vittorio Emanuele Secondo adjoins the Piazza *Garibaldi*, on the left of which stands the *Palazzo del Comune*, containing a small PICTURE GALLERY (open all day; fee). Among the chief paintings, mostly brought from the churches of the town, are the following: **Piero della Francesca*, Resurrection (fresco), *Madonna della Misericordia* and saints (1445); *Signorelli*, Crucifixion, with

two
Col
in t

alt

Lyc
of
(Ba
sic
Ge

C
by
at
de

U
(
at
(

r
(

M
/
a
t

two saints on the back (originally a church-banner); *Raffaello del Colle*, Annunciation, Circumcision. — Nearly opposite, to the left, is the *Court of Law*, with armorial shields by the Robbia.

To the right stands the CATHEDRAL, a Romanesque edifice, altered in the Renaissance period.

In the Choir are an Ascension by *Perugino* (replica of the work at Lyons) and a Resurrection by *Raffaello del Colle*. Left aisle Two wings of an altar-piece by *Piero della Francesca*, the central painting of which (Baptism of Christ) is in London; Adoration of the Magi by *Alessandro*. Right aisle: St. Thomas by *Santhé de Pisa*. Also, the monument of *Abbot Simone Giustiniani* (d. 1505), the Camaldulensian.

Near the cathedral, at No. 15, *Via Lorenzo Magnifico*, is the *Casa Colonnaioni*, containing a fresco of the "Youthful Hercules" by *Piero della Francesca* (adm. only by permission of the proprietor, at Florence; fee). In the *Giardino Pubblico* is a monument to *Piero della Francesca* (1892).

From *Fam Sepolero* a road crosses the Central Apennines to (11 M.) *Urbento* (p. 127). — A diligence piles twice daily in 2 hrs. (fare 1 fr.) to (10 M.) *Pieve Santo Stefano* (1814 ft.). About 12 M. farther on, to the N., and 1 M. from the village of *La Balza* (lan), is the source of the Tiber (*Vena del Tevere*, 4160 ft.), on the slope of *Monte Fumaiolo* (4618 ft.).

The railway proceeds to the S.E. along the left bank of the river. 31 M. *San Giustino* (1074 ft.), with a chateau of the Bufalini (15th cent.); 33½ M. *Solei Lama*.

38 M. *Città di Castello* (945 ft.; *Albergo e Trattoria della Canoniera*, Pl. a, A 3, R. & L. 1½-3 fr.; *Albergo Tiferno*, *Via Sant' Antonio*, Pl. B 2, very fair), with 6096 inhab., occupying the site of *Tifernum Tiberinum*, which was destroyed by Totila. It belonged to the Vitelli family in the Renaissance period, and afterwards to the States of the Church. The town, built in the form of a rectangle and still surrounded by walls erected in 1518, contains many interesting buildings of the Renaissance. The most conspicuous of these are the Palazzo Comunale, the Cathedral, and the Palaces of the Vitelli, the lords and masters of the town (15-16th cent.), who, like most of the magnates of the Renaissance period, were passionately addicted to building. Two hours suffice for a rapid visit to the chief objects of interest.

Opposite the railway-station (Pl. B, 2), to the right, stands the *Palazzo Vitelli a Porta Sant' Epidio*, the largest of the Vitellian palaces, with an elaborately painted loggia and a fine ceiling (adm. only by permission of Principe Vitelli at Florence). In the garden at the back is an interesting summer-house (*Palazzina*, Pl. B, 1) of the 16th century. The *Via Mazzini*, near which is a statue of *Garibaldi* (1897), leads hence towards the town, passing (right) the *Palazzo Vecchio Bufalini*. A little farther on we turn sharply to the right into the —

PIAZZA VITELLI (Pl. B, 2), on the S. side of which (left) stands the *Pal. Municipale*. Farther to the W. are the *Pal. del Governo* (Pl. 1; A, 2), the N. façade of which is of the 14th cent., and the

PIAZZA VENTI SETTEMBRE (Pl. A, 2), containing the handsome *Palazzo Comunale*, a rusticated building by Angelus of Orvieto (14th cent.), with a staircase borne by pillars.

Adjoining the Pal. Comunale is the CATHEDRAL OF SAN FLORENZO (Pl. A, 2), an admirable specimen of the Renaissance style, with a baroque W. façade, erected in 1482-1540 by *Elia di Bartolomeo Lombardo* and his son. The only relics of the original Romanesque building of 1012 are the campanile and the carved N. portal. The most notable features of the interior are the fine capitals and the intarsia-work in the choir (16th cent.). In the sacristy is a small Madonna by *Pinturicchio* (?). The treasury contains an embossed silver antependium, with designs in silver-gilt (ca. 1150), and a fine crozier (14th cent.). — To the W. of the cathedral lies the *Giardino Pubblico* (Pl. A, 2), affording views of the Tiber valley.

About 350 yds. to the S. of the Piazza Vitelli is the Gothic church of *San Domenico* (Pl. B, 3), of 1395. Still farther to the S., by the town-wall, is the *Palazzo Vitelli della Canoniera* (Pl. A, 3), with decorative frescoes on the staircase and a fine sgraffito façade (towards the garden).

About 250 yards to the N. of the Piazza Vitelli is the Pinnestosa (Pl. A, 2), formerly a monastery, containing paintings and works of art collected from various churches.

The notable works include the following: *Luca Signorelli*, Martyrdom of St. Sebastian (1488; from San Domenico); *School of Signorelli*, Adoration of the Magi, Baptism of Christ, Coronation of the Virgin; *Eusebio di San Giorgio* (?), Church-banner, with (No. 32) the Trinity and (No. 16) the Creation of Eve, formerly attributed to Raphael and in a very damaged condition; early and free copy of Raphael's Coronation of St. Nicholas of Tolentino, painted for Città di Castello (whereabouts now unknown); *Piero della Francesca*, *Salvator Mundi*; *Francesco Tifernese da Castello*, Annunciation (1524), Madonna enthroned; *Giacomo da Milano*, St. Sebastian; *Florentine Master*, Virgin enthroned, with saints; paintings by *Raffaello del Colle*; several terracottas by *Andrea della Robbia* and his school, including a large Assumption; silver reliquary (1420).

A little to the N. of the piazza is the small church of *Santa Cecilia* (Pl. A, 2), with an Adoration of the Magi from the workshop of the Robbia. Not far off is *Santa Maria delle Grazie* (Pl. A, 1), with Gothic remains. To the S., at the end of the Via Undici Settembre, is *San Francesco* (Pl. B, 2), with a tablet to the memory of Raphael and a chapel of the Vitelli built by Vasari.

Raphael, it is well known, painted some of his first works in Perugia for churches in Città di Castello, but they have since disappeared, or (like the *Sposalizio* now in the Brera at Milan) have been carried elsewhere.

The train follows the right bank of the Tiber 43 M. *San Secondo* (860 ft.), at the mouth of the Aggia valley. On a height to the right lies the pilgrim-resort of *Madonna di Canoceto* (1473 ft.), 2 M. from the station of the same name. — 45½ M. *Trestina*; 47 M. *Ranchi del Nestoro*. Beyond (49 M.) *Montone-Monte-Castelli* we cross the Tiber and reach (53 M.) *Umbertide* (810 ft.; Alb. Guardabassi),

1000 1000 1000 1000

1000 1000 1000 1000

1000 1000 1000 1000

1000 1000 1000 1000

1000

1000

1000

1000

1000

1000

1000

1000

a small town (5682 inhab.) on the left bank of the Tiber. In the church of Santa Croce is a Descent from the Cross by Luca Signorelli (1516). Diligence to Perugia (p. 60).

Beyond (55 M.) *Monte Corona* (774 ft.) the railway quits the Tiber and ascends to the N.E. through the narrow valley of the *Assino*, crossing the stream eight times — 57 M. *Serra Portuconi* (872 ft.), 59½ M. *Campo Beggiano* (1030 ft.). At (63½ M.) *Pietralunga* (1233 ft.), the village of which name (1853 ft.) lies 9 M. to the N., we reach the fertile table-land of Gubbio, a former lake-basin in the main chain of the Apennines, which is drained on the S. by the *Chigoglio* or *Chiascio* (Lat. *Closius*).

70 M. *Gubbio* (1568-1735 ft.; *Albergo San Marco* Pl. a, D 2, *Via Alfredo Baccarini*, with garden. R. 1½-2½ fr., B. 60 c., well spoken of, *Caf  in the Corso Garibaldi*), with 5783 inhab., lies at the foot and on the slopes of *Monte Calvo* (2224 ft.), at the entrance to a gorge flanked by steep cliffs through which the road leading to *Scheggia* (p. 117) passes. The town presents quite a medi val appearance, and the proximity of the Apennines also gives it a different character from most other Italian towns. Conspicuous among the houses is the huge *Palazzo dei Consoli* (p. 68), while above them towers the convent of *Sant' Ubaldo* (2690 ft., beyond Pl. E, 1). The hurried traveller may 'do' the town in 3 hrs.

Gubbio is the ancient Umbrian town of *Iguvium* (the medi val *Signinum*). It was destroyed by the Goths, became later an independent state, afterwards belonged to the duchy of Urbino, and with it finally acceded to the States of the Church. — The picturesque procession of the *Festa del Carl* takes place on May 15th, the eve of St. Ubaldo (bishop of Gubbio in the 12th cent.), and winds its way through the streets to the above mentioned convent (comp. 'The Elevation and Procession of the Carl at Gubbio', by Herbert M. Bower, 1867).

Gubbio was the native place of *Oderisio*, a famous miniature-painter (1240-99), who is called by Dante in his *Purgatorio* (xi 80) 'l'Onor d'Agobbio'; but no authentic work by his hand now exists. In the 14th and 15th cent. a branch of the Umbrian school flourished here, and among its masters whose renown extended even beyond their native place were *Guido Fulcherio* (1285-1345?) and several members of the *Volpi* family, particularly *Ottaviano Nelli* (d. 1444; comp. p. 6). — Gubbio occupied a still more important page in the history of *Artistic Handicrafts*. Like Urbino, Castel Durante, Pesaro, and Faenza, it was noted for the manufacture of *Majolica* or earthenware vases and tiles which were covered with a coating of colour before being baked. This position it owed mainly to *Don Giorgio Andreoli*, nicknamed *Maestro Giorgio*, the inventor or discoverer of a *carmine* tint, which, after baking, acquired a singularly beautiful metallic lustre. Of his numerous and widely scattered works Gubbio possesses only one small vase, with St. Francis receiving the stigmata.

The town is traversed from end to end by three parallel streets: *Corso Garibaldi*, *Via Savelli*, and *Via Venti Settembre*. Most of the streets are very steep.

About ¼ M. from the rail station is the spacious *PIAZZA VITTORIO EMANUELE* (Pl. C, D, 2). To the left is the Gothic church of *San Francesco*. The *Via Paoli* ascends hence to the *PIAZZA DELLA SIGNORELLA* (Pl. D, 2), on the slope of the hill, supported by massive vaults.

A small side-street to the left, near the beginning of the Via Paoli, leads to the Gothic church of *San Giovanni Battista*, with an early-Gothic altar borne by 16 columns.

The most conspicuous building in the Piazza della Signoria is the PALAZZO DEI CONSOLI, a huge pinnacled Gothic edifice with a tower, erected in 1332-48 by *Giovanello Maffei* of Gubbio, surnamed *Gallapone*, and now a 'national monument'. The ground-floor contains a slab with an inscription of the Augustan period. The *View from the loggia embraces the ruins of the Roman theatre in the plain (p. 59), and the Palazzo Ducale on the hill (fee $\frac{1}{2}$ fr.).

The PALAZZO PANTONIO (opposite), now the *Palazzo Comunale* (Pl. D, 2), contains a few collections (fee $\frac{1}{5}$ -1 fr.).

On the first floor are the so-called *Augustan Tablets*, which were discovered in 1444 near the ancient theatre (p. 59). They are of bronze, and the Italic inscriptions on the seven tablets are the most extensive in existence. They contain in the Umbrian language, an old Italian dialect akin to Latin, liturgical regulations and forms of prayer, dating from different periods. The five older ones, in the Umbrian character, are read from right to left. The later (two and a fragmentary third), in Latin letters, date from about the 2nd cent. B.C.

The upper saloon (handsome door) contains a number of pictures, chiefly of the Umbrian school, among the best of which are a church banner of 1503, a St. Vincent Ferrer (school of *Nelli*), and an example of *Finotto Viti*. The same room contains several charters of the Hohenstaufen emperors (with golden bulls); wood-carving of the 15th and 16th cent. (chests, cabinets, and chairs); and a number of ancient (comp. p. 57) and modern majolicas.

The third side of the piazza is occupied by the modern Palazzo *Ranghiasci-Brunelleschi* (Pl. 1; D, 1, 2).

We leave the Piazza della Signoria (at the E. corner), and soon ascend the steep Via Ducale, which brings us to the Via Sant' Ubaldo (on the right), containing the PALAZZO DUCALE (Pl. D, 1), an old Gothic edifice, which was remodelled in the early-Renaissance style by *Luciano de Laurana* (p. 129), in 1474-80. The fine colonnaded court (custodian in the house next to the cathedral) resembles that of Urbino. The interior is quite a ruin (fine view).

Opposite rises the CATHEDRAL OF SAINT MARIANO E JACOPO MARTINI (Pl. D, 1), a structure of the 13th cent., destitute of aisles and so built against the slope of the hill that its back is embedded in the ground. The façade is adorned with sculptures of the Evangelists and the Lamb of God (13th cent.).

Among the pictures in the interior is a Madonna with SS. Ubaldo and Sebastian, by *Scabellio JM* of Gubbio (first altar on the left). By the third altar, a Coronation of Mary Magdalen by *Finotto Viti* (1521), 10th altar (left), a Nativity by *Scabellio di San Giorgio*. The Pieta at the organ is by *Adamo Doni*, who has to some extent followed Michael Angelo's group at Rome (p. 324). The sacristy contains a Flemish vestment, presented by Pope Marcellus II.

We now return to the Via Vanti Settembre, descend to the Via Savelli, and follow the latter to the left. At the end (on the right) *see the church of SANTA MARIA NUOVA (Pl. E, 2), containing the 'fairly-preserved 'Madonna del Belvedere', by *Ottaviano Nelli* (ly to the sacristan; prob. dating from 1404), a Crucifixion by

Bernardino di Nanni (much damaged), frescoes on the entrance wall, and on the wall to the left of the door a St. Anthony by *Guido Palmerucci*.

Farther on to the S.E., just outside the *Porta Romana* (Pl. E, 8), lies the church of *Sant' Agostino*; the frescoes in the choir (scenes from the life of St. Augustine, a glory with angels and apostles, and the last judgment; discovered in 1902) are by *Ottaviano Nelli*. We now re-enter the gate and turn to the left, passing the Romanesque church of the *Santissima Trinità*, into the *Corso Garibaldi*, whence we turn to the left, down the *Via Vincenzo Armani* to the church of *San Pietro* (Pl. D, E, 3), with a ruinous façade of the 12th cent., and to the *Porta Vittoria*. Outside the gate is the church of *Santa Maria della Piaggia* (Pl. D, 8; visitors knock at the left door), containing a good Madonna by *Gentile da Fabriano* (or *Ottaviano Nelli*?) over the high-altar. — By following the town-wall (outside) to the N.W. from the *Porta Trasimena*, and then turning to the left, we reach the remains of an *Ancient Theatre*, apparently of the republican era and restored under Augustus. The ancient town extended farther into the plain than the modern, as is also proved by other remains.

From Gabbio to Perugia by road, see p. 69.

73 M. *Paddle*. Beyond (78½ M.) *Branca* (1217 ft.) we cross the *Chiggiolo* and traverse the valley of that stream to —

88 M. *Fossato di Vico*, see p. 126.

9. Perugia.

Arrival. **ELECTRIC TRAMWAY** from the station through the *Porta Nuova* (25 c.) and across the *Piazza Vittorio Emanuele* (Pl. C, 5; 20 min.) to the *Piazza Dante* (Pl. C, 3); fare 30 c., handbag 10, trunk 50 c. — Cabs rarely at hand (see below). The road ascends in curves and ends at the *Porta Nuova* (Pl. C, D, 8). At the first bend of the road to the left, a footpath (shorter) leads straight to the town in 20 min., ending at the *Porta Etrusca* (*Strada del Buaccio*; Pl. A, B, 6).

Hotels. — **PALACE HOTEL** (Pl. p; C, 5), *Piazza Vittorio Emanuele*, R. 4-6, H. 1½, déj. 8, D. 5, pens. 8-12, omn. 1½ fr., new; **GRAND HOTEL BRUFANI** (Pl. a; C, 5), well situated at the entrance to the town, R. 3-5, L. 1½, A. 1, B. 1½, déj. 8, D. 5, pens. 8-12, omn. 1 fr.; these two of the first class. — Second class **GRAND BRITANNIA** (Pl. b; C, 4; formerly *Pelle*), *Corso Vannucci* 21, at the corner of the *Piazza Umberto Primo*, with trattoria, R. from 2½, L. & A. 1, pens. 7 fr., very fair. — **ALBERGO BELLE ARTI** (Pl. c; C, 5), *Via Luigi Bonazzi* 21, plain but good, R. 1½-2½ fr.; **ALBERGO RISTORANTE UMBRIA** (Pl. d; C, 4), *Via Roncambio* 2, R. 1½-2½ fr., unpretending. — Furnished rooms, *Signora Rosa Savini*, *Via Luigi Bonazzi* 11.

Restaurants. *Hôtel de la Grande Bretagne*, see above; *Prograsso*, *Via Mannini* 10 (Pl. C, 4). — Beer at *Via Baglioni* 33a (Pl. C, 5).

Cafés. *Baduel, Trasimeno*, both in the *Corso Vannucci*. — *English Tea Room*, *Via Mannini* 10 (Pl. C, 4).

Baths, *Via Augusta* 1 (75 c.).

Post & Telegraph Office (Pl. C, 5), in the *Palazzo Cesarini* (p. 62), *Piazza Vittorio Emanuele*.

Cabs. Fares in the town: with one horse, per drive 75 c., per hr. 1½ fr., each ½ hr. more 50 c.; at night (1-5 a.m.) 1½, 2, and 1 fr.; with two horses, per drive 1¼, per hr. 3, each ½ hr. more 1 fr.; at night, 2, 4, and 1½ fr.

Between the station and the town one-horse $2\frac{1}{2}$, two-horse 4, a single place 1 fr. Small luggage 10, trunk 20 c. — **Delegation Office.** Corso Vercelli 15 diligences to Umbertide (p. 66), daily at 7 $\frac{1}{2}$ a.m. and 5.15 p.m., in ca. 4 hrs., 3 fr.; to Fossé (p. 60), daily at 7 a.m., in $2\frac{1}{2}$ hrs., $0\frac{1}{2}$ fr.

Photographs at *Farver's*, opposite the Municipio (Pl. C, 4).

English Church Service at the Grand Hôtel

Perugia on account of its good air is well adapted for a summer-resort, though if walks there are practically none. It is much frequented by English and American visitors in the spring and autumn. Apartments are not expensive. The drinking water, which comes from the neighbourhood of Nocera Umbra, is good. — At least a day or a day and a half should be devoted to the town. Guides are not indispensable, and strangers are cautioned against purchasing their 'antiquities'. — A drive to *Assisi* is recommended.

Perugia (1615 ft.), the capital of the province of Umbria, with 20,182 inhab., the residence of the prefect, of a military commandant, and an archbishop, and the seat of a university, lies on a group of hills about 985 ft. above the valley of the Tiber. The town is built in an antiquated style, partly on the top of the hill, and partly on its slope. Numerous buildings of the 14-15th cent. (when the town was at its zenith), the paintings of the Umbrian school, and the fine views of the peculiar scenery, make Perugia one of the most interesting places in Italy. Comp. 'Perugia', by Margaret Symonds and Lina Duff Gordon (London, 1898, Medieval Town Series).

Perusia (comp. p. 15) was one of the twelve Etruscan confederate cities, and not less ancient than Cortona, with which and Arretium it fell into the hands of the Romans, B. C. 310. It subsequently became a municipium. In the war between Octavianus and Antony, the latter occupied Perusia in the autumn of 41, but after an obstinate struggle was compelled by the former to surrender (bellum Perusinum), the town suffering severely, and being finally reduced to ashes. It was afterwards rebuilt and became a Roman colony under the name of *Augusta Perusia*. In the 6th cent. it was destroyed by the Goth Totila after a siege of seven years. In the wars of the Longobards and of the Oosiphs and Othobaldines it also suffered greatly; in the 14th cent. it acquired the supremacy over nearly the whole of Umbria, but in 1370 was compelled to surrender to the pope. Renewed struggles followed, owing to the conflicts between the powerful families of Oddi and Baglioni. In 1416 the shrewd and courageous Braccio Fortebraccio of Montone usurped the supreme power, whence new conflicts arose, until at length Giovanni Paolo Baglioni surrendered to Pope Julius II. (1508). Leo X. caused him to be executed at Rome in 1520. In 1540 Paul III. erected the citadel, 'ad conservandam Perusinarum civitatem', as the inscription, destroyed during the last revolution, recorded. In 1798 the town was captured by the Duke of Savoy, on 31st May, 1849, by the Austrians, and in 1860 by the Piedmontese. Pope Leo XIII. was archbishop of Perugia from 1893 to 1877.

Umbrian School of Painting. As early as the time of Dante an Umbrian artist, the miniature-painter Ottaviano of Gubbio, was celebrated, and art was practised in Gubbio, Fabriano, Perugia, etc. The neighbouring Siena doubtless exercised an influence on the prevailing style of art, which was confirmed by the situation of the towns, the character of their inhabitants, and the religious atmosphere diffused by Assisi and Loreto. Neither dramatic power, nor wealth of imagination is to be found in the Umbrian style, its characteristic features being reverie, tranquillity, and gentleness of sentiment. The men portrayed often appear destitute of individuality and vigour, the female figures, on the other hand, excite our admiration owing to their winning and devout expressions. Technical improvements seem to have been introduced but slowly, but the old style was thoroughly cultivated and rendered more attractive by frequent use of decorative adjuncts.

Setting aside the painters of the 14th cent., who were dispersed among various small towns, we find that Ottaviano Nelli (p. 67) was the first able representative of this school. Works by this master are preserved both at his native town and at Perugia. Nelli was, however, eclipsed by Gentile da Fabriano (b. before 1370 d. 1427), who probably had studied the Sienese masters in his youth and who afterwards undertook long journeys (e.g. to Venice and Rome), thus establishing his reputation throughout Italy. His style not infrequently resembles the Flemish. Besides Gubbio and Fabriano other Umbrian towns possessed local schools of painting, such as Camerino and Foligno. The latter about the middle of the 15th cent. gave birth to Niccolò di Lignano, surnamed *Alunno*, a man of limited ability which, however, he redressed to the utmost. His prevailing theme is the Madonna, to whose features he imparts beauty in happy combination with severity, and in this department he may be regarded as the precursor of Perugino and Raphael.

Meanwhile Perugia the largest city in this district, by no means remained idle. In this wider and more enterprising field the old conventional styles were soon abandoned as unsatisfactory, and the necessity of adopting the Florentine style was urgently felt. In the latter half of the 15th cent. Bernardino Cesi (ca. 1420-33) was the first who strove to throw aside the local style of painting, and the same effort was made by Francesco di Lorenzo, a younger master, perhaps a pupil of Bernardino.

This improved style was brought to maturity by Pietro Vassari of Città della Pieve (1445-1504), surnamed *Piovone* after the chief scene of his labours, a master to whom the Umbrian school is chiefly indebted for its fame. Perugia was however by no means the only sphere of his activity. He repeatedly spent years together in Florence and was employed for a considerable time in Rome. His endeavours to overcome the defects of his native school were crowned with success. In Vassari's studio in Florence he was initiated into the secrets of perspective and the new mode of colouring, and in both respects attained consummate skill. Down to the beginning of the 16th cent. his excellence continued unimpaired, as his frescoes in the Collegio del Cambio and several works in the Gallery at Perugia sufficiently prove. During the last twenty years of his life, however, his works show a falling off, occasioned, doubtless, by his accepting more orders than he could conscientiously execute, whereby his art was degraded to a mere handicraft. He seems indeed to have had more studios than one at the same time, as for example in 1500-5 both at Florence and Perugia, in the latter of which the young Raphael was employed (comp. p. 68).

Another great master of the Umbrian school, dying with Perugino, is Bernardino Neri, surnamed *Ferravento* (ca. 1465-1515). Although he exercised an considerable influence on the progress of Italian art, and remained unaffected by the striking improvements introduced by Leonardo and others, yet he thoroughly understood how to utilize the traditional style and the current forms, and was marvellously prolific as a fresco painter. The Vatican and Roman churches, the Cathedral Library at Siena, and the Collegiate Church at Spello are the chief scenes of his activity. — Amongst the younger contemporaries of Perugino we must next mention Giovanni di Paolo, surnamed *Lo Spagnoletto* after his native country, whose paintings are hardly inferior to the early works of Raphael, and who, in common with all the Umbrian masters, exhibits great ease of execution.

Other assistants of Perugino, but of inferior merit, were Giannicola di Paolo Razzi (d. 1504) and Antonio di San Giovanni (ca. 1480). The latter was so successful in imitating Raphael in superficial respects that several of his pictures, amongst others the Adoration of the Kings in the picture-gallery at Perugia (Room XII. No. 23, p. 64) have been attributed to Raphael himself. Of Giannicola's son and disciple, Giovanni di Antonio, who flourished during the first twenty years of the 16th cent., little is known and their works are rare. Cesare di Pietro seems to have been a good painter of the average class, and the works of Donatello di Paolo Altani (1480- after 1520), a friend of Raphael, possess considerable attraction. These last

masters, however, show little individuality, and before the middle of the 16th century the Umbrian school was completely merged in those of Rome and Florence.

At the entrance to the upper part of the town, on the site of the citadel (p. 60), which was removed in 1860, extends the *PIAZZA VITTORIO EMANUELE* (Pl. C, 5), in which rises the *Prefettura*, adorned with arcades on the ground-floor. In the centre of the piazza is a bronze equestrian *Status* of *Victor Emmanuel II.*, by Tadolini (1890). The garden-terrace in front of the Prefecture affords a superb *View of the Umbrian valley with Assisi, Spello, Foligno, Trevi, and numerous other villages, enclosed by the principal chain of the Apennines extending from Gubbio onwards; the Tiber and part of the lower quarters of Perugia are also visible. (A band plays here two evenings a week.)

Northwards from the Piazza Vittorio Emanuele runs the Corso Vanucci to the left, leading to the cathedral-square; and the Via Baglioni to the right, leading to the Piazza Giuseppe Garibaldi (p. 67), at the corner of which is the *Palazzo Cesaroni*, with the Post and Telegraph Office. We follow the Corso VANUCCI (Pl. C, 5, 4), the chief street in the town.

Beyond the Piazza Umberto Primo (left) is the *Banca di Perugia* (No. 5; Pl. C, 4), with a room on the first floor with mural paintings from the history of the town, by A. Brugnoli (1895; adm. by permission of the manager).

Still farther on, on the same side, is the **Collegio del Cambio* (Pl. C, 4), the old chamber of commerce, with the *UDENZA DEL CAMBIO*, containing celebrated frescoes by *Perugino* (1499-1500). As the largest complete work of the master these are of the greatest interest, while their subjects throw important light on the culture of the Renaissance period. Adm. 7-12 and 3-5; in winter 10-2; tickets, 50 c., at the adjacent *Farmacia Severini*; best light 11-12.

On the wall to the left of the door, 1st Arch to the left, *Fabius Maximus*, *Socrates*, and *Numa Pompilius*, with *Prudence* above; to the right, *Furius Camillus*, *Pittacus*, and *Trajan*, with *Justice* above. 2nd Arch: to the left, *Lucius Scipio*, *Leonidas*, and *Horatius Cocles*, with *Fortitude*; to the right, *Scipio*, *Pericles*, and *Cincinnatus*, with *Temperance*. These compositions thus depict the four cardinal virtues, with the ancient historic personages who stood for them; the three Christian virtues are glorified in the remaining frescoes. On the pillar between the arches is a portrait of *Perugino*. — Opposite the entrance to the left, the *Transfiguration* as the fulfilment of faith; to the right, **Adoration of the Magi*, as a revelation of love (charity). — Right wall. 1st Arch to the left, *Prophets*, to the right *Bibys*, as the heralds of hope; above, *Jehovah*. The 2nd Arch is occupied by the finely-carved judicial throne and the money-changers' bench. — On the ceiling are medallions of the seven planets, surrounded by admirable arabesques (the work of his pupils). — *Raphael* is said to have been one of *Perugino's* assistants in the execution of these frescoes, though there is no direct evidence of it. *Perugino* received 300 ducats for his work from the guild of merchants. The exquisite carved and inlaid work ('*lavori*') of the judicial benches, doors, etc., by *Dom. del Faso* (1480-90) of Florence and *Antonio di Morandello* (1501), which are amongst the finest works of the kind, also deserve notice. — The adjacent *Oratorio* contains an altar-piece & frescoes by *Gianmichele Mazzini* (1517).

Immediately adjoining the Collegio is the *Palazzo del Municipio* (Pl. C, 3, 4), a huge edifice of 1281 and 1333, recently skilfully restored, with its principal façade towards the Corso and a second towards the Piazza del Duomo. It is adorned with fine windows, a handsome portal, and Gothic sculptures, the armorial bearings of allied towns, saints, etc. Over the portal in the Piazza del Duomo are a griffin and a lion in bronze (14th cent.), below are chains and bars of gates, commemorating the victory gained by the Perugians in 1368 over the Siennese. The chief entrance is in the Corso. On the first floor is the *SALA DEL CONSIGLIO*, with a fine Renaissance door, in a lunette above which is a Madonna by *Pierfrancesco di Lorenzo*. On the same floor is the *SALA DEL CAPITANO DEL POPOLO*, an apartment of noble dimensions, with frescoes of the early 15th century. On the third floor is the **PIRACORONA VANUCCI*, or municipal picture-gallery, formed since 1863 of works collected from suppressed churches and monasteries, and of great value to the student of Umbrian art. Adm. 9-5, June-Aug. 10-4, Sun. & holidays 9-1, tickets 1 fr., in the 'Economato' on the first floor (to the left). Catalogues provided.

The Vestibule (I) contains a St. Jerome painted on canvas (probably by *Antonuccio*), a few other unimportant pictures, and also works of art for sale. Adjoining it is the *SALA DEI CINELLI* (II; old paintings) 1. *Madonna and child*, 2. *Madonna and child*, 3. *Two saints*, and 4. *The Apostles* (the latter as predella) evidently belong to the same work. 12. *Antropia Lorenzetti*, Madonna and four saints; 21. *Morphettone d'Arzzo* (1272), Large Crucifixion; 22-24. perhaps by the same master.

SALA III (formerly the *Cappella dei Decemviri*), with frescoes by *Benedetto Bonfigli* (1464-66). To the right of the windows and on the entrance-wall are scenes from the life of St. Louis of Toulouse. Opposite the windows are the Burial of St. Louis and the Martyrdom of St. Hieronymus on the occasion of the capture of Perugia by Totila. On the adjacent wall is the Burial of St. Hieronymus. — The glass cases in RR III and IV contain MSS and choir-books with miniatures — Copper-plate Engravings.

SALA DEI STACCHI (IV) Frescoes of the Umbrian School (14th and 15th cent.), transferred to canvas.

SALA DI TADDEO BARTOLI (V) Siennese pictures of the 15th cent., most of them valuable. *Taddeo Bartoli* (1408), 9. Madonna with angels and saints, 10. Descent of the Holy Ghost. *Franco d'Armando* of Cortona, Exploits of the condottiere *Braccio Fortebraccio* (fresco). — Turning to the left, we enter the —

SALA DEL FRA ANGELICO (VI) 1-18. *Fra Angelico da Fiesole*, Fragments of a large altar-piece (Madonna with angels, Annunciation, Saints, Miracles of St. Nicholas of Bari, 1437); 21. *Piero della Francesca*, Madonna and four saints, with the Annunciation above, St. *Donato Cestari*, Madonna enthroned with saints (1450), *Gratie da Fabriano*, Madonna.

SALA DEI BONFIGLI (VII) *Bonfigli*, 7. Annunciation, with St. Luke, 10. Adoration of the Magi, 13. Madonna with angelic musicians; 16, 19. *Giovanni Boccioni da Camerino*, Madonna and angels; *Sart. Caporali*, Saints.

SALA DI BERNARDINO DI MARZOTTO (VIII) *Bernardino*, 1. Betrothal of St. Catherine, 2. Madonna and saints; 10. *Bonfigli*, 'Gonfalone (sacred banner) of the Fraternity of San Bernardino di Siena (Christ blessing the saint, below a procession); 12. *Sart. Caporali*, Christ and the Madonna in glory (fresco, 1460); 14. *Michele da Foligno*, Gonfalone of the Brotherhood of the Annunciate (1460). — The small Room beyond contains drawings.

SALA DI FIORENZO DI LORRENZO (IX) 4. *Pinturicchio*, Adoration of the Magi; *Florentino*, 3. Adoration of the Shepherds, 44. Piety; 21. *Perugino*, Coron-

ation of the Madonna; 27 *Myerazzi*, Madonna. — *Gastuccio di Frontone di Lorenzo* (X): 2-6 *Florence* (?), Miracles of San Bernardino (2-6, masterpieces); 16. *Florence* (?), Bust of the Madonna in a garland, with angels' heads below. Tabernacle with 68 Peter and Paul, St. Sebastian.

Sala del Pasquino (XI): Corradini, Marble bust of Perugino. *Perugino*, 11. Baptism of Christ, 20. Nativity, 21, 16, 12, 7. Predella, 8, 9, 13, 14, 17, 18, 22, 23. Saints, all being fragments of a large altar-piece. Below No. 6. (St. James, by Perugino) is an autograph letter of the master to the Prior of Sant'Agostino. — We now traverse the *Sala di Giannicola Maggi* & *di Barto* (XIII) to the —

**Sala del Pincicchio* (XII), which contains the gems of the collection. *Perugino*, 2. Transfiguration, 3-5. Predella, 6. Madonna blessing the Brotherhoods; 7. *Spagno*, Madonna and saints; 10. *Anturacchio*, Large altar-piece in its original frame, the Madonna with the Child and St. John; on the wings, 68. Augustine and Jerome, above, the Annunciation, in the pediment, a Pietà; in the predella, scenes from the lives of 68. Augustine and Jerome (1488). 12. Gentilezza with St. Augustine (on silk). *Perugino*, 14. Madonna, worshippers, 68. Francis and Bernardino; 15. Madonna and saints; 16. John the Baptist with saints; *School of Raphael*, 17. Strip of decorative painting. 24. God the Father with angels (both belonging to the Estembrecht, in Rome, p. 136); *Scuola di San Giorgio*, 18. Madonna with saints; 23 (Raphael?), Adoration of the Magi; 26. *Apoll* of Raphael (?), Madonna, resembling the Constabile Madonna, formerly in Perugia. — We return through *Sala XII* to the *Sala della Scuola di Pasquino* (XIV): 36. *Doménico di Pietro Alfani*, Holy Family, designed by Raphael. — The following rooms (XV-XVIII) are the *Sala Domenico Alfani*, *Sala della Torre*, and *Sala Oratio Alfani*.

The *Biblioteca Pubblica*, which is also in this Palazzo, contains about 30,000 vols., and some fine MSS. of the 11-15th cent., with miniatures.

The *Sala del Collegio della Mercanzia* (adn. by the 5th door to the right of the main entrance to the Municipio; nominal hours, 10-12, not rigidly adhered to) contains fine literary work (ca. 1400).

In the *Piazza del Municipio* (Pl. C, 3) rises the **Fonte Maggiore*, dating from 1277-80, one of the finest fountains of that period in Italy. It consists of three admirably-proportioned basins, adorned with numerous biblical and allegorical figures in relief, executed by Niccolò and Giovanni Pisano and Arnolfo di Cambio (1280, two of the statuettes are modern substitutes). — The W. side of the piazza is occupied by the *Episcopio*, or episcopal palace (picturesque inner court), behind which is the vaulted gateway called *Maestà delle Volte*, a relic of the Palazzo del Podestà, which was burned down in 1329 and again in 1534.

The church of *San Martino di Forore*, to the N., in the street skirting the Teatro Morlacchi (Pl. C, 3) on the E., contains a remarkable fresco by Giannicola Maggi (the Virgin between St. John the Baptist and St. Lawrence).

The Cathedral of *San Lorenzo* (Pl. C, 3), a Gothic edifice dating from the 15th cent., is externally unfinished. Adjoining the entrance from the piazza is (right) a handsome late-Gothic pulpit (1499), and (left) a *Brass Statue of Julius III.* by V. Danti (1566).

The *Internon*, consisting of nave and aisles (of equal height) with a short transept, is of spacious but heavy dimensions. — On the right of the entrance is the tomb of Bishop Ugolini (d. 1451) by Tribone da Certosa (?), beyond which is the *Cappella San Ransano*, with a *Draceni* from the Cross, the masterpiece of Barocci (1659), the painted window representing the Preaching of St. Bernardino of Siena is by *Costantino di Senese* and *tipo* *Plomings* of Malines (1665, restored in 1888). — In the *Late Area*

is the *Cappella del Santo Spirito* (i.e. of the betrothal-ring of the Virgin), which down to 1797 contained the celebrated *Spasmodic* by Perugino, now at Caen in Normandy. The stalls are by *Stro Botti Bastoni* (1679); the elegant tabernaculum was executed by the goldsmith *Cassaro del Sassello*, in 1618. On the 3rd pier is a revered *Madonna* by *Simone Martini*, the conception of which is unusually vigorous. — Below the 2nd window to the left, Christ imparting his blessing, and saints, by *Lodovico di Angelo*; below the 3rd window, *Platt* in relief, by *Agostino d'Antonio di Duccio* (1474). — The *Left Treasury* contains a marble sarcophagus of 1618 enclosing the remains of *Pope Urban IV* and *Martin IV*, both of whom died at Perugia (1264 and 1285). The bones of Innocent III were transferred to Rome in 1493 (see p. 84). — The beautifully carved *Coin Stalls* were begun by *Giulio de' Medici* in 1488 and finished by *Domenico del Tasso* in 1491. — In the *Right Treasury* is a statue of *Leo XIII* (1893). — The adjoining *Western Choir* contains an *Altarpiece* by *Luca Signorelli*: *Madonna* with a lute playing angel and St John the Baptist, *Houphreus* the Hermit, *Stephen* (?), and a bishop as donor (1484).

In the *Lunette* are preserved precious MSS., such as the *Codex* of St. Luke of the 8th cent., in gold letters on parchment.

To the E. and N. of the Cathedral lies the *PIAZZA DANTI* (Pl. C, 3), quitting which, by the *Piazza Piorclino* and the *Via Bontempi* to the E., and then taking the first side-street, the *Via Raffaello*, to the left, we reach the college of *San Severo* (Pl. D, 3), formerly a convent of the order of *Camaldoli*. In the chapel of this convent *Raphael* painted his first independent fresco, in 1505, having left Perugino's school the year before, and visited Florence in the interim. Entrance adjoining the chapel (costedien 1/2 fr.).

The fresco, which was seriously damaged, and was spoiled in 1873 by the restorer *Consoli*, betrays the influence of *Fra Bartolomeo's Last Judgment* in *Santa Maria Nuova* in Florence and may also be regarded as the forerunner of the upper part of *Raphael's Disputa* in the Vatican; above, God the Father (obliterated) with two angels and the Holy Ghost; below, the Redeemer, between two angels, and the saints *Maurus*, *Placidus*, *Benedict*, *Remwald*, *Benedict the Martyr*, and *John the Martyr*. The Umbrian school has produced nothing finer than some of these figures. At the sides, lower down, St. Scholastica, St. Jerome, St. John the Evangelist, St. Gregory the Great, St. Boniface, and St. Martha, painted by Perugino in his 71st year, and plainly revealing the artist's fading powers.

Thence following the side-streets to the N.W. (fine view from the *Piazza di Proma*, Pl. D, 3), or from the *Piazza Danti* by the *Via Vecchia*, to the N., we reach the so-called *Anco di Augusto* (Pl. C, 2), an ancient town-gate with the inscription *Coloniae Fidis Augustae Perusia*. The foundations date from the Etruscan period, the upper part from the 3rd cent. A.D., while the loggia is of the Renaissance period. The old Etruscan walls (nearly 1 3/4 M. long), which enclosed the height where the old part of the present town stands, may be easily traced on the W. and S.W.

The small space in front of the *Arco di Augusto* is called the *PIAZZA FORTERMACIO* (Pl. C, 2). To the left is the *Palazzo Gallenga*, formerly *Anticori*, by *Alessi* (13th cent.). Straight in front extends the *Corso Garibaldi* (see p. 86).

From the *Palazzo Gallenga* the *Via Aristodemo Fabretti* leads to the *University* (Pl. B, C, 2), established in 1920 in a monastery of *Olivetana*. It possesses a small *Botanic Garden*, *Natural History*

and Art History Collections, and a Museum of Etruscan and Roman Antiquities (open daily, except Mon., 10-2, in summer 10-12, and 3-5, adm. 1 fr., strangers are admitted at any time).

The Museum of Antiquities is on the first floor. On the *murazzi* are Etruscan and Latin inscriptions and unimportant Roman sculpture. The corridor contains casts of Etruscan inscriptions and funeral urns - *R II* Etruscan vases and *terracotte*, vases in *brocchieri* ware, etc. - *R III* Clavary urns - *R IV* Bronzes - *R V* Vases with black and with red figures - *R VI* contains the longest Etruscan inscription known (Tabula Perusia), found near the town in 1822. In the middle of the room, a bronze helmet. In front of the window *terracotte* are in the form of a recumbent man, who is being smothered by a goddess of death with the features of a lion. The hollow interior once contained the ashes of the deceased. The glass cases by the window contain bronze mirrors, including one with representations from the myth of Helen. In the case to the right of the door Mountings of a chariot with figures and ornamentation in the most archaic style of eastern Greece. In the case to the left of the door Gold ornaments, in the center, large gold earring with a female head - *R VII* Cyprian antiquities Roman sculpture - *RR VIII & IX* contain the *Umanoevanti* Collection, consisting chiefly of interesting objects from Etruscan graves. In the VIII R-om, at the entrance, five mirror cases with a representation of Dionysos on the pancher, toilet articles, and amber and coral ornaments, etc. (catalogue 1 fr.). In the IX Room, Collection of jet gems - The next five rooms contain Cosentin Antiquities - *R X* Eclectic shell and shells, crucifixes (very interesting, including a circular piece with chessman and a representation of French knights starting for the chess (14th cent.) - *R XI* To the left Cuffs of Bishop Baglioni with a complete velvet covering (15th cent.); episcopal vestments of the 14th cent. richly carved panels from the confessional of Saint Agostino perhaps by *Dardi* - *R XII* Reliquary containing the remains of the condottiere Braccio Fortebraccio who fell at the siege of Aquila on 21st June 1424 (formerly in San Francesco dei Conventuali). At the end, V things used in municipal elections, with the girdle of the guilds (14th cent.) On the walls are weapons - *R XIII* The glass case in the center contains three *Encaustic* pieces of enamel work (chalice, ewer) a goblet which once belonged to Pope Benedict XI (13th cent.), and a cup and plate or saucer executed by *Colaforte di Pietro* of Todi (14th cent.) *terracotte* in the corner at the back to the right, Medallions by *Agostino d'Antonio di Duccio*, to the left, Bust of one of the *Baldeschi* family (15th cent.) At the door is a fine *terracotta* relief of St. Francis by *Luca della Robbia* On the walls majolica, below, wallis bronze belonging to distinguished families of Perugia - *R XIV* Collection of coins. The Corridor contains medieval sculptures, fragments from the *Beata della Voite* (p. 64), by *Agostino d'Antonio di Duccio* (1476), and a model of the *Fonte Maggiore* (p. 64).

The University Church contains medieval works of art, including an 11th cent. tabernacle and an early Christian sarcophagus, and plaster casts.

The Corso Garibaldi (Pl. B. C. 1 p. 65), which begins at the Piazza Fortebraccio, leads past the piazza in front of the church of Saint Agostino the choir of which contains fine wood-carving by *Baccio d'Agnolo* (1502 and 1503) and drawings attributed to *Perugino*. To the right is an oratory containing pictures by Alfani, Scarsamont, etc. About 8 min. further on, to the right of the *Porta Sant'Angelo* (comp. inset map on the Plan), is the interesting church of Saint Angelo, a circular structure with 10 antique columns in the interior, probably dating from the 8th cent., with later additions.

A vaulted passage under the clock of the Palazzo del Municipio (p. 63) leads from the Corso Vanucci to the VIA DE' PRIORI (Pl. C, 4), the best route to the sights of the W. quarter. The Via Deliziosa, the first turning to the right in the Via della Cupa, which diverges to the left at the Chiesa Nuova (Pl. C, 3, 4), contains the *House of Perugino* (denoted by a tablet).

We continue to descend the Via de' Priori, passing the mediæval *Torre degli Scerri* (Pl. B, 3), and the *Madonna della Luce*, a pleasing little Renaissance church of 1519, and reach an open space on the right. Opposite us here rises the —

**Oratorio di San Bernardino* (Pl. A, 3). The early-Renaissance façade, executed by *Agostino d'Antonio di Duccio*, a Florentine sculptor, in 1457-61, is a magnificent polychrome work, in which both marble and terracotta are employed, while the ground of the numerous and very elaborate sculptures is also coloured (Saints in Glory, six Franciscan Virtues, and angelic musicians). A picture in the interior, representing the consecration of the church, contains a fine view of the façade.

Adjacent is the former convent of *San Francesco al Prato* (Pl. A, 3), recently restored and now occupied by the *Accademia di Belle Arti*. It was for the church of this convent (now much dilapidated) that Raphael painted the *Entombment* now at Rome (p. 194). In the crypt are frescoes of the 13th cent. (*Betrothal and Death of the Virgin*).

To the E. of the Corso Vanucci, and parallel with it, stretches the PIAZZA GIUSEPPE GARIBOLDI (Pl. C, D, 4), formerly *Piazza del Sopramuro*, resting on extensive substructures, portions of which belong to the ancient Etruscan town-walls. In the centre is a bronze *Statue of Garibaldi*, by Ces. Zocchi. On the E. side of the Piazza rises the attractive *Palazzo del Capitano del Popolo*, afterwards the *Palazzo del Podestà*, dating from 1472; adjoining it is the *Old University*, built in 1483; both edifices are now occupied by courts of justice (*Tribunali*; Pl. D, 4).

The Via Baglioni leads hence towards the S. to the Piazza Vittorio Emanuele (p. 62). We descend here immediately to the left, passing the substructures of the old citadel, where an ancient gate, called *Porta Marsia* (Pl. D, 5), with interesting sculptures and the inscriptions *Augusta Perusia* and *Colonia Vibia*, which was removed from its old site to make way for the fortress, has been re-erected. — We turn to the left here, and follow the Viale Carlo Alberto, at the end of which, to the left, rises the small Gothic church of *Sant' Ercolano* (Pl. D, 5), with an altar above an ancient sarcophagus.

Following the Corso CAVOUR (Pl. D, E, 5, 6), we reach, to the left, the church of —

***San Domenico** (Pl. D, E, 6), a Gothic edifice built by *Giov. Pisano* (?) after 1304, and almost entirely re-erected by *Carlo Moderno* in 1616, with a lofty campanile, part of which has been taken down.

In the **LAST TRANSEPT** is the Monument to **Pope Benedict XI.**, who fell a victim to the intrigues of Philip IV. of France, and died in 1303 from eating poisoned figs. It is one of the most famous monuments of its kind, though its ascription to *Simone Pisano* is mistaken; above the recumbent figure of the pope rises a lofty canopy, borne by spiral columns and adorned with mosaics (above is a Madonna between St. Dominic and the kneeling pope on one side and St. Hieronimus on the other). On the adjacent wall is the monument of **Bishop Benedetto Gaddalotto** (1429). — The **CHAPEL**, with a rectangular termination, contains a huge Gothic window filled with rich stained glass, the largest of its kind in Italy (218 sq. yds.), executed in 1441 by *Pro Bartolomeo* of Perugia, and recently restored. This window belonged to the original church. — The **INLAID CHURCH STALLS** (inlaid) date from 1478-88. — The **South chapel** (*Cappella del Rosario*) in the **RIGHT AISLE** has a large altar by *Agostino d'Antonio di Duomo* (1480).

After a few minutes more we pass through the **Porta San Pietro** (Pl. E, 7), richly decorated by *Agostino d'Antonio di Duomo* (1473), and reach the old Benedictine monastery (now an Institute of Experimental Agriculture) and church of —

***San Pietro de' Camminoni** (Pl. F, 8, entrance in the first court in the corner diagonally opposite, to the left), with a massive Renaissance portal. The church, erected about the year 1000 by *San Pietro Vincioli* of Perugia, is a basilica, consisting of nave, aisles, and a transept, with a richly gilded flat ceiling, borne by antique columns (10 Ionic and 2 Corinthian) of granite and marble and two pillars, and contains numerous pictures.

In the **Nave**, above, are eleven large pictures illustrating the life of Christ, executed in 1093-94 by *Ant. Fiammenghi*, surnamed *F. Amone*, of Perugia, a pupil of *Tirotello* and *Paolo Veronese*. — The **RIGHT AISLE** contains several Umbrian pictures. The chapel of **St. Joseph** adorned with modern frescoes, contains, on the left, the monumental relief of a *Countess Baldeschi*, in terracotta, from a drawing by *Fr. Overbeck*; on the right, *Holy Family*, a copy from *Andrea del Sarto*, by *Fontana*. — Then above the door leading to the monastery. Two saints by *Sanseverino*, after *Perugino*, and a *Holy Family* after *Montfauti* of Venice. Above the door leading to the sacristy, Three saints, also after *Perugino* by *Sanseverino*. — In the **SACRISTY** (shown by the custodian, 2-3 p.m.) are five small half figures of saints, by *Perugino* (which formerly surrounded the Ascension by the same master, now in Lyons); *Infant Jesus* and *St. John*, a copy (not by *Raphael*) of *Perugino's* large altar piece of *Marcellus, Santa Francesca Romana*, by *Caracciolo*. — The **CHURCH BOOKS** are embellished with good miniatures of the 16th century.

The **CHOIR STALLS**, in walnut, are admirably carved and inlaid (inlaid) by *Stefano da Borgome*, 1535; the doors at the back are by his brother *Domenico*, 1530. (The visitor should have these doors opened by the verges and enjoy the splendid view obtained from this point of the Tiber and the *Chiagge* valleys as far as *Assisi*.) — Under the arch of the choir, on each side, are *ambones* (pulpits) in stone, with reliefs on a golden ground, by *Francesco di Guido*, 1467.

The **LAST AISLE**, beginning at the upper end by the choir, contains a picture by *Ampio di Baldassare*, *Mary* with the body of Christ and two saints, 1469. In the adjoining chapel is a marble altar with reliefs, partly gilded, by *Mino da Fiesole*, 1473. In the next two chapels, pictures by *S. Sant*, *George Vanni*, and others. Between these, on the wall of the *last Judith*, by *Sanseverino*. Then, *Adoration of the Magi*, by *Luca di San Giorgio*, *Annunciation*, after *Raphael*, by *Sanseverino*; *Pieth*, a

copy of *Perugia*, part of a large dismembered altar-piece from the church of *Sant' Agostino*.

Close to *San Pietro*, on the opposite side of the street, is the *Giardino del Frontone*, extending to the *Porta San Costanzo*, and commanding a magnificent prospect of the valley of *Feligno* and the *Apennines*. — Outside the gate lies the church (restored) of *San Costanzo*, dating from about 1100(?), with an ancient portal.

About $\frac{1}{2}$ M. beyond the *Porta Pace* (Pl. E, 2) is the church of the *Maddonna di Monte Luss*, with a fine altar-piece by *Francesco di Simone* of *Florence* (1483).

Outside the *Porta del Carmine* (Pl. E, 3) lies the *Cemetery* (comp. inset map on the Plan), containing a monument to the champions of liberty who fell in 1859.

About 2 M. beyond the *Porta San Costanzo* (Pl. F, 5), $\frac{1}{2}$ M. on this side of *Ponte San Giovanni* (p. 70), the *Ancient Etruscan Necropolis* of *Perugia* was discovered in 1845. Carriage there and back, a drive of $1\frac{1}{2}$ hrs., 12 fr. This expedition may be conveniently combined with the drive to *Assisi* (p. 70). — The most interesting of the tombs, and one of the handsomest (though not the eldest) in *Etruria*, is the *Sepulchre del Volturni* (the tomb of the *Volturni*, 3rd cent. B.C., adm. 1 fr.), close to the road, where it is intersected by the railway. A flight of steps descends to the entrance, on the wall within which a figure of the sun-god is carved between dolphins. The tomb contains ten chambers, seven in the corner-grained tufa. The cinerary urn of the *Faterfamilias* occupies the central position, with a head of *Medusa* above it, and two genii of death hanging from the ceiling. Round it, and in the adjoining chambers, are other cinerary urns, the coverings on which are extraordinarily expressive (one bears traces of painting; another, on the left, in the form of a temple, has an *Etruscan* and *Latin* inscription). — The smaller objects are now preserved in a chamber built above, to the right of the entrance.

From *Perugia* to *Genoa*, about 28 M. (car in 4 hrs.). Leaving the town by the *Porta Sant' Antonio* (Pl. E, 1), the road crosses the *Tiber* by the ($\frac{1}{2}$ M.) *Ponte Felice* (810 ft.). — At (6 M.) leaves the road to *Umbertide* (p. 69) diverges to the N. (diligence see p. 67). — Further on our road runs to the N. E. over a barren hilly district, skirting *Monte Orsino* (715 ft.). — 20 M. *Gubbio*, see p. 67.

From *Perugia* to *Todi*, about 28 M. (diligence, see p. 69). The road descends rapidly to the S. into the valley of the *Tiber*, which it crosses by the ($7\frac{1}{2}$ M.) *Ponte Nuovo* (810 ft.), and then remains on its left bank. The scenery presents no great attractions. — $9\frac{1}{2}$ M. *Deruta* (715 ft.) was from the 10th to the 18th cent. the seat of a majolica industry. The church of *San Francesco* contains a painting of *God the Father*, with saints, by *Florentino di Lorenzo* (1476). — $12\frac{1}{2}$ M. *Casatana*.

28 M. *Todi* (1345 ft.; *Frattoria Gariboldi*, *Piazza Garibaldi*, also rooms), the ancient *Umbrian Tuder*, with 3500 inhab., is situated on a steep hill. Its ancient importance is indicated by the fragments of walls and the extensive ruin of a supposed *Temple of Mars* (comp. p. 69), or of a *Basilica*. Although poor in treasures of art, the town boasts several interesting edifices, among which are the *Romanesque Cathedral* and the *Romanesque Gothic Town Hall* (containing a *Coronation of the Virgin* by *Lo Spagna*, 1511) in the Piazza. The church of *San Fortunato* possesses a handsome portal, attributed to *Lov Maiani* (c. 1320). The finest building of all, however, is the pilgrimage-church of *Santa Maria della Consolazione*, the interior of which was begun in 1508 by *Ces. Matteucci da Caprarola*, while the exterior was completed in 1516-34 by *Ambr. da Milano* and *Fr. de Vito Lombardo*. It is in the form of a Greek cross and covered with a dome, added in 1608. The arms of the cross are also surmounted with domes, and are polygonal in shape with the exception of the choir, which is

semicircular. The exterior is remarkable for its simple and massive style, and the interior for its symmetrical proportions and the delicately graduated ornamentation of its pillars. — Todi was the birthplace of *Jacopone da Todi* (d. 1306), the supposed author of the '*Stabat mater dolorosa*'.

From Todi to Narni, 28 M., viâ *Assisi*, *Castel Todi* (1483 ft.) and *San Gemini*. About 2 M. on this side of the last and about $\frac{1}{2}$ M. to the E. of the road, on the ancient, now abandoned *Via Flaminia*, are the interesting ruins of the once prosperous *Carsulae*. The best-preserved relic is a city-gate, known as the *Arco di San Damiano*. [From this point, with the aid of a guide from San Gemini, we may ascend the *Monte Torre Maggiore* (3678 ft.; to the S.E.) in 2 hrs.; the way passes *L'Eremita* (2570 ft.), an old convent.] On the highroad, about $\frac{1}{2}$ M. farther on, is the mineral spring of San Gemini (well-house). From San Gemini ($7\frac{1}{2}$ M. from Narni) two roads descend gradually to the beautiful valley of the *Nera*, one leading to the S.E. to Terni (see p. 82; diligence from Todi in 7 hrs., 5 fr.), and the other to the S. to Narni (p. 85).

10. From Perugia to Foligno and Orte (*Rome*).

71 M. RAILWAY. Express (after Foligno only) in $4\frac{1}{4}$ hrs. (fares 15 fr. 40, 10 fr. 80 c., 7 fr.); ordinary train in $4\frac{3}{4}$ hrs. (11 fr. 40, 10 fr. 10, 8 fr. 50 c.). — The most interesting points are *Assisi*, *Spoleto*, and *Terni*. It is sometimes advisable to exchange the railway for the road; in this way the Tomb of the *Volumnii* (p. 89) may be visited by driving from Perugia to Assisi (one-horse carr. 10, there and back 15 fr.), and the Temple of *Clitumnus* (p. 78) between Foligno and Spoleto — From Perugia to Rome, 129 M., in 8-7 $\frac{1}{2}$ hrs.

Perugia, see p. 59. The train descends, passing through several tunnels. To the left we obtain a glimpse of the tomb of the *Volumnii* (p. 89), and a pleasing retrospect of Perugia. — 7 M. *Ponte San Giovanni*. The train crosses the Tiber, which was the ancient frontier between Etruria and Umbria and here breaks through the Umbrian mountains in a S.W. direction. We then cross the *Chiuggio* (p. 57). The valley which the train now follows as far as Spoleto (p. 78) forms a prolongation of the upper valley of the Tiber, to the W. of the main ridge of the Apennines. — 13 M. *Bastia*.

15 M. *Assisi* (715 ft.). The town lies on a hill to the left (cab 1 fr., there and back 1 $\frac{1}{2}$ fr.; omn. 1 fr.).

Before ascending to Assisi the traveller should visit the magnificent pilgrimage-church of **SANTA MARIA DEGLI ANGELI*, about $\frac{1}{4}$ M. to the W. of the station, on the site of the original oratory of St. Francis. It was begun in 1569 by *Vignola*, after whose death in 1573 it was continued by *Galeazzo Alessi* and completed by *Giulio Danzi* about 1640. The nave and choir were re-erected after the earthquake of 1832; the dome was also injured.

The INTERIOR contains, below the dome, the Oratory of the saint (called *Portiuncula*), the cradle of the Franciscan order, on the façade of which is St. Francis receiving the indulgence of the Portiuncula, a fresco by *Fr. Oesbeck* (1839). On the back are remains of a fresco of the Crucifixion, by *Perugino*. The altar-piece (Annunciation) is by the *Presbyter Martinus de Viterbo* (1388). Behind the Portiuncula is the cell where St. Francis died, with frescoes by *Lo Spagna* and a terracotta *Statue of the saint by *L. della Robbia*. — In the *Cappella di San Giuseppe*, in the left transept, is

,

.

an altar with terracotta reliefs by Andrea della Robbia (Coronation of the Virgin, St. Francis receiving the stigmata, St. Jerome). — To the R. of the sacristy is a little garden in which the saint's thornless roses bloom in May. Adjacent are the *Cappella della Rossa*, containing frescoes from the life of the saint by Filippino Lippi (1515), and the hut of St. Francis, over which an oratory was erected by Bonaventura.

A small hamlet (*Albergo Forastunella*, clean) has sprung up round the church, whence a beautiful path leads to ($\frac{3}{4}$ hr.) —

Asisi. — Hotels. *Leone* (Pl. B, D, 5), *Piazza Vettovado* 5, R. $1\frac{1}{2}$ fr., B. $\frac{3}{4}$, del 2, D. 3, pens. $5\frac{1}{2}$, omn. 1 fr.; *Albergo del Duomo* (Pl. A, B, 2), with a fine view, adjoining the monastery of San Francesco, R. $2\frac{3}{4}$, B. 1, del 2, D. $3\frac{1}{2}$, pens. 7-9, omn. 1 fr. — *Osteria*, near the Porta San Francesco (Pl. B, C, 2), R. $1\frac{1}{2}$, B. $\frac{1}{2}$ fr.; *Murava*, near the last-mentioned, R. from $1\frac{1}{2}$ fr., unpretending.

Photographs from Giotto's frescoes sold by P. Lummi, Via Principe di Napoli, near the Piazza San Francesco (Pl. C, 2) and by G. Caricoffini (opposite).

Asisi (1345 ft.), a picturesque town and episcopal see (pop. 5398), the ancient Umbrian *Assinum*, was the birthplace of the elagian poet *Propertius* (B.C. 46) and of St. Francis, to whom it mainly owes its fame.

St. Francis of Asisi was born in 1182. He was the son of the rich merchant Pietro Bernardone and his wife Pica, and spent his youth in frivolity. In 1201 he was captured while engaged in a campaign against Perugia, and his imprisonment and subsequent dangerous illness turned his thoughts to higher things. In 1208 he founded the monastic order of *Franciscans*, which speedily found adherents in all the countries of Europe, and was sanctioned in 1210 by Innocent III, and in 1223 by Honorius III. Poverty and self-abnegation formed the essential characteristics of the order, which under different designations (*Seraphic Brethren*, *Minorites*, *Observantes*, and *Capuchins*, who arose in 1526) was soon widely diffused. St. Francis is said to have been favoured with visions, the most important of which was that of 1224, when Christ impressed on him the marks of his wounds (stigmata). From the 'apparition of the crucified saviour' the saint is also known as *Pater Seraphicus*. St. Francis died on 4th Oct., 1226, and in 1228 was canonized by Gregory IX. Dante (*Paradiso* xi 80) says of him that he rose like a sun and illumined everything with his rays. In the 16th cent. the Franciscan Order possessed 8000 convents with 120,000 monks, and the general of the order was subject only to the pope. Comp. Paul Schaffer's *Life of St. Francis of Asisi*.

Having reached the town, we proceed to the left to the conspicuous old ***MONASTERY OF THE FRANCISCANS** (*San Francesco*; Pl. B, 2) on the brow of the hill, which was finished soon after 1228 upon massive substructures. It was suppressed in 1866, but a few monks have been allowed to remain here till their death. Part of the building has been converted by government into a school for the sons of teachers. Visitors are admitted (8-11 and 2-5; fee 50 c.) by the iron gate to the left of the entrance to the lower church. It contains several frescoes of the 16th and 17th centuries and (on the outer wall) a statue of Sixtus IV. From the external passage a magnificent view is enjoyed.

The two ***CHURCHES**, erected one above the other, are objects of great interest. The Crypt, with the tomb of the saint, was added in 1618, when the rude stone sarcophagus containing his remains was re-discovered.

The Lower Church is always accessible; entrance by a side-door on the terrace (best light in the forenoon). It was begun in 1228, continued after 1232 by *Filippo da Campello*, and completed in 1263. Originally the church consisted of a nave of four bays with groined vaulting supported by wide circular arches, a W transept, and a semicircular apse. About 1300 the Gothic chapel and the E. transept were added, while the E. portal dates from about the same period, though the vestibule in front of it, with its rich Renaissance decoration, was not erected till the 16th century.

To the right of the entrance is a tomb of the 14th cent., with an urn of porphyry beside which is the magnificent 'Tomb of the Queen of Cyprus', of the close of the 15th cent., the recumbent figure on which probably represents *John de Brime*, king of Jerusalem and Byzantine emperor (d. 1267). — The adjoining *Cappella di Sant'Antonio Abate* contains the tombs of a count of Spoleto and his son (14th cent.) — Opposite the entrance is the *Cappella dei Concessato*, with some unimportant frescoes of the 14th cent. by the pillar to the left, *Concessionatus* as cardinal of *Egidius Aibornus* (d. 1267), founder of the chapel, who is buried here. Fine stained glass windows of the 14th century.

The Nave was painted by predecessors of Cimabue. The hexagonal *Cappella di San Martino* the best on the left, is adorned with frescoes of scenes from the life of the saint, by *Simone Martini* of Siena. — Above the pulpit *Coronation of the Virgin*, by *Giottino* (?). — To the right of the nave are (1) the *Cappella di Santo Spirito* with frescoes from the life of the saint, by *Domenico di Bona* (1400), (2) *Cappella di San Antonio da Padova* the frescoes in which have been repainted, and (3) the *Cappella di Santa Margherita*, adorned with frescoes, representing scenes from the life of the saint and of *Maria Egypciaca*, ascribed to *Agostino*, but perhaps by *Giottino* himself.

The *Great (N) Transept* contains on its right wall scenes from the life of *Jesus* by *Giotto* assisted by his pupils. Adjacent, *Madonna with four angels* and *St. Francis*, by *Cimabue*. — On the left wall the series of frescoes from the life of *Jesus* is continued *Flight into Egypt*, *Manners of the Innocents*, *Jesus in the Temple*, *St. Francis*, and *Death as Conqueror*. — On the E. transept wall *Miracles of St. Francis* and the *Annunciation*, by *Simone*, *Saints* and *Madonnas*, by *Simone Martini*. — At the end of the E. transept is the *Cappella dei Sacramento*, with frescoes from the life of *St. Nicholas*, perhaps by *Giotto* in his youth, and the tomb of Cardinal *Guas* *Guascone* *Orsini* (d. 1269), who is represented in the stained-glass windows.

The *High Altar* occupies the spot where the remains of *St. Francis* once rested. Above it are four triangular spaces on the groined vaulting containing the famous 'Parables of *Giotto*', illustrative of the vows of the Franciscan order: poverty, chastity, and obedience; the fourth painting is an apotheosis of *St. Francis*. The first picture represents the baptism of *St. Francis* with *Poverty* in rage; Next, next to whom is *Love*, has banded the ring in the bride. In the next picture *Chastity* appears in a tower, while in the foreground a monk is being baptized by angels. *Party and Drunkenness* are bestowing on him a banner and shield, while on the right angels, with penances as their weapons, are combating the demons of lust. *Obedience* enthroned between *Prudence* and *Humility* is further symbolized by the laying of a yoke on a monk. Each scene moreover, is replete with allegorical allusions (such as abound in *Dante*), most of which will be readily understood by those who are versed in the fanciful combinations of the period.

The *Last (S) Transept* contains scenes from the *Passion*, and (on the left wall) a much damaged *Crucifixion* by *Pietro Lorenzetti* (not *Pietro Cavallini*) and a *Madonna* between *St. Francis* and *John*, by the same. — To the *Cappella di San Giovanni* is a *Madonna with saints*, by *Lo Spagna* (1510).

In the SACRISTY, over the door of the second apartment, is a portrait of St. Francis, dating from the close of the 15th century. A magnificent piece of tapestry, which belonged to St. Peter IV, is kept here and hung over the organ on Oct. 1st 3rd.

The CATHEDRAL (p. 71) is approached by a double staircase, and is lighted with candles when visited by strangers. — Behind the tomb stand colossal statues of Popes Pius VII and IX.

The UFFIZIA CURVON (completed in 1250) is entered either by the principal portal, or (by applying to the sacristan) from the lower church (by the stairs ascending to the right of the entrance to the sacristy). The church is in the form of a Latin cross, with fine Gothic windows, and contains several noteworthy frescoes (restored). The E side possesses a Gothic portal. The pulpit in the nave dates from ca. 1350, the episcopal throne in the choir from ca. 1250, and the stalls from 1501.

The W end of the church is adorned with much-damaged frescoes by Cimabue (or, according to some, by Giotto/Pisano): in the N. TRANSEPT, as we enter from the lower church, are a Crucifixion, scenes from the Apocalypse, angels and saints, in the Choir, Assumption and Death of the Virgin, in the S. TRANSEPT, a Crucifixion, and History of St. Peter. In the vaulting of the choir and nave are Evangelists and Church Fathers. — NAVE. In the upper section of one wall are sixteen scenes from Old Testament history, from the Creation of the world to the Recognition of Joseph by his brethren; on the other wall, sixteen scenes from the New Testament, from the Annunciation to the Descent of the Holy Ghost, by *Paolo di Cimabue*, showing gradual improvement in execution. The lower section contains twenty-eight "Scenes from the life of St. Francis, probably by Giotto and his contemporaries (ca. 1280-90): 1 (at the right transept) St. Francis receives honour while a youth; 2 He clothes the poor; 3 His vision of a palace and weapons; 4 Warned by the crucifix in San Damiano; 5 Restores his apparel to his father and is enveloped in a bishop's cloak; 6 Appears to Pope Innocent III., supporting the Lateran; 7 Receives licence to preach; 8 Appears to his brethren in a fiery chariot; 9 Vision of his appointed seat in heaven; 10 Expels evil spirits from Arezzo; 11 Offers the ordeal of fire to the Sultan; 12 Hovers in the air while praying; 13 The infant Christ awakes in the saint's arms, as the latter is constructing a manger for the Christmas festival; 14 Miraculous production of a spring of water; 15 Sermon to the birds; 16 Predicts the death of a nobleman; 17 Preaches before Honorius III.; 18 Appears at the Council of Arles; 19 Receives the stigmata; 20 His death; 21 Appears to a dying man; 22 A doubter convinced by the stigmata; 23 Parting from St. Clare; 24 Canonisation; 25 Appears to Pope Gregory IX; 26 Cures a wounded man in Spain; 27. Condemns a dead woman; 28. Prays a repentant heretic.

Quitting the upper church and emerging on the space in front of it, we descend the steps to the right and follow the unpaved street ascending thence to the Via Principe di Napoli. On the right is the *Cydo Neocomis* (No 13, Pl. 4, C, 2), a hospital. Near the latter is the *Cappella dei Pellegrini* (recognisable by the defaced frescoes over the door) adorned with frescoes by Masaccio (p. 76) and Matteo da Gualdo (1408), representing the miracles of St. Anthony and James the Great. Farther on, to the right of the fountain, is an arcade of the 18th cent., formerly the *Monte Pratomartino*.

In the Piazza Vittorio Emanuele rises the beautiful *Portico of a Temple of Minerva (Pl. 9, D, 3), perhaps of the Augustan

period, with six Corinthian columns of travertine, converted into a church of *Santa Maria della Minerva*. The inscription, made out from the nail-holes of the bronze letters, tells us that the builders were the brothers C. and T. Caelius. Ancient inscriptions immured in the vestibule. — An iron gate in the pavement in front of the church is the entrance to the ancient Forum (uninteresting), which corresponded to the present Piazza, but lay considerably lower. In the forum is a *Base* for a statue, with a long inscription (key at the Guardia Municipale; fee $\frac{1}{2}$ fr.).

The *Chiesa Nuova* (Pl. D, 3), a small but tasteful edifice of 1615, reached by descending to the right, near the S.E. angle of the Piazza, occupies the site of the house in which St. Francis was born in 1182 (p. 70).

The Piazza San Rufino, in the upper town, is embellished with a bronze copy of Dupré's *Statue of St. Francis* in the cathedral, erected in 1882.

The CATHEDRAL OF SAN RUFINO (Pl. E, 3), named after the first bishop (240), was completed in 1140, and the crypt in 1228. The ancient façade is adorned with three fine rose-windows. The interior, which was modernised in 1571, contains a marble statue of St. Francis, the last work of *Giovanni Dupré*; a Madonna with four saints by *Niccolò da Foligno* (in the nave, to the right); and fine choir-stalls by *Giovanni da San Severino* (1520).

From the cathedral an unpaved road descends to the left to the Gothic church of SANTA CHIARA (Pl. E, 4), near the gate, erected by *Fil. de Campello* in 1257 et seq. The massive buttresses have been restored. Beneath the high-altar are the remains of St. Clara (1194-1253), who, inspired with enthusiasm for St. Francis, abandoned her parents and wealth and founded the order of Clarissines (see below). A handsome crypt of differently-coloured marbles has been constructed about her tomb since 1850. On the arch above the high-altar are frescoes by *Giottino* (?), and in the Cappella di Sant' Agnese (right transept) are damaged frescoes in the style of Giotto.

The *Giardino Pubblico* (Pl. F, 4), to the S. of the cathedral, between the Porta Nuova and the Porta Cappuccini, contains some fine oaks and commands a good view of the town and its fertile valley. A little farther on, to the N.E. of the Piazza Nuova, are the ruins of a Roman Amphitheatre (Pl. F, 3). — About $\frac{1}{2}$ M. outside the Porta Nuova (Pl. F, 4) is the *Convent of San Damiano* (1000 ft.), erected by St. Francis, the first abbess of which was St. Clara (see above). The cloisters contain frescoes by *Eusebio di San Giorgio* (1507) representing the Annunciation and St. Francis receiving the stigmata.

A magnificent view of the town and environs is obtained from the *Castello* or *Rocca Maggiore* (1655 ft.; Pl. D, E, 2), above the town, reached from the piazza in about $\frac{1}{2}$ hr. The custodian is to be found in the piazza.

A beautiful and interesting walk (ca. $1\frac{1}{4}$ hr.) may be enjoyed by descending from the Porta San Giacomo (Pl. D, 2) by the Via di Fontanella to (20 min.) the *Ponte Santa Orec* (whence the *Col. Caprili*, 1983 ft., may be ascended in 1 hr.). We then retrace our steps for 200-300 paces, take the footpath diverging to the right, and cross a second bridge over the shallow *Taselo*, whose right bank we follow to the (20 min.) *Ponte San Vittorino* (Pl. A, 1). Thence we return to the Porta San Francesco (Pl. B, 2, 3).

In a ravine of the *Monte Subasio* (4230 ft.), to the E. of Assisi, is situated the hermitage *delle Caverre* (2800 ft.), to which St. Francis retired for devotional exercises. Near the chapel are a few apartments built in the 14th cent., and the rock-bed of the saint. It is reached on foot from the Porta Cappuccini (Pl. F, 4) in $1\frac{1}{2}$ hr., with donkey in 1 hr.

The carriage-road from Assisi to Spello is very attractive (one-horse carr. 4-5 fr.; on foot 2 hrs.). To the right of the road as the town is approached are the ruins of an *Amphitheatre* of the imperial period (not visible from the railway).

22 M. *Spello* (1030 ft.; *Bronzi*; *Presiosi*), a town of 5155 inhab., picturesquely situated on a mountain-slope, is the ancient *Colonia Julia Hispellum*. The gate (*Porta Consolare*) near the station, with three portrait-statues, as well as the *Porta Urbana* and the *Porta Venaria*, are ancient.

The *Cathedral of Santa Maria Maggiore*, built in the 16th cent. (façade begun in 1644), contains good paintings.

The holy-water basin to the right of the entrance is formed of an ancient cippus. To the left the *Cappella Baglioni* with frescoes by *Pinturicchio* (1501) on the left, the *Annunciation* (with the name and portrait of the painter); opposite to us the *Adoration*; to the right, *Christ in the Temple*; on the ceiling, four *Sibyls*. The pulpit is by *Simone da Campione* (1545). — The *Cross* contains a magnificent canopy in the early-Renaissance style by *Scorci da Piacenza* (1515). On the left a *Pieta*, on the right a *Madonna* by *Perugino*, 1521. — In the *Cappella del Santissimo Sacramento* is a *Madonna* by *Pinturicchio* (under a wooden cover which is opened by the vergers). — A building on the right of the church contains a majolica pavement made at *Deruta* (1568).

Sant' Andrea contains (3rd altar to the right) an altar-piece, *Madonna and saints*, by *Pinturicchio* and *Eusebio di San Giorgio* (1508), with a letter from G. Baglione to *Pinturicchio* painted upon it.

Among other antiquities the 'House of Propertius' is shown, although it is certain that the poet was not born here (p. 71). In the *Palazzo Comunale* and on the church-wall of *San Lorenzo* are Roman inscriptions. *San Girolamo*, outside the town, contains an interesting tempera painting of the *Marriage of the Virgin* by an unknown master. The upper part of the town commands an extensive view of the plain, with Foligno and Assisi. Traces of the earthquake of 1832 are still observed.

The train crosses the *Topino* and reaches —

25 M. *Foligno*, the junction of the *Ancona* line (R. 15).

Bagli (44). Incl. wine $2\frac{1}{2}$ fr.) at the station. — 'Posto' (seat in a carriage) to the town ($\frac{1}{4}$ M.) 40 c., including luggage.

Hotels. **Poeta*, by the gate, in the *Via Cavour*, the main street, R. 2-4, pens. $7\frac{1}{2}$ -10 fr., with good restaurant and café; *Ala. & Trattoria* *San Lorenzo*, R. $1\frac{1}{2}$, pens. 5 fr., clean. — *Frattoria Fulmine*, *Via Cavour*. — *Post & Telegraph Office*, *Via Umberto Primo*.

Folligno (771 ft.), a town with 9532 inhab., various industries, and an episcopal residence, lies in a fertile district, a little to the W. of the ancient *Fulginiae*. In 1281 it was destroyed by Perugia, from 1305 to 1439 it was governed by the celebrated family of the Trinci, and in 1439 annexed to the States of the Church. The earthquake of 1832 occasioned serious damage.

At the entrance to the town is a marble statue (1872) of the painter *Niccolò di Liberatore*, surnamed *Alunno*, the head of the school of Folligno (p. 61).

The *Via Cavour* leads to the *Piazza Vittorio Emanuele*.

The *Via Giuseppe Plarmarini* on the right conducts us to the old *Chiesa di Betlemme*, at the corner of the first side-street, accommodating the *PINACOTHECA* (which, however, is about to be transferred elsewhere). The latter contains a few Roman sculptures (relief representing circus-games) and some paintings by Umbrian masters: *Pier Antonio Messasistris of Folligno*, 1. Madonna and angels, 3. Madonna with SS. John and Dominic, 4. Crucifixion, 5. Madonna with SS. Francis and John, in the middle, 67. *Dono dei Doni*, St. Catharine.

In the *Piazza Vittorio Emanuele* is the S. façade (restored in 1908) of the *CATTEDRALE SAN FELISIANO*, with a Romanesque portal (1139). The interior was modernised in the 16th and 17th centuries. To the left of the choir is an octagonal chapel, by *Antonio da Sangallo the Younger* (1527); some of the columns in the crypt date from the 9th century. — Opposite the side-portal is the *Palazzo Orfini*, with a Renaissance façade, unfortunately much injured. A little to the N. is the pretty *Oratorio della Nunsiatella* (15th cent.) with a fresco by Perugino (Baptism of Christ, see 20 c.). — On the N. side of the piazza rises the *Palazzo del Governo*, the seat of the Trinci in 1398-1439. The chapel on the upper floor (custode in the Municipio, at the other end of the market-place) contains damaged frescoes by *Ottaviano Nelli* (1424, History of the Virgin, St. Joachim, and St. Anna; in the vestibule, Romulus and Remus).

The *Via Principe Amedeo*, No. 22 in which, on the right, is the handsome *Palazzo Deli* (1510), leads to the *Piazza Giordano Bruno*. The old church of *Santa Maria infra Portas*, in this piazza, with a portico of the 8th cent., contains several faded frescoes by *Niccolò de Folligno*. — The Gothic church of *San Domenico*, opposite, is now a gymnasium (*Palestra Ginnastica*).

The *Scuola d'Arti e Mestieri*, in the street of that name diverging from the *Via Principe Amedeo*, contains casts of many almost inaccessible monuments of Umbrian art, including the 'Temple of Clitumnus' (p. 75). — In the *Piazza San Niccolò* is the church of *SAN NICCOLÒ*, the second chapel to the right in which contains a large altar-piece (Nativity, with twelve saints at the sides and the Resurrection above) by *Niccolò de Folligno* (1492); the chapel to the right of the high-altar is adorned with a Coronation of the Virgin, by the same master.

About 1 M. to the E. of Folligno lies the church of San Bartolomeo, with a Martyrdom of St. Bartholomew by Nicolo da Folligno. About $\frac{3}{4}$ M. farther to the E., on the slope of the hills, is situated the *Abbatia di Santorso*, with cloisters built in 1238, resembling those of San Paolo Fuori di Rome (p. 300).

About 5 M. to the W. of Folligno is Bevagna (1000 ft., diligence twice daily in 1½ hr., fare $\frac{1}{2}$ fr.), with 3000 inhab., on the *Clitumno*, the ancient *Monsis* of the Umbri. It possesses the remains of an amphitheatre and other antiquities. The little churches of San *Silvestro* and San *Vicente* (in the picturesque *Piazza*) dating from the 12th cent., have frescoes by *Simone* (1195) and *Modugno* (1201) respectively. The former is restored as a 'national monument'.

From Bevagna ($\frac{5}{8}$ M.) or from Folligno direct (8 M., diligence twice daily in 2 hrs., 1 fr., fare there and back 5-6 fr.) we may visit the lofty *Montefalco* (1600 ft., *Porta*, near the gate, clean), with 3000 inhab., one of the best places for the study of Umbrian painting. In *Sant'Assentino* (not far from the gate) is a Madonna with saints, of the Umbrian School (1522; left wall). One of the most interesting churches is San *Francesco* (now a national monument, 600 $\frac{1}{2}$ fr.), in the *Piazza Vittorio Emanuele*; it was built in the 16th cent., the portal dating from 1285. On the entrance-wall, *Annunciation* and *Nativity*, by *Perugino*, wall of left aisle, Madonna and saints by *Filippo d'Assisi* (1513), *Crucifixion*, *Miracles of St. Anthony*, *School of Sanese Gossoli*. Madonna, *Tobias* and the angel and four saints, by *Fra Agnolo da Montepulciano* (1530), last chapel in the left aisle, *Crucifixion* and Christ appearing to Mary Magdalen, *School of Ostia*. The choir is adorned with good frescoes by *Sanese Gossoli* (1482), representing the legend of St. Francis, with portraits of popes, cardinals, and church-fathers, below the window, portraits of Dante, Petrarch, and Giotto. The most important of the frescoes on the wall of the right aisle are those by *Sanese Gossoli* (1482, *Crucifixion*, Christ blessing, four church-fathers, Madonna and four saints). The chapel to the right of the choir contains sculptures and wood carvings from old churches. — Nearly opposite to San Francesco is the small chapel of *Santa Maria di Piazza*, with a Madonna by *Fra Melchiorre of Montefalco* (16th cent.). The church of San *Laurence* by the *Porta di Spoleto* contains a Madonna and saints, also by *Melchiorre* (1615). — The church of San *Francesco* $\frac{1}{2}$ M. beyond the *Porta di Spoleto* also possesses several interesting paintings. In the *Cappella di San Francesco* (to the left in the court) Legend of St. Francis, by *Filippo d'Assisi* (1517); over the entrance of the church are a Madonna with St. Francis and Bernard and seven angels by *Sanese Gossoli*; on the right wall, Madonna adoring the Holy Child, by *San Gossoli* (1485). — A walk round the walls of the town affords magnificent views of the Umbrian plain.

The RAILWAY traverses the luxuriant, well-watered valley of the *Clitumno*, whose herds of cattle are extolled by the ancient poets, to —

30 M. Trevi (*Locanda*, near the *Porta del Lago*, poor). The small town (1047 inhab.), the ancient *Trebitis*, lies on a steep hill (1800 ft.) to the left. About halfway up is the church of Santa Maria delle *Lagrine* (p. 78). The *Pinacoteca* in the Municipio contains three works by *Lo Spagna* (1. Coronation of the Virgin, after Ghirlandajo's painting at Narni, p. 85; 61. St. Cecilia, 65. St. Catharine), a Madonna by *Pieruccio di Lorenzo*, and a *Crucifixion* (triptych) of the Umbrian School (15th cent.). The church of *Sant'Amiliano*, 12th cent., possesses an interesting portal (St. Amilian between two lions) and three richly-ornamented altars by *Rocco da Vicenza* (1521).

About $\frac{1}{2}$ M. beyond the *Porta del Lago* lies the church of San *Martino* (key at the *Cast. Cocchini*), with most interesting frescoes. In the

enter chapel is a "Madonna in glory, surrounded with four saints, by *Lo Spagna* (1512); above the entrance to the church, Madonna and two angels, by *Tiberio d'Assisi*, in the interior, St. Martin by *Lo Spagna* (? to the left), and Madonna, St. Francis, and St. Anthony, of the *School of Foligno* (to the right). — The church of SANTA MARIA DELLA LASSINE, $\frac{1}{4}$ M. from the Porta del Cielo (see p. 77), was built in 1487 by *Antonio Marchini* and possesses a fine portal by *Giovanni di Gian Pietro* of Venice, added in 1511. In the 1st chapel to the left is a Resurrection, by an *Umbrian Painter*; in the transept, to the left, Entombment, by *Lo Spagna*; 2nd chapel to the right, Adoration of the Magi, by *Perugino*; 1st chapel to the right, Annunciation, *Umbrian School*.

The small village of *Le Vene*, the old posting-station of *Saceraria*, is next passed. Near it, to the left, we obtain a glimpse of a so-called Temple, sometimes regarded as that of *Clitumnus* mentioned by *Pliny* (Epist. 8, 8). The elegant little building, however, now known as the church of *San Salvatore*, was constructed of the materials of ancient tombs not earlier than the 4th cent., as the Christian emblem (the vine and the cross), the twisted marble columns on the façade, and various inscriptions in the crypt and on the foundations testify. Near *Le Vene* the clear Source of the *Clitumnus*, beautifully described by *Pliny*, wells forth from the limestone-rock, close to the road (comp. *Byron*, *Childe Harold*, iv, 66 seq.). — 3½ M. *Campello sul Clitunno*, a village on the height to the left. About 2 M. to the S. is the roadside village of *San Giacomo*, with a church the choir of which is adorned with interesting frescoes by *Lo Spagna* (Coronation of the Virgin, Legend of St. James of Compostela; 1526). Beautiful road through richly cultivated land.

40½ M. *Spoleto*. — The town is $\frac{1}{4}$ M. distant; one horse carr. 1 fr.

Hotels. — *Albergo e Ristorante Lucini*, Via Felice Cavallotti and Piazza San Filippo, in the upper town, near the theatre, R. 2-2½. Adj. 2, D 3-5 (both incl. wine) pens. 5-7½ fr. (less for a long stay); *Albergo e Ristorante Camilli*, Corso Vittorio Emanuele; Porta, Piazza Garibaldi, in the lower part of the town, near the Porta Leonina (Pl. B, C, 1). — *Trafferia della Ferrovia* (also rooms), to the right of the gate. — *Cafés*: *Clari*, *Farnacchiotti*, *Nicolas*, all in the Corso Vitt. Emanuele. — *Baths*, Piazza San Luca. — *Post & Telegraph Office*, Piazza Collicola.

Spoleto (1000-1485 ft.), the ancient *Spolitum*, a small industrial town (8631 inhab.), is prettily situated at the S. end of the valley mentioned at p. 70. Very early the seat of a bishop, it is now an archiepiscopal see. Truffles are found in great abundance in the surrounding woods and are used in the preparation of preserved foods. Mining (*Miniere di Lignite*) is also carried on to the N.W. of the town. Its interesting works of art, its picturesque situation, and its cool and refreshing climate combine to make *Spoleto* an attractive place to visit.

In B. C. 241 a Roman colony was established in the ancient *Umbrian* town, and in 217 it vigorously repelled the attack of *Hannibal*, as *Livy* relates (23, 9). It subsequently became a Roman municipium, suffered severely during the civil wars of *Sulla* and *Marius*, and again at the hands of *Toilla* and his *Goths*, after the fall of the W. Empire, though *Theodoric the Great* favoured it. The *Longobards* founded a duchy here (as in *Benevento*) in 570, the first holders of which were *Favard* and *Arifulf*. After the fall of the *Carolingians*, *Guido* of *Spoleto* even attained the dig-

4

5

6

7

8

nity of Emperor, as well as his son *Lambert*, who was murdered in 886. In 1155 the prosperous town was destroyed by Frederick Barbarossa, and in the beginning of the 13th cent. it was incorporated with the States of the Church. The *Castle of Spoleto*, known as *La Rocca* (p. 80), was rebuilt in 1264 by Cardinal Albano, on the site of the ancient *Ars* and completed by Pope Nicholas V. In 1499 it was inhabited by *Lucretia Borgia*. It fell into the hands of the Piedmontese on 18th Sept., 1860, after a gallant defence by Major O'Reilly, an Irishman.

Outside the *Porta Leonina* (Pl. B, C, 1) are the (subterranean) remains of a *Roman Bridge* ('*Ponte Sanguinario*'; 80 ft. long and 33 ft. high), to which visitors may descend (electric light; key at the Municipal Customs Office). The main street begins at the gate, and, after traversing the lower part of the town under various names, is continued through the upper town as the winding *Via Umberto Primo* and *Corso Vittorio Emanuele*.

A little to the S.E. of the *Porta Leonina*, in the *Via dell' Anfiteatro*, is the *Caserma Severo Miservio*, which contains the remains of a *Roman Amphitheatre* (Pl. C, 2), measuring 300 ft. by 235 ft.

About 5 min. from the gate a side-street diverges to the right, passing under a gateway of the Roman period, called the *Porta d'Annibale*, or *Porta della Fuga* (Pl. B, 2), in allusion to the above-mentioned resistance to Hannibal. We may continue to follow the main street, or take one of the direct but steep side-streets to the *Corso Vittorio Emanuele*, which leads to the piazza of the same name.

The *PIAZZA VITTORIO EMANUELE* (Pl. B, 4), in the centre of which is a *Monument to Victor Emmanuel* (1892), occupies the site of a *Roman Theatre* (over 370 ft. in diameter), of which remains were discovered beneath the piazza in 1891. The *Via Sant' Agata*, to the right as we enter the piazza, leads to the convent-church of *Sant' Agata*, now a prison, with traces of Roman construction. The *Viale Regina Margherita*, near the *Prefettura*, leads to the left (S.) to the *Porta Romana* (p. 81).

The *Via Brignone* ascends to the left from the *Piazza Vittorio Emanuele* to the *Piazza Monteni*, and leads, a few paces farther on, round the corner to the left, to the *Via dell' Arco di Druso*, which runs under the half-sunken *Triumphal Arch of Drusus and Germanicus* to the *PIAZZA DEL MERCATO* (Pl. B, C, 4), the ancient Forum. The small staircase adjoining the arch leads to a picturesque monastery-court. — From this point we may enter the lower church of *Sant' Ansano*, with its damaged frescoes of the 11th cent., formerly dedicated to St. Isaac, a Syrian monk who founded the hermitages on the *Monte Luco* (p. 81). The church is built on the foundations (partly excavated) of a Roman temple, to which visitors are admitted (electric light).

From the fountain (restored in 1748) in the *Piazza del Mercato* the *Via Municipale* ascends to the *PALAZZO MUNICIPALE* (Pl. C, 3, 4), which contains several inscriptions and the small *Pinnacoleon*.

Pinnacoleon. On the entrance-wall, early mediæval sculptures. — Room II. Entrance-wall, Handsome chimney-piece of the beginning of the 18th cent.; centre, Archaic inscription regulating the felling of timber in a

sancti grove. — R. III. Entrance-wall, Madonna with saints, an admirable fresco by *Lo Spagno*; right wall, Three virtues and putti, by *Lo Spagno*, a Madonna, of the School of *Antonello da Messina*. — R. IV. Right wall, Madonna, by *Sera. Campello* (1512).

Below the terrace in front of the Palazzo a Roman House with rich mosaic pavements has been brought to light. The house, originally belonging to the mother of the emperor Vespasian (p. 82), has been restored and adorned with the sculptures, coins, inscriptions, etc., found on its site (entrance from the Pal. Municipale).

The Via dell' Arringo, beginning opposite the main entrance of the Palazzo Municipale, leads past the Palazzo Arconi, with a fine portal and graffiti of mythological scenes (16th cent.), to the —

*CATHEDRAL OF SANTA MARIA ASSUNTA (Pl. C, D, 1), raised to its present dignity in 1067 and restored in the 12th century. The magnificent early-Renaissance vestibule was added after 1491; on each side of it is a stone pulpit. Above, Christ with Mary and John, a large mosaic by *Solaresius* (1207). The richly ornamented portal (after 1155), bears on the left the name of *Gregorius Meliorantius*.

To the right of the vestibule (built by *Ambrasio da Milano*) is a Baptistry (Cappella Erolli), containing frescoes of the late-Umbrian school. The travertine font, with sculptures from the life of Christ, is also by *Ambrasio da Milano*. Several ancient fragments are built into the left side of the vestibule.

The interior of the cathedral was restored by *Bernini* about 1640. In the chapel immediately to the right of the entrance are some fragments of frescoes by *Antinori* (1497) and a Crucifixion (1147), from *Santi Giovanni e Paolo*. — The Choir contains "Frescoes (damaged), the masterpieces of *Fra Filippo Luppi*, completed after his death by *Fra Diamante* in 1470. Annunciation, Birth of Christ, and Death of Mary; in the semicircle, Coronation and Assumption of the Virgin. — At the entrance to the chapel on the left of the choir, to the left, is the Tomb of *Fra Filippo Luppi* (1412-1460). The monument was erected by *Lor. de' Medici*, the epitaph is by *Pollitani*. Opposite is the monument of an Orsini, by *Ambrasio da Milano* (1460). — The Western Choir, in the left aisle, contains some good carving.

In the Piazza del Duomo probably stood the palace of the Longobard dukes (p. 78). Adjacent is the *Chiesa della Nanna d'Oro*, an elegant Renaissance building, founded in 1527. — The Via del Seminario, between the churches, descends to the Via Umberto Primo (p. 79). In a side-street lies the small church of *Santi Giovanni e Paolo* (Pl. B, 3, key kept by the vergier of the cathedral) which has a subterranean oratory, with frescoes dating from the 11th century.

We now return to the Via del Municipio and follow it to the Piazza BERNARDINO CAMPILLO (Pl. O, 4), where a memorial slab commemorates the capture of the fortress in 1860 (see p. 79). Passing the fountain, we leave the upper part of the Piazza by a street to the right, which passes immediately below the lower entrance of the fortress of *La Rocca* (1486 ft., see p. 79), now a prison. A little farther on, near the *Porta Rocca* (Pl. D, 4), we perceive, to the left, polygonal foundations, being remains of the ancient town-wall.

Outside the wall is a profound ravine, spanned by the imposing viaduct **Ponte delle Torri*, built of brick, which is used as a viaduct,

uniting the town with Monte Luce (see below). It rests on ten arches, and is 290 ft. in height and 231 yds. in length. Its construction is attributed to Theodelapius, third duke of Spoleto (804). The ground-plan is apparently Roman, while the pointed arches indicate a restoration in the 14th century. A window midway affords a view. Beyond the bridge we turn to the left, ascend a stony path to the aqueduct, and follow the direction of the latter. After 10-15 min. a more unbroken prospect is obtained of the fortress, town, and valley.

Returning to the bridge, we follow the road that passes under the arch of the aqueduct and runs to the S. W. along the edge of the gorge. In $\frac{1}{4}$ hr. we reach the church of *San Pietro* (1273 ft.), founded in the 5th cent., and restored after its destruction in 1829. The reliefs on the façade are of different dates: those from the bestiaries (the wolf preaching, the fox feigning death) at the central portal are the oldest, and may date from the 11-12th cent.; those above (deaths of the righteous and of the sinner) are later. — At the top of hill (2080 ft.) is the small basilica of *San Giallano*, where St. Isaac (p. 79) founded a monastery about 500.

A broad street leads in $\frac{1}{4}$ hr. from San Pietro to the *Porta Romana* (p. 79). Outside the gate (about 50 paces along the town-wall to the W., then to the left) lies the church of *San Paolo* (1210 ft.; 13th cent.), with a convent now used as a poorhouse, the church contains some old frescoes. A picturesque walk may be taken to the right to the *Madonna di Loreto*, founded in 1572, with a later portal, and thence, following the arcades, to the *Porta San Matteo* (Pl. A, 4), whence the Via Loreto brings us back to the Via Umberto.

A road issuing from the Porta San Gregorio, crossing the bridge, skirting the river to the right for 120 paces, and then ascending to the left, brings us to the church of *Il Crocifisso*, formerly *San Salvatore*, the façade of which is conspicuous among the arcades of the *Campo Santo*. This church, standing on a terrace within the cemetery, was erected in the 4th cent. on the site of a Roman temple, and was destroyed at an early date. The fine ancient Roman doors have been preserved, but the ivy wreaths and consoles with which they are adorned and also the three magnificent windows which pierce the façade are the work of the Christian architects. In the interior the nave was separated by twenty Doric columns from the aisles, which were built up on the conversion of the church into a monastery. Six antique columns with a Doric entablature are still preserved in the choir; and the octagonal dome rests upon eight gigantic columns, with curious imposts. — In the neighbourhood is the small 13th cent. church of *San Ponziano* (Pl. D, 1).

The ascent of Monte Luce (2728 ft.; 1 $\frac{1}{2}$ hr.) may be made from the Ponte delle Torri, if time permit. Michael Angelo, when he visited (in 1558) the hermits who lived here, was enchanted with its natural beauties. Refreshments at the Franciscan convent near the top (remuneration expected). The hermitages are now used as summer dwellings. The 'Fra Guardiano' conducts visitors to the best points of view. To the N. and E. lies the valley of the Clitumnus with Trevi, Foligno, Spello, and

Ascoli, then Perugia and the Central Apennines near Città di Castello and Gubbio. In the other directions the view is interrupted by the mountains in the vicinity. Towards the E. these are once topped by the rocky crest of the Monti Sublimes often snow-capped.


From Grosseto to Nocera and Ascoli Piceno, 60 M., a highly picturesque route at going the Apennines obliquely. A motor omnibus runs daily from the Porta (station P. S. 1) to (20 M.) Nocera on D. (in winter 4) hrs., starting at 8, in winter at 6 a.m.; fare 1st class 5 2nd class 3 fr. baggage 20 c. for every 5 kilograms (11 lb.), one horse gets in 3 hrs. (not half at Nocera & Corvara 1½ fr. — The road at first ascends to the E. over a wooded slope with fine panoramas of the valley of the Tevere, and then descends beyond the 10 M. mountain pass of *Pizzo di Corva* (2400 ft.) in wide curves (short cuts for walkers) via (15 M.) *Ortona* (210 ft.) to the deeply-cut valley of the *Sera*, the right bank of which it then follows towards the S. Between (11 M.) *Polignano* (1000 ft.) carriage road to *Torri* on the S. and (16 M.) *Serra di Corvara* (two quarters of the distance off) it requires several rocky sections. Beyond *Corvara di Spazio* it can be seen (18 M.) *Fogginio* where a road to (17½ M.) *Plan di S. Giorgio* to the left. We now turn to the S. and enter the valley of the *Corva*, a tributary of the *Sera*, in this valley (up 7½ M. from Nocera) is the ancient *Fogginio*, the birthplace of *Vespasianus*, mother of the *Emp. Vespasianus*. The road threads another rocky pass and crosses the mountain-girt plate of *Borcia* (*Pizzo di S. Maria* formerly a lake).

At S. *Borcia* (1900 ft., 20 miles from the Roman *Murcia*), is a steep hill town with 6000 inhab. and several ancient factories, situated on the W. base of the Monti Sublimes and still surrounded by its ancient walls. It was the birthplace of the Roman general *Quintus Sertorius* (d. 70 B.C.) and also of St. *Benedictus* (ca. 480-540), and his sister *Scholastica*. In the *Piazza Sertorio* is a statue of St. *Benedict*. The church of *San Benedetto* has an attractive Romanesque facade. The *Monte* resembles a castle, the *Procuria* has early Romanesque cruciform. The *Cathedral* with a Romanesque portal and a rose window has in ruins. In a house in a side street is a *Lepros* with an early Christian inscription.

At (1½ M.) to the S. of *Borcia* the road to (10 M.) *Ascoli* turns to the E. by the churchyard and ascends to the crest of the mountains in long windings. (The bridge path leads to S. to *San Feliciano* then ascends rapidly through a stony ravine and rejoins the road. About 1½ M. beyond *Borcia* is the mountain pass of *Pizzo di Corvara* (2400 ft.). At the top we enjoy a glorious view to the S. E. to the *Gran Sasso* (4000 ft.) to the S. E. the *Monte Vettore* (3100 ft.) the highest summit of the *Monti Sublimes* (which may be ascended from *Castelluccio*, 4000 ft. & see to the S. E. of *Borcia*, in D. hrs. with guide). The bridge-path again quits the road and does not again join it before (1½ M.) *Cape di S. Maria* (2000 ft.). A road diverging to the S. about 1½ M. farther on (distance from *Ascoli* road as far as the W. slope of the *Pizzo di S. Maria* (2400 ft.) and past *Acquedotto*, *Acquedotto* birthplace of *Leonardo* (the painter), *Monte* *Acquedotto* *Acquedotto* and *San Feliciano*, in *Ascoli* (see *San Feliciano* & *San Feliciano*). Our road then leads to the S. E., through the fine valley of the *Corva* to (10 M.) *Ascoli* (at *Ascoli* (At) *dalla Porta* beyond the village, past *Acquedotto* to *Ascoli* 20½ M., daily in 4 hrs. starting early in the morning and returning in the afternoon in 6 hrs., fare 3 fr.) — 7½ M. *Acquedotto* a summer resort with warm sulphur springs known to the Romans as *Ad Aquas* (now to *Ascoli* 5 fr.). The valley expands — 40 M. *Ascoli Piceno*, see *San Feliciano* & *San Feliciano*.

The Railway penetrates the limestone chain of the Umbrian Apennines by means of a tunnel over 1 M. in length — 51 M. *Giuliano*. Then a romantic rocky gorge.

56½ M. *Torricella* — The town is about ¼ M. from the station (restaurant), and is connected with it by an electric tramway. One horse cab to the *Piazza Vittorio Emanuele* (10, two-horse 20 c. (at night 10 c. and 2½, bus 20 c.).

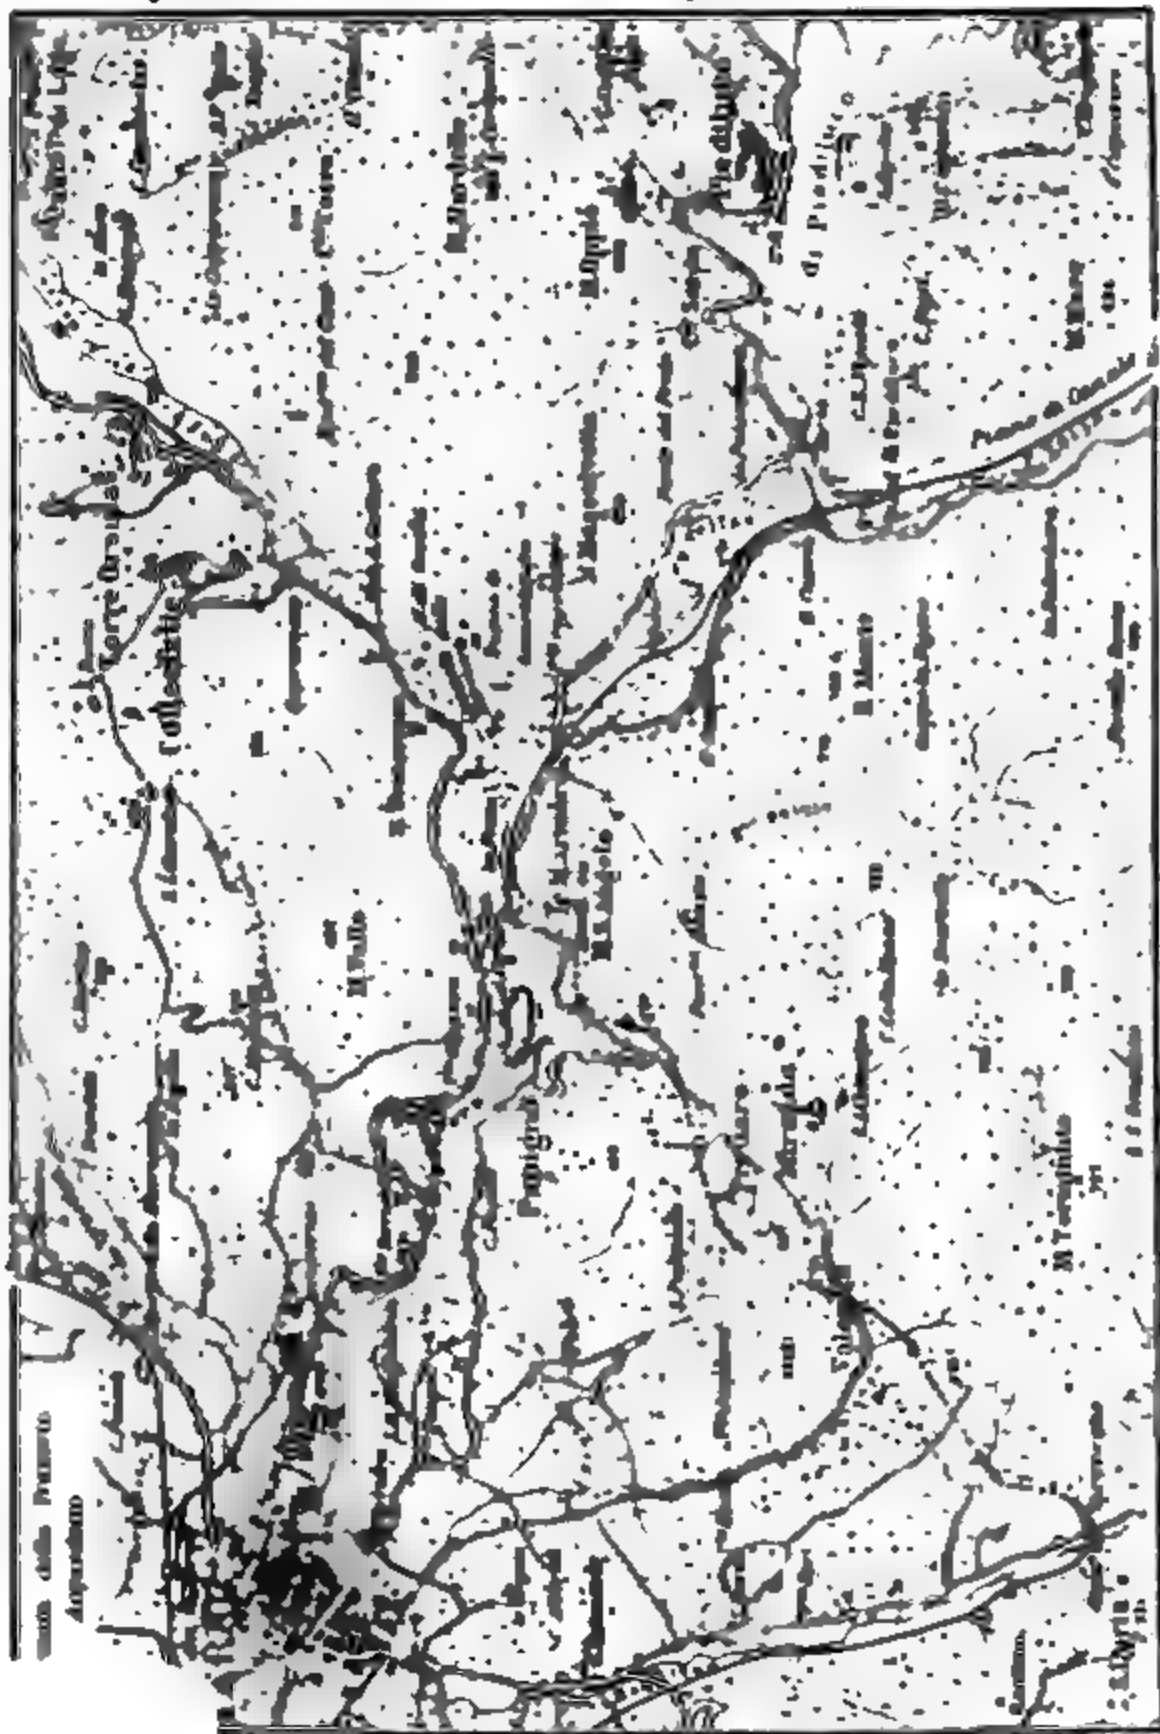

Hotel. *EUROPA 30 INGHILTERRA, Piazza Vitt. Emanuele 2, with baths and restaurant, R. 2½, L. ½, A. ½, B. 1½, 86). S. D. 5 (both incl. wine), om. ½ fr. — **Restaurants.** *Aquila d'Oro* (also rooms), Strada Cornelia Tacito 10; *Pulce d'Oro*, Strada Cornelia Tacito 21a (Gandini procures bedrooms if desired). — *Caffè Messia*, near the Europa.

Post Office, behind the Palazzo Pubblico. — **Photographers** at *Angeli's*, Via Nuova 8.

Electric Tramway and Carriages to the Waterfalls, see below.

Terni (426 ft.), an industrial town with 25,877 inhab. and the junction of the railway to Solmona, is situated in the fertile valley of the Nera (the Roman *Nar*), which was once occupied by a lake. It represents the ancient *Interamnina Nephers*, the birthplace of the Emperor Tacitus (275 or 276 A.D.) and, many contend, of the historian Tacitus (55-117 A.D.) as well. Remains of an amphitheatre in the grounds of the episcopal palace, Roman inscriptions and fragmentary sculptures in the *Palazzo Pubblico*, the *Biblioteca* (containing a Benozzo Gozzoli and other paintings), etc., are objects of interest. Pleasant walk on the ramparts, whence the beautiful Nera valley is surveyed.

Excursion to the Waterfalls of Terni. Visitors should take the **ELECTRIC TRAMWAY** as far as (5 M.) *Collestatte*. Cars leave the railway-station and the Piazza Vittorio Emanuele every 10-15 min. for the (1½ M.) *Acquedotto* (see below), whence they run 5 times daily (in 25 min.) to *Collestatte*. Passengers alight at (.5 min.) the station ('fermata') of *Cascate Marmore* (1½ M., p. 84). Fare 30c (between 11.30 a.m. and 1.15 p.m. and between 5.45 and 8.30 p.m., 20c), no return-tickets. — *CARRIAGES* (¾ hr. back ½ hr. by the lower road, where the tramways run ('dalla parte di sotto'), with one horse 5, with two horses 7 fr., by the upper road ('dalla parte di sopra') 7 or 8 fr.; round trip ('giro'), by the lower road and back by the upper via *Papigno* (comp. p. 84) about 12 fr. (see ½-1 fr.), bargaining advisable, and less than tariff-rates sometimes accepted. — **By Railway** (to Solmona, see *Santhier's Northern Italy*; few trains) to (10 M.) *Marmore*, ½ M. above the falls (p. 84), in ca. 50 (back in 35) min.; fares 2 fr. 5, 1 fr. 40, 90 c.

The traveller should be abundantly provided with copper coins. At the different points of view contributions are levied by the custodians (15-20 c.); flowers and fossils from the *Valine* are offered for sale (also not more than 15-20 c.). Pedestrians should start early in the morning, to avoid the heat.

The **ELECTRIC TRAMWAY** (see above) runs to the S. from the rail. station to the Piazza Cornelia Tacito, then turns to the E., and, after crossing the bed of the brook *Serra*, traverses the plain (on the right is a government manufactory of small arms). — 1½ M. *Acquedotto*, with an armour-plate factory. — 2¼ M. *Corrara*. The valley of the Nera contracts. On each side tower lofty rocky hills, with slopes clad in luxuriant vegetation, while in front appear the ruins on the top of *Monte Sant' Angelo* (2000 ft.). — 3½ M. *Papigno Ponte* (small restaurant), picturesquely situated on a solitary rock to the right (see p. 84). — 3¾ M. *Papigno Bivio*, with a generating-station (*Stabilimento Carburo*) on the S. bank, to the right. — 4¾ M. *Cascate Marmore*, where passengers alight (see below). — 5 M. *Collestatte*, the terminus (small restaurant), about 1½ M. below the village of the same name.

84 Route 10. CASCADE DELLE MARMORE. From Perugia

The RAILWAY gradually ascends to the S., across the plain of the Nera, to (5½ M.) *Stroncone* (787 ft.); the village (1479 ft.) lies 2 M. to the S. Thence the line ascends rapidly, threading six tunnels, after which we catch fine glimpses (left) of the upper valley of the Nera. — 10 M. *Marmore* (Rail. Restaurant, very fair).

Leaving the station, we turn first to the right, and 180 paces beyond the point named but No. 218, cross the railway. Paying no attention to the 'Castelli delle Caserte' here lying in wait, we keep to the left for about 10 paces, then turn to the right through vineyards and past some cottages. We then pass through the gate on the right (when closed, fee of 10-15 c.), and finally (8 min.) turn to the left for the upper fall (p. 89).

The picturesque UPRAN ROAD (carriage, see p. 83) is reached from the piazza at Terni by passing the Albergo Europa and descending the Strada Garibaldi to the left. We at first follow the Rieti and Aquila road, which crosses the Nera just outside the gate, traversing gardens and olive-plantations. After 2 M. a broad road to the left descends into the valley of the Nera, while the highroad ascends gradually to the right in the direction of Le Marmore (see above). The former descends in windings past the village of *Papigno* (p. 83), then (¾ M.) crosses the Nera, and on the right bank, near the Villa Grariani, reaches the lower road (electric tramway, see p. 83), 1-1¼ M. from the falls.

The celebrated falls of the *Vellino* (which here empties itself into the Nera), called the **Cascade delle Marmore*, are about 650 ft. in height, and have few rivals in Europe. The rivulet is precipitated from the height in three leaps of about 65, 330, and 190 ft. respectively, the water falling perpendicularly at some places, and at others dashing furiously over rocks. The spray of the falls is seen from a considerable distance.

The *Vellino* drains a valley running parallel to and between the Umbrian and the Roman Apennines. Near Rieti it traverses an old lacustrine basin, not yet completely dried up. The stream is so strongly impregnated with lime that its deposit (travertine) continually raises its bed, and the plain of Rieti (1420 ft.) is therefore frequently exposed to the danger of inundation. In ancient times (B. C. 272) *Manius Curius Dentatus* helped to counteract the evil by the construction of a canal, which, though altered, is still in use. Two other canals were afterwards excavated, the *Cava Reatina* or *Gregoriana* by *Fieravante Fieravanti* in 1422, and the *Cava Paulina* by Paul III. in 1546; these, however, proving unserviceable, Clement VIII. re-opened the original 'emissarium' of *Dentatus* in 1598. But new works are still from time to time necessary.

The finest views of the falls are obtained from the lower road and from the following points. Before reaching the falls, we may ascend a rough path to the left, leading in 10 min. to the finest view of the upper and central falls. — We now return to the road, retrace our steps (120 paces) to the cart-track on the left, and cross the Nera by a natural bridge, below which the water has hollowed its own channel. Where the path divides, we ascend gradually to the left. The surrounding rocks (in which there is a quarry) have been formed by the incrustations of the *Vellino*. The channel on the right (*Cava Paulina*) is full in winter

only. A steep ascent of 20-25 min. to the left, with a fine view of the fall, in the spray of which beautiful rainbows are occasionally formed, leads to a small pavilion of stone on a projecting rock, affording a beautiful survey of the principal fall and the valley of the Nera. We next ascend a flight of steps (4 min.), follow the path at the top for a few minutes more, then turn to the right, and come to a small house, with a garden through which we pass (10-15 c.). Then, beyond several houses, we reach in 8 min. the road to Rieti and Aquila (p. 84), near the postman's cabin No. 216. The station of Marmore (p. 84) is seen to the left.

If time permit, an excursion may be made by following the road to the left (without crossing the railway), which in a few min. passes to the right bank of the Velino. In less than $\frac{1}{2}$ hr. we reach the beautiful *Farm of Piediluco* (1207 ft., 415 acres in area), where the road forks. The branch to the right leads to the railway station of Piediluco (1237 ft., 11 M. from Terni; fares 2 fr 10, 1 fr 50, 85 c.), while the main road follows the bank of the lake (rowing-boat in $\frac{1}{2}$ hr., $\frac{1}{2}$ -1 fr) to the (40 min.) village of *Piediluco* (tolerable inn), with its ruined castle (Rocca, 1777 ft.).

THE RAILWAY TO ORTE intersects the rich valley of the Nera. To the right on the hill lies *Cesi* (1433 ft.), 5 M. to the N.W. of Terni, with remains of ancient polygonal walls and subterranean grottoes. To the left, *Colleciopoli* (781 ft.).

66 $\frac{1}{2}$ M. Narni (787 ft.; *Alb. Angelo*, clean, with electric light and view from the back-windows, R. 1 $\frac{1}{2}$ fr.), the ancient Umbrian *Narnium*, the Roman *Narnia*, birthplace of the Emperor Nerva, Pope John XIII. (965-72), and Erasmus of Narni, surnamed *Gattamelata*, the well-known 'condottiere' (d. 1443). Pop. 5200. It is picturesquely situated, $\frac{1}{2}$ M. from the station, on a lofty rock on the Nera, at the point where the river forces its way through a narrow ravine to the Tiber (omn. up 75, down 50 c.). The old castle (*Rocca*; 1089 ft.) is now a prison. — The Cathedral, erected in the 13th cent., with a vestibule of 1497, and dedicated to St. Juvenalis, the first bishop (369), contains a Renaissance altar-recess, dating from the end of the 16th cent. (2nd chapel on the right), a wooden statue of St. Anthony by *Vecchiatta* (1475), and the tombstone of Bishop Gormas (1515; 3rd chapel on the left). — The *Town Hall*, on the façade of which are 14th cent. sculptures, contains a Coronation of Mary by *Ghirlandajo*, spoiled by retouching. The garden of the church of *San Bernardo* (wooden statue of the saint in the interior, by *Vecchiatta*) affords a good view of the valley of the Nera.

From Narni to Perugia via Todi, see pp. 70, 88.

From Narni a road leads to the N.W. (diligence in 2 hrs., fare 2 fr) to the (6 M.) venerable and finely situated Umbrian mountain-town of *Amelia*, Lat. *Ameria* (1352 ft., inn outside the gate), mentioned by Cicero in his oration *Pro Roscio Amerino*, with admirably preserved Cyclopean walls and other antiquities.

The train turns towards the narrowing valley of the Nera, and passes close to the so-called *Bridge of Augustus* (on the left), which spanned the river immediately below Narni in three huge arches

and belonged to the Via Flaminia (p. 117), leading to Bevagna (p. 77). The arch next to the left bank, 80 ft. in height, still stands, but of the two others only the piers remain.

The train continues to follow the valley of the Nera, with its beautiful plantations of evergreen oaks. Beyond (71 M.) *Nera Montoro* we pass through two tunnels, and then (near the influx of the Nera) cross the Tiber, which in 1860-70 formed the boundary between the Kingdom of Italy and the Papal States. — Near —

77 M. *Orte* (*Rail, Restaurant) we reach the main line from Chiusi to Rome (see p. 94).

11. From Florence to Rome via (*Arezzo*) Terontola and Chiusi.

187½ M. RAILWAY. This is the shortest route from Florence to Rome. Express in 5½-7¼ hrs. (fares 40 fr. 85, 28 fr. 25, 18 fr. 85 c.); ordinary train in 11½ hrs. (fares 86 fr. 70 c., 25 fr. 70, 18 fr. 60 c.); no change of carriages. — The digression from Orte (p. 94) to the waterfalls of Terni (p. 84) is recommended to all who have sufficient time.

From Florence to Terontola, 76 M., see pp. 44-53. The main line to Rome diverges to the right (S.) from the branch-line to Perugia, Assisi, and Foligno, and at first skirts the W. bank of the Trasimene Lake (comp. p. 53).

82½ M. *Castiglione del Lago*, lying to the left on a promontory (997 ft.) extending into the lake, possesses an old palazzo of the Duchi della Cornia, built by Galeazzo Alessi.

86½ M. *Panicale*, a small place 4 M. to the S.E. of the station, with unimportant frescoes in its churches by Perugino and his school. — The line takes a W. direction and joins the line from Siena in the valley of the Chiana (R. 6).

93½ M. *Chiusi*. — The RAILWAY STATION (good Restaurant) is about 1½ M. from the town, on the hill to the right. 'Posto' (seat in a carriage) to the town 1 fr., two 'posti' 1½ fr.

Hotels. CORONA, outside the Porta Romana, R. 1½-2½ fr., clean; ETRURIA, PORSENNA, ITALIA, near the station, plain. — Travellers are cautioned against making purchases of Etruscan antiquities at Chiusi, as 'antiquities' from Etruscan tombs are largely manufactured here.

Chiusi (1305 ft.; 5974 inhab.), the ancient *Clusium*, one of the twelve Etruscan federated towns, frequently mentioned in the wars against Rome and as the headquarters of Porsenna, was fearfully devastated by malaria in the middle ages, and it was only in later times, after the Val di Chiana had been drained (see p. 50), that the town recovered from these disasters. The walls are mediæval; a few relics of those of the Etruscan period are traceable near the cathedral, outside the *Porta delle Torri*. A walk thence round the town to the *Porta Romana*, also called *Porta di San Pietro*, affords pleasing views of the S. portion of the Chiana Valley, Città della Pieve, the mountains of Cetona, to the N. the lakes of Chiusi and Montepulciano, and the latter town itself. Under the town extends

a labyrinth of subterranean passages (inaccessible), which probably belonged to an elaborate system of drainage, as the ancient Etruscans excelled in works of this kind, and were even in advance of many modern nations.

The interesting *Museo Etrusco* (adm. $\frac{1}{2}$ fr.), in a new building (1901) in the Piazza del Duomo, contains a valuable collection of objects found in the Etruscan tombs around Chiusi, such as vases (including some curious polychrome urns), dishes, bronzes, mirrors, sarcophagi, and especially cinerary urns, chiefly of terracotta, with a few of alabaster and travertine. The custodian also keeps the key of the Tomba della Scimmia (see below; fee 2 fr.).

The *Cathedral of Santa Mustiola* (recently restored and redecorated) is a basilica consisting almost entirely of fragments of ancient buildings, with eighteen columns of unequal thickness. In the left aisle is the tomb of St. Mustiola. The sacristy contains a mass-book illuminated with admirable miniatures of the 15th cent., chiefly by artists of the Sienese school. The walls of the arcades in the cathedral square bear numerous Etruscan and Roman inscriptions.

The *ETRUSCAN TOMBS, situated in isolated hills at some distance from the town, are the great attraction of Chiusi. They are distinguished by numbers on the above map. The paths to the tombs are very muddy in wet weather. If time is short only the first two should be visited (2 hrs. there and back; carr. from the station 5 fr.); viz. the *Tomba del Granduca* (No. 2), on the N.E., near the Siena railway (1 hr.), owned privately (fee $\frac{1}{2}$ fr.), and (20 min. to the S.W.) the *Tomba della Scimmia* (No. 1; key, see above), the most important of all, with paintings representing gladiatorial combats. The dilapidated *Tomba del Poggio Gaiella* (No. 3), which was formerly supposed, but without authority, to be the *Mausoleum of Porsenna* mentioned by Pliny and Varro, is 3 M. to the N.N.W. The *Tomba dei Cappuccini* (No. 4) lies to the N.E. and the *Tomba di Vigna Grande* (No. 5) to the S.

Near *Santa Caterina*, on the way to the station, are small catacombs of the early-Christian period, and near them a Roman tomb.

A diligence plies between the Chiusi rail station and ($4\frac{1}{2}$ M.) *Chiusi della Pieve* (see below) in 1 hr.; fare $1\frac{1}{2}$ fr. (carr. there and back 5 fr.).

About 5 M. to the S.W. of Chiusi (diligence in 2 hrs., $1\frac{1}{2}$ fr.) lies the little town of *Cartesano* (1878 ft.), above which rises an ancient castle. The *Villa Bergogni* contains a collection of sarcophagi, vases, small bronzes, and other antiquities found in the neighbourhood, to which admission is courteously granted. — About $2\frac{1}{4}$ to the S.E. of *Cartesano*, and $7\frac{1}{2}$ M. to the S.W. of Chiusi (diligence in $1\frac{1}{4}$ hr., $1\frac{1}{2}$ fr.) lies the small town of *Gotena*, commanded by a mediæval castle (1280 ft., key kept below, in the town). The *Palazzo Ferretti* contains a small collection of antiquities found in the neighbourhood, such as handsome polychrome and richly gilded urns, an elephant's tusk with archaic reliefs from the *Odyssey*, etc. (visitors admitted on presenting their cards). — Picturesque grounds at the back of the palace.

$99\frac{1}{2}$ M. *Città della Pieve* (820 ft.). The town (1666 ft., *Alb. del Falcone*, *Via Pietro Vanucci*; diligence and carr. from Chiusi, see above), which lies 9 M. to the N.E. (carriages not always obtainable) has 6684 inhab., and is the birthplace of *Pietro Vanucci*, surnamed *Perugino* (comp. p. 61). It possesses several of his pictures, but they are works of his later period, hastily painted and chiefly done by his pupils, as the master apparently deemed his native place not capable of appreciating works of a more elaborate kind. — The *Oratorio dei Disciplinati*, or *Santa Maria dei Bianchi* (see $\frac{1}{2}$ fr.), in the *Via Pietro Vanucci* or main street, contains an Adoration of the Magi, one of the largest pictures by Perugino. Two letters of the artist from Perugia (1504) are shown with regard to the price of this fresco, reducing it from 200 to 75 ducats. An inscription on the opposite wall marks the site of the house where Perugino was born. — In the Cathedral (interior modernised) is the Baptism of Christ (first chapel to the left), and in the choir a Madonna with SS. Peter, Paul, Gervasius, and Protasius, 1513. The picture of St. Anthony with St. Paulus Eremita and St. Marcellus in *San Pietro*, belonged originally to the church of Sant' Antonio. All these pictures are by Perugino. — Outside the S. gate is the church of *Santa Maria dei Servi*, containing remains of a Crucifixion by Perugino, dating from 1517. — A road (affording fine views) leads towards the E. to Perugia (p. 59; ca. 31 M.).

105 M. *Ficulle*, the village (1433 ft.), lies 9 M. to the S.E. $112\frac{1}{2}$ M. *Allerona*. Near Orvieto the Chiana falls into the *Puglia*, a turbulent tributary of the Tiber. The stratification of the rock from Chiusi to this point dates from the tertiary period, and shows clay, marl, and sandstone, while at Orvieto the volcanic district begins, of which the central point is the lake of Bolsena (p. 93).

119 M. *Stat. Orvieto* (407 ft., Rail. Restaurant), at the base of the hill occupied by the town, to which a cable-tramway (*Funicolare*; 5 min., 30 c.), 612 yds. in length, ascends at a gradient of 27:100, passing through a tunnel under the Fortezza. Hotel-omnibuses ($\frac{1}{2}$ fr.) wait at the upper end of the cable-tramway.

Orvieto. — *Hotels* (comp. p. xvii). **GRAND HOTEL DELLE BELLE ARTI** (Pl. a; C, 5), Corso Cavour, R. 3-5, B. 1½, 44j. S, D. 6 fr., both incl. wine, good; **ALB. TONDI & AQUILA BIANCA** (Pl. b; B, 5), Via Garibaldi, R. from 2, B. 1, 44j. S, D. 4 (both incl. wine); **ITALIA** (Pl. c; C, 2), Via del Popolo 5, **CONVITTO** (Pl. d; C, 3), Piazza Ippolito Nievo 1, at both R. 1½-2 fr.; **TRATTORIA DEL DUOMO** (Pl. e, C, 3), Via Umberto Primo, clean, R. 1½ fr. — *Café* in the Piazza Vittorio Emanuele.

The Wine of Orvieto is celebrated. — *Photographs* sold by Armoni, near the Cathedral. — About 4-5 hrs. are sufficient for a hasty visit to the town.

Orvieto (1093 ft., 8220 inhab.), a small town and episcopal residence, on an isolated tufa rock (the perpendicular sides of which are partly of artificial creation) occupies what was probably the site of *Volturni*, one of the twelve capitals of the Etruscan League. *Volturni*, after various vicissitudes, was taken and destroyed in B.C. 280 by the Romans, who are said to have carried off 2000 statues. The wealth of the ancient town has been proved by the discovery of numerous vases, trinkets, and statues. A new town, the *Urbibentum* of Procopius, arose on the site, and was called *Urbs Vetus* at a very early period, whence is derived its modern name. In the middle ages it was a great stronghold of the Guelphs, and often afforded refuge to the popes.

From the E. entrance to the town, where the terminus of the cable-tramway is situated, near the old castle mentioned at p. 92, runs the *Corso Cavour*, the principal street of Orvieto. Two medieval towers rise in this street; opposite the first (*Torre del Moro*) is the *Via Umberto Primo*, leading straight to the Piazza Santa Maria with the far-famed —

Cathedral (Pl. i; C, 3; closed 1-3), a magnificent example of the Italian Gothic style, and one of the most interesting edifices in Italy, founded in consequence of the 'Miracle of Bolsens' (comp. p. 93). The building was begun about 1285, perhaps by *Arnolfo di Cambio*, and the work progressed so rapidly that in 1309 Bishop Guido di Farnese was able to read the first mass in the church. It consists of a nave and aisles, with transept and rectangular choir. It is 114½ yds. long and 36 yds. wide, and, like the cathedrals of Florence and Siena, is constructed of alternate courses of black and white stone (basalt and limestone). This cathedral, like those in other towns, once constituted a great arena for the display of artistic skill. The guardians of the building were unwearied in providing for its ornamentation, and like the curators of modern museums who are zealous to secure works by the best artists, they did all in their power to obtain the services of the first masters of the day for the embellishment of their church.

The **Façade**, with its three gables, 44 yds. wide and 160 ft. high, is gorgeously enriched with sculptures and (freely restored) mosaics, and is probably the largest and most gorgeous 'polychrome' monument in existence. Though it was begun in 1310 under the supervision and according to the plans of *Lorenzo Maitani* of Siena its upper part was not finished until the 16th century.

The excellent *San Ruffino* on the lower part of the pillars, which in many respects are characteristic of the transitional style preceding the Renaissance, represent scenes from the Old and New Testament: 1st pillar to the left from the Crucifixion down to Tubal Cain; 2nd, Abraham, governing of the Virgin; 3rd, History of Christ and Mary; 4th, Last Judgment with Paradise and Hell; above are the bronze emblems of the Evangelists, by *Lov. Mattioli*. Above the principal portal, a Madonna under a canopy, in marble, wrongly attributed to *Andrea Pisano*. On the margin of the large square panel, in the centre of which is a rose-window, are marble statues of prophets and (above) Apostles, by *Raffaello da Montepulciano* (1480 or early).

Above the doors and in the three pointed gables are mosaics on a golden ground, of various periods (14-15th cent.): Annunciation, Nativity of the Virgin, Baptism of Christ, Coronation of the Virgin; the last, the principal picture, is the richest.

The interior has been admirably restored. It is constructed, like that of the Siena cathedral, of alternate layers of dark and light stone (black basalt and greyish yellow limestone from the vicinity). On each side four columns and two pillars separate the nave, which is 131 ft. in height, from the lower aisles. Above the round arched apse is a gallery adorned with rich carving. The windows are pointed, the lower parts being filled with translucent alabaster, the upper with stained glass. The visible frame-work of the roof was formerly richly ornamented.

In the *Left Aisle*, a Madonna, a fresco by *Gentile da Fabriano* (1430), much damaged. Near the main entrance stands a fine marble font, the lower part by *Piero* and *Jacopo di Piero* (1433); the upper by *Scas di Matteo* (1437). — In the Nave, to the right, a fine marble holy water basin by *Ans. Padovani* (1461-66, p. 28). — In the Choir, frescoes from the life of the Virgin by *Cydonio di Fieschi* and *Pietro di Paolo*; in the corner on the right Annunciation and Visitation, by *Ans. di Filippo*, a pupil of Pinturicchio. On each side is an altar by *Simone di Verone* (1491 & 1493), with reliefs in marble by *Marco*: on the left, Visitation of Mary; to the right Adoration of the Magi.

Right Transept: The "*Capella Nuova*" (best light in the morning), containing a magnificent image of the Virgin (*Madonna di San Brizio*), occupies an important page in the annals of Italian art. Don Francesco di Barone, the superintendent of the cathedral-mosaics having heard that the famous painter and monk *Fra Angelico da Fiesole* was not engaged during the summer in Rome (where he had been working at the Vatican), invited him to Orvieto, and secured his services for the decoration of the chapel. In 1447 *Fra Angelico* accordingly worked here, but for three months only, during which time he executed two panels of the vaulting above the altar representing Christ in the glory as Judge, and prophets to the right. Nothing more was done till 1493-1494, when the work was continued and completed by *Luca Signorelli*, whose mural paintings are the chief attraction here. The first painting on the left wall shows the overthrow of Sodom, who is represented in the foreground, preaching; tradition has it that the two devout figures, in the corner to the left, are portraits of *Signorelli* and *Fra Angelico*. The spaces on the entrance-wall have been skilfully covered with representations of the symbols of the Sun and Moon and the Death of the Two Witnesses (to the right, as we look towards the entrance), and the Destruction of the World by fire (to the left). — Next in order are the Resurrection of the Dead and the Punishment of the Condemned, then, on the wall of the altar, (right) the Condemned descending into Hell, and (left) the Blessed ascending into Heaven, and lastly adjoining the picture of Antichrist, Paradise. Below these are medallions of poets of the future life, surrounded with scenes from their works. On the ceiling: Apostles, angels with the instruments of the Passion, patriarchs and church fathers, virgins and martyrs. These paintings are the most important work produced during the 15th century. In the mastery of form, in the boldness of motion and of foreshortening, and in the acquaintance with the nude, *Signorelli* is by no means unworthy comparison with Michael Angelo, who, according to Vasari, borrowed

several motives from these works for his Last Judgment in the Sixtine Chapel. — *Sigismondi* also painted the fine Entombment in the niche behind the Pieta of *Scalco* (1577).

Opposite, to the *Left* Frontispiece, is the *CAPPILLA DEL CORPORALE*, where, behind the principal altar, is a canopy of marble mosaic, containing a silver reliquary, in which is preserved the blood-stained shroud-cloth (corporate) connected with the Miracle of Bolsena (p. 101). The reliquary, executed by *Ugolino di Maestro Piero* of Siena in 1337, and resembling in form the façade of the cathedral, is about 4½ ft. broad, 2 ft. high, and 640 lbs. in weight. The Passion and the 'Miracle' are represented on it in transparent enamel; it is exhibited to the public on Corpus Christi and on Easter Day, but at other times it is shown only by special permission. Modernized frescoes of the 'Miracle of Bolsena' by *Ugolino di Piero Piero* (1357-64). Over the altar on the left, a Madonna by *Lippo Memmi*.

Opposite the cathedral is the *Opera del Duomo* (Pl. 2; C, 3). Adjoining the cathedral on the right, behind, are the *Palazzo Veseciole* (1264) and, more in front, the —

PALAZZO DEI PAPI or *Palazzo Soliano* (Pl. C, D, 3), founded by Pope Boniface VIII. in 1296, and recently restored. The large hall on the first floor contains the *Museo Civico*, the medieval works of art in which belong to the *Opera del Duomo*. Director, *I. C. Franci*. Tickets (1 fr.) are obtained at Armoni's photograph-shop (p. 89). A catalogue is being prepared.

The top row of pictures consists of twelve paintings (taken from the Duomo) by *Memmi*, the brothers *Stecher*, and other painters of the 16-17th cent.; the drawings between are by artists of the Bolognese school, brought from the Palazzo Quirinale. Among them *Luca Signorilli*, Portraits of the artist and the chamberlain Nic. Fracastelli (fresco-sketch executed before 1800); Mary Magdalen (1804), *Ass. di Viterbo*, Madonna; *Simone Martini*, Madonna and saints (1424) Madonna and the Bishop of Savona. The statues of Apostles, by *Masso*, *Scalco*, *Totti*, *Storace* da Bologna, etc., were formerly in the cathedral — In the middle an Annunciation, two statues by *Masso*, and two wooden statues by *Friedrich von Preburg* (14th cent.); fine statue of the Madonna by *Nino Pisano* (the paint still adheres in places); a precious reliquary by *Ugolino di Maestro Piero* and *Piero di Massa*, antependia. — The *Erasmian Collection* contains weapons, bronzes, pottery, etc., from the Etruscan Necropolis (p. 172). Plan of the excavations. Reconstruction of an early Etruscan grave. Architectural ornaments in terracotta, from a Roman temple, the remains of which were discovered in a new street near the *Giardino Pubblico* — On the farther wall *Cos. Francini* Relief of *Totila's* siege of Orvieto (1065). Below are two fine designs on parchment for the façade of the cathedral (one, probably the older, showing only a single gable) and a sketch (also on parchment) for a pulpit, which was never completed.

In the street behind the *Pal. dei Papi* is the *Palazzo Marsciano* ('*Uffizi Finanziari*'), by *Ant. da Sangallo the Younger*.

The Corso Cavour leads to the W. to the Piazza Vittorio Emanuele, with the *Palazzo del Comune* (Pl. 4, B, 3), dating from the 12th cent. and restored in the 14th, the still unfinished façade of which was renewed by *Scalco* in 1585. The first floor contains a fresco by *Ant. da Viterbo* (St. Sebastian). — Adjacent is the church of *Santi Andrea* (Pl. 5, B, 3), with a twelve-sided tower of the 11th cent. and a restored façade. In the interior are paintings of the 14th and 15th cent., and a late-Gothic pulpit, the ornamentation on the back of which dates from the 9th century. — Farther to the N.W., by the Via

Malabranca, is *San Giovenale* (Pl. 5; A, B, 3), an 11th cent. church, with early-Gothic choir, altar of 1170, and fragments of old frescoes by Guilelmus de Graa (1312 and 1399; entrance in the Via Volturni, to the left).

We now return and proceed from the Corso Cavour to the left to the Piazza del Popolo, with the *Pal. del Popolo* or *del Capitano*, the rear of which is interesting (12th cent.). — Passing through the archway and then taking the Via degli Orti to the right and the Vicolo degli Orti to the left, we reach *San Domenico* (Pl. 6; C, 2). In the S. transept of this church is the monument of Cardinal de Braye (d. 1282), by *Arnolfo di Cambio*; the crypt was built by *Sammicheli* (1518-23).

The *Fortress*, constructed by Cardinal Albornoz in 1384, and situated at the N.E. entrance of the town (p. 88), has been converted into a garden (fine views) with an amphitheatre for public performances. — The custodian keeps the key of the famous adjacent well, *Il Pozzo di San Patrisio*, which was begun by *Ant. da Sangallo the Younger* in 1527, and completed by *Mosca* in 1540. It is partly hewn in the tufa rock, partly built of masonry, and is 200 ft. deep and 42 ft. wide. The bottom touches the tertiary marl below the tufa rock. Two separate spiral staircases wind round the shaft; the water-carrying asses descended by one and ascended by the other (fee 60 c.; 248 steps).

The winding road between the town and the (2½ M.) station passes about 200 paces to the right of an extensive ETRUSCAN NECROPOLIS, discovered by Riccardo Mancini in 1874 (comp. Pl. A, B, 2). The tombs date chiefly from the 5th cent. B. C., and some of them were found intact. Their façades, as elsewhere, are constructed of three large stones, two of which, placed nearly upright, are roofed by the third. Adjoining the entrance is inscribed the name of the deceased in the ancient Etruscan character. The inner chamber is square in form, and covered with the primitive kind of vaulting in which the stones (tufa) are laid horizontally, each overlapping the one below it. The tombs contained many painted vases, of Greek, and particularly of Corinthian and Attic workmanship, and articles of native manufacture, the most important being black terracotta vases with stamped patterns (now in the Museo Civico, p. 91).

Signor Mancini (Corso Cavour, No. 85) and Count Eug. Faiss (opposite the cathedral) also possess collections of Etruscan antiquities, to which visitors are politely admitted. An iron gate, with an inscription (near the Fontana delle Conce, Pl. A, 2), leads to the *Fam. Mancini* (belonging to Sig. Mancini), one of which retains its original contents.

About 1½ M. beyond the Porta Romana (Pl. B, 5) is *L'Abbadia*, the ruined abbey-church of San Severo, dating from the 11th century.

FROM ORVIETO TO BOLSENA, 12 M. (one-horse carr. in about 3 hrs., 10-12 fr.; bargain beforehand). — Quitting Orvieto by the Porta Romana (Pl. B, 5), the road at first descends into the valley and soon re-ascends with many windings (fine retrospect of the town)

through a well-cultivated district and up the tame declivity of an extinct volcano (see below). Finally we descend abruptly by the margin of the so-called crater to —

Boisena (1140 ft., *Stella*, in the main street), a little town with 3288 inhab., picturesquely situated on the N.E. bank of the lake, a little below the site of *Volturni Novæ*, which arose after the destruction of the older *Volturni* (p. 89). The present town contains inscriptions, columns, and sculptures of this Roman municipium. The *Museo Comunale*, in the Piazza, contains a Roman sarcophagus with the triumph of Bacchus. The ruins are reached in a few minutes by an antique causeway of basalt. Beautiful view of the lake.

The church of *Santa Cristina* was founded in the 11th cent., and embellished with its fine Renaissance façade by Cardinal Oliv. Medici, afterwards Pope Leo X., about 1500. Above the doors are two terracotta reliefs by *Andrea della Robbia*.

Internum. To the right of the choir is a bust of Santa Lucia, of the school of the *Robbia*, beneath a wooden crucifix of the 14th century. A portal in the left aisle dates from the 11th cent.; the relief represents the Five Wise Virgins and the Adoration of the Magi. Beneath the church, in the space before the entrance to the *Catacombs*, stands a terracotta altar, of the school of the *Robbia*; to the right, above the stone with which St. Christina, a maiden of Boisena, was drowned in 773, is the *Altar dei Miracoli* (see below), beneath a canopy of the 8th century. Adjacent is the *Fond. of the Saint*, below a modern canopy. Several good frescoes have recently been discovered here under the whitewash. — The curé also keeps the key of a small *Museum*, with inscriptions and glass vessels from the catacombs, Longobard antiquities, and a terracotta statue of St. Christina, dating from the beginning of the 10th century.

The *Miracle of Boisena*, the subject of a celebrated fresco by Raphael in the Vatican (p. 340), occurred in 1263. A Bohemian priest, who was somewhat sceptical as to the doctrine of transubstantiation, was convinced of its truth by the miraculous appearance of drops of blood on the host which he had just consecrated. In commemoration of this Pope Urban IV. instituted the festival of Corpus Domini in 1264 and ordered the erection of the superb cathedral of Orvieto (p. 99).

The remains of an ancient Amphitheatre are preserved about $1\frac{1}{2}$ M. from the town.

The Lake of Boisena, the ancient *Lacus Fucinus*, 1000 ft. above the sea-level, a circular sheet of water, 71 sq. M. in area, 27 M. in circumference, and 480 ft. deep, is the central point of a volcanic district not inferior in size to that of Mt. Etna. More than 500 square miles of country, stretching from Orvieto almost to the sea, are covered with its eruptive tufa. Numerous streams of lava flowed down to the W. and N.W., but it is doubtful whether a true cone was ever formed. The lake-bed, instead of being a crater, is more probably the result of the subsidence of the earth's crust into the subterranean hollow, whence the volcanic matter was ejected. Lateral craters are found near Valentano, in the W., near Montebassone and the island of Martana (see below), in the S.E., and at other points. The lake abounds in fish (its eels are mentioned by Dante, *Purg. xiv. 24*), but the banks, especially on the W. side, are bleak and deserted, owing to the malaria, which is not easily dispersed by the wind from the confined basin of the lake. It finds an outlet to the sea in the *Marta* (p. 93). The monotony of the surface is relieved by the two picturesque islands of *Montina* (1154 ft.) and *Martana* (1208 ft.). On the latter, which consists of a horseshoe-shaped crater, *Amalasuntha*, Queen of the Goths, the only daughter of Theodoric the Great, was imprisoned in 533.

and afterwards strangled whilst bathing, by order of her cousin Theodatus, whom she had elevated to the rank of co-regent. The church in the island of Biondina was erected by the Farnese family and embellished by the Carracci. It contains the relics of St. Christina.

From Bolsena the road leads towards the S., at first on the bank of the lake, then partly by a steep ascent, to (7½ M.) *Montefiascone* (p. 87; diligence in 2½ hrs.; fare 3 fr.).

The RAILWAY FROM ORVITO TO ORTE AND ROME reaches the wooded valley of the Tiber, the broad, stony bed of which bears traces of numerous inundations, and forms at this point the demarcation between the volcanic districts of Etruria and the Apennines. Two tunnels. To the left lies *Baschi*. 126 M. *Castiglione in Teverina*. The river is crossed. 131 M. *Alviano*.

137 M. *Attigliano (Buffet)*, the junction for Viterbo, p. 97.

140½ M. *Bassano in Teverina*, on a hill (1000 ft.) to the right (1½ M.).

The small marshy *Lake of Bassano*, formerly *Lacus Vadimonis*, is famous in ancient history as the scene of the great victories of the Romans over the Etruscans, B.C. 309 and 283. Pliny the Younger (Ep. viii. 20) has described the lake with its 'floating islands'. — About 3 M. farther to the N.W. is *Bomarse* (808 ft.), the ancient *Pekmarium*, picturesquely situated on a precipitous rock, where numerous tombs of the Etruscan and Roman period have been found.

The train passes through two tunnels, and reaches —

144 M. *Orte* (**Rail. Restaurant*), where the railway from Foligno (Perugia and Ancona; R. 10) unites with the main line. The high-lying town (440 ft.), about 2 M. to the N., is the ancient *Horta*, but presents no object of interest beyond its situation. Pop. 4397.

The train descends the valley of the Tiber on the right bank. The lofty and indented ridge of *Mount Soracte* (p. 96) becomes visible, at first to the left, then to the right. To the left, on the other side of the river, lie *San Vito* and *Otricoli*, the latter a small place 6 M. distant from Orte, near the site of the ancient *Otriculum*, where numerous antiquities (p. 352, etc.) have been excavated. — 149 M. *Gallese*. Farther on, high above the left bank, is the small town of *Magliano Sabino* (see below).

152½ M. *Civita Castellana Station*, situated near *Borghetto*, with a ruined castle on the height to the right. To the left is the *Ponte Felice* (see below).

The following is an attractive day's excursion. From the station (carr. to Calvi in 3 hrs.; diligence to Magliano Sabino in 1 hr.; fare 1 fr.), we proceed to the N.E. by the *Otricoli* (see above) and *Narni* (p. 86) road. This crosses the Tiber by the handsome *Ponte Felice*, formerly of great importance for the traffic between Rome and the N.E. provinces; it was built by Augustus for the *Via Flaminia* (p. 117) and reconstructed by Sixtus V. in 1589. After 2 M. a road, diverging to the right, leads to (3 M.) *Magliano Sabino* (728 ft.) and (10 M.) *Calvi* (1815 ft.). From Calvi we ascend (with guide) to (2 hrs.) the top of *Monte San Pancrazio* (370 ft.; chapel), a fine point of view. Thence we descend via the convent of *Le Specie* (rfrmt.) and *Buchi* to (1½ hrs.) *Narni* (p. 86). The finest point of the descent is the ravine of *Vasciano*. We reach the above-mentioned road about 2½ M. from Narni; it enters the town below the castle.

The station of Civitā Castellana lies about 5 M. from the town (carriages at the station; omnibus in $1\frac{1}{2}$ hr., fare 1 fr.). The road ascends over tufa rocks and crosses a lava-stream which once flowed from the Lago di Vico (p. 101). A bridge, erected by Clement XI. in 1707 (restored in 1862), carries the road into the town across a ravine, 130 ft. in depth.

Civitā Castellana (475 ft.; *Alt. Natalucci*, good cuisine), with 5132 inhab., is picturesquely situated at the W. end of an isolated tufa plateau, bounded on either side by affluents of the Treia. On this plateau once stood *Falerii*, the town of the *Falisci*, an important centre of S. Etruria, which was captured by Camillus in B.C. 396 and destroyed by the Romans in B.C. 241. The inhabitants were removed to the Roman *Falerium Novum* (see below), a much less strong fortification, but they returned in the 8th or 9th century to the site of the original town. The Cathedral of *Santa Maria* possesses a handsome portico erected (according to the inscription) in 1210, by *Laurentius Romanus*, his son *Jacobus*, and his grandson *Cosmas*; the bust in mosaic of Christ over the door to the right is by *Jacobus*; the interior was modernised in 1736-40. A flight of steps descends on the left of the high-altar to a crypt supported by columns (partly ancient), and containing two Renaissance altars presented by *Roderigo Borgia*; the choir-screens, with elaborate coxmatasque ornamentation, are now built into the wall in an adjoining chamber. — The Citadel, erected by *Alexander VI.* in 1494-1500 from a design by *Ant. da Sangallo the Elder*, was enlarged by *Julius II.* and *Leo X.*, in the court is a marble relief of Christ, which, according to tradition, is a likeness of *Caesar Borgia*. In the deep ravine by which the town is enclosed and at other points in the vicinity a few fragments of ancient walls and numerous Etruscan tombs hewn in the rock are preserved. — At the highest point of the old town district, in the Contrada *Lo Scasato*, to the E., are the remains of an Etruscan Temple discovered in 1868, while others were unearthed in the Contrada *Celle*, in the valley to the N.E., and (1901) in the valley of the Fosso Maggiore, to the N.W., the last-mentioned perhaps belonged to a Temple of *Mercury*.

FROM CIVITÀ CASTELLANA TO THE RUINS OF *FALERII* ('*Falisci*'), $2\frac{1}{2}$ M. to the N.W. From the under-mentioned road to *Nepti* a carriage-road diverges after $\frac{1}{2}$ M. to the left and crosses first the valley of the Fosso Maggiore, then, about $\frac{1}{2}$ M. before reaching *Falerii*, that of the *Illo del Purgatorio*, with its numerous rock-tombs. The town of *Falerium Novum* or *Colonia Iunonia*, founded by the Romans about 240 B.C. (see above), was nearly in the form of a triangle; the well-preserved walls, $1\frac{1}{2}$ M. in circumference, are protected by square towers and pierced by gates, of which the *Porta di Giove*, on the W., and the *Porta del Sole*, on the S.E., are worthy of a visit. Near the latter are the theatre (of Roman construction), the *placina*, and what is regarded as the forum, at the back of the theatre. At the *Porta di Giove*, within the walls, is the interesting ruin of the abbey-church of *Santa Maria*, of the 12th century. In the nave, antique columns.

FROM CIVITÀ CASTELLANA TO *SONAGRO*: there and back about 7 hrs. A good road (one-horse carriage, 6-8 fr., in about 2 hrs.; diligence in 3 hrs.

1 hr., on foot $3\frac{1}{2}$ hrs.) leads to *Sant' Oreste* (1253 ft., modest tuffaceous and night-quarters near the gates), a village about 1 hr. from the summit.

Boracis mentioned by Horace (Carm. 1. 9. *Patet ut alta sit ante amplexum Boracis*) and Virgil (*Aen.* 12. 775. *Boracis domus amplexu ceteris de ceteris Apollis*), is a limestone ridge, a fragment of a former chain of the Apennines (continued towards the E. by *Monte Cetona*, p. 145) which was overwhelmed in the volcanic upheaval of this region. It descends precipitously on both sides extending $3\frac{1}{2}$ M. from N.W. to S.E., and culminating in several peaks. On the slope which gradually descends towards the S.E. is situated *Sant' Oreste*. Leaving the village to the right, the stony path ascends gradually to the left and in $\frac{1}{2}$ hr. reaches the monastery of *San Salvatore* (1265 ft.). Bread and wine may be had) founded in 1110 by *Castor*, son of *Charles Martel* and brother of *Papa*. The centre and highest summit (1265 ft.), with the church of *San Salvatore* and a small disused monastery, may be reached in 5-6 minutes more. In ancient times a temple of *Apollis* occupied this site. The "View" notwithstanding in every direction, embracing several snow-capped peaks of the Central Apennines, the *Sabina*, *Volturnus*, and *Alban Mts.*, the sea (to the W.), the *Lago di Bracciano*, and the *Umbrian Forest* (to the E.). A steep path descends from *Sant' Oreste* to S. 1 hr. 15 min. (see below), about $1\frac{1}{2}$ M. short of which we are hurried across the *Tiber* (10 c.). *Stimigliano* may also be reached by an open mule drawn car (*carralla*) on rails, which occasionally runs from the foot of a disused cable railway connected with an old limestone-quarry about $1\frac{1}{2}$ M. from *Sant' Oreste*. This may be chartered at any time for 5 fr. enquiries should be made at *Sant' Oreste* or from the station-master at *Stimigliano*.

The (Civil) *Castellana* road next leads to the S.W. to (7 $\frac{1}{2}$ M.) *Sep* (distance in $1\frac{1}{2}$ hr., see 1. 9.), finally crossing the *Rio Fucine* by means of a handsome viaduct. A more direct footpath ($\frac{1}{2}$ M.) crosses the *Formello* *Isola* to the S., and then follows the heights. About $2\frac{1}{2}$ M. from *Civil Castellana* this latter route passes the village of *Castel Sant' Elia*. The ancient church of *Sant' Elia* built about 1000 on the site of a temple of *Diana* and restored by *Pius IX.*, contains rude frescoes of the 11th cent. (Bays kept by the monks and by the *Fratelli del Santuario* above the church). The footpath joins the road at the entrance to the town.

Sep, *Platano Brunello* and *Orto dei Santi* (see 1. 9.) with 1113 inhabitants, the *Erasmian* *Sep* or *Nepes* afterwards *Papa* is now an episcopal seat and surrounded by medieval walls and towers. The elegant *Rossini* *Palazzo* *Montepulciano* in the market place, contains a few Roman sculptures and inscriptions. The cathedral dates from the 11th cent. but its crypt is older. The picturesque ruined *Castello*, to the E. of the town occupies the site of an ancient castle rebuilt by *Ant. da Sangallo* the Elder in 1493 for *Pope Alexander VI.* and restored by *Paul III.* (*Lucius Borja*) resided here in 1555 after the death of her first husband. Below the castle, near the *Porta Romana* are some squared blocks of tufa belonging to *Stimigliano* Walls. — About 6 M. further to the W. (see *Stim.* p. 142).

As the train proceeds, *Civil Castellana* (p. 95) becomes visible for a short time to the right. The train crosses to the left bank of the *Tiber* — 161 M. *Stimigliano* (*Locanda* and *Osteria della Porta*, at the station) and (165 M.) *Poggio Mirteto* are both situated in the mountainous district of the *Sabina*, where olive-trees abound. From *Stimigliano* to the top of *Boracis*, see above — 172 $\frac{1}{2}$ M. *Pura Sabina*.

A carriage road ascends to the N.E. through the valley of the *Formello* *Corsini* to (10 M.) *Pura* to *Sabina* (1570 ft.). After 3 M. we are to the right, beyond the stream a bit (about 145 ft.), with the ruins of the ancient *Sabine* town of *Cura*, where *Veneranda* *Pomponius* was born. From *Pura* in *Sabina* a footpath leads to the N.W. through wood to (1 M.) *Purys*, a former *Benedictine* monastery founded in 601, in the pretty valley of the *Rio*, the ancient *Perforus* or *Puroris*.

The line follows the left bank of the Tiber to (180 M.) *Monterotondo*. The village (*Trattoria Vitt. Emanuele*, in the Piazza), with 4552 inhab., to the left, 2 M. higher, has an old castle of the Orsini, belonging later to the Piombino family, and now municipal property. It was stormed by Garibaldi on 26th Oct., 1867. About 1 M. to the S.E. is *Montana* (p. 390), where he was defeated on 3rd Nov. by the Papal and French troops.

From *Monterotondo* to *Rome*, a journey of $\frac{3}{4}$ hr., the line follows the direction of the ancient *Via Salaria*. Beyond *Castel Giubileo* (p. 388) we catch our first glimpse of the dome of St. Peter's at *Rome*, which vanishes again as we approach the *Ania* (p. 388). To the left are the Sabine and Alban mountains. — 187 M. *Sette Bagni* (p. 388). — 194½ M. *Portonaccio*. The train describes a wide circuit round the city, and just beyond the *Porta Maggiore* passes the so-called temple of *Minerva Medica* (p. 185; left).

197½ M. *Rome*, see p. 181.

13. From Attigliano to Viterbo and Rome.

This line is of little importance except for visitors to *Viterbo*. There are no express trains and no through-trains (comp. p. 93). — From *ATTIGLIANO* to *VITERBO*, 26 M., railway (*Rete Adriatica*) in 1½-1¾ hr. (fares 4 fr. 85, 3 fr. 25, 2 fr. 10 c.). — From *VITERBO* to *ROME*, 54 M., railway (*Rete Mediterranea*) in 2½-3¼ hrs. (fares 10 fr. 10, 7 fr. 10, 4 fr. 55 c.).

Attigliano, see p. 94. — The train crosses the *Tiber* and passes (3½ M.) *Sipicciolo* and (10½ M.) *Grotte Santo Stefano*.

16½ M. *Montefiascone* (1925 ft.). The station, at which omnibuses and carriages meet the trains, lies on the *Viterbo* road, nearly 2 M. from the town (2076 ft.). About 100 paces before we reach the town-gate, on the road to *Bagnorea* (see p. 98), we pass *San Flaviano*, a curious church of 1030, restored by Urban IV. in 1262 in the Gothic style (but with round arches). The interesting façade is turned towards the valley. Frescoes of the 14th cent. adorn the interior. The lower church, the quaint capitals in which should be noticed, contains a tomb in front of the high-altar, with the inscription —

EST. EST. EST. PR(OPTER) VIN(UM) — EST RIV
IO(NUM) DE VO DO(MINUS) — MEVS MORTVS EST.

The inscription is said to have been composed by a valet who preceded his master when travelling in order to test the wines at the various stopping places. On the doors of the hostalries where the best wine was to be had he inscribed the word 'Est', and when he reached the inn at *Montefiascone* ('bottle mountain') he wrote the 'Est' three times on the door, with the result that his master never got any farther. That the inscription refers to a member of the *Fuggi* family, as is usually asserted, is unlikely. The best muscatel of the district is still known as *Est Est* (½ fr. per 'Sacchetto').

The little town (*Aquila Nera*, at the gate, plain; *Italia*, Piazza *Vittorio Emanuele*), with 3428 inhab., situated on a lateral crater of the lake of *Bolsena* (p. 93), probably occupies the site of the *Fanum Voltumnæ*, the most sacred shrine of the Etruscans. The uncompleted Cathedral of *Santa Margherita*, with an octagonal dome,

was one of the earliest works of Bramante (1519). The upper part of the town, crowned by the imposing ruins of a castle restored by Leo X., commands a magnificent view.

A road (diligence $1\frac{1}{4}$ fr.) and a footpath lead to the W. from Montefiascone to (3 M.) *Marta* (Osteria del Comune, with good 'chowder'), a decayed little town on the S. bank of the lake with an old octagonal tower of the Farnese, at the point where the *Marta* leaves from it. On a promontory in the lake, $1\frac{1}{4}$ M. farther on, lies *Capodimonte*, and 3 M. farther, to the N. W., at the foot of *Monte S. Angelo* (1542 ft.), are the ruins of the ancient *Vulturnum*, where a number of tombs have recently been brought to light. The return from Marta may be made by boat (3 fr., bargaining necessary), with a visit to Martana (p. 101). — *Tuscanella* (p. 101) lies about 6 M. to the S. of Marta.

To (7 $\frac{1}{2}$ M.) *Bolsena*, see p. 98. — The direct road to Orvieto, which diverges at San Flaviano (p. 97), does not touch Bolsena, but remains on the height to the E. A branch to the right leads to (3 M.) *Sagnano* (1600 ft., the ancient *Solunum Regis*), picturesquely situated on a hill surrounded by ravines, and interesting to geologists.

The railway to Viterbo runs to the S. through a plain between the volcanic districts defined by the lakes of Bolsena and Vico. To the right, beyond a tunnel, lies part of the ancient *Via Cassia* (p. 384).

25 M. *Viterbo*. — *Stations*. *Stazione Porta Fiorentina* (Pl. B, 1; small buffet), to the N. of the town, outside the *Porta Fiorentina*. *Stazione Porta Romana* (Pl. C, 5), for the line to Rome, to the S. E., outside the *Porta Romana*. There is no passenger-service between the stations. — Can to the town, 1-2 pers. 70 c., each additional pers. 30 c., trunk 20 c., to Montefiascone (p. 97) 3-4 fr. (2-2 $\frac{1}{2}$ hrs.).

Hotels. *Quattrociocchi* (Pl. a, B, 1), at the *Porta Fiorentina*, rooms only, R. from $1\frac{1}{2}$ fr.; *Arenzo* (Pl. b, B, 3), *Piazza Vittorio Emanuele*, R. $1\frac{1}{2}$ fr., with trattoria, good; *Schianchi* (Pl. c, B, 3), near the *Piazza*, with café and trattoria.

Post Office, *Piazza del Plebiscito* (Pl. B, 3). — *Photographs* at *Felici's*, *Vicolo della Ficonaccia* (Pl. C, 2).

Viterbo (1073 ft.), an episcopal residence with 17,344 inhab., surrounded by ancient Longobard walls and towers, is situated in a plain on the N. W. side of the Ciminius Forest, on or near the site of the ancient *Sorvina*. It was the central point of the extensive grant called the 'patrimony of St. Peter', made by the Countess Matilda of Tuscany (d. 1115) to the papal see, and is frequently mentioned as a residence of the popes and as the scene of the papal elections in the 13th century. Viterbo, called by old Italian authors the 'city of handsome fountains and beautiful women', still presents an abundance of fine architectural details and picturesque points.

The centre of the town is occupied by the *Piazza del Plebiscito* (Pl. B, 3), in which rises the **Palazzo Municipale*, begun in 1284, with a beautiful portico of the 15th cent. and frescoed rooms of the end of the 17th century. The court (affording a fine view to the W.) contains an elegant fountain and six large Etruscan sarcophagus-lids with recumbent figures. To the right is the entrance to the *Museo Municipale* (key on the 1st floor; fee 1-1 fr.).

Room 1 Lids of Etruscan sarcophagi with recumbent figures, some bearing inscriptions, Etruscan, Roman, and mediæval antiquities; also (at the window) the 'Decree of Desiderius, King of the Longobards', and the *Tabula Cibalensis*, forgeries of the notorious Dominican *Antony of Viterbo* at Rome 1502. On the wall to the right, *Madonna* by *Lorenzo de' Fiorino*.



— Room II. *Pieta from the church of San Francesco (p. 100), painted by *Sebastiano del Piombo* under the influence of Michael Angelo; an ancient but ruined replica of the Scourging of Christ (p. 877), by the same; a Baptism of Christ (school-piece); and an Adoration of the Holy Child, by *Ant. de Fiesole*. By the exit, Portrait-bust in terracotta, probably by *Andrea della Robbia* (1502). — Room III. Aquamanile of the 12th cent.; mediæval sculptures, including a sphinx from Santa Maria in Grado (1286).

Passing through the archway to the right of the Palazzo Municipale, we reach in a few yards the elegant portal of the church of *Santa Maria della Salute* (close of the 13th cent., Pl. B, 3). — In the N.E. angle of the Piazza del Plebiscito, at the beginning of the Via dell'Indipendenza, is the small church of *Sant' Angelo* (Pl. B, 3), on the façade of which is a Roman sarcophagus, with the Hunt of Meleager; above is a 16th cent. inscription in honour of the beautiful Galiana, on whose account, as on that of Helen of old, a war is said to have raged in 1136 between noble families of Rome and Viterbo, in which the latter were victorious. Opposite, at the other corner of the Via dell'Indipendenza, are a lion and a palm-tree, the cognizance of Viterbo, corresponding to a similar group at the other end of the Piazza, at the corner of the Via San Lorenzo.

The VIA SAN LORENZO leads to the cathedral; No. 7 in the first side-street to the right is the interesting Palazzo Chigi (16th cent.). Halfway to the cathedral we cross the little Piazza della Morte (Pl. B, 4), with a mediæval fountain, whence a large bridge leads to the PIAZZA SAN LORENZO (Pl. A, 4), in front of the cathedral. This is the spot where in July, 1155, Pope Hadrian IV. (Nicholas Break-spears, an Englishman) compelled the Emp. Frederick I., as his vassal, to hold his stirrup. To the left of the cathedral is a palace of the 13th century. To the right, approached by a flight of steps, is the Palazzo Vescovile (1286, at present under restoration), in which, by order of Charles of Anjou, the Conclave elected Gregory X. pope in 1271, John XXI. in 1276, and Martin IV. in 1281.

The CATHEDRAL OF SAN LORENZO is a handsome Romanesque basilica of the 12th cent. (?), with a Gothic campanile, restored in the 16th century.

INTERIOR. The fantastic capitals of the columns should be noticed. The 2nd chapel on the right contains the tomb of Princess Isabella Wyse-Bonaparte (1804-71). At the end of the right aisle is the modern tomb of Pope John XXI.; the ancient tomb of 1277 is opposite, in the left aisle, behind the door. In the choir-chapel to the left is a fresco, Christ with four saints (1472), by *Giov. Scacco*, of Verona. — It was not at the high-altar of this church, but probably at that of San Silvestro (now the Chiesa del Gesù, Pl. B, 4), that in 1271, Guy de Montfort, son of Simon de Montfort, Earl of Leicester, assassinated Henry, nephew of Henry III. and son of Richard, Earl of Cornwall, King of the Germans, in order thereby to avenge the death of his father, who had fallen at the battle of Evesham in 1265 when fighting against Henry III. Dante mentions this deed and places the assassin in the seventh region of hell (*Inf.* xii. 120).

We return to the Piazza della Morte and enter (to the right) the Via Principe Umberto (Pl. B, C, 4), which skirts the N. side of a quarter containing many mediæval houses (especially in the Piazza San Pellegrino, at the E. end of the Vicolo San Pellegrino). From

the Via Principe Umberto the Via Annio leads to the left to the **PIAZZA FONTANA GRANDE** (Pl. C, 4), in which rises the largest fountain in the town, in the Gothic style, completed in 1279, and restored in 1424. This square is connected with the Piazza del Plebiscito (p. 98) by the Via Cavour, with the Porta Romana (Pl. C, 4) by the Via Garibaldi, and with the Porta della Verità to the N.E. by side-streets. At the Porta Romana is the church of *San Sisto*, founded in the 11th cent.; its apse is built into the town-wall.

Outside the Porta della Verità (Pl. C, 3) lies the former church of *Santa Maria della Verità*, now used as a public hall (key in the Scuola Tecnica, fine monastery-court). The Cappella Mazzatosta, to the right, is adorned with *Frescoes by *Lorenzo da Viterbo* (completed in 1469), representing the Marriage of the Virgin, the Annunciation, the Nativity, the Ascension, saints, and prophets, with numerous portraits. The majolica floor-tiles date from the 15th century. — In the Strada di Circonvallazione, 200 paces to the N. of the Porta della Verità, to the left, beside the town-wall, are some scanty remains of a palace built by Frederick II.

Re-entering the Porta della Verità, we follow the Vicolo della Porta to the right to the little Romanesque church of *San Giovanni in Zoccoli* (11th cent., Pl. C, 3; restored in 1881). Thence the Via Mazzini and the Vicolo della Ficunaccia, ascending to the right, bring us to the church of *Santa Rosa* (Pl. C, 2), a railed side-chapel (ring for admission) in which contains the blackened mummy of that saint, who urged the people to rise against the Emp. Frederick II. Annually since 1664, on the eve of 3rd Sept., the image of the saint has been carried from the Porta Romana to the church of St. Rosa on a triumphal tower (*Macchina di Santa Rosa*) 60 ft. in height. — We now descend to the Corso Vittorio Emanuele (Pl. B, C, 2, 3), which is joined on the N.W. by the Via Principessa Margarita.

In the **PIAZZA DELLA ROCCA** (Pl. B, 2) stands a fountain of 1566, ascribed to *Vignola*, adjacent to which is the Gothic church of *San Francesco*. In the left transept of the latter is the tomb of Pope Clement IV (d. 1268), to the right, and in the right transept that of Hadrian V. (d. 1276), to the left; to the left of the high-altar is the tomb of Fra Marco da Viterbo (later than 1536), and in the left transept that of Cardinal Gerardo Landriani (1445). — Outside the Porta Fiorentina lies the *Giardino Pubblico* (Pl. A, B, 1, 2).

Excursions. About 1¼ M. to the N.E. of the Porta Fiorentina (comp. Pl. C, 1; diligence in 35 min.; one-horse cab 1 fr.) is the handsome pilgrimage-church of *Santa Maria della Quercia* (1470-1525). The reliefs in the lunettes of the entrance are by Andrea della Robbia (1503); the wooden ceiling is by *Aut. de Sangallo the Younger* (1519-25); the ciborium is by *Andrea Bregno* (1480). One of the two courts of the adjoining Dominican monastery has a Renaissance loggia supported on Gothic foundations; both courts have pretty fountains. — About 1¼ M. farther on is the small town of *Agosta* (diligence in 1 hr.; cab there and back, incl. stay at La Quercia, 3 fr.). The Via di Mezzo leads to the right from the principal piazza to the charming *Villa Lante*, built in the 16-18th cent., the summer-residence of the ducal family of that name (visitors admitted; fee ½ fr.).

About $3\frac{1}{2}$ M. to the N. of Viterbo (camp. Pl. C. 1) and 1 M. to the E. of the road to Ostia *d'Asinio*, are the ruins of *Vesuvius*, the *Strusian Forum*, birth-place of the Emperor Otho. In 1172 it was destroyed by the inhabitants of Viterbo on account of its heretical tendencies, for the *Parentino* represented the saviour on the cross with open eyes, instead of closed, as was thought more orthodox. Among the extensive medieval, Roman, and Etruscan remains, whose recent excavations have been richly rewarded, a *Fluvio* of peculiar and primitive construction, with later additions, deserves notice. The route to Viterbo through the romantic valley of the *Agro Rome* is recommended.

About 2 M. to the W. of Viterbo is *A. Sulfurea*, a warm sulphurous spring, mentioned by Dante (*Inf. xiv. 70*) and still used for baths. It is a small pool lying in a hollow of a travertine hill, and is in a constant state of effervescence owing to the action of the gas escaping to the surface; like many other springs in this region, it is of volcanic origin. The *Stabilimento Bagno* lies 1 M. to the S. W. The attractive road thither ($\frac{1}{2}$ hr.) leads straight on from the *Porto Paul* (Pl. A. 4) and commands a fine view of Viterbo. The route to the left from the *Porto Paul* across the small bridge leads direct to *Castel d'Asno* (see below).

Castel d'Asno, 3 M. to the W. of Viterbo may be visited on horseback or on foot. About $\frac{1}{2}$ M. to the W. of the *Bulltramo* we turn to the left, ignore two ravines, turn again ($1\frac{1}{2}$ M. to the S.) to the right, and in 2 M. more reach the valley, which contains a succession of *Strusian* *Fontes*, hewn in the rock. The fronts of these are architecturally designed, and bear some resemblance to the rock tombs of Egypt, numerous inscriptions. On the opposite hill are the picturesque ruins of a medieval castle and the remains of an ancient village, probably the *Castellum Asno* of Cicero.

From *Viterbo* to *Tuscanella*, $18\frac{1}{2}$ M., diligences ($1\frac{1}{2}$ fr.) daily, in 3 hrs., starting at 8 AM. from the *Alb. dell' Angelo* — *Tuscanella* (514 ft., *Albergo-Ristorante e Caffè Port.*, new), the ancient *Fundus*, is a medieval looking town of 4000 inhab., with walls and towers. Outside the Viterbo gate is a picturesque *caveau*, with several *Strusian* tombs. Amidst the ruins of the ancient *Asno*, on the height to the right is the Romanesque church of *San Pietro* ($\frac{1}{2}$ M. from the town), dating from the 9th cent., and restored in 1000, though part of the *facade* is later. In the interior are a tabernacle of 1000, choir screens from the original church and (to the right of the choir) frescoes of the 15th century. The crypt is ancient. The cathedral lives adjacent, to the disappointed bishop's palace. — The adjacent *San* church of *Santa Maria*, in the valley, was built in 1000-1200 and has a picturesque *facade*. The pulpit has been put together out of ancient and modern fragments. On the choir wall is an interesting fresco of the Last Judgment (14th cent.). East door of the *Palazzo Comunale*. Both churches are now disused. The old Romanesque churches of the *Sanctissima delle Rasse* and *San Michele* are also interesting. — From *Tuscanella* to *Corinto* see p. 8.

The highroad from Viterbo to Rome gradually ascends the slopes of the *Monte Cimino*, the highest point (2464 ft.) of which, a half disintegrated volcano (trachyte), remains to the left. The *Ciminius Fucius* (*Monte Cimino*) was looked upon as an impenetrable bulwark of Central *Strusian* until the daring Consul A. Fabius Rullianus successfully traversed it in 210 B.C., and completely routed the *Strusians*. The head of the pass (2464 ft., 7 M. from Viterbo) commands an extensive view. Below, on the right, lies the *Lago di Vico* (1000 ft.), the ancient *Lacus Ciminius*, a wood-girt crater-basin $7\frac{1}{2}$ sq. M. in area, 11 M. in circumference, and 400 ft. deep; on its N. side rises a lone cone (*Monte Fucius*, 2730 ft.) of more recent formation. The margin of the crater attains, in *Monte Popellus* (on the W.), a height of 3100 ft. — About 10 M. from Viterbo the road to *Caprarola* (p. 102) diverges to the left. About 8 M. further on is *Romaphila* (p. 102).

The RAILWAY FROM VITERBO TO ROME (p. 97), opened in 1894, has brought within the reach of modern traffic the interesting sites

of Southern Etruria, which have almost been forgotten since the shortest carriage-road to Rome, which led through them, has been deserted by tourists. — From the station outside the Porta Romana (1145 ft., Pl. C, 5) the railway gradually ascends, crossing several deep ravines. — $2\frac{1}{2}$ M. *San Martino al Cimino* (1270 ft.). The village (1840 ft.) lies over $1\frac{1}{2}$ M. from the station. To the right we have a view across the plain to the Monte Argentario (p. 5); to the left are the wooded heights of the Monte Fogliano (p. 101).

8 M. *Vetralla* (1300 ft.). The little town (*Albergo Centrale*), with 8020 inhab. and the 12th cent. basilica of *San Francesco*, lies $1\frac{1}{4}$ M. to the right; 1 M. to the N.E. is the Roman *Forum Cassii*.

From Vetralla a visit may be paid (with guide) to the *Necropolis of Etruria*. We follow the road to Corneto for about $2\frac{1}{4}$ M., and then a rough track to the N. over a bleak moor for 3 M. more. The valley of graves here is similar to that of *Castel d'Asce* (p. 101), but more imposing. Two of the tombs are Greek in style. On the other side of the valley a town named *Orvib* stood in the 8th cent., of which only the ruins of the castle and church now remain. — *Stada*, the ancient *Starna*, now a poor village, $4\frac{1}{2}$ M. to the S.W. of Vetralla, possesses similar rock-tombs and two ancient bridges.

12 M. *Barbarano* (1496 ft.), on a barren moor, is the highest point of the railway. — A viaduct of seven arches, 160 ft. in height, crosses the deep bed of the *Fosso Cuccinano*.

15 M. *Capranica* (1302 ft.). The little town (*Alb. dell' Angelo*, poor), with 3335 inhab. and two pointed church-towers, lies $1\frac{3}{4}$ M. to the left of the principal station. Close to the town is the station of *Madonna del Piano*, on the branch-line that diverges from Capranica to (5 M.) *Ronciiglione* (1446 ft., *Aquila d'Oro*, poor), a quaint little town (8056 inhab.), rising with its walls and towers above a rocky ravine and commanded by a ruined castle, about $1\frac{1}{4}$ M. to the S.E. of the *Lago di Vico* (p. 101).

An excursion may be taken from Capranica ($2\frac{1}{2}$ M.; $4\frac{1}{4}$ M. from the principal station; diligence or car in $1\frac{1}{4}$ hr.), or from Ronciiglione (3 M.) to the little town of *Butri* (934 ft., *Alb. Farnese*), the ancient Etruscan *Surium*, picturesquely situated on the narrow crest of a hill of tufa. *Surium* is frequently mentioned as the ally of Rome in the wars against the Etruscans, from whom it was wrested by Camillus in B.C. 295 (*Cleostro Etrusco*), and in 243 it became a Roman colony. In medieval history Butri is known for the synod of 1086, which deposed Pope Sylvester III. and Pope Gregory VI. for simony. The deep ravine of the *Fosso Casablanc* contains numerous Etruscan tombs, and, on the S. side, fragments of the ancient walls. Three of the five gates are ancient, two towards the S., and the *Porta Farnes* on the N. side (said to be so named after M. Furius Camillus), now built up. Outside the *Porta Romana*, at the foot of an eminence near the *Villa Savorelli*, is situated an *Amphitheatrum*, now in the rock (aces 55 and 44 yds. respectively; key at the Municipality). The rocks above contain numerous tomb-chambers, one of which is now a church. — From Butri to Trevignano, see p. 100; to Nepi see p. 98.

The little hill-town of *Capranica* (1574 ft.; 5501 inhab.) is reached by footpaths in about 1 hr. from Ronciiglione. Carriages follow the Viterbo road for about 3 M. and then diverge to the right for 1 M. more (diligence twice daily in 1 hr., fare 50 c.). The lofty *Palazzo Farnese* at Capranica, built about 1547-49 by *Vignola* for Cardinal Alexander Farnese, nephew of Paul III., is one of the most magnificent châteaux of the Renaissance. It is now in the possession of Count Cocchi. The ground-plan is pan-

logonal, with a central rotunda; the round central court, with its arcades, is adjoined by five wings of equal size. The chief façade looks towards the town (S.E.). The interior (accessible by special permission only) is adorned with frescoes of scenes from the history of the Farnese family, allegories, etc., by *Pedroto, Giovanni, and Taddeo Zuccheri*; the staircase by *Antonio Tempesta*. The fine view ranges across the hilly country, with Sutri, Nepi, and Civitá Castellana, to Mt. Soracte; in the distance rise the dome of St. Peter's and the Volcanic hills, to the E. the Apennines, and to the S.E. the Abruzzi. The beautiful gardens and the charming *Palazzina*, also designed by Vignola, are not open to the public.

17½ M. *Basiglio di Sutri* (1215 ft.), the next station, is preceded and followed by a viaduct. The line enters the volcanic district of the Lake of Bracciano. — 20½ M. *Oriolo Romano* (1236 ft.), with an old park of the Altieri family. — The line now descends, passes through a tunnel, and crosses several viaducts. 23½ M. *Monsiano* (1243 ft.) is beautifully situated among woods, on the slope of *Monte Calvario* (1775 ft.). — Beyond another tunnel we reach —

26½ M. *Bracciano* (915 ft.; *Alb. Sabasio*, on the main road from the station; *Alb. della Poste*, *Via Flavia*, both with trattoria and very fair). The station commands a beautiful view of the town with its imposing mediæval castle, and of the Lago di Bracciano with the towns of Trevignano (to the left), with the Rocca Romana (see below) above it, and Anguillara (p. 104; to the right), between which Mt. Soracte and the blue Sabine mountains appear in the distance. Bracciano has 1739 inhabitants.

The "Castle, built by the Orsini in 1480, but the property of the Princes Odescalchi since 1696 (restored in 1894-99), conveys a good idea of the character of a mediæval stronghold. It is said on this account to have rivaled the attention of Sir Walter Scott in 1832 far more powerfully than the ruins of antiquity. Permission to inspect the castle is obtained at the 'Amministrazione del Principe Odescalchi', in the piazza immediately below the castle. Under the archway leading to the main court are two large frescoes by Antoniazio Romano, representing Virginio Orsini and his family. In the interior of the castle are fine early-Renaissance furniture, mediæval timber ceilings, and family portraits. The view from the battlements is fine.

The almost circular Lake of Bracciano (536 ft.), the *Lacus Sabotinus* of antiquity, is about 22 sq. M. in area, 20 M. in circumference, and 500 ft. deep; like the Lake of Bolsena (p. 95), its formation is held to be due to a volcanic subsidence. It is famed for its fish, and the banks are well cultivated, the upper parts being wooded. It finds an outlet to the sea in the Arno (p. 6). The tufa deposits which surround it extend as far as Rome, and it is evident that lava-streams once flowed to the N and N.E. Numerous eruptions must have occurred, as is witnessed by the *Lago di Martignano* (815 ft., *Lacus Alstetinus*), and the former lake-basins of *Baccano* (Baccanæ) and *Siraciacappe* on the E., and by the Bay of Trevignano (see below), and the small lake of *Monsorato* (734 ft.), on the N.E. The large number of warm springs in the district proves that volcanic energy is not yet extinct.

A road leads along the N.E. bank of the lake to (7 M.) Trevignano. About 1¼ M. from Bracciano a path ascends to the left to the (¼ hr.) church of *San Liberato* (9th cent.) erected, as the inscription states, up

the site of an ancient villa called *Pandilypus*. Here stood the ancient *Forum Gladit*. In the valley to the E. E. are the wine-villages of *Princes Odoneschi*. About 3 M. farther on, $\frac{1}{4}$ M. to the left of the road, lie the thermal sulphur springs of the *Baths of Fieraville*, perhaps the *Aquae Apollinares* of antiquity, the ancient popularity of which was proved in 1882 by the discovery of a large quantity of coins and votive offerings (see pp. 26, 263). Owing to the malaria, the bathing season is not prolonged beyond the early part of summer. By the road are seen many remains of villas of the Imperial epoch. The poor village of *Trevignano Romano* (879 ft.; *Fruturina de Monte*) lies on a typical semi-circular, and perhaps occupies the site of the Etruscan town of *Abute*, which early fell into oblivion. The principal church contains two pictures of the school of *Perugino*. The ruined castle, destroyed by Cesare Borgia, commands a fine view — A bridle-path leads hence in 2 $\frac{3}{4}$ hrs. to *Sutri* (p. 102), first ascending along the E. slope of the *Rocca Romana* (1876 ft.; fine view) to the N. of *Trevignano* and then passing between the tufa cones of *Monte Caci* (1208 ft.), on the left, and *Monte Varone* (1500 ft.), on the right — Another path skirts the lake to (2 $\frac{1}{4}$ hrs.) *Anguillara* (see below), but if the wind be favourable it is preferable to cross the lake from *Trevignano* by boat.

31 $\frac{1}{2}$ M. *Crociatella* (755 ft.). To the right we now have a view of the black Roman Campagna, with the faint outline of the dome of St. Peter's in the distance, and the Alban Hills beyond. — 35 M. *Anguillara* (838 ft.). The little town of that name, the ancestral seat of the Counts of Anguillara, lies 2 $\frac{1}{2}$ M. from the station, on the S. bank of the Lake of Bracciano, and is not visible from the railway. Near it are a few ancient remains. — 36 $\frac{1}{2}$ M. *Casano* (840 ft.), 1 $\frac{3}{4}$ M. from the station, at the S. base of the once actively volcanic *Baccano* (p. 103).

From this station we should visit the ruins of *Galera*. Crossing the line we proceed straight on (S.W.) to the ($\frac{1}{4}$ hr.) *Oratorio Nuova* (closed), thence across the road, and on this side of the conspicuous cemetery turn sharp to the right, and traverse the meadows (in the direction of the church tower), passing finally ($\frac{1}{4}$ hr.) through a sunken lane. — *Galera*, the ancient *Cerame*, stands on an abrupt tufa-rock washed by the *Arone* (p. 100), the inhabitants were driven from it by malaria at the beginning of the 19th cent., and the town lies in ruins. The walls of the 11th and 15th cent., the castle of the Orsini, and a church are recognizable, all densely overgrown with ivy and creepers. About $\frac{1}{4}$ M. to the S. of the cemetery (see above) is the *Casale di Santa Marta di Galera*, belonging to the *Collegium Germanicum* at Rome, with some fragments from *Galera* and a church of the 11th century.

From this point the subterranean conduit of the *Aqua Paola* (p. 379) runs near the railway as far as *Sant' Onofrio*. — 42 M. *La Storta-Fornello* (825 ft.) was anciently the last post-station on the route from the N. to Rome. About 2 M. to the S.W. are the ruins of *Vell* (comp. p. 432). — Beyond (47 M.) *Sant' Onofrio*, a viaduct of seven arches carries the line across the upper end of the *Valle d'Inferno*, a deep ravine to the W. of the *Monte Mario* (p. 385), overgrown with cork-trees and occupied below by brick-fields. The train descends this valley and, beyond a short tunnel beneath the fortifications of Rome, crosses its lower end by means of a viaduct, 980 ft. long, with five arches. We traverse another tunnel, cross the valley of the *Gelsomina* on another viaduct of seven arches, and reach the station of (51 M.) *Roma San Pietro* (450 ft.; comp. Plan 'Rome, II, 5), $\frac{1}{2}$ M. outside the *Porta Cavalleggeri*. — We pass

under the Jactulum by means of a tunnel, $\frac{3}{4}$ M. in length, and descend in a curve to the terminus —

54 M. Roma-Trastevere (62 ft.), outside the Porta Portese (p. 377, comp. Plan of Rome, III, 15, 11). Tramway to the Piazza Venezia, see Appendix, p. 2, No. 9.

13. From Bologna to Rimini, Falconara (*Rome*), and Ancona.

177 M. RAILWAY in $4\frac{1}{4}$ to $7\frac{1}{4}$ hrs. (fares 20 fr. 70, 16 fr. 60, 10 fr. 60, express 20 fr. 20, 16 fr. 25, 11 fr. 35 c.) — From Bologna to Rome, 300 M., express in 13 hrs. (via Florence in 9-10 hrs.). This train diverges to the S.W. at Faenza, the last station before Ancona.

The towns on the coast of the Adriatic are far inferior in attraction to those in Tuscany and Umbria, but without a visit to them the traveller's acquaintance with Italy would be but imperfect. The views of the Adriatic to the E., and of the Apennines to the W. are often charming, and the situation of some of the towns, especially Ancona and Recanati, is strikingly beautiful. Rimini, an ancient Roman colony and frontier-fortress, possesses several fine monuments of antiquity, and its church of San Francesco is an admirable Renaissance work. Roman triumphal arches are also preserved at Ancona and Fano, and Loric boasts of valuable sculptures in the Renaissance style. Urbino, too, the birthplace of Raphael, lies within a short distance of this route. Many of the towns now have galleries of pictures collected from the suppressed monasteries, but of second-rate importance. The provinces of Pesaro-Urbino, Ancona, Macerata, and Ascoli are called the *Marche* (*Le Marche*; comp. p. 3). In Roman times the S. part as far as Ancona was called *Æmum*, while the N. part belonged to Umbria (comp. p. 110).

The line follows the *Via Emilia*, which ran from Piacenza to Ariminum. — From Bologna via (22 M.) Imola to (26 M.) Castel Bolognese, junction for the branch-line to Ravenna, see *Boscher's Northern Italy*. — We then cross the river *Senio*, the ancient *Sinnius*.

31 M. **FAENZA**. — Hotels: *Conza*, Corso Aurelio 34/1, near the Piazza Vittorio Emanuele, B. 1-2, 44 (incl. wine $2\frac{1}{2}$ fr., with clean trattoria, well spoken of); *Virrona*, Corso Garibaldi 71. — *Anthony Restaurant*. — On the Piazza Vitt. Emanuele and the adjoining Piazza del Duomo. — Can from the station to the town, with one horse 1, with two horses $1\frac{1}{2}$ fr.; one-horse cab per hr. 1 fr. 70, each additional $\frac{1}{2}$ hr. 60 c.

Faenza, a pleasant town with 21,809 inhab., on the *Lamone* (ancient *Anomo*), is the *Fuventia* of the Celtic *Belli*, who were conquered by the Romans in 191 B. C. *Faventia* was the scene of Sulla's victory over the consul Gn. Papirius Carbo in 82 B. C., during the civil war. In the middle ages it witnessed numerous feuds, and in 1509 it was annexed by Julius II. to the States of the Church. The town was famous in the 15-16th cent. for its pottery, the manufacture of which has lately been revived ('*faïence*'), and contains considerable silk and weaving factories.

From the railway-station we follow the Corso Alfredo Baccarini and (within the city) the Via Filatole. After passing the baroque Palazzo Strozzi we turn to the left by the Corso Mazzini, and reach the Piazza Vittorio Emanuele, which is surrounded by arcades. In

this square, to the left, is the CATHEDRAL OF SAN COSTANZO, a handsome early-Renaissance basilica, named after Constantius, the first bishop of Faventia (313), begun by Giuliano da Majano of Florence in 1474 and completed in 1513. The façade is unfinished. This church contains the tombs of Giov. Beai (d. 1542, 1st chapel on the right) and Africano Severoli (d. 1523, 5th chap. on the right), both by Pietro Bordino, two reliefs of the Miracles of St. Savinus (ca. 1450, over the altar in the last-named chapel), a Holy Family by Innocenzo da Imola (covered; 4th chap. on the right), a painting of the Adoration of the Magi by Perino Fumai (in the beautiful chapel to the right of the high-altar), and (in the chapel to the left of the high-altar) the *Tomb of St. Savinus, with reliefs from his legend below, by Benedetto da Majano (1468), and a painting of the Burial of the Saint, by Fumai. — In the Piazza Vittorio Emanuele are also the Palazzo del Comune and the Torre dell' Orologio, the fountain in the centre, embellished with bronzes, dates from 1621.

The Via Severoli, beginning at the post-office, at the S.W. end of the piazza, leads to the right to the former monastery of Santa Maria dell' Angelo, which now contains various schools (Pl. 2) and the municipal Pinacoteca (first floor, key kept by the curator).

At the end of the VERRAZZA Colonial group of Mary with John the Baptist and St. John the Evangelist by Alf. Lombardi — Room I. *Passo da Parma*, Madonna with saints (14th cent.); *Minerva da Porto* (?), Pieth; *Leonardo Braccio*, Madonna with angels and saints (1484); Crucifixion, St. Dominic and St. Peter, *Giambattista Sartori*, Madonna with saints (1506); *Agostino*, Betrothal of St. Catharine, *Polissone*, Madonna with saints (1495), Bearing of the cross (1520), *Dono Dono* Two heads. — Room II. *Donato* *Sartori* the Younger, Madonna with saints (1506), Descent from the Cross, *Catigaris*, Baptism of Christ, *Michelangelo*, Martyrdom of St. Eutropius, *Papale*, Judith, *Parma* *Fumai*, Bethesda, *Massimo d'Azeglio*, Landscape, *Guido Reni*, Madonna, with St. Francis and Christina; *Fan Dyck*, Portrait of a lady. Also, good copy of the fresco in the Commenda (see below) — In the small rooms. Two fine 'cassoni', formerly belonging to the Manfredi, and a wax mask of the Dominican Pagnanelli — In the Room to the right of the entrance. Marble bust of John the Baptist, by *Donato* (also attributed to *Ant. Rossini*), wooden statue of St. Jerome by *Donato*; terracotta bust of the 16th cent., and a Madonna of the school of the *Raffa*.

In the entrance is the important collection of majolica.

In the Via di Porta Montanara, to the left is the church of San Michele (Pl. 5), with tasteful brick ornamentation, and, to the right, the Palazzo Manfredi. — In front of the church of San Francesco, in the Corso Garibaldi, is a marble statue of Evangelista Torricelli (1608-47), who invented the barometer in 1643.

The Corso Aurelio Saffi leads from the clock-tower across the bridge to the Borgo. The second church in it, to the right, the Chiesa della Commenda, contains a fine fresco by *Girolamo Pannocchi da Udine* (1593), representing the Madonna and saints (in a recess in the choir).

From Parma to Florence, see *Bondar's Northern Italy*.

The train crosses the Lamone, then the Montone (Olla), which, tied with the Ronco (Redesio), falls into the Adriatic near Ravenna.

40 M. Forlì (**Alt. Mastai*, Via Giuseppe Garibaldi, R. 2½ fr.; *Commercio*; *Vapore*, R. 1½ fr.; *Trattoria al Forno*, very fair), the ancient *Forum Livii*, said to have been founded by M. Livius Salinator (188 B. C.), is a well-built provincial capital with 15,461 inhabitants.

Forlì, where in 410 the marriage of *Athaulf*, King of the Visigoths, with *Galla Placidia*, sister of the Emp. Honorius was solemnised, was long an independent state in which the Guelphs retained their ascendancy down to 1315. The *Ordelaffi* then usurped the supreme power, which they retained till 1480, when they were succeeded by *Girolamo Riario*, a favourite of Sixtus IV. This prince was assassinated in 1488, and his widow, *Caterina Sforza*, was afterwards banished by *Cesare Borgia*. At length, in 1504, *Pope Julius II* annexed the city to the States of the Church. — Forlì was the birthplace of the poet *Cornelius Gallus* (d. B.C. 27), of the historian *Florentius Biondo* (15th cent.), and of the eminent painter *Melezzo da Forlì* (1485-94), who was closely allied to *Piero della Francesca* (p. 85), was recognised by his contemporaries as a master of perspective, and was afterwards engaged at Rome.

The *Piazza Vittorio Emanuele*, the principal square, is enclosed by handsome palaces. Here, to the left of the post-office, is the church of —

SAN MEROURIALE (so named after the first bishop of Forlì). In the 1st chapel to the left, *Palmezzano*, Crucifixion, with saints and the donor, 4th chap. to the left, the decoration in which is by *Jac. Bianchi da Venezia* (1536), the Immaculate Conception by *Palmezzano*, one of his best works; in the choir, behind the high-altar, carved stalls by *Alessandro de' Bignani* (1532). — Opposite the church is the restored *Palazzo del Municipio*, with a tasteless tower of the 18th century.

Proceeding to the N.W. from the piazza, we soon reach the *Piazza del Duomo*, in which rises the CATHEDRAL OF SANTA CROCE, an imposing edifice entirely rebuilt since 1844, with the exception of the large chapels in the transept. In the left transept is the Chapel of the Madonna del Fuoco, the dome of which was adorned in 1686-1706 with frescoes of the Assumption by *Carlo Cignani* of Bologna. The painter is buried in the chapel. At the end of the right transept, to the left, is a fine St. Sebastian by *Rondinelli*.

The *Via Maldanti*, leading to the right from the N.W. corner of the piazza in front of the cathedral, and then the *Via Cesare Hercolani*, also to the right, bring us in 5 min. to the church of —

SANTI BLASIO E GIROLAMO, which contains a few good paintings (best light about 11 a.m.). In the double chapel (1st & 2nd) on the right are frescoes by *Palmezzano*, History of St. James, early works showing the influence of *Melezzo*, and (in the dome) prophets and angels, by *Melezzo*. To the left is the tomb of *Barbara Manfredi* (1486), by *Francesco di Simone*. In the 3rd chapel on the right is an Immaculate Conception, by *Guido Reni* (covered). In the 4th chapel: *Palmezzano*, Madonna and saints, with *Girolamo Riario* and *Caterina Sforza* and their sons (1486), in the original frame. The frescoes in the dome are also by *Palmezzano*.

The **GIMNASIO COMUNALE**, in the Piazza Morgagni, to the S. of the Piazza Vitt. Emanuele, contains the municipal art-collections, including the *Pinacoteca*, in which the school of Forlì is represented by *Melozzo* and *Palmasano*, and also by *Cignani*.

In the COURT. Monument to the anatomist *Morgagni* (d. 1771), unveiled in 1878. — On the *Staircases*, to the right, Sarcophagus of the 14th cent.; Sarcophagus of St. Marcellinus, by *Simone Rossellino* (15th). On the first floor, beneath a fine door-frame and lunette Madonna with angels (formerly in the cathedral), by *Simone di Santi Fornaci*, in the entrance to the —

Pinacoteca (see p. 111). Passing through a corridor with engravings we enter Room I. In the centre, *Moisés*, statue by *Canova*. To the left, 10. *Marcilio Venusti*, Resurrection (restored); 20. *San Pietro*, Madonna and saints; 25. *San Bartolomeo*, Taking of Christ (intarsia); 31. *Pompeo Batoni*, Diana and Endymion. The *Lower Room* contains the gems of the collection.

Entrance wall: *Cassiano*, St. Valerian, St. Hieronymus, two large works; 74. *Stromboli*, Crucifixion (16th cent.). Then, to the right 84. *Ag. Carracci*, St. Francis; 85. *Guercino*, Annunciation; 86. *Primo*, Adoration of the Child; 90. Tapestry from the design of a Lower Rhinish master (Crucifixion); 91. *Giuseppe de' Peniti*, 103. Adoration of the Child; 104. Christ on the Mount of Olives; *Palmasano*, 105. Portrait; 111. Presentation in the Temple; and 112. Flight into Egypt (both from altars); 114. Portrait of himself in his 34th year (1536); 117. Crucifixion (1487); 119. St. Anthony Abbot, John the Baptist, and Sebastian; above, 118. *Melozzo*, 'Pantocrator', an apse mosaic with panels and mosaic in fresco (formerly used as a shop sign); *Palmasano*, 120. Annunciation; 122. Institution of the Eucharist (1501); 123. *Luca da Cremona*, Portrait; 124. *San Bernardino*, Madonna; 125. Crucifixion, a tapestry after the design of a South German master (ascribed to Weigmann); 126. Composite. God the Father and saints (1519); 127. *Cignani*, Madonna in clouds with Saints Peter, Paul, and John; 128. *Sanseverino*, Madonna in prayer; 129. *Antoniello* Portrait. — In the *Small Room*, *Medals* (among which is the portrait of Caterina Sforza), *Majolica*, Pre-Roman and Roman antiquities, marble bust of *Pino Ordelaffi* (15th cent.).

The church of *San Felice*, opposite the *Ginnasio*, to the right, contains a fine tomb of the 15th century.

The *Citadel*, constructed in 1361 by Cardinal Albornoz, and enlarged by the *Ordelaffi* and *Riari*, is now used as a prison.

From Forlì steam railways run to the N. to *Arezzo* (five times daily, in 1½ hr.; fare 3 fr. 15 c. 1 fr. 50 c.), see *Guida del Nord-Est d'Italia* and to the S. to *Modena* (five times daily, in ¾ hr.; fare 1 fr. 40 c.). — A diligence route leads from Forlì through the Apennines via *Sanseverino* and *San Benedetto* to *Pontassieve* (p. 66; ca. 13 hrs.; fare 7 fr.).

The RAILWAY TO RIMINI crosses the *Ronco* and passes (45 M.) *Portonovo* (2250 inhab.), the ancient *Forum Populii*, to the right, on the hill, *Servituro*, with its productive vineyards, once the property of the *Malatesta*. It then crosses the *Savio* (the ancient *Saps*).

62 M. *Osenna*. — *Hotel*. *Luce e' Oro* (Pl. a, C, 2), Piazza Vittorio Emanuele, R. 2½ fr.; *Orto* (Pl. b, C, 2), with trattoria, very fair, *Caffè*. — *Railway Restaurant*.

Osenna is a small town with 7470 inhab., surrounded by beautiful meadows and hills, and boasts of several interesting palaces and an ancient fortress (*Rocca*), built in 1340.

This town, the ancient *Osenna*, is one of the oldest episcopal sees in Italy. During the middle ages it was at first an independent state, then became subject to the *Ordelaffi* family of *Montefeltro*, and shortly afterwards to the *Malatesta*, who were partisans of the *Guelphs*. This rapid change of rulers is alluded to by Dante, *Inf.* xxvii. 66:

1

.

.

*Cesè com' ella s'è tra il piano e il monte,
Tra Romagna al suo e stato France.*

In 1377 the town was cruelly sacked by Cardinal Robert of Geneva, and subsequently by Cesare Borgia after which it was incorporated with the States of the Church.

The Cathedral (Pl. 1; D, 2) contains two fine marble altars of the Lombard school (15th and 16th cent.; in the aisles) — In the Piazza Vittorio Emanuele is the handsome *Palazzo Comunale* (Pl. 2; C, 2); the Piazza Edoardo Fabbri contains a statue of Pius VI., who was born at Cesena in 1717, as well as his successor Pius VII in 1742. — The small piazza known as the *Giardino Bufalini* (Pl. O, 1) is embellished with a statue (by Cesare Zocchi) erected in 1883 to the physician Maurizio Bufalini of Cesena. — The edifice to the N. (Pl. 3), built in 1452 by Matteo Rustico for Domenico Malatesta Novello, contains the *Biblioteca Malatestiana* and the *Municipal Library*. In the former are 4000 MSS., many of which were used by the learned Aldus Manutius in preparing his famous editions of the classics. The rooms containing the libraries are good examples of the early-Renaissance style. The *Pinacoteca* in the same building contains a good Presentation in the Temple by Franc. Francia.

On an eminence, $\frac{3}{4}$ M. to the S E., stands the handsome church of *Santa Maria del Monte*, attributed to Bramante. It contains carved stalls of the 15th century. — Productive sulphur mines in the vicinity, towards the S.

The train crosses the stream *Piaciatello*, the upper part of which, called *Urpone*, is usually held to be identical with the *Rubicon* of the ancients, the boundary between Italy proper and the province of Gallia Cisalpina, and memorable for its passage by Cæsar at the beginning of the civil war between him and Pompey, B.C. 49. The lower course of the Rubicon, which has altered its channel since antiquity, is now represented by the *Fiumicino*, which the railway crosses between (56 M.) *Gambettola* and (50 $\frac{1}{2}$ M.) *Savignano di Romagna*. The *Fiumicino* is claimed by recent authorities to have been the real Rubicon.

Most of the towns of this district have in turn laid claim to the distinction of possessing the Rubicon within their territory; a lawsuit involving this question was actually instituted at Rome, and in 1756 the 'Rota' decided it in favour of the Usc. On the road between Cesena and Savignano stands a column bearing a decree of the Roman senate, which threatens to punish those who should without authority trespass beyond the Rubicon. Montesquieu regarded this as genuine, but it is an obvious imposition.

The train crosses the *Usc. 69 M. Sant' Arcangelo di Romagna*, where Pope Clement XIV. (Ganganelli) was born in 1706 (d. 1774). The *Marecchia* (the *Ariminus* of the ancients) is next crossed.

69 M. Rimini. — *Hotels*. *Aquila d'Oro*, in the *Corso d'Augusto* (Pl. B, 4), R. 2, omn. $\frac{1}{4}$ fr., good; *Leon d'Oro*, with trattoria, R. 1 $\frac{1}{2}$ -2 fr.; *ITALIA*, both at the *Pescheria* (Pl. B, 5). — *Frattoria del Commarolo*, *Piazza Cavour* (Pl. B, 5); *Anthony Restaurant*, good local wine. — *Caffè del Corso*, *Corso d'Augusto*; *Caffè del Commarolo*, *Piazza Cavour*.

Carriage from the station to the *Piazza*, with one horse 1 fr., with two horses 1 fr. 20 c. — *Ferry* in summer from the *Piazza Cavour* to the bathing-places on the beach. — *Post Office* in the *Piazza Cavour*.

Rimini, beautifully situated about $\frac{1}{2}$ M. from the Adriatic at the mouth of the *Ause* (the ancient *Aprum*) and *Maronechia*, with 20,645 inhab. and extensive fisheries and silk-manufactories, is frequented by Italians for its sea-bathing. A *Casual* (café-restaurant) and lodging-houses have been erected on the beach, to which a shady avenue leads from the *Porta Marina* (see below). The shifting sands are apt to obstruct the harbour.

Ariminum, the ancient *Ariminum*, a town of the Umbrians, became a Roman colony in B.C. 285 and was the frontier fortress of Italy in the direction of Gaul and the termination of the *Via Flaminia* (p. 117). The town was extended and embellished by Julius Caesar and Augustus. During the *Esarchate* it was the northernmost of the 'Five Maritime Cities' (*Pentapolis Maritima*), which were ruled over by one governor. The other four were *Favara*, *Pesaro*, *Senigallia* and *Ancona*. In 300 *Ariminum* became an episcopal see, and in 350 a council against Arianism was held here. The town afterwards belonged to the Longobards.

In the course of the 13th cent. the *Malatesta* made themselves masters of the city. In 1278 *Guacerno* de *Armeneto* ('the lame'), nicknamed also *Stinetotto*, put to death his wife, *Francesca* *Polenta* of *Verona*, and his brother, *Paolo* di *Selle* (an event from which Dante derived the episode of 'Francesca da Rimini' in the 6th canto of the *Inferno*, and Leigh Hunt the materials for his 'Story of Rimini'). During the following century this family ruled the greater part of the *Romagna*, and also, for a time, the march of *Ancona*. Under Louis the Bavarian they became viceregents of the emperor, but Cardinal *Albornoz* afterwards succeeded in reducing them under the power of the pope. The *Malatesta* family, divided into the *Favara* and *Rimini* branches, distinguished themselves as condottieri, but also as patrons of learning. The most famous scion was *Sigismondo*, son of *Pandolfo* (1417-55), who united the gifts of a great military leader with the most violent passions. He attracted painters and scholars to his court, in order to secure immortality for himself and his mistress (afterwards his wife), the clever *Isotta*. — In 1525 the people revolted against the *Malatesta* and placed themselves under the authority of the pope.

A broad road leads from the *Station* (Pl. C, D, 3, 4) to the *Porta Marina*, within which it is called the *Via Umberto Primo*. After 4 min. we follow the *Via del Tempio dei Malatesta* to the left, passing a dilapidated Renaissance palazzo.

**SAN FRANCESCO* (*Duomo*, *Tempio dei Malatesta*, Pl. 3, C, 5), originally a Gothic edifice of the 13th cent., was magnificently remodelled in the early-Renaissance style in 1446-55 by *Sigismondo Malatesta* from designs by *Leon Battista Alberti* and under the superintendence of *Matteo de' Pasti*. The windows of the original building are retained. Of the façade unfortunately the lower part only has been completed while the dome intended by Alberti to surmount the choir is wanting. The choir itself was restored in 1709. On the plinth are the initials and arms (the elephant and rose) of *Sigismondo* and *Isotta*.

The vaults on the S. side contain the sarcophagi of poets and scholars whom *Sigismondo* entertained at his court. In the first four are the remains of *Ennius*, the *Parmae* poet; *Stazio* de *Caesi*, *Gemistus* *Plotin* (d. 1451), a Greek philosopher whose corpse *Sigismondo* brought hither from his campaigns in Greece; and *Roberto* *Faliero* (d. 1453), the learned engineer. In the others repose several physicians and a bishop of the 10th century.

The *Isotta* was said by Pope *Pius II.* to resemble a heathen temple.

rather than a Christian church. To the right of the entrance is the Tomb of Sigismondo (d. 1468). Most of the plastic ornamentation of the chapels was executed by *Agostino d'Antonio di Duccio* of Florence; a few works are by *Guglielmo*. — 1st CHAPEL on the right above the altar, St. Sigismond of Burgundy, patron-saint of the founder, by the pillars, allegorical figures of the virtues — 2nd CHAPEL on the right ('Santuario', closed), containing a (restored) *Fresco by *Piero della Francesca* (p. 55; '*Petri de Burgo opus 1468*'). Sigismondo Malatesta kneeling before his patron St. Sigismond, with the castle, built by him (p. 112); on the right. — In the CAPPILLA DI SAN MICHAEL, the 3rd to the right, is the Tomb of Isotta (d. 1470), erected as early as 1450, with the motto '*tempus loquendi, tempus tacendi*'. The archangel on the altar, by *Guglielmo*, is a portrait of Isotta. By the pillars, angels musicians. — 4th CHAPEL on the right: by the pillars, the planets and other fantastic representations from a poem by Sigismondo in honour of his mistress. — 5th CHAPEL on the left: by the pillars, allegorical figures of the sciences. — 6th CHAPEL on the left: Children's games, probably by *Simone di Nanni Ferrucci*, a pupil of Donatello. — The 2nd CHAPEL on the left is closed. — The 1st CHAPEL on the left is named the Cappella dell'Acqua from an ancient statue of the Madonna, represented as sending rain. On the left is a sarcophagus for the reception of the ancestors of the founder, with two reliefs, representing the House of Malatesta in the Temple of Minerva and the Triumph of Sigismondo. By the pillars, above the elephants, two portrait-medallions of Sigismondo.

From the small piazza in front of the church, the Via Paterna leads to the S.W. to the PIAZZA GRULIO CMEAR (Pl. C, 5), the ancient forum. A stone Pedestal here, erected by Sigismondo and restored in 1560, commemorates Cmea's passage of the Rubicon (p. 109). Near it is a chapel, on the spot where St. Anthony once preached, and another on the canal is said to mark the spot where he preached to the fishes because the people refused to hear him. — The Corso d'Augusto (Pl. B, C, 4, 5), which intersects this piazza, leads to the S.E. to the Porta Romana, and to the N.W. to the Piazza Cavour and the bridge of Augustus.

The *PORTA ROMANA or Arco d'Augusto (Pl. C, D, 5) is a triumphal arch of travertine, of elegant execution (note the capitals on the outer side), erected by the Roman government to Augustus in B.C. 27 out of gratitude for the restoration of the Via Flaminia (p. 117), as the inscription on the outside records (inaccurately restored; the letters on the wall to the right of the gate also belong to it). Above are medallion-figures on the outside Jupiter and Venus, on the inside Neptune and Minerva.

The scanty remains of an Amphitheatre, which held 12,000 spectators (Pl. D, E, 5) are uninteresting. But a walk on the ramparts outside the Porta Romana to the under-mentioned Castello of the Malatesta is recommended (Pl. C, B, A, 5, 5).

The MUNICIPIO (Pl. 9, B, 5), in the Piazza Cavour, contains a small picture-gallery (fee 1/2 fr.), comprising: *Perin del Vaga*, Madonna; *Domenico dei Ghirlandajo* (school-piece), SS. Vincenzo Ferrer, Sebastian, and Rochus; *Giovanni Bellini*, Pietà (fine early work); *Benedetto Coda da Rimini*, Madonna enthroned with saints and angelic musicians (1513); *Jac. Tintoretto*, San Domenico; *Agostino di Duccio*, Medallion-portrait of Augustus. — In front of the palazzo

fixes a bronze *Status* of Pope Paul V. (inscription obliterated). Beyond the Teatro Vittorio Emanuele (Pl. 10, B, 5) is the ancient *Castello* of Sigismondo Malatesta (Rocca; Pl. A, B, 5), now a prison, and in a very dilapidated condition. The Malatesta arms are still to be seen over the entrance.

The Library (Pl. 6; C, 5), in the Via Gambalunga to the N.E. of the Piazza Cavour, founded in 1617 by the jurist Gambalunga, contains 23,000 vols. and several MSS. The small Museo Archeologico here contains the fine tomb of a woman, a hermos of Pan, and other antique sculptures, and tombstones of the 10-11th centuries.

At the end of the Corso the *Marcechia* (p. 110) is crossed by the five-arched **Porta d'Acquero* (Pl. A, B, 4), begun by Augustus and completed (20 A.D.) by Tiberius. Fine view of the Apennines. The bridge leads to the Borgo San Giuliano, where the Via Emilia (p. 105) united with the Via Flaminia (p. 117). Here, too, is situated the church of *San Giuliano* (Pl. 6, A 3, 4; key at No. 46, the house opposite), containing the Martyrdom of St. Julian, a large altar-piece by Paolo Veronese (covered), and the Life of the Saint, an old picture by *Matteo da Farnes* (1357).

An interesting excursion may be made from Rimini to (about 12 M.) *San Marino* diligences daily in 3 hrs. (fare 1½ fr.) starting from the Piazza Cavour at 12 noon, returning at 6 a.m. One horse carriage there and back ca. 18, two horse ca. 22 fr. (and fare). The walk is also interesting (4¼ hrs.) start from the *Porta Mecenate*, Pl. B 6). — The republic of *San Marino*, the smallest in the world (32 sq. M. in area, with 2500 inhab.), is traditionally said to have been founded in an inaccessible wilderness by St. Marino (4th C.) at the time of the persecutions of the Christians under Diocletian. As a matter of fact the settlement grew up round a Convent of *San Marino*, which is known to have existed here as early as 876, and afterwards extended its domains. This diminutive state obtained papal recognition in 1631 and has maintained its independence ever since. It is governed by two *Capitani Reggenti*, elected twice a year from the 40 M. members of the Great Council, which is composed in equal proportions of representatives of the nobles, the land owners, and the burghers. They are assisted by the Small Council, a committee of 12 members of the Great Council.

The road from Rimini leads through the suburb of *Borgo Maggiore* (1700 ft.), at the base of the precipitous rock (*Monte Titano*, 2437 ft.) on the E. end of which the town (pop. ca. 1500, *A. Borgo del Titano*, with café restaurant, R. 1½ fr., fair) is situated, in a bleak district. In the Piazza del Pignello (see views) rises the Gothic *Palazzo del Governo*, by Francesco Sassetti (1634). In front of it is a statue of Liberty, presented in 1870 by an Englishwoman, who was rewarded with the title of Duchess of Acquariva. The Cathedral, built in 1498-25, contains the grave of St. Marino (see above). The Museum contains a small picture-gallery. The *Ancro* (2420 ft.), which affords a fine view, is now a prison and not accessible in the afternoon. The *Giardino Borghesi* also commands a fine view. The epigraphist and numismatist *Count Bartolomeo Borghesi*, born at Ravenna in 1781, was from 1821 until his death in 1890 a resident of *San Marino*, where he arranged and described his admirable collections.

From Rimini to *San Leo*, 20 M., diligences daily in 5¼ hrs., starting at 8.30 a.m. (fare 5 fr.). The road (see Pl. A, 6) which is interesting for walkers also leads at first towards the S.W., ascending the mountainous valley of the *Marcechia*. The imposing cone of *San Marino* is long conspicuous to the left. On the height appears *Verucchio*, the seat of the *Malatesta*, to whom the castle visible on the other side of the river, above *Verucchio* also belonged. The valley contrasts. Beyond the (10 M.) bridge

.

.

.

.

leading to Scotticata, which remains to the right, is a fair inn. About 2 M. farther on is a road leading to the left to (4 M.) San Marino. Beyond (2 M.) *Portofranco* we turn to the S. into the valley of the *Masocchio*, and about 2 M. farther on begin to wind up the steep slopes of San Leo, enjoying fine retrospects of Verucchio, San Marino, and the sea.

San Leo (pop. 720; quarters at *Locanda Praticca*) is a high lying little town (fine view), situated on a steep rocky height rising over the *Marche*. In its old *Castle*, now used as a prison, the impostor *Cagliostro* (Giosuè Balsani; b. at Palermo in 1743) died in confinement in 1796. The former *Cathedral* is a *Romanesque* structure with a raised choir, a spacious crypt, and some ancient details. Under the left flight of steps leading to the choir is the sarcophagus of St. Leo. — A picturesque but fatiguing footpath ascends to the N.E. to (3 hrs.) San Marino (see above). We follow the road back to the valley of the *Masocchio*, cross the river, and ascend to the right to the *Monte Mappia*. We then descend to the *Torrente di San Marino*, cross this stream, and re-ascend.

FROM RIMINI TO RAVENNA, 81 M., railway in 1½-2 hrs. (6 fr. 80 c., 4 fr. 10, 2 fr. 65 c.). *Ravenna*, and thence to Ferrara, see *Booklet's Northern Italy*.

Beyond Rimini the line skirts the coast and crosses the streams *Marano* and *Conca* (the 'Crustumium' of Lucan). 75 M. *Riccione*. — 81 M. *Cattolica*, so called from having been the residence of the Roman Catholic bishops during the Council of Rimini in 359. The lower spurs of the Apennines descend here to the sea. After threading a tunnel the train passes the *Monte San Bartolo*, with the *Villa Imperiale* (p. 115), situated on the left. We then cross the *Foglia*, the ancient *Pisaurina*.

90½ M. *Pesaro*. — *Hotels*. *ALBERGO ZONGO*, Via Zongo (see below), with restaurant, R. 2½ fr., oms. ½ fr.; *LEONE D'ORO*, Via Garibaldi (Pl. C, 4, 5). — *Trattoria del Genio*, in the Piazza, very fair. — *Café*. On the ground-floor of the Alb. Zongo, entrance Via Branca; *Café della Piazza*, in the Piazza Vitt. Emanuele.

Post & Telegraph Office (Pl. 6; C, 4) at the *Prefettura* (p. 114). — Cab from the station to the town, one-horse 80 c., two-horse 1 fr.

Pesaro, with 14,768 inhab., the ancient *Pisaurum*, is the capital of the united provinces of Pesaro and Urbino. During the Renaissance period it was famous for its majolica (comp. p. 57).

Pesaro, first inhabited by the *Stelli*, then by the *Umbrians* and *Etruscans*, afterwards by *Senonian Gauls*, and a Roman colony as early as B.C. 184, was destroyed by *Vittiges* the Goth in 536 A.D., and rebuilt by *Belisarius*, after which it belonged to the *Pennipolis Maritima* (p. 120). It passed to the *Malatesta* family in the 13th cent., in 1446 to *Lill Sforza*, and in 1512 to the *Rovere*, dukes of Urbino, under whom, chiefly through the influence of *Lovaria d'Este*, consort of *Francesco Maria II.*, it became a centre of art and literature, and was visited by *Bernardo* and *Fernando* *Furze*. *Bernardo* completed his '*Amadio*' ('*L'Amadigi*') here. In 1631 the town was annexed to the Papal States. — The fairs of *Pesaro* are celebrated.

Approaching from the Station (Pl. A, 5) we enter the S. town-gate and reach the Piazza Garibaldi, embellished with flower-beds and a marble Statue of *Garibaldi* (1891). Thence, passing the Teatro *Rossini* (Pl. B, 5), we follow the Via Branca to the Piazza Vittorio Emanuele, on this side of which (to the left) is the Via Zongo, with the *Albergo Zongo*, once a cardinal's palace. On the right is the handsome portal of the former church of *San Domenico* (1390; Pl. C, 4).

In the **PIAZZA VITTORIO EMANUELE** (Pl. C, 4), which is adorned with a large fountain, rises the imposing **PALAZZUCCIA**, the ancient ducal palace, built by *Laurenza* for the *Sforza* about 1455-65, and completed in the 16th cent. by the *Rovere*, whose architects were *Girolamo Genga* and his son *Bartolomeo*. The banquet-hall, 112 ft. long and 54 ft. wide, still contains a painted wooden ceiling dating from the latter half of the 16th century. In 1475 this hall was the scene of the marriage of *Costanzo Sforza* and *Camilla d'Aragon*. — Opposite stands the more modern **Palazzo dei Papi**. Between the palaces, to the right, is a façade erected in 1848, with marble statues of the composer *Gioachino Rossini* (1792-1868), the 'Swan of Pesaro', and the author *Count Giulio Particelli* (1779-1821), by P. Lorandini. — At the other angle of the piazza is the **Palazzo Municipale**, in front of which stands a monument to *Count Tersilio Mamiani* (p. 227), a native of Pesaro, by *Ettore Ferrari* (1896).

To the W. of the Piazza, in the **Via Mazzini** (No. 24), is the **Palazzo Almerici**, with the **ATENEUM PESARENSE** (Pl. B, 4), comprizing the municipal collections. Admission on Thurs. & Sun., 10-12, free, other days, 10-2, for a fee (1/2 fr.).

In the **Vestibule** are votive stones of the matrons of *Pesurum*, among the most ancient Latin monuments extant. In the court and on the staircase are Roman and Christian inscriptions and sculptures. — On the **First Floor** are two reliefs, dating from about 1000 B.C., one with representations of ships; ancient terracotta images and lamps, ivory carvings (early Christian reliefs of the Expulsion from Paradise and the Stoning of Stephen, and a slab from the so-called throne of St. Maximian in the cathedral of Ravenna), early Italian bronzes and coins (see graves from *Vetulonia*), an image of *Nithras* in vitreous paste. Here also are an admirable *Majolica* Collection (500 pieces, many from Pesaro, Urbino, Castel Durante and Gubbio; some of the last by *Maestro Giorgio*), a collection of paintings, including two pictures by *Zeppo* (a Field and a head of John the Baptist), and a marble bust of *Napoleon* by *Canova*. There is also a collection of natural history, especially rich in shells. — On the **Second Floor** is the **Biblioteca Oliviana**, recently much increased by the acquisition of the *Biblioteca Particelli*, and containing 60,000 volumes and 2000 MSS., amongst which are letters of *Turquoise Tasso* and others. Adm. daily, 9-4, except Sun. and holidays.

In the **Palazzo Nacchetti**, now the **Liceo Rossini** (Pl. B, 4), is a sitting figure of *Rossini* by *Marochetti*, erected in 1864.

In the **Via Rossini**, which leads from the Piazza to the sea-baths (comp. Pl. C, 4, 3), stand the small house where *Rossini* was born (Pl. 2, C, 4), the **Palazzo Mosca** (opposite), with a collection of pictures, fayences, furniture, etc. bequeathed to the town (15 rooms; open on Sun. & Thurs., 11-3), and the old Cathedral (closed at present). Close by, in the hall of the **Vescondo** (Pl. B, C, 3, 4), is an early-Christian Nymphaeum. — On the E. side of the town stands the **Rocca Costanza** (now a prison), built by *Giovanni Sforza*.

The present cathedral (Pl. C, 4), **San Francesco**, in the **Via Roma**, has a Gothic portal and contains a 'Coronation of the Virgin with four saints, and beautiful prodelle, by *Giovanni Bellini* (c. 1475, much darkened), at the 1st altar to the left. — **San' Agostino** (Pl. B, 5), in the **Corso Ufficiali Settembre**, has a rich Gothic portal of 1412. —

At the end of the Corso, near the spacious Lunatic Asylum (*Montecitorio*, on the left) is the small *Otto Studio* (Pl. A, B, 4), with a meteorological observatory and a fine view of the Foglia (spanned by an ancient bridge) and of Monte San Bartolo (see below). — The church of *San Giovanni Battista* (Pl. A, 4), in the Via Passeri, was begun by Ottol George in 1640 and contains the tomb of Count Giulio Percheron (p. 114).

To the S W of Pesaro rises *Monte San Bartolo* or *Monte Sento* (550 ft.), where the Roman senator *Lucius Attius* is said to have been interred. On the W slope lies the "Villa Imperiale," belonging to the *Principe Azzurro*, at whose town house in Pesaro (Via Massi 5) tickets of admission may be obtained. A steep road leads higher to about 2,000 ft. from the old bridge over the Foglia (Pl. A 4, tab. 4 & 5, bargain necessary). *Alessandro Biondi* built a country house on this site the foundation stone of which was laid by the Emperor *Friedrich III.* on his army to Italy in 1494. The upper rooms were adorned by the Emperor with stucco work, majolica, plaques, and frescoes. In the 1st Room (*Stanza dei Giuramenti*) on the ceiling, is the triumphal procession of Duke *Francesco Maria* of Urbino, accompanied by *Alfonso* of Ferrara by Ottol George in the whole landscape and pool, by *Luca Mattioli*. The 2nd Room or *Stanza delle Capote* (the South), is decorated as an arbore, with figures of *Daphne* and *landscapes*, by the brothers *Doni*; on the ceiling is the duke with his army. In the 3rd Room (*Stanza dei Desiderii*) are the Coronation of *Charles V.* and allegories after designs by *Angelo Bronzino*. The frescoes in the following rooms represent the duke being appointed commander-in-chief by Cardinal *Adrian*, Pope *Leo X.* and the duke of *Venice*. The 4th room is adorned with charming grotesques in the style of *Giovanni da Udine*. The last room (*Stanza della Casacca*), which has a fine stucco ceiling, is embellished by paintings by *Luca Mattioli* del *Cello* representing the duke being crowned with a garland (*Caesareo* after *Apollon*), and the Christian virtues. *Eleonora Gonzaga* caused *Giovanni George* to erect a new palace about 1600 upon the old house with an inscription on the facade to the effect that it was built for her husband *Francesco Maria*, a building which still exists. It was never completed, but even in its present dilapidated condition it retains much beauty. See view from the terrace — in the neighbourhood is the church of the *Oratoriani*, one of the finest views in the environs is obtained from an eminence behind the monastery.

The *Maneggio* of the little town of *Gradara*, 7 M. to the S W of Pesaro, contains a Madonna and saints by *Giuseppe Doni* (1404), in the Rocco is a terracotta altar by *Andrea della Robbia*.

From Pesaro to *Ugento*, 23 M., diligences leave daily in 4 hrs. (high in 3-3½ hrs.), fare 5 fr. 20 c., return ticket (available for 10 days) 8 fr. 20 c. The *Maneggio Anconitano* leaves the place of Pesaro at 6.15 a.m. and *Ugento* at 2.30 p.m., the *Diligenza Comense* starts at 3 p.m. and returns at 6 a.m. — The road leads through the fertile valley of the *Foglia*, crossing the river beyond the village of *Montebello* and, as we come in sight of *Ugento*, ascends to windings. Above, to the right, is the feudal palace, with three towers flanked by round towers. The diligences stop in the *Corso Garibaldi*, a little below the inn. — *Ugento*, see p. 120.

Beyond Pesaro the RAILWAY skirts the coast the whole way to Ancona, being at places pushed close to the sea by the projecting spurs of the Apennines.

28 M. *Fano* (*Albergo del Moro*, Via Naldi, Café in the Piazza), the *Fanum Fortium* of antiquity, is indebted for its origin to a temple of *Fortuna*, a feat commemorated by a modern statue on the public fountain. It is now a pleasant little town (10,555 inhab.), sur-

rounded by ancient walls and a deep moat. The once celebrated harbour is silted up and unimportant; vessels anchor in a new channel through which part of the water of the Metaurus (p. 118) is discharged. The first printing-press with Arabic type was set up here in 1514 at the cost of Pope Julius II. As a sea-bathing place Fano is less expensive than Rimini.

We enter the town by the *Via Nolfi*. Farther on, to the left, is the Piazza, in which (in the *Palazzo della Ragione*, 1300) is the Theatre. One of the rooms adjoining it contains a David with the head of Goliath, by *Domenichino*, and a Betrothal of the Virgin, by *Guercino*. — The old Gothic *Palazzo del Municipio* is reached through the arch to the right of the theatre.

The S side of the Piazza, which is enlivened by a fountain of flowing water, is skirted by the *Corso Vittorio Emanuele*. Following the latter to the right, we reach the *Via dell' Arco d' Augusto*, the second street to the left. In a small piazza here rises the *Cattedrale* or *San Fortunato*, the four recumbent lions in front formerly supported the pillars of the portico. The portal dates from the 19th century.

In the interior the chapel of *San Girolamo* (the 2nd on the left) contains a monument of the *Rinalducci* family; nearly opposite is a chapel (4th on the right) adorned with frescoes by *Domenichino* (damaged). — In the chapel to the right of the choir, a Madonna with two saints, by *L. Carracci*. — In the court of the *Vescovado*, behind the cathedral, *Via Montecavallo* 7, are a few sculptures, including three 13th cent. reliefs.

Farther on we come to the *Arch of Augustus*, which spans the street; a second story was added in the 4th cent., when it was dedicated to Constantine. It once had three openings, as is shown by a view of it on the adjacent church of *San Michele*, adjoining the handsome Renaissance portal. — Beside the arch is the *Foundling Hospital (Brevetorlo)*, a pleasing edifice with loggia.

Returning to the Piazza, we follow the *Via Boccaccio* opposite the fountain, and then take the *Via Bonaccorsi*, inclining to the left, to the church of *Santa Maria Nuova*, with its portico.

Interior: 1st chapel on the left *S. Gen. Visitation*; 2nd chapel: *Perugia*, *Annunciation* (1495). 3rd chapel on the right: *Perugia*, Madonna enthroned and six saints, with predella (1497). Key at the house No. 18.

In the vestibule of *San Francesco* (closed) are the monuments of *Pandolfo III. Malatesta* (d. 1427; to the right), perhaps by *Leon Battista Alberti*, 1460, and his wife *Paola Bianca* (d. 1398; left), by *Tagliapietra* (1413). — *Santa Croce*, the hospital-church, in the *Via Nolfi*, contains a Madonna with four saints, by *Giovanni Santi*. — *San Pietro*, in the same street, is an imposing and richly-decorated church in the baroque style, with frescoes by *Viviani* on the vaulting; in the chapel of the *Gabrielli* (1st to the left) is an *Annunciation* by *Guido Reni*. — *San Paterniano*, dedicated to the first bishop of Fano, possesses a *Marriage of the Virgin*, by *Guercino*. — In *San' Agostino* (entr. by side-door, via the cloisters of the *Seminario*) is a painting of *Sant' Angelo Custode*, by *Guercino*, the subject of a poem by *Robert Browning* ('The Guardian Angel').

An interesting excursion may be made to the *Monte Giove* (800 ft.), on the top of which is a monastery, with a splendid view of the Adriatic and the Apennines. It is reached in about 1 hr. by a good road from the church of *Rossano* (see below).

From *Fano* to *Pesave* via *Pesembro* and *San Fuccio* Pass, carriers daily (fare 10 fr.) to *Fossombrone* 3 1/2 hrs., to *Cagli* 5 1/2 hrs., to *Osseggia* 1 1/2 hrs. and to *Fossato* 1 1/2 hrs. The road is the ancient road from *Rome* to *Blind* (p. 100), the *Via Flaminia*, constructed in B.C. 220 by the Consul C. Flaminius, afterwards Consul (p. 25), to ensure the directness of the *Po* which had been recently diverted from the *Quadr*. The road quits *Fano* by the Arch of Augustus and the *Porta Reggione*, traverses the plain to (1 1/2 M.) the church of *Sanctus* at the foot of *Monte Giove* (see above), and then skirts the N. bank of the *Metaurus*, the monotonous but fertile valley of which is well cultivated. About 1 M. from *Fossombrone*, near the church of *San Marino* at *Fano*, was once situated the Roman colony of *Fornu Bonorum*, destroyed by the Goths and Longobards.

1 1/2 M. *Fossombrone* (500 ft.) long in possession of the Malatesta family, passed to the State of the Church under Sixtus IV. It is now a busy little town with 7000 inhab. and still fortifications, prettily situated in the valley, which contracts here and is commanded by a castle. The Cathedral contains an altar by *Domenico Rossini* (1487). — A road, quitting *Fossombrone* by means of a lofty single-arched bridge, leads to the N. to *Monte* and *Sanpellegrino* (p. 118). *Diligence* to *Osseggia* see p. 118.

The *Via Flaminia* beyond (10 1/2 M.) *Cusumano* (p. 120) crosses the *Metaurus*, which descends from the valley near *Sanctus* again to *Fano* from the N., and follows the left bank of the *Condottone*, which at this point empties itself into the *Metaurus*. *Veritas* (p. 120) is seen to the distance to the right. The valley once contracts again, to the right rises the hill of *Petrus*, occasionally named *Monte d'Andreato*. Here, according to the popular tradition, was fought the memorable battle of the *Metaurus* to which, B.C. 271, *Hasdrubal* whilst marching to the aid of his brother *Hannibal* with 60,000 men, was signally defeated and slain by the consuls *Levius Salinator* and *Claudius Nero*. This was the great event which decided the 2nd Punic War in favour of *Rome*.

The road, which skirts the river, now pierces the N.E. chain of the Apennines by means of a ravine between lofty and precipitous cliffs. At the narrowest point, where there is room for the river only, is the "Ponte Fano" (40 ft.), *Summa Porta* or "Paved Stone", the earliest known, later *Ponte Fano* a tunnel 17 ft. wide, 14 ft. high, and about 30 yds. in length. The founder of the work was the King *Vasparius* (in A.D. 77), as the inscription hewn in the rock at the N. entrance records (see *Cassio Aug. Vasparius* post near 17th post. VII map XVII post) *placuit* etc. VII. *summa* *fortitud.* *curavit*).

About 1 M. beyond the pass is the small church *Sanctus del Fano*, and a little further on (1 1/2 M.) the village of *Sanpellegrino* (p. 127).

3 1/2 M. *Cagli*, see p. 127. — Travellers beyond *Cagli* are generally conveyed in smaller carriages. Above the town the *Domus*, which the road skirts, pierces the main chain of the Apennines by means of a wild and deep gorge. At the other end lies (2 1/2 M.) *Osseggia*, with 1200 inhab., the *Osseggia* contains a *Holy Family* by *Perugino*. — The road ascends rapidly, and reaches the height of the pass, 2000 ft. above the sea. A little before arriving at *Osseggia* the road crosses a ravine by the cartons *Ponte* or *Sella*, constructed in 1000.

2 1/2 M. *Osseggia*, an insignificant place, lies at the junction of the roads to *Fossato* and *Pollino* and to (1 1/2 M.) *Osseggia* (the latter leading over the pass of *Monte Giove*, p. 87, carriage 1-4 fr.). On *Monte Fano*, in the vicinity, amid oak-plantations, stand the ruins of the temple of *Jupiter Apenninus*, whose worship was peculiar to the Umbrians. Several bronzes and inscriptions have been discovered in the environs.

The main road continues to descend the green valley of the *Clugy*, and leads via *Cusumano* and *Osseggia* (situated in the valley) to —

50 M. *Fossato di Vico*, a station on the Ancona and Rome line (p. 120).

Beyond Fano the train crosses the river *Metaurus* (p. 117), then the *Cesano*, beyond (105 M.) *Mondolfo-Marotta*.

112 M. *Senigallia* or *Sinigaglia* (*Albergo Roma*, near the harbour, good; *Trattoria del Giardino*, near the Municipio), the ancient *Sena Gallica*, with 5556 inhab., chiefly occupied in fishing, lies at the mouth of the *Misa*. The town was destroyed by Pompey (in B.C. 82) during the Civil War between Marius and Sulla. It was an episcopal see as early as the 4th cent., but was afterwards frequently devastated by fire and sword, so that it now presents quite a modern appearance. The house in which Pope Pius IX. (p. xxviii) was born is shown; it contains a few memorials. In summer *Senigallia* is a favourite sea-bathing place. — The monastery-church of *Santa Maria delle Grazie* (1491; 2 M. to the S.W.) contains in the choir a picture by Perugino (Madonna with six saints), and over the 3rd altar on the right a small Madonna by Piero della Francesca.

From *Senigallia* via *Mondolfo* to *Fossombrone* and thence to the *Forle Fano*, see p. 117.

119½ M. *Montemarciano*. Pleasant view of the promontory of *Ancona*. The train crosses the *Esino*. At (122 M.) *Falconara Marittima* (Rail. Restaurant) passengers for the line to Rome change carriages (see R. 15). The town lies on the hill to the right.

127 M. *Ancona*.

14. *Ancona and its Environs. Osimo. Loreto.*

Hôtels (comp. p. xvii). *Grand-Hôtel Roma e Pace* (Pl. d; D, 4), Via *Giacomo Leopardi* 3, with lift, electric light, central heating, and restaurant, R. from 2 fr., well spoken of; *Grand-Hôtel Vittoria* (Pl. b; C, 3), *Corso Vittorio Emanuele* — *Milano* (Pl. c; C, 4), *Via Vestri-Rove Settembre*; *Als della Ferrovia*, near the station, mediocre.

Cafés. *Stoppini & Levi*, in the *Corso Vitt. Emanuele*, at the corner of the *Piazza Roma* (Pl. D, 4); *Dorico*, *Piazza del Teatro* (Pl. C, 5). — *Trattorie*. *Romae Pace*, see above; *Picchio*, *Piazza Roma*.

Post Office (Pl. D, 4; 8-8 o'clock), *Piazza Roma* (Pl. D, 4). — *Telegraph Office*, same place. — *Theatre*, *Piazza del Teatro* (Pl. C, 5).

Cabs. One-horse cab from station to town, incl. luggage, 1, at night 1½ fr.; two-horse 1½ or 2 fr. For 1 hr., 1½ or 2 fr.; each ½ hr. more, 60 or 80 c. — Beyond the town, 2 fr. 60 or 3 fr. 60 c. for 1 hr.; each ½ hr. more, 1 fr. 15 or 1 fr. 70 c. — *Tramway* from the station through the *Via Nazionale* to the *Piazza del Teatro* (Pl. C, 5), 10 c.

Steamboats of the *Navigazione Generale Italiana* once a fortnight, on the way from Venice to Bari, Brindisi, Alexandria, and Port Said; once a week for Brindisi, the Pireus, and Constantinople; and vice versa. — *Steamboats* of the *Società di Navigazione Pugliese* once a fortnight on the way from Bari and Brindisi to Zara and Fiume. The boats of the *Società Ungaro-Croata* ply direct to Fiume thrice a week in summer.

Sea Baths, near the station (Pl. A, 6). *Warm Baths*, *Piazza Stamura* (Pl. E, 4).

British Vice-Consul, *Edward A. Kama*. — *Lloyd's Agent*, *Umberto Servadio*.

Ancona, the capital of a province, with 83,837 inhab., of whom upwards of 6000 are Jews, and possessing an excellent harbour, is beautifully situated between the promontories of *Monte Asagnò*

1

2

3

4

5

6

4
2

1
2
3

14

►
9

1

1

1

1

1

1

1

(Pl. C, 8) and *Monte Guasco* (Pl. C, 1). The duties and harbour dues produce an annual revenue of over 18,000,000 fr. Coals and raw sugar are the chief imports, asphalt is the chief export. The province contains sulphur-mines, silk-factories, paper-mills, and vineyards.

Ancona was founded about 400 B.C. by Doric Greeks from Syracuse, and thence named *Dorica Ancon* (i.e. 'elbow', from the shape of the promontory). It was afterwards a Roman colony, and the harbour (see below) was enlarged by Trajan. After the beginning of the Christian era it repeatedly recovered from the ravages of the Goths and others, and in 1532 was made over by Gonzaga to Pope Clement VII, who built a fort and garrisoned it. Ancona is also frequently mentioned as a fortress of strategic importance in modern history. Thus in 1798 it was surrendered to the French, in 1799 to the Austrians, in 1805 to the French again; and in 1815 it was ceded to the pope, to whom it belonged till 1860.

The *Hammour*, an oval basin of about 990 by 880 yds. in diameter, is considered one of the best in Italy. The handsome quay, called the *Banchina*, was completed in 1880. The N pier is of ancient Roman origin. At the beginning of it rises the well preserved marble *Triumphal Arch* (Pl. B, 1), erected A.D. 115 by the Roman senate and people in honour of Trajan on the completion of the new quays, as the inscription records. Its original bronze enrichments have long since disappeared. The new pier constructed by Pope Clement XII., a continuation of the old, also boasts of a *Triumphal Arch* (Pl. B, 1), designed by *Vanvitelli*, but far inferior to the other. At the S. angle of the harbour is the old *Lazzaretto* (Pl. B, 5), built in 1792, now a sugar-refinery (Pl. B, 5). The harbour is defended by several forts.

The *Cathedral of San Gerasio* (Pl. C, 1), dedicated to the first bishop of Ancona, stands on the *Monte Guasco*, an excellent point of view. The church (consecrated in 1128 and completed in 1189) occupies the site of a temple of Venus mentioned by Catullus and Juvenal, and contains ten of its columns. It is built in a mixed Byzantine and Romanesque style, in the form of a Greek cross, each of the arms being flanked with aisles. The dodecagonal dome over the centre of the cross is one of the oldest in Italy. The facade (18th cent.), ascribed to *Margheritone d'Aresso*, has a beautiful Gothic portico, the front columns of which are borne by red lions.

Interior (closed 12-4.30 p.m.). In the *Left Aisle*, in front, is a tomb of 1580, and near it that of D. *Girolamo Gianelli*, by *Otto Delmase* (1808). In the *Right Transept* the semi-Byzantine capitals have been preserved; the railing of the steps to the choir dates from the 12th century. — In the *Choir*, to the right, sculptures of the 13th cent.; relief of Christ between an ox and a lion (the symbols of the evangelists St. Luke and Mark), by *Philippus*, beneath, Head of Christ and St. George; tomb of the Franciscan B. *Gabriel Ferretti* (1454); in the corner, three statues (13th cent.); then, poor terracotta figures of St. Cyrillius, Marcellinus, and Liberius; interesting 12th cent. reliefs, probably from the ancient choir of the left transept; *Sarcophagus of Placitus Gorgonius*, *Frutor of Ancona*, with reliefs (in front, Christ and the apostles with Gorgonius and his wife at the Saviour's feet; on the lid to the left of the inscription, Adoration of the Magi; to the right, Moses, Goliath, David, Baptism of Christ; on the left end, Moses, Abraham's Offering, on the right end, Magi

before Herod, etc.; 4th cent.); further on, Roman head; statue of St. Primitivus; relief of Christ (12th cent.); sarcophagus of SS. Cyriacus and Liberius. — The *CARRY OF THE LAST TREASURY* (restored) contains the tombs of SS. Cyriacus, Marcellinus, and Liberius, in the baroque style (see 30-30 a.).

Pope Pius II. Piccolomini, while vainly endeavouring to organise a crusade against the Turks, died in the *Episcopal Palace*, adjoining the cathedral, in 1464. The palace commands a splendid view of the sea. — Within a house at the foot of the hill are scanty remains of a Roman Amphitheatre.

The *PALAZZO DEL COMUNE* (Pl. C, 2), built in the 13th cent. by *Morphettione d'Arezzo*, was restored (after 1493) from the plans of *Francesco di Giorgio*, and partly modernized in 1647. The reliefs of Adam and Eve on the façade and the lower part of the rear date from the original building. On the staircase in the interior is a statue of the law-giver *Marco de' Rosai* (14th cent.).

The *Strada delle Scuole* descends from the *Palazzo del Comune*. On the left is the church of *San Francesco* (Pl. D, 2; now a hospital), resting on a massive substructure with a rich Gothic portal, by *Giorgio da Sebenico* (1458-59). — The street next leads (r.) to the *Prefettura* (Pl. D, 3), the fine court of which is flanked by Gothic arcades (with Renaissance capitals) and has a fine Renaissance archway. — We proceed through the court to the *Piazza del Plebiscito* (Pl. D, 3), reached by steep approaches between which is a statue of *Clement XII* by *Cornacchini*. — Farther up is the church of *San Domenico* (Pl. D, 3), which contains a *Madonna* and *SS. Francis and Nicholas* by *Titian* (in the 4th chapel on the right), beautiful and imposing in its composition, though now much injured (1520).

Adjoining the church on the right is the *MUSEUM* (*Civica Pinacoteca Podestà e Museo Archeologico delle Marche*).

On the *Ground Floor* is the *Archæological Museum* (open 10-3, Sun. 10-1). *VASTIUM*. Keystones from the doorways of houses and other reliefs of the 13th cent., including large groups of *Cain and Abel*, etc., from the old *Palazzo Comunale*. — *Room I.* Chiefly Roman antiquities and coins. — *Room II.* Antique bronzes and vases; medals; skeleton of a warrior with a bronze helmet (7th or 8th cent. B. C.), found in 1892 at *Novilara*, to the S. of *Pesaro*.

Upper Floor. The *Picture Gallery* here includes a few good works of the Venetian school (open free on Sun. & Thurs., 10-1; on other days on application to the custodian, 10-12; fee 50 c.). *Room I.* Paintings and cartoons by *Francesco Podestà*. — *Room II.* 1 *Carlo Crivelli*, Small *Madonna*; 2 *Titian*, *Crucifixion* (damaged); 3 *Pellegrino Tibaldi*, *Baptism of Christ*; 11 *Guercino*, *Cleopatra*; 13 *Lorenzo Lotto*, *Assumption of the Virgin* (1550; spoiled by restoration); 27 *Ciccarelli*, *Relief of the Madonna*; 30 *Guercino*, *St. Pelagia*; 37 *Lorenzo Lotto*, *Madonna enthroned, with four saints*.

The *Via Bonda* descending to the right from the *Prefettura* leads to the *Loggia dei Mercanti* (Exchange, Pl. C, 3), a late-Gothic edifice with a façade by *Giorgio da Sebenico* (1454-59). In the interior are paintings by *Pellegrino Tibaldi* and stucco-work by *Varà*. — Adjoining, on the left, is the pretty *Palazzo Benincasa* (16th cent.).

— Farther on to the right we reach the church of *Santa Maria della* (Pl. C, 3), with an elaborate façade (1210), the sculptures

are by Philippus. Still farther on, on the same side, is the church of *Santa Maria della Misericordia* (Pl. C, 2), with an early-Renaissance portal. — We return through the *Strada della Loggia* to the *PIAZZA DEL TEATRO* (Pl. C, 3), the centre of traffic, beyond which is *Sant' Agostino*, with a late-Gothic portal showing a Renaissance tendency, by Giorgio da Sebenico (begun in 1460).

From the *Piazza del Teatro* the *CORSO VITTORIO EMANUELE* (Pl. C, D, E, 4) ascends towards the E., through the new quarters of the town. At the end is the *PIAZZA CAVOUR* (Pl. E, 4), with a marble statue of Count Cavour in the centre (1868). At the point where the *Corso Giuseppe Mazzini* passes the *Piazza Roma* is a tasteful fountain of the 16th century.

A pre-Roman *Barici Ground* was discovered in 1902 outside the *Porta Cavour* (Pl. F, 4); the objects found in it are now in the Museum (p. 120).

EXCURSIONS FROM ANCONA.

The Province of Ancona, the ancient *Picenum*, is a remarkably fertile district, abounding in beautiful scenery. The Apennines send forth a series of parallel spurs towards the sea, forming short, but picturesque valleys. The towns are invariably situated on the heights. To the W. the view is bounded by the *Central Apennines*, usually covered with snow, which here attain their greatest elevation in several continuous ranges, from the *Monti Sibicini* (p. 82) to the *Gran Sasso d'Italia* (9560 ft.).

On the coast, 9 M. to the S. of Ancona, rises the *Monte Conero* or *Monte di Ancona* (1875 ft.), the *Promontorium Cunicum* of antiquity, with a Camaldulensian monastery, commanding a superb panorama. The hill, consisting of limestone, does not form part of the Apennines, in front of which it lies, and geologically considered is perhaps, like Monte Gargano, a remnant of the Dalmatian limestone plateau which is now submerged by the Adriatic. The pedestrian follows a tolerable road over the coast-hills nearly as far as (7 M.) *Sirolo* (2676 inhab.), whence a path to the left ascends in $\frac{3}{4}$ hr. to the top. A carriage (see p. 118) may be taken as far as the foot of the hill. An alternative route is to take the train to *Osimo* (see below) and thence proceed by diligence to *Sirolo* ($1\frac{3}{4}$ hr., fare 50 c.).

The ANCONA-FOGGIA RAILWAY (to Loreto, 15 M., in 34-50 min.; fares 2 fr. 80, 1 fr. 95, 1 fr. 30 c.; express 3 fr. 10, 2 fr. 15 c.; to Porto Civitanova, 27 M., in 1-1 $\frac{1}{2}$ hr.) penetrates the heights enclosing Ancona by means of a tunnel. 4 M. *Varano*. To the left rises the finely formed *Monte Conero* (see above).

10 M. *Osimo* (*Albergo Corona*, in the market-place; omnibus from the station to the town, 3 M., 75 c.), the ancient *Auximum*, colonised by the Romans in 157 B.C., and mentioned by Caesar, is now a country-town with 6404 inhab., and lies on a hill (870 ft.) in a commanding position. The N. part of the *Town Wall* (2nd cent. B.C.) still exists. A walk round the town affords beautiful views. The *Palazzo Pubblico* in the *Piazza* contains inscriptions and statues

in Roman dress, found on the site of the ancient forum in the 15th cent., but mutilated by the Milanese in 1457. Here are also a Madonna and angels, by Lor. Lotto, and an altar-piece by Bart. Vivarini. The Cathedral, the portal of which is adorned with sculptures of the 13th cent., contains a fine bronze font (16th cent.).

Proceeding hence by railway, we perceive, to the right, *Castel-Sardo*, where on 18th Sept., 1860, the papal troops under Lamoricière were totally defeated by the Italians under Cialdini.

15 M. Loreto. — Hotels (comp. p. xvii). *PACH & GENELLI*, with electric light, R. 1½, D. 2½, 44½; 2, D. 3 fr.; *PALLANZINO*, in the Piazza; *Roma*, well spoken of; *Franz. Tommaso Franz*, in the Piazza, under the arcade, to the left, No. 77. — *Frattoria di Front. Betti*, Via della Piazzetta 12. — 'Posto' in *Omibus* or *Ost* to the town, 60 (back 40) s.; one-horse cab to *Recanati*, 3-4 fr. (bargain beforehand). Those who walk from the station to the town leave the main street to the right, at the point where it is crossed (viaduct) by a street running towards the E. end of the church. — Loreto is infested by beggars and importunate (but useless) 'guides'.

Loreto (1178 inhab.), situated on a hill 1½ M. from the line, with admirable views of the sea and the Apennines, is a celebrated resort of pilgrims. It consists of little more than a single long street, full of booths for the sale of rosaries, medals, images, etc. An important festival takes place on Sept. 8th (Nativity of the Virgin).

According to the legend, the house of the Virgin at Nazareth became an object of profound veneration after the year 330, when the aged *Empress Helena*, mother of *Constantine*, made a pilgrimage thither, and caused a basilica to be erected over it. Owing to the incursions of the *Saracens* the basilica fell to decay, and after the loss of *Ptolemais* (*Acre*) the *Cruz Santa* was miraculously transplanted by the hands of angels in 1201 to *Torcello*, near *Venice*. Three years later, however, it was again removed by angels during the night, and deposited in a laurel-grove (*Lauretum*) near *Recanati*. A church was erected over it, and houses soon sprang up for the accommodation of the believers who flocked to the spot. In 1585 *Pope Sixtus V.* accorded to Loreto the privileges of a town.

Among the numerous pilgrims who have visited this spot may be mentioned *Tasso*, who thus alludes to it:—

*'Ecco fra le tempeste, e i fieri venti
Di questo grande e spazioso mare,
O santa Stilla, il tuo splendor m'ha aperto,
Ch' illustre e solido per l'umane menti.'*

The large *CHIESA DELLA CASA SANTA*, with nave and aisles of equal height and a transept with aisles, was begun on the site of an earlier church in 1468 for *Pope Paul II.* and was continued in 1479-86 by *Giuliano da Majano* of Florence. The lofty dome supported by eight pillars above the crossing was completed in 1500 by *Giuliano da Sangallo*, the interior was altered after 1526 by *Antonio da Sangallo the Younger*, while the handsome travertine façade was erected in 1583-87 under *Sixtus V.*, a colossal statue of whom adorns the entrance flight of steps. Over the principal door is a lifelike statue of the Madonna and Child, by *Girolamo Lombardo*, whose sons and pupils executed the three fine bronze doors, under *Pope Paul V.*, in 1605-21. The campanile, designed by *Vanzetti*, is a lofty structure in a richly-decorated style, sur-

mounted by an octagonal pyramid. The principal bell, presented by Pope Leo X in 1510, weighs 11 tons.

In the INTRON, to the left of the entrance is a beautiful frieze, cast in bronze by Tiburzio Parenti and Giambattista Viani, and adorned with bas-reliefs and figures of Faith, Hope, Charity, and Fortitude. On the stairs and in the chapel of the nave are murals representing St. Francis of Assisi, by Simonastino the Architectural Michael, by Guido Risi, etc.

The **BIGGY TRAPPEY**, the central chapel of which is adorned with modern frescoes is flanked on each side by SACRISTIES, containing celebrated "Piemonte" In the sacristy to the right the Entry of Christ into Jerusalem, and the elaborate ceiling painted in imitation of architecture with pilasters and angels (14th) are by *Schizzo da Ford* (p. 107). The frescoes (freely restored) to the flagstone della (over to the left are by *Luca Signorelli* (p. 61) and his assistant *Bartholomeo* the Apostle, Christ and the Doubting Thomas Conversion of St. Paul, and (in the dome) Evangelists, church fathers, and angels (see 14th), the marble fountain and the tiled dome are by *Don de Bionne* the interior painting by *Don de Bionne*.

The Court Room is richly painted from the designs of Lady Stills (1900). In the Duns are fine frescos by O. Stewart.

In the center of the church beneath the dome since the Casa Santa (or "Holy House") a simple stone building, 12 $\frac{1}{2}$ ft in height, 20 ft in length, and 12 $\frac{1}{2}$ ft in width surrounded by a lofty "Mural Screen," designed by Bramante (1610), and executed by Andrea Sansone (1613-29), Giulio Lombardo, Sandrino, Tribolo Raffaello de Montalupo Oughino della Porta etc with bronze doors by Giulio Lombardo. It is adorned with statues of prophets and sibyls, and (on the E side) of David and Goliath, and with relief among which are on the W side Annunciation, by Sansone S. Trinity by Sansone Adoration of the Magi, by Raffaello de Montalupo and Giulio Lombardo E. Arrival of the Casa Santa at Loreto, by Nicolo Tribolo, above it Death of the Virgin by Sansone above S. Trinity of the Virgin begun by Sansone, continued by Nicolo Sandrino and Raffaello de Montalupo Resurrection of the Virgin, by the same master.

In a niche of the interior is a small black image of the Virgin and Child in cedar attributed to St. Luke. It is richly adorned with jewels, the lustre of which is enhanced by silver lamps always kept burning. In 1793 it was carried off to Paris by the French.

In the N. Treasury is the entrance to the Treasury (open free to the public, 9-11 AM and 2-3-5 PM in summer 4-5-6 PM, at other times only with permission), which contains valuable native offerings and curiosities, the gifts of monarchs and patrons of rank (chiefly of the 19th cent.). The ceiling painting is by Paganini.

In the Piazza in front of the church are the Jesuits' College and the unfinished Palazzo Apostolice, or Braccio, begun in 1510 by Bramante, continued by And. Sansovino and Ant. da Sangallo the Younger. It contains a collection of works of art (see p. 148).

PICTURES. *Low Life, Adoration of the Child St Christopher, Rochus, and Sebastian, Christ and the Women taken in adultery, and four other works.* *Feast, Last Supper, Ascension, St. Luke, Quercus, Descent from the Cross, San Giovanni, Majesty — Tapestries after Raphael's Cartoons (Paul at Lyons, Healing the Lame, 'Feed my Sheep, Byman the Hermit, Holy Family, Virginal Drought of Fiebia, St. Paul's Speech) — Miniatures, chiefly from Lening.*

At (17 1/2 M) Porto Ragnotti (4028 inhab) we alight for —

Bonatti (*Aldero* Corona, *Trattoria Spasati*, with bedrooms, clean, 15,207 inhab.), situated 4 1/2 M. to the W. and commanding charming views of the Apennines and the sea. It was a fortified and important place in the middle ages. The handsome *Municipio* contains two good works by *Lor. Lotto* (Madonna enthroned, 1608.

Transfiguration, 1612), a bronze bust of Leopardi (see below) by G. Monteverde (1898), and a charter of municipal privileges accorded to the town by Emp. Frederick II in 1229. The Cathedral of *San Flaviano*, with a Gothic porch, contains the monument of Gregory XII, of 1417. In the small church of *Santa Maria sopra Mercanti* is an Annunciation by *Leo Lotto*. *San Domenico* (with a fresco of the Apotheosis of St. Vincent Ferrer by *Leo Lotto*) and *San' Agostino* have Renaissance portals of 1481 and 1484, while the palace of *Card. Veneri* has a loggia (towards the court) by *Giuliano da Majano* (1477-79). The palace of the Leopardi contains the collections of the scholar and poet Count *Giuseppe Leopardi* (d. 1837), to whom a marble statue has been erected in front of the Municipio.

A diligence runs from *Bonassai* to *Macerata* (see below) in $3\frac{1}{2}$ hrs. (fare 1 fr.), passing the interesting ruins (amphitheatre and bridge) of *Albino Arona* (see below).

The train crosses the *Poturno*. 23 M. *Poturno Piazza* (4816 inhab.), named after a vanished Roman colony.

27 M. *Porto Civitanova*, at the mouth of the *Chienti*; the town of *Civitanova* (508 ft.; 3880 inhab.) lies 3 M. inland. — Thence to *Pescara*, *Foggia*, etc., see *Baudouin's Southern Italy*.

From *Porto Civitanova* to *Paonano*, 10 $\frac{1}{2}$ M., railway (two through-trains daily) in $2\frac{1}{2}$ -3 $\frac{1}{4}$ hrs. — The line at first ascends the fertile valley of the *Chienti*. 5 M. *Montecosaro*. 8 M. *Marconella-Monte San Gualdo*, 12 $\frac{1}{2}$ M. *Assunta*, a town on the height (210 ft.) to the left, with 200 inhabitants.

17 $\frac{1}{2}$ M. *Macerata* 1026 ft. 418 Centuri. M. 2 to, above, *Albino Arona*, * *Fraternum Pontifex*. Left at the post-office, a flourishing town with 6176 inhab. and a large seminary (200 students), capital of the province of *Macerata*, is picturesquely situated on the heights between the valleys of the *Chienti* and *Flaviano*. Like *Bonassai* *Macerata* sprang up after the destruction of *Albino Arona*, of which there still exist some remains of an amphitheatre and of a bridge on the *Poturno*. 4 M. to the N.W. of *Macerata*. From the rail station we follow (left) the *Via delle Mura* (views) to ($\frac{1}{4}$ M.) the large *Castello Nazionale*. Hence the *Via dei Convitti* leads to the right to the town and ascends to the church of *San Giovanni*, with an Assumption of the Virgin by *Luigi Bruni*. Adjacent is the *Sublime Comunale* containing a small *Pinacoteca* (open on week days, 9-3) the chief treasures of which are St. Julian and Anthony of Padua by *Gerardo da Fabriano* (7, No. 11), a Madonna by *Carlo Crivelli* (1470; No. 10), a Madonna with St. Julian and Anthony by *Allegretto Masti da Fabriano* (1500, No. 10) and a *Pentecost* by *Luigi Bruni* (No. 10). It also contains a few antiquities and coins. Proceeding hence in a straight direction past the *Post Office*, we reach the main Piazza, with the *Palazzo Municipale* (in the court ancient tapestries and inscriptions) and the *Procuratore*, a Renaissance palace of the *Guinigi* with Gothic survivals. We then descend, passing the Cathedral and the small church of *Santa Maria del Porto* (late Romanesque brick facade), to the *Porto Mercati*, built by Pius II. Outside the town 4 M. to the right of the station, is the church of *Santa Maria della Vergine*, by *Giuliano da Corti* (1573).

23 M. *Urbisaglia*. The road to the little town of this name, which lies 5 to 6 M. to the S.W. (diligent), crosses the *Chienti* and the *Flaviano* and passes the villa of *Principe Ruffini*, a secularized convent with a large garden and an interesting Romanesque church. Farther on the *Monte Sublimi* (p. 11) come into sight. The loftily situated *Urbisaglia* (*Contra Fiume*, very hot), to the W. of the road, occupies the Art of the Roman *Urbs Sublimi*, which spread over the whole slope as far as the *Flaviano* and was destroyed by *Alaric*. A ruined theatre and amphitheatre and traces of many other ancient buildings still remain. The medieval wall, which enclosed the

while open, may also be used; on its N.W. side it has utilized some ancient masonry — 10 1/2 M. *Possano*.

20 1/2 M. *Tulentino* (725 ft.; *Corona*, medieval; *Poligno*, near the piazza, representing the ancient *Poluntinum Picenum*, prettily situated on the *Clitum* with 5111 inhab., was once strongly fortified. The rail station is about 1/2 M. from the town. To the left stands the church of *San Catero*, which contains the early Christian sarcophagus of St. Catero, and frescoes of the 13th century (School of *Pintoricchio*). A few hundred paces farther up is the *Stesso Closter* established in the Renaissance cloisters to the N.E. of *San Niccolò*. Among its contents are a large statue and the records of the excavations carried on by Count *Saverio Gentili* since 1880 in the *Picene* acropolis surrounding the town (6th cent. B.C.; see page at the *Pal. Gentili*, nearly opposite). Adjacent is the Cathedral of *San Niccolò*, which possesses a fine portal by *Giuseppe Ragni* (1825) presented to his native town by *Niccolò Marconi*, the celebrated condottiere. In the chapel to the N. of the high altar are the remains of St. Nicholas of *Tulentino* (d. 1300) and two paintings of the late Venetian school (16th cent.). An adjoining room contains a wooden statue and the Renaissance tomb of St. Nicholas and frescoes from the life of the saint by *Lorenzo* and *Giuseppe de San Severino* (? *Stettino*). The adjoining cloisters date from the 16th century. In the adjacent Piazza is the church of *San Francesco* (13th cent.), with a fresco of 1470 representing the Madonna and Saint Ambrose of *Santhone* healing the infirm. — The church at *Settore* (or *Chigi*), 5 M. to the S.W., contains a large altar piece by *Ottavio Masini* of *Catharina* (1688).

The railway now quits the *Clitum* and enters the valley of the *Poligno*. — 25 M. *San Saverio Marche* (761 ft.; *Ab. della Speranza*), a town with 3521 inhab., arose from the ruins of the ancient *Aspempeda*. The lower town (*Sorbo*) contains the *New Cathedral*, in the sacristy of which is a fine Madonna, with donor by *Pintoricchio* (1488). The church of *San Lorenzo* stands on the site of an ancient temple. The *Pieve* *San* contains paintings by *Niccolò de Poligno* (altar-piece of 1488) and others, besides inscriptions and antiquities (see 26 c.). The *Old Cathedral* (*San Saverio*) is in the upper town (*Castello*), and is adorned with frescoes by *Pintoricchio* and *Angelino*. — 41 M. *Capitolo*.

From 42 M. *Castellomonte* (418 ft.; *Rossi*) a road leads to the E. to 45 M. *Camerano* (1145 ft., 5318 inhab.), the ancient *Camertum Umbrosum*, once the capital of the *Fimbrian Camertini* who during the *Samnite* wars allied themselves with *Rome* against the *Umbrosum*. It is the seat of a bishopric (founded in 269) and of a university. The cathedral of *San Simeone* occupies the site of a temple of *Jupiter*; in front of it is a bronze statue of Pope *Sixtus V.*, of 1667. The painter *Carlo Maratta* (1625-1713) was born here.

47 M. *Matellina* (1105 ft., *Ab. Monte Alen*), a town with 3713 inhab., possessing pictures by *Polignone* (1504) and *Luca* di *San Giorgio* (1517) in the church of *San Francesco dei Sordani*, and other paintings in the *Pal. Piccini*. — 51 1/2 M. *Corona d'Est* 54 M. *Altino* (p. 135; change carriages for *San* and *Ancona*). — 55 1/2 M. *Poligno*, see p. 135.

15. From Ancona to Foligno (*Orto, Rome*).

50 M. *Railway* to 51 1/2-5 1/2 hrs (times 15 fr., 10 fr. 50, 6 fr. 70 c.; express 14 fr. 50, 11 fr. 50, 7 fr. 50 c.). To *Rome* (105 M.) in 6-1 1/2 hrs (times 24 fr. 25, 24 fr., 15 fr. 40 c.; express 37 fr. 50, 26 fr. 50, 17 fr. 30 c.). Last carriage to the left.

To (5 M.) *Pescasseria Marittima*, see p. 118. — Here the train diverges to the S.W. into the valley of the *Esina* (*Lat. Anis*), which it crosses at (10 1/2 M.) *Chiaravalle*.

17 1/2 M. *San*; 41 M. *San Antonio*, *Speranza*, both fair; *Corona*), a town with 20,825 inhab., was the ancient *Anis*, where the *Rimp. Frederick II.* was born on 26th Dec., 1194. The picturesque town-walls, dating from the middle ages, are in good preservation. The

Cathedral is dedicated to the martyr St. *Septimius*, the first bishop of *Jeai* (308). The *Palazzo Pubblico*, now the *Prefettura*, bears the town-arms within an elaborate Renaissance border. The interior and the *Public Library* contain works by *Lorenzo Lotto*.

Jeai was also the birthplace of *Giov. Batt. Pergolesi* (b. 1710; d. 1736 at *Forquoli*), the composer of the *Stabat Mater*; and a neighbouring village gave birth to the composer *G. Spontini* (1778-1851).

The valley contracts, and the train crosses the river twice. 26 M. *Castelpiano*. Beyond (30½ M.) *Serra San Quirico* the line threads a long tunnel through the *Monte Rosso* and then traverses a ravine between lofty cliffs (part of the E. Apennine chain). — 39½ M. *Albasina*; to *Porto Civitanova*, see p. 125.

44½ M. *Fabriano* (1066 ft.; *La Campana*, R. 2, d.dj. 1½, D. 2½ fr. incl. wine), a prosperous town with 9586 inhab., noted since the 14th cent. for its paper-manufactories, lies in a depression between two heights, near the sites of the ancient *Tuscanum* and *Attidium*. The *Town Hall* contains ancient inscriptions and a small collection of pictures. The churches of *San Niccolò*, *San Benedetto*, and *Santa Lucia*, and the private houses *Casa Morichi* and *Casa Fornari*, contain pictures of the local school (see p. 61).

From *Fabriano* to *Urbino*, see R. 16; to *Porta Civitanova*, see pp. 125, 126.

Beyond *Fabriano* the train skirts the brook *Giano*, and penetrates the central Apennine chain by a tunnel 1¼ M. long.

At (54½ M.) *Fossato di Vico* (to *Arezzo* and *Fossato*, R. 8) we enter the plain of the *Chiappio*. To the left on the hill, *Palassolo*; to the right, *San Pellegrino*; farther on, to the left, *Palasso* and *San Facondino*.

58 M. *Gualdo Tadino* (1755 ft.), a small town with 4440 inhab., lies about 1 M. to the E. of the railway (cab 40 c.), near the insignificant ruins of the ancient *Tadinum*. In 552 *Narses* defeated and slew the Ostrogothic king *Totila* here. In the *Palazzo Comunale* are pictures by native artists, with a *Pietà* by *Niccolò da Foligno* (1471). The *Cathedral* has a fine rose-window.

We gradually descend to (68 M.) *Nocera Umbra* (1797 ft.), an episcopal town (5685 inhab.), on the site of the ancient *Nuceris*, a city of the *Umbri* (2½ M. from the station; omn.). The *Cathedral* and the church of the *Madernina* contain a few fair paintings. Some admirable frescoes of 1494 may be seen on the organ-screen of *San Francesco*, and others of less importance (ca. 1500) in the nave and choir. The *Orfanotrofio* (*Venerevole Antico*) contains portraits of the bishops of *Nocera* from the 1st cent. of our era (!), painted in 1659. About 2¼ M. from the town are mineral springs, known since 1510.

On the slope of the *Monte Pennino* (5155 ft.), above the town, is a prettily situated and much frequented *Summer Hotel* (1970 ft.; pens. 8-10 fr.; omn. at the station; open June-Sept.).

The train enters the narrow *Val Topina*, crosses the brook several times, traverses a tunnel, and descends by *Ponte Castasino* to —

60 M. *Foligno*. Thence to *Roma*, see pp. 77-86 and 94-97.

16. From Fabriano to Urbino.

80 M. Railway in $3\frac{1}{2}$ hrs. (fares 5 fr. 30, 0 fr. 30, 4 fr. 20 c.; two trains daily; no express).

Fabriano, see p. 126. — $2\frac{1}{2}$ M. *Metauro* (1186 ft.), 8 M. *San Donato Marche* (1102 ft.). — $10\frac{1}{2}$ M. *Sassoterrate-Arecore* (1017 ft.). *Sassoterrate* (1266 ft.; *Fata, Pretorio*), situated on the *Sentino*, with 3142 inhab., possesses interesting churches and pictures. *Giambattista Sisti*, surnamed *Sassoterrate*, was born here in 1606; he was especially noted for his Madonnas, and died at Rome in 1685. *San Pietro*, in the upper town, contains a Madonna by him.

In the vicinity are the ruins of the ancient *Senonium*, where, in B. C. 295, the great decisive battle took place between the Romans and the allied Samnites, Gauls, Umbrians, and Etruscans, in which the consul Decius heroically sacrificed himself. The Roman supremacy over the whole of Italy was thus established. — About 6 M. to the N.E. of *Sassoterrate* (diligence in 2 hrs.), on the road to *Senigallia* (p. 118) lies the little town of *Arecore* (2150 inhab.). The church of *San Medardo* contains a large altar-piece by Luca Signorelli (1507, restored in 1880), a *San Baptism of Christ* and a Madonna with saints (1530), by the same master, and a terracotta altar by Giovanni della Robbia (1518).

19 M. *Monterosso Marche*, 17 $\frac{1}{2}$ M. *Bellio Solfare*, with sulphur-mines, 20 M. *Pergola* (965 ft.), 23 M. *Canneto Marche* (1102 ft.). — 26 M. *Frontone* (1345 ft.), in a high situation to the left.

A rough road leads from *Frontone* to the S.E. to (4 M.) *Serra Sant'Abbondio*, and then ascends to the S.W., through the wooded gorge of the *Osima*, to ($7\frac{1}{2}$ M.) the Camaldulensian convent of *Avellana*, where tradition avers that Dante found refuge after the death of Henry VII. We may spend the night here, and next day ascend (8 hrs.; guide 2-3 fr.) the *Monte Catria* (5583 ft.), which is surmounted by a cross 60 ft. high, and commands an extensive "Panorama."

$29\frac{1}{2}$ M. *Acquafredda Marche* (1100 ft.). — 32 M. *Cagli* (830 ft.; *Alt. Roma*, in the main street), a small town with 4628 inhab., on the site of the ancient *Cales* or *Calle*. The church of *San Domenico* contains a fresco (Madonna with saints), by *Giovanni Santi* (p. 128), one of his most important works, a *Pietà* with SS. Jerome and Bonaventura is also by him. *San Francesco* and *Sant'Angelo Minore* also contain pictures. At the foot of the hill is a stream spanned by an ancient bridge, constructed of huge blocks of rock. From *Cagli* to the convent of *Avellana* (see above), $3\frac{1}{2}$ hrs., to *Scheggia*, see p. 117.

The train descends the valley of the *Burano*, which is also followed, as far as ($35\frac{1}{2}$ M.) *Acqualagna* (898 ft.), by the road over the *Furlo Pass* (see p. 117). — 38 M. *Fola-Flobbico* (793 ft.).

$42\frac{1}{2}$ M. *Urbano* (780 ft.); the town, formerly named *Castel Durante* and famous for its majolica, lies 4 M. to the N.W. (diligence in 1 hr.). Adjacent is the secularized convent of *Monteflorentino*, with two marble monuments by *Francesco di Simone* (ca. 1484) and a Madonna by *Giov. Santi* (1481).

We continue to follow the valley of the *Metaurus* to (46 M.) *Fermignano* (904 ft.). — 50 M. *Urbino* (1000 ft.); the town is $1\frac{1}{2}$ M. from the station (picturesque road). Omnibus 60 c., luggage 15 c.; one-horse carr. 1 fr. 25, two-horse 2 fr.

Urbino (1480 ft., *Altare d'Italia*, Corso Garibaldi, Caffè near the Piazza, plain), the ancient *Urbium Metanensis*, the birthplace of *Raphael Santi* (b. 1483 d. at Rome, 1520), lies on an abrupt hill, surrounded by barren mountains. The town, with narrow, crooked streets and 8000 inhab., has an unimportant university, and merits a visit for the sake of its monuments and associations.

In the 13th cent. the town came into the possession of the *Montefeltro* family, and under *Federigo Montefeltro* (1444-82) and his son *Guidobaldo* (1472-1508) attained to such prosperity as entirely to eclipse the neighbouring courts of the *Malatesta* at Rimini and the *Strozzi* at Florence. *Federigo Montefeltro* who distinguished himself as a condottiere in the service of the 15th cent. married his daughter in 1474 to *Giovanni della Rovere*, a nephew of *Sixtus IV.* and was in consequence created Duke of Urbino. His court was regarded as a model among the princely courts of that period. It was visited for shorter or longer periods by numerous scholars and artists amongst whom the prince was prominent for learning. His son, *Guidobaldo* in spite of ill health and other misfortunes constantly followed his example with the able assistance of his beautiful and accomplished wife *Isabella Gonzaga*. A famous description of the court of Urbino under *Guidobaldo* depicting it as the most refined court school of the day is given by *Guise de Selve* in his *Fortunio*; the ideal of a courtier. In 1497 *Guidobaldo* was expelled by Cesare Borgia, the son of *Alexander VI.* after whose death however he returned to Urbino in 1503. He died in 1516 and bequeathed his dominions to his nephew *Francesco Maria della Rovere* the favourite of *Pope Julius II.* In 1626 the duchy was incorporated with the States of the Church when *Urban VIII.* persuaded the last and childless Duke *Francesco Maria II.* to abdicate.

Amongst the most distinguished artists employed at the court of Urbino during the zenith of its splendour under *Federigo* and *Guidobaldo*, were *Piero della Porta della Francesca*, and *Melozzo da Forlì*. Even foreign painters like *Lucas van Ghent* (see p. 129), were attracted to the court. The peculiar band of artists who came to Urbino were attracted to the interests of science and art is chiefly exhibited in the library pictures or ideal portraits of scholars painted by *Melozzo da Forlì* and others, which however have been removed from Urbino together with the library. *Timoteo Viti* of *Urbino* (see p. 129), of *Ferrara* (1467-1524), the best pupil of *Francesco Francia*, spent the greater part of his life in Urbino; he was the best painter who exercised an influence on *Raphael* but at a later period he himself became subject to that great master's magic spell. — The master however in whom we are now specially interested is *Giovanni Santi* of Urbino (ca. 1480-94), the father of *Raphael* whose fresco at *Caffè* (p. 127) and *Pano* (p. 116) show considerable power and a keen sense of the graceful. As *Giovanni* died when *Raphael* was in his 11th year his son was hardly have had the benefit of his instruction. After his father's death *Raphael* remained in Urbino till 1502 but under what tuition is unknown. Another native of Urbino was *Francesco Bassano* (1524-1612), some of whose works are able while others display the customary affectation of the post *Raphaelite* period. During the Renaissance period, Urbino was one of the chief centres of the majolica manufacture (see p. 117) owing to the excellent patterns easily found in the neighbourhood.

In the centre of the town is the MARKET PLACE, or Piazza *San Settimio*, where the *Corso Garibaldi* ends. — The Via *Puccinotti* ascends hence to the right to the narrow Piazza *Duca Federigo* with the cathedral and the ducal palace. The fine *Raphael Monument* here is by Luigi Del (1807). The bronze statue of the painter stands on a pedestal of marble, adorned with reliefs from his life, below are bronze figures of the Renaissance and the Genius of Art.

The new CATHEDRAL, erected in 1801 on the ruins of its predecessor, contains some interesting pictures.

INTERIOR. To the right of the entrance, St. Peter, a copy of the statue in St. Peter's at Rome. In the 3rd chapel to the right, St. Sebastian by *Pedro de Berraco*, in the left of the high-altar, Last Supper, also by *Ped. Berraco*. In the sacristy, next the right transept, St. Martin and Thomas à Becket, with a portrait of Duke Guidobaldo, the masterpiece of *Pinuccio Fisi* (1501); "Scourging of Christ" by *Piero della Francesca*, elaborately executed in the miniature style (usually covered) — The Carrer (entered from the right corner of the small piazza between the cathedral and the palace) possesses a Pietà in marble by *Giov. da Bologna*.

The "DUCAL PALACE, erected by *Luciano de Laurana* of Dalmatia in ca. 1460-82 by order of *Federigo Montefeltro*, is now used as a 'Residenza Governativa' and as an 'Istituto di Belle Arti', and contains the archives. The requirement of strength, coupled with the unevenness of the ground, has given rise to the irregularity of the building, but at the same time has enhanced its picturesqueness. The palace was much admired by the contemporaries of the founder. According to modern standards, however, its dimensions are not grand, and even the court, the entrance to which is opposite the cathedral, is pleasing rather than imposing. In the latter, to the right, are mediæval tombstones and a relief (Pietà) of the 14th century. The staircase to the upper rooms is on the left, with a statue of Duke *Federigo*, by *Giov. Campagna* (1606). The ornamentation of the doors, windows, and chimney-pieces here and in the apartments is by *Ambrogio da Milano*, etc. The corridors and rooms contain a collection of inscriptions from Rome and the Umbrian municipia, early-Christian, mediæval, and Renaissance sculptures, and a picture-gallery. Open daily, 9-12 and 2-4 (in summer 2-6), fee 1 fr.

The Collection of Inscriptions was made by the epigraphist *Petrus*. — SCULPTURE. In the corridors are 72 reliefs with representations of engines of war (after *Francesco de Strozzi*), by *Ambrogio da Milano* (1474), which formerly decorated the outside of the palace. Room I (Sala degli Angeli). Five beautiful doors, frieze of dancing angels on the chimney-piece, by *Domenico Rosselli*. Room II. Four marble chimney-pieces. Room III. Two crucifixes of the 13th century. Room IV. Tapestry worked in Urbino by masters from Flanders, stucco reliefs by *Brandino*, two marble chimney-pieces. — We now return and enter the Chapel, in which is a plaster-cast of Raphael's skull. The studio of Duke *Federigo* should be visited for the sake of the intarsias, which formerly covered also the upper part of the walls, and the fine ceiling. From the balcony a beautiful view of the Apennines is obtained; still better from the W. tower, to which an interesting winding staircase ascends. In the colonnade on the upper floor and in the lower chapel are two reliefs by the so-called *Master of the Marble Madonna* (15th cent.) — The celebrated library collected by *Federigo* has been removed to Rome (p. 386).

PICTURE GALLERY. To the right, 39. *Berraco*, Madonna, with saints; 38. *Filipp*, Resurrection, a late work like the Last Supper (see below); *Pinuccio Fisi* (or *Giov. Santi*?), 40. St. Rochus, 41. Tobias and the Angel, 26. St. Sebastian, 25. *Piero della Francesca*, Legend of the decorated Host. Five chimney-pieces. — 41. *Pin. Fisi*, St. Sebastian; 42. *Filipp*, Last Supper (damaged); *Giovanni Santi* 2. Madonna with St. John the Baptist, Sebastian, Jerome, and Francis, and the *Buffi* family (1489); 14. *Piero della Francesca* (?), Architectural piece; "1. *Justus van Ghent*, Holy Communion, with numerous portraits, including Duke *Federigo* and *Caterina Sforza*, the Persian ambassador (to the right of the table; injured, 1474); 60. *Pin.*

VIII, St. Apollonia; *Master of the Marble Madonna*, Bust of the youthful St. John.

Opposite the palace rises an Obelisk, facing which is the church of *San Domenico*, with a pleasing portal by Maso di Bartolomeo (1449-54) and a terracotta relief of the Madonna, with four saints, by Luca della Robbia (1449). — The street contracts, to the right is the *University*, with armorial bearings over the door (161 students).

In the market-place (p. 128) is the loggia of *San Francesco*, a 14th cent. church, with a handsome campanile. The portal of the chapel to the right of the high-altar is by Costantino Trappola (15th cent.).

The Contrada Raffaello leads hence to the former *Fortezza* (see below). Raphael was born at No. 278, on the left, the house now belongs to the 'Reale Accademia Raffaello'.

The rooms are adorned with engravings from Raphael's pictures. In one of the rooms is a fresco of the Madonna (removed from the court; entirely repainted), by *Giovanni Santi*, possibly representing Maria Clara, Raphael's mother (see 1/2 fr.).

From the beginning of the Contrada Raffaello the Via Bramante leads to the church of *Santo Spirito*, containing a *Pietà* and Descent of the Holy Ghost, two good paintings by *Luca Signorelli*, originally a church-banner (1494-95).

Returning to the market-place, and descending the Via Mazzini, we follow the Via della Porta Vecchia, the first side-street to the right, and then the Via Barocci, the first street to the left, which leads, past the church of *San Giuseppe* (containing a group of the Nativity by Fed. Brandano), straight to the *Oratorio di San Giovanni*. The walls of the oratory are covered with *Scenes from the history of the Virgin and John the Baptist and a large Crucifixion, by *Lorenzo* and *Jacopo da San Severino* (1416; restored). The ancient timber roof should be noticed. — In the church of *San Sebastiano* is a picture of St. Sebastian, by *Giov. Santi*.

The bastion of *Pian del Monte*, at the end of the Contrada Raffaello, commands an extensive view. Passing through the adjacent gateway, we walk round the base of the *Fortena* (now a prison and not accessible) until we find ourselves (in 6 min.) opposite the Ducal Palace. In front is the barren chain of the Apennines, in which the abrupt Sassi di San Simone are specially conspicuous. The peak of San Marino (p. 112) appears to the N.W.

About 1 M. to the E. of Urbino are situated the conspicuous old monastery and church of *San Bernardino* (ca. 1400) with the new cemetery of Urbino. This spot commands a fine view of the town. The church contains the tombs of the Dukes Federigo and Guidobaldo, with their busts.

From Urbino to Fossombrone (p. 117), viâ Calmarzo, 11 1/2 M., diligence daily in 2 (returning in 3) hrs, fare 2 fr. 10 c.; carriage 10 fr. The 'Corriere del Furi' passes through Fossombrone at 10.30 a.m. and on its way to Fano about 1.30 p.m. Travellers bound for Fano should visit the (50 min.) Furi Pass from Calmarzo. Carriage from Urbino to Gubbio 40 fr.

SECOND SECTION.

R O M E.

Comp. also p. xxvii.

Preliminary Information	133
a. Hotels. Pensions. Private Apartments	133
b. Cafés. Confectioners. Restaurants. Birrerie. Osterie	136
c. Post and Telegraph Offices. Carriages. Horses. Porters.	138
d. Embassies and Consulates. Bankers. Physicians and Chemists. Sick Nurses. Baths, etc.	139
e. Studios. Art Associations. Art Dealers	141
f. Shops	141
g. Church Festivals. English Churches	144
h. Principal Libraries. Learned Institutions	146
i. Theatres. Concerts. Sport. Popular Festivals. Street Scenes. Garrison	147
j. Best Time for visiting Churches and Hours of Admission to Public and Private Collections, Villas, etc.	148
General Topographical Description	153
I. The Hills to the N. and E.: Pincio, Quirinal, Viminal, and Esquilina	155
a. Piazza del Popolo. Monte Pincio. Piazza di Spagna	155
S. Maria del Popolo, 158. — Villa Medici, 159. — S. Trinità de' Monti, 159. — Fontana Trevi, 161.	
b. Via Sistina. Ludovisi Quarter. Quattro Fontane. Via Venti Settembre	162
Fontana del Tritone, 162. — Palazzo Barberini, 163. — Porta Pia, 165.	
c. Piazza delle Terme. Via Nazionale. The Quirinal	166
Thermae of Diocletian, 166. — S. Maria degli Angeli. Thermae Museum, 167. — Galleria d'Arte Moderna, 171.	
d. From the Via Nazionale to S. Maria Maggiore and S. Lorenzo fuori le Mura or the Porta Maggiore	179
S. Pudenziana, 179. — S. Maria Maggiore, 180. — Porta S. Lorenzo, 183. — Minerva Medica, 185. — S. Croce in Gerusalemme, 186.	
e. From S. Maria Maggiore to the Forum Romanum	187
S. Prassede, 187. — S. Pietro in Vincoli, 188.	
f. Villa Borghese. Villa di Papa Giulio	189
II. Rome on the Tiber (Left Bank)	197
a. The Corso and Adjacent Side Streets	197
S. Lorenzo in Lucina, 198. — Piazza di S. Silvestro, 199. — Piazza Colonna. Temple of Neptune, 200. — Piazza di Venezia, 201.	
b. Museo Kircheriano and Ethnographical and Prehistoric Museum. Doria and Colonna Galleries	203
c. From the Piazza di Spagna to the Ponte S. Angelo	212
Via Condotti, 212. — Palazzo Borghese, 213. — S. Agostino, 214.	
d. From the Piazza Colonna past the Pantheon to the Piazza Navona (Circo Agonale) and the Ponte S. Angelo	215
Monte Citorio (Chamber of Deputies), 215. — Pantheon, 216. — S. Maria sopra Minerva, 218. — University, 219. — Palazzo	

Madama (Senate). S. Luigi de' Francesi. Piazza Navona, 220. — S. Maria dell' Anima, 221. — S. Maria della Pace, 222.	
e. From the Piazza Venezia to the Ponte S. Angelo. Corso Vittorio Emanuele	223
Gesù, 223. — S. Andrea della Valle, 224. — Palazzo Massimo, 225. — Cancelleria, 226. — Chiesa Nuova, 227. — S. Gio- vanni de' Fiorentini, 228.	
f. Quarter to the S. of the Corso Vittorio Emanuele as far as the Piazza Montanara. Isola Tiberina	228
Campo di Fiore, 228. — Palazzo Farnese. Palazzo Spada, 229. — Fontana delle Tartarughe, 231. — Porticus of Octavia. Theatre of Marcellus, 232. — Isola Tiberina, 233.	
III. The Southern Quarters (Ancient Rome)	234
a. The Capitol	234
S. Maria in Arscelli, 235. — Palace of the Senators, 238. — Palace of the Conservatori, 239. — Capitoline Museum, 244. — Tabularium, 249.	
b. The Forum Romanum and the Colosseum	250
Temple of Vespasian and of Concordia, 253. — Basilica Julia, 254. — Temple of Saturn. Rostra. Column of Phocas, 255. — Arch of Septimius Severus, 257. — Basilica Emilia, 258. — Temple of Caesar. Temple of Castor and Pollux, 259. — S. Maria Antiqua, 260. — Regia, 261. — Atrium of Vesta, 262. — Temple of Faustina, 263. — Basilica of Con- stantine, 264. — Arch of Titus. Temple of Venus and Roma, 265. — Colosseum, 268. — Arch of Constantine, 270.	
c. Fora of the Emperors	271
Carcer Mamertinus, 271. — Accademia di S. Luca, 272.	
d. The Palatine	275
e. Velabrum and Forum Boarium	282
Janus Quadrifons, 282. — Clonca Maxima. Piazza Bocca della Verità. S. Maria in Cosmedin, 283.	
f. The Aventine. Monte Testaccio. Pyramid of Cestius	286
g. The Via Appia within the City.	290
h. The Caelius (S. Gregorio Magno; Villa Mattei)	294
i. S. Clemente. The Lateran	299
Lateran Museum: Antiques, 306; Christian Museum, 303; Picture Gallery, 310.	
IV. Quarters of the City on the Right Bank	312
a. Ponte S. Angelo. Castello S. Angelo. The Borgo	312
b. St. Peter's	319
c. The Vatican	329
Cappella Sistina, 331. — Raphael's Stanze and Logge, 335, 342. — Picture Gallery, 344. — Raphael's Tapestry, 345. — Appartamento Borgia, 347. — Antiquities Museo Pio- Clementino, 349. Museo Chiaramonti, 357; Braccio Nuovo, 359. — Egyptian and Etruscan Museum, 360. — Library, 364. — Christian Museum, 368.	
d. The Lungara (Villa Farnesina, Palazzo Corsini)	368
e. Trastevere.	373
Ponte Sisto. Ponte Garibaldi, 373. — S. Crisogono. S. Maria in Trastevere, 374. — S. Cecilia in Trastevere, 375. — S. Pietro in Montorio, 377. — Passeggiata Margherita. Villa Doria Pamphili, 379.	

Preliminary Information.

a. Hotels. Pensions. Private Apartments.

Arrival. At the *Stations Formid*, or chief railway-station (Plan I, II, 27; Restaurant, *de* 2-2½, D. 5½-6 fr.), hotel-omnibuses are in waiting, for the use of which a charge of 1-1½ fr. is made in the bill. Cabs in the town: with one horse, for 1-2 pers. 1 fr., at night 1 fr. 20 c.; with two horses, for 1-4 pers. 2 fr., at night 2½ fr.; small articles of luggage free, each small box 30 c., trunk 50 c. (comp. tariff in the App.). *Portier (fanchin)* 25-30 c. — There is another station at *Tramviro* (Pl. III, II, p. 577), of little importance, however, to tourists, except as the terminus of the line from Viterbo (R. 11, electric tramway to the *Piazza Venezia*, see the Appendix, p. 2, No. 9) — *Police Office (Questura)*, Via Sant' Apostoli 17 (Pl. II, 18). — Railway enquiry and ticket office in the town: *Corso Umberto Primo* 210 (near the *Piazza Colonna*) and *Corso Vittorio Emanuele* 48; *Thos. Cook & Son*, *Piazza di Spagna* 2 and *Piazza Esdra di Termini* 54 (corner of *Via Nazionale*), *Compagnie Internationales des Wagons-lits*, *Piazza di San Silvestro* 98.

Hotels (comp. p. xvii). — The first-class hotels are large and comfortable establishments, with lifts, baths, central heating (in many cases), etc., and are lighted by electricity. Prices are usually raised at Easter. **Grand Hôtel* (Pl. O H, I, 24, 27), *Piazza delle Terme*, a large establishment belonging to a company and under Swiss management, with a superior restaurant (p. 136), R. 7-16, B. 2, *de* 5, D. 7, frequented by the English. — **Grand-Hôtel du Quirinal* (Pl. Q; I, II, 27), *Via Nazionale* 7, a large hotel (Swiss management), with a small garden, R. from 6, B. 2, *de* 4, D. 7, pens. 13-20 fr., **Bristol* (Pl. B, I, 24), *Piazza Barberini* 23, R. from 6, B. 1½, *de* 4, D. 6, pens. from 16 fr., frequented by the English, **Royal* (Pl. R, I, 26), *Via Venti Settembre* 31, in a sunny situation, patronized by Americans, **Continental* (Pl. C; II, 27), *Via Cavour* 1, opposite the station, R. from 7, B. 1½, *de* 4, D. 6, pens. 13-16 fr., **Hôtel de Russie* (Pl. R, I, 17), *Via del Babuino* 9, near the *Piazza del Popolo*, with fine garden, R. from 6, B. 1½, *de* 3½, D. 6, pens. from 12 fr., closed in summer, *Hôtel d'Europe et des Îles Britanniques* (Pl. E, I, 21), *Piazza Mignanelli* 9, with restaurant, R. from 6, B. 1½, *de* 4, D. 6, pens. (except from Feb. to April) from 12 fr., these two frequented by the English, *Londres* (Pl. L; I, 17), *Piazza di Spagna* 15, R. from 4, B. 1½, *de* 3½, D. 6 fr., *Bertolini's Splendid Hotel* (Pl. B; I, 18), *Corso Umberto Primo* 128, R. from 4, B. 1½, *de* 3½, D. 6, board 8 fr., with bar and restaurant, new.

Many of the following are also excellent establishments. — In the high-lying new quarters on the Pincian Hill and the N. slope of the Quirinal: *Palace Hotel* (Pl. Pa, I, 21), *Via Veneto*, R. from 4, B. 2, *de* 4½, D. 6 fr., new, **Eden* (Pl. E, I, 20), *Via Ludovico* 40, in a sunny situation, near the Pincian Garden, R. from 4, B. 1½, *de* 3½, D. 6, pens. 11-15 fr.; **Suisse* (Pl. Su; I, 21), *Via Veneto* 20,

third floor, 6-7 fr.; *Varlet*, Via Marche 17, 5-8 fr.; *Ghedini*, Via delle Muratte 78, second floor, 5-7 fr.; *Lucarini*, Via Gregoriana 54, 6 fr. — The pension kept by the *Suore della Santa Croce* (Swiss nuns), Via San Basilio 8, Cava San Giuseppe, 7-8 fr., is highly spoken of.

The following are largely patronized by Germans: *Quisler*, Via Ventì Settembre 58 (Pl. I, 26), with lift and baths, from 8 fr.; *Boos*, Via del Quirinale 43 and Via Nazionale 181 (Pl. II, 21, 27), with baths, 8-8 fr.; *Castellani-Stolzer*, Via Sistina 79 (Pl. I, 21), with baths, 8-12 fr.; *Kaizer*, Via Ballustiana 38, 7-9 fr.; *Schmidt-Eckstein*, Corso Umberto Primo 61, 6 fr.; *Lehmann*, Via Frattina 7, 6-7 fr.

Private Apartments (comp. p. xviii). The best are situated in the old strangers' quarter (Pl. I, 17, 18, 21), bounded by the Corso Umberto Primo, the Via del Tritone, and the Via Sistina, especially in the Piazza di Spagna and its immediate neighbourhood, in the Via Nazionale (Pl. II, 24), Via Ventì Settembre (Pl. I, 24, 27, 26), and in the high-lying Ludovisi quarter (p. 155, Pl. I, 20, 23). Sunny apartments may be obtained in the Forum of Trajan and the adjoining streets.

Rent of two well-furnished rooms in a good locality 100-250 fr., one room 50-80 fr. per month; for a suite of 3-5 rooms 300-500 fr. and even 1000 fr. (e.g. in the Via Sistina or Via Gregoriana). Rooms to let are indicated by notices and placards; but, as these are seldom removed when the rooms are engaged, the traveller must be prepared for a number of fruitless enquiries — House-agents *Toti*, Piazza di Spagna 54; *Impresa Alloggio*, Via Quattro Fontane 11; — Firewood is kept stored in many houses (basket about 2½ fr.); it may be bought cheaper (20 fr. per 'pacco', delivered free), at *Betti's*, Via Monte Brianzo 33; *Società di Consumo*, outside the Porta Salaria; and other large wood-stores.

b. Cafés. Confectioners. Restaurants. Birrerie. Osterie.

Cafés. **Nazionale*, usually called *Caffè Aragno* (after the proprietor), Corso Umberto Primo 179, at the corner of the Via delle Convertite (cold luncheon only; ladies' room, with entrance at No. 183); **Roma*, Corso Umberto Primo 426 (excellent tea and coffee at these two); *Ramassotti*, Corso Umberto Primo 282; *Colonna*, Piazza Colonna; *Gilli & Bezzola*, Via Nazionale 47; *Santa Chiara*, Via Santa Chiara, adjoining the Piazza Minerva; *Caprettari*, Piazza Caprettari; *Caffè Greco*, Via Condotti 86, frequented by the English (luncheon and afternoon tea); *Castellina*, Via Nazionale 134.

Confectioners. *Rossi & Singer*, corner of the Via Corso Umberto Primo (No. 349) and the Piazza Colonna; *Viano*, Corso Umberto Primo 98; *Pesoli*, Via del Tritone 53, *Ramassotti*, Via Frattina 76, Corso Umberto Primo 404, and Via Nazionale 195; *Strachan*, Via Condotti 20; *Varini*, Via Muratte 14, *Latour*, Piazza Santi Apostoli 67. — **Tea Rooms:** Piazza di Spagna 23; Via Capo le Case 24 (British Stores); Via Condotti 20; *Charitas*, Corso Umberto Primo 5 (profits of the last devoted to charitable purposes).

Restaurants (comp. p. xix). The following are of the highest class, with corresponding charges, and first-rate chefs: **Grand Hôtel* (p. 183; non-residents admitted to table d'hôte at separate tables),

and the *Quirinale* (p. 133). — Next in point of excellence come the *Roma* and *Colonna Cafés* (p. 136) and the *Restaurant San Carlo*, Corso Umberto Primo 120, at the corner of the Via dello Carrozze, where the cuisine is partly Italian, partly French.

Second class (*Trattorie*), in the strangers' quarter (p. 155): *Corradetti*, Via della Croce 81; *Barardi*, Via della Croce 75 (closed in summer); *Ranieri*, Via Mario del Fiori 28 (closed in summer); *Ristorante Umberto*, Via della Mercede 48; *Flora*, Via Sistina 147; *Bordoni*, Via delle Tre Cannelle 5, near the Teatro Nazionale; *Albertini*, Via Nazionale 64 (N. Italian wines); *Ristorante dell'Esposizione*, Via Nazionale 213; *Cardinali*, Via Nazionale 248, near the Piazza delle Terme; *Regina*, Via Agostino Depretis 89; *Massimo d'Azeglio*, Via Cavour 14; *Benedetti*, Piazza delle Terme; *Railway Restaurant*, see p. 193. — To the W. of the Piazza Colonna (Pl. II, 18): *Hôtel Milano* (p. 135); *Fagiolo*, Piazza Colonna, at the corner of the Via Colonna; *Le Venete*, Via di Campo Marzio 69, with garden (Venetian cuisine), to the N.W. of the Piazza Colonna, very fair; *Bucci* (fish and 'zuppa alla Marinara'), Piazza delle Coppelle 54; *Nazionale Tre Re*, Via del Seminario 109-112 and Via de' Pastini 120, moderate, much frequented; *Rosetta*, Via Giustiniani 22 and Vicolo della Rosetta 1, nearly opposite the Pantheon; *Jacobini*, Piazza di Pietra 64. — Unpretending: *Passetto*, Piazza Tor Sanguigna 17, with a second entrance at Circo Agonale 52; *Fiorilli*, Via delle Colonnelle 4, to the W. of the Corso Umberto Primo, and N. of San Carlo al Corso; *Restaurant Cosmopolitain*, Vicolo del Colonnato 2, near the Portone di Bronzo, convenient for visitors to the Vatican.

Birrerie. *Pilsener Urquell & Weihenstephan* (Pilsen beer and cold viands), Piazza Santi Apostoli 52; *Regina* (Pilsen beer), Via Agostino Depretis 89; *Bavaria* (Munich beer; restaurant), Corso Umberto Primo 393, dcl. 11½, D 2½ fr.; *Saverio Albrecht* (Munich beer; no hot dishes), Via San Giuseppe a Capo le Case 23, to the S. of the Piazzadi Spagna; *Peroni* (Ital. beer), Via del Cardello 15; *Anglo-American Bar* (p. 138). — Vienna or Munich beer is also sold at most of the better *cafés*.

Tuscan Wine Shops (comp. p. xxi). *Fiaschetteria del Parlamento*, Via della Missione 4; *Trattoria la Toscana*, Piazza Colonna 31; *Meroni*, Piazza San Lorenzo in Lucina 33; *Fiaschetteria Fiorentina*, Via Bocca di Leone 4. Good restaurants at all these.

Provision Dealers, etc. Meals are supplied to private houses by all the *trattorie*. — Mention may be made also of the *Rostricciari*, where freshly cooked meat and poultry may be bought by the pound for dinner or supper. *Campes* (with small restaurant), Via Venti Settembre, entrance in the Via Pastrungeo; *Franchini*, Via Venezia 19; *Poiatti*, Via di Tor Argentina 52a; Via del Tritone 99; Via Principe Amedeo 74, etc. — *ENGLISH AND VIENNESE BAKERS* *Colalucci*, Via del Babuino 94; *Donati* (biscuits), Via Principe Umberto 145; *Lotti*, Via della Croce 48; *Perugi*, Via Nazionale 145; *Falini*, Via del Babuino 100 and Via Condotti 79a; *Giaggi*, Via San Claudio 72; *Union Italo-Hollandaise*, Via San Niccolò da Tolentino 82, Via Nazionale 127, and Corso Umberto Primo 328. — *VACCINARI* (dairies; fresh milk, cream,

butter, and eggs daily): Via Salaria 104; Via delle Muratte 81; Via del Tritone 151; Via Capo le Case 7; Via Frattina 101; Via del Babuino 41a; Piazza Sant' Ignazio 126 (sterilized milk). — *GROCERIES* *Ponti & Cie*, Via Marco Minghetti 23-25; *Casoni*, Piazza di Spagna 82; *Castrati*, Piazza Trevi 90; *Parenti*, Piazza di Spagna 46 and Via Nazionale 20; *Notogna*, Via Due Macelli 90; *British Stores*, Via Capo le Case 21 (English specialties); *Adamo*, Piazza di Monte Citorio 115. — *PRESERVED MEATS*, etc. *Albertini*, Via Nazionale 65; *Dagnino*, Via del Tritone 54-55, Corso Umberto Primo 295, and Piazza del Pantheon 73; *Bassani*, Via Maddalena 48. — *FRUIT* *Smors*: *Pondoro*, Via del Tritone 179; *Melano*, Via Agostino Depretis 55.

Osterie (wine-shops, comp. p. xxi). *L. de Angelis*, Piazza San Claudio 93; *Barile*, Via del Pozzetto, near the Piazza San Silvestro (post-office); the *Osterie*, Vicolo del Vaccaro 1, at the N. end of the Piazza Santi Apostoli (Montefiascone, p. 97, Est! Est! 70 c. per fiaschetto), Via Palombella 2, Piazza Trevi 95; *Castello di Costantino* (Pl. III, 19; see p. 290, *View), with restaurant, Via Santa Prisca 7. There are also favourite *Osterie* outside the *Porta Pia* (p. 388) and the other gates, and by the *Ponte Molle* (p. 383); comp. also p. 150.

Foreign wines are sold at the restaurants (p. 135), and by *Burnel & Gutchard* *Aiad*, Via Frattina 115; *British Stores*, Via Capo le Case 21; *Loches*, Via delle Converlette 21; *Baton*, Piazza Trevi 57; *Vannucci*, Via Poli 50; *Jacobini*, Piazza di Pietra 64. Also by the *Liquorieri*: *Gillario*, Corso Umberto Primo 370 c, Piazza Colonna; *Cassaro*, Via della Maddalena 17-19; *Attili*, Via del Tritone 88 (open till 2 a.m.); *Anglo-American Bar*, Corso Umberto Primo 328. — *Liqueurs*, wines, etc. at the *Automatic Bars* in many of the streets (10-15 c. per glass). — *MINERAL WATERS* may be obtained from *Chiodini*, Corso Umberto Primo 20; *Mansoni*, Via di Pietra 90; *Belletti*, Via San Claudio 56, and the *Società Farmaceutica Romana*, Via degli Asinelli 18.

Tobacco (comp. p. xxi) at the *Spaccio Normale* or depôt of the *Regia dei Tabacchi*, corner of the Corso Umberto Primo and Piazza Sciarra; foreign cigars from 25 c.; English tobacco 4 fr. per $\frac{1}{4}$ lb.

c. *Post and Telegraph Offices. Carriages. Saddle Horses. Cycles. Porters.*

Post Office (comp. p. xxiii), Piazza San Silvestro (Pl. I, 18; p. 199, also entered from the Via della Vite), open from 8 a.m. to 9.30 p.m., *Poste Restante* letters ('ferma in posta') are delivered at several windows for the different initials under the arcades in the court, on the right. At the entrance (on the right) is a writing-room. Parcels are delivered at Via della Vite 37 (9-4). *Branch Offices*: at the *Hôtel Continental*, opposite the Railway Station (open till 10 p.m.; the letter-boxes at the rail. station, cor. of the Viale Principessa Margherita, are cleared $\frac{1}{4}$ hr. before the departure of the principal express trains), Via due Macelli 70 (*Elefante & Lattes*), Piazza Barberini 28, Via Ventì Settembre 123 (War Ministry, to the right), Corso Vittorio Emanuele 203, Via Cavour 361, Piazza Rusticucci 95, Via del Babuino 49, Via Ludovico 29, etc. (open 8-8). — The letter-boxes for city-letters are painted green, the others 'og red.

Telegraph Office, open day and night, in the General Post Office building, Piazza San Silvestro (Pl. I, 18; p. 199). **Branch Offices**: Piazza Barberini 28, Piazza Rusticoni 85, Via Vent Settembre 128 (8-8); also at the railway station (open 8-8).

Omnibuses, Tramways, and Cabs, see Appendix.

Carriage Hires. *Brit.*, Via Margutta 29, *Ciccon*, Piazza San Claudio 33. *Fioravanti*, Via Sicilia 104; *De Gempis*, Piazza del Cappuccini 11; *Fulmini*, Via Bocca di Leone 42; *Jacobini*, Via Belgiana 101. Charges vary according to the season, but the average may be placed at 30 fr. a day. The best carriages are obtained at the larger hotels, where, however, the charge is sometimes as high as 50 fr. a day. Gratuity to the coachman extra. — **Saddle Horses**. *Vinc. d'Angelo & Co.*, Viale Castro Pretorio 72a; *Jarrot*, Piazza del Popolo 3, *Pieretti*, Palazzo Rospigliosi (p. 175); *Franceschini & Fumini*, by the main entrance to the Villa Borghese 8. Charge about 10 fr. for half-a-day; ostler's fee 1 fr.

Bicycles (comp. pp. xvi, 147), with which many pleasant trips may be made in the Campagna (e.g. to Ostia), may be hired at Via Quattro Fontane 114, Corso Vittorio Emanuele 200, Piazza del Popolo 1, and other large cycling shops. Lessons are given on the cycle tracks (*piste*) at the Velodromo Roma, Via Isonzo (Pl. I, 25). Owners of bicycles must procure a licence (*licenza*, 12 fr.) at the Questura, Via di Monte Tarpeo 35.

Porters (*Fattorini* or *Faccini Pubblici*). The best are those of the *Aprata Romana*, Vicolo Sciarra 80, with the name on their caps and a brass number on their coats. Porter with letter or luggage under 25 lbs., 25-35 c. according to the distance.

d. Embassies and Consulates. Banks. Physicians and Chemists. Sick Nurses. Baths, etc.

Embassies and Consulates. There are two classes of diplomatic agents at Rome, those accredited to the Italian government, and those accredited to the Papal court, Great Britain and the United States being, however, the only great powers with no representatives at the Vatican. **BRITISH EMBASSY**, *Sir Francis Bertie*, Via Vent Settembre, near Porta Pia, **AMERICAN EMBASSY**, *Geo. V. L. Meyer*, Piazza San Bernardo 16 (office-hours 10-1). — **BRITISH CONSULS**: *C. Ceccarelli-Morgan*, consul, Piazza San Claudio 96. **AMERICAN CONSULS**: *Hector de Castro*, consul-general, Piazza San Bernardo 16; vice-consul general, *Chas. M. Wood*.

Banks. **English**: *Thos. Cook & Son*, Piazza di Spagna 1b; *Sebasti & Reali* (successors of *Maquay, Hooker, & Co.*), Piazza di Spagna 20, *Rosier Frères & Fils*, Via Condotti 20, **French**, *Lemon, & Co.*, Piazza di Spagna 49, *Plowden & Co.*, Piazza Santi Apostoli 53. — **Italian**: *Banca d'Italia*, Via Nazionale, *Banca Commerciale Italiana*, Via del Plebiscito 112, *Credito Italiano*, Piazza Santi Apostoli 49 (agencies: Piazza delle Terme 70 and Corso Umberto Primo 47). — **German**: *Nast-Kolb & Schumacher*, Palazzo Marignoni, Corso Umberto Primo (entrance Via San Claudio 87, Pl. I, 18); *Schmitt & Co.*, Via della Vite 7; *Norrenberg & Co.*, Pal. Chigi, Piazza Colonna 370. — **MONEY CHANGERS** in the Corso Umberto Primo, Via Condotti, at the Pantheon, etc.

Physicians. *Baldini* (American), Via Gregoriana 25; *Thomas-Senar*, Via del Babuino 114, at the corner of the Piazza di Spagna; *William Bull*

(phys) to the American Embassy, Villino de la Perse. Via Veneto, Surcouf-
Boussy (phys) to the British Embassy, Via Venti Settembre 3. Appt. Piazza
di Spagna 31, Fumani. Via Nervesa 13. Ambrosio Street. Via Veneto 11 —
Germans. Baum (speaks English), Via Quattro Fontane 14 (His woman and
children). Brunschwiler. Via Condotti 15. Schmidt. Piazza di Spagna 26,
Flint. Via Venti Settembre 6. Von Flachs (speaks English), Piazza Cam-
brano 33. Jansen. Via Salice 45 (so). Kluge (so) to summer. Otto. Via
Venti Settembre 4. Old. Via Quattro Fontane 14, De Leo. Via del
Dabbino 114 — Italian. Agostini (inventing physician), Piazza Campitelli 9,
C. Compagnella (speaks English). Piazza Barbera. St. Adalberto Salazar (spe-
cialist in nervous and mental diseases speaks English). Piazza Fiume
Pie 16, Bonaventura. Piazza della Pietra 14. Montagna (see also above),
Corso Colosseo Prima 33. Corso Via Nazionale 21. C. Rogni (speaks French
and English). Via Pasquini 2. Tassary physician to the Sant' Spirito Hos-
pital, p. 31. Via della Croce 31 — Macchietti. Bald. Borgo. Via Fiume
della Capoccechia 3. Lohr (so). Palazzo. Corso Vini. Dimanche 10. —
Sag. Sag. Bonanni. Via Torino 105. Cristoforo. Viale San Marco. De T. Lon-
ghe 13 (His woman), Duranti. Via Garibaldi, Mancini. Via Condotti 9,
Pomponi. Via Nazionale 114 — Dezzio. Brattini. Corso Vini. Bonanni
219, Pavesi. Via Arcole 99. A. Lippa. Via Belmonte 1 — Agostini. Spini,
Via 4. Pietro 70. Pavesi. Via Capone 1.

Dentists Charges are apt to be rather high as that a previous understanding is desirable. Visitors are warned against practitioners styling themselves American dentists without warrant - Chamberlain 14 del Dake no 114. *Fumelli & Curiel Piazza di Spagna 43, 1st floor, West Via Nazionale 87 (all Americans), Marini Via Piuma 12, Mrs. Sestini (Swiss) Via Tordinona (entrance) Via del Condottiero 52, 1st floor. Marguli (Lombard), Via Salaria 12, Mrs. Baum (Ger. American) Via quattro Fontane 14*

Obsequists. *Beane & Co.* Via Condotti 6-8/11, represented by the British and American embassies, *Roberts & Co.* Piazza di San Lorenzo in Lucina 26, *Dufur & Co.* Piazza di Spagna 42 and Piazza delle Terme 72. *Webb*, Via San Biagio de T. (entrance). *Bartoni*, Via del Babuino 99, *Garnier*, Via del Quattrovi 25. *Fornace del Quattrovi*, Via del Quattrovi 44, *Beane*, Via Torino 147. *Bertoni*, Via Frattina 117 and Via Roma di Leone 92, etc. — *Monogramm* (inquest) *Adams*, Via Frattina 5. *Beane* at *Intermarco* and *Barbaceo*. *Amman*, Via Frattina 138. *Bertoni*, see above.

High Water may be obtained on application to the English Consulate (Please compare it with the Consulate to no fixed charge), or to the English Consulate, via Fawcett 13. The English American Shipping House via Fawcett 13 established and managed by a number of English and American residents in 2 ms. has accommodated on five eight passengers free and also applied to a number of ports of call.

Baths : 1. 39° for 15 M., at the house, also at the Institute Roux-Guyon. Via Ponte (no apparatus), swimming bath in the Japanese style, etc.) and at home (where Pierre LSI Via del Babuino 80, Via Veneto 67, Via Venezia 8a. After Baths (in summer only) at the Ponte Molle - Hydropeste Elettrolitica Via Crivellari 44.

[illegible]

Leura e Amato (Pl. 11, 24); Via Nazionale beside the Galleria d'Arte Moderna (Pl. 11, 24); Piazza della Sordomutità near the Piazza Colonna (Pl. 1, 10); Via dei Fanciulli adorning the church of Sant'Agostino (p. 344); Via Nazionale 21 (Pl. 1, 10); Via del Babuino adorning the Piazza Venezia (Pl. 11, 17, 18-1); Via de' Condotti-Via dei Fori Imperiali (Pl. 11, 17; Pantheon (Pl. 1, 14); in the colonnade of the Piazza di St. Pietro, on the side next the Porta Angelica (Pl. 1, 6), outside the Porta del Popolo, to the left, on the Piazza (Pl. 1, 10), Via della Cuscagna, to the S. of the Piazza Navona (Pl. 11, 10).

Babuino 92; *Amstelred.*, see above; *Agre*, Piazza di Spagna 63; *Almonetti*, Via Vittoria Colonna 11; *De Agut*, Via Condotti 9a.

CARRO & CARO *Piemonte*, Via de' Cappuccini 10 (1st floor); *Padre de' Padri*, Piazza di Spagna 93; *Fondini*, Via Condotti 3; *Clappert*, Via Sistina 120; *Lomet*, Via Sistina 10.

CARTE *Morini*, Via Fratina 10; *Malpieri*, Corso Umberto Primo 54; CORIO or ANCIENT BOOKS and MANUSCRIPTS, Via Condotti 76; *Alfonsi*, Via Due Macelli 62; *Faldi*, Via del Babuino 110; *Antonelli*, Via del Babuino 92 & 120; *Morrell & Stenidi*, Via del Babuino 132.

CORIO or RENAISSANCE SCULPTURE in TERRACOTTA. The *Alma Mater* Gallery, Via del Babuino 60.

CORAL *Beltrami*, Corso Umberto Primo 247; *Cesa*, Via Condotti 91.

FRANKS (carved, see also *Ephraïm*, p. 143) *Baraldi*, Via Babuino 134; *Sestini*, Via Fontanella di Borghese 10; *Mura*, Corso Umberto Primo 419, also at Via delle Tre Pile 4, and Piazza Arcovechi 24. *Tarascio* (ancient and modern) *Breda*, Via del Babuino 150.

GOLDENITUS *Cristoforo*, Piazza di Trevi 66, who also possesses an interesting collection of ancient golden ornaments and executes imitations from Greek Etruscan and Byzantine models; *Comptemini*, Via Fontanella di Borghese 12; *Morichini*, *Sera*, corner of the Corso Umberto Primo and Via Condotti; *Sera*, Piazza San Carlo al Corso; *Agre*, *Padre*, *Piemonte*, Piazza di Spagna 93, 95, and 91; *Franchi*, Via Condotti 56; *Capli*, Corso Umberto Primo 410; *Calci*, Via Sistina 16 (silver ornaments after ancient patterns).

MANICHA WARE *Campitelli*, Via Due Macelli 60; *Storti*, Via del Tritone 24; *Andoni*, Via del Babuino 118a.

MANUSCRIPTS *Orlando*, Via Sistina 75b; *Sturmatal*, Via Sistina 61.

MONACO *Reichmann*, Via Condotti 12. — Monks and monks, at moderate prices, also at Via Sistina 24.

ROMAN PRICES. *Agre*, Via del Babuino 120; *Lucchini*, Piazza di Spagna 63.

BOOKSELLERS. *Spithöfer*, Piazza di Spagna 64; *Leischer & Co.*, Palazzo Almonetti entered from Via del Collegio Romano; *Padre*, Piazza di Spagna 1; *Made & Mendel*, Pal. Borstini, Corso Umberto Primo 140; *Luc*, Via delle Conventuali 19. English (German and French books at all these) *Frattini* Roma, Corso Umberto Primo 317; *Frattini* Firenze, Corso Umberto Primo 203; *Parsons & Co.* Via Nazionale 15 and Piazza Santi Apostoli 28-30. Religious Works. *Spithöfer*, see above; *Padre*, Piazza di Trevi 61; *Davida*, *Leischer*, & Co. Via Santa Chiara 70. — *Mura*, *Leischer*, see above; *Sera*, Corso Umberto Primo 405. — Old Books at *Leischer's* (see above) and *Kempner*, Via Condotti 61. — BOOKBINDERS (Roman parchment bindings) *Ottolenghi*, Via della Mercede 30 and Piazza di Spagna 60; *Ottolenghi*, Piazza di Spagna 67; *Androni*, Via Fratina 47 and Via Boncompagni 134; *Scotto* *Cooperativo*, Via Pio di Savoia 12 (cheap).

Leading Libraries. *Padre*, Piazza di Spagna 1, with over 20,000 English, French, German, and Italian works on history, art, etc. (one vol. 2 three vols. 4 fr. monthly; *Alma Wilton's* Piazza di Spagna 22, for recent English books and for works on Rome (one vol. 3, three vols. 6 fr. monthly); *Leischer's* (see above, one book weekly 1 monthly 1 fr.) — Reading Room. *Padre* Piazza di Spagna 1 (English and American newspapers; per month 3 fr.) *Fondini* *Navarrete* Piazza di Spagna 61.

MUSIC SELLERS. *Clara* *Brachet* *Leischer* Via Condotti 66, 1st floor (pianos and music for sale or hire); *Sturmatal* *Manzoni* *Manzoni*, *Sturmatal*, *Sturmatal*, Corso Umberto Primo 307, 141, and 202.

Photographs. *Almonetti* & *Co.* Corso Umberto Primo 157a; *Spithöfer* (see above) *Anderson* (photographs); *Leischer*, *Made & Mendel* *Padre*, and *Ottolenghi* (see above) *Manzoni*, Via Condotti 76; *Parsons*, Via Condotti 20a; *A. Parsons & Co.*, Via Condotti 10a b. — PHOTOGRAPHIC MATERIALS *Brugner*, Via del Quirinale 62; *Andri*, Corso Umberto Primo 222; *Fanni*, Via Mercede 67; *Roma*, Via del Babuino 93a.

PHOTOGRAPHY. For reproductions of pictures, etc. *Almonetti*, Corso Umberto Primo 130; *Padre*, Via Capo le Case 90 (1st floor); *Leischer*, Via della Croce 41 (1st floor). — Portraits. *Almonetti*, Via Condotti 61; *Le*

Livorno, Viale del Martirio 19; Palermo, Corso Umberto Primo 174 and
Piazza di Spagna 9; Manchester, Via Nazionale 113; Amsterdam & Sefti, Via
Marconi 54; Napoli, Via del Quirinale 7 (1st floor); Dottorati, Via Dante 20;
London (children & specialty), Via Luigi Macchi 62.

Engravings of the Regio Caeli, formerly the Stampate Camerale (moderate prices, large views by Piranesi 4-6 fr.; Via delle Stampe 6 (Pl. 1, 21, p. 104). Old engravings at Koenig's, Via Condotti 51 (two p. 142).

Clothing, etc. — Ready-made Clothing for Ladies and Gentlemen (see also Tailors) *Profeta Sumart* Corso Umberto Primo, adjoining the Piazza Colonna; *Carraresi & Co* Corso Umberto Primo 225, Old England, Via Nazionale 119 (also to measure)

LACERTE DIAMOND AND JEWELLERY. *Portofino, Corso Umberto Primo 170, Apollini, Via del Tritone 20; Portofino, Porto, Via Nazionale 118 and 201; Campagna Luminaria, S. Ombrogio Gussano, Milano, De Bonis - Mary, all Corso Umberto Primo (Nos. 471, 473, 475, 477 and 479); Corso d'Angelo (mail-order), Via Fratelli 33, Giordani, Via San Niccolò da Tolentino 20, first floor (See moderate requirements); Mailam, Corso Umberto Primo 614.*

Ducasse Goods, Lingerie, etc. *Parasoliers*, Corset Umbrella Primo 149,
Ballerio, Via Colombo 20 *Wriston*, *Alaglia* Corset Umbrella Primo 150 and
151; *Borgia* Via del Profeta 19; *Prato & Co* Via Nazionale 69, *Alati*,
Via Fontana 61 *Al Fucolo Parigi* Corset Umbrella Primo 150, *Padova*,
Schmitt, *Quattri*, Corset Umbrella Primo 151 152, and 255; *Kane & Co*, Via
Condotti 69, *Anglist Warehouse*, Via dei Telfoni 69, and Via Condotti 61;
La Perfumiera Corset Umbrella Primo 153

GIOVENE CARRARO AND MASO VINO Mercata, Corso Umberto Primo 143
and Via Nazionale 80, Spumanti, Via dei Testoni 41, also at Corso Umberto
Primo 227 and 414 and V. Candiani 47

Haveva: *Milano* Via Condotti 18 and *Corno Umberto Primo* 303, *Firenze*, Via Marco Minichelli and Via Cavour 75, *Martinedi*, *Andover*, *Corno Umberto Primo* 303 and 304.

Roman Silk Weaving Co. Via Condotti 97, *Parapente De Frise*, Piazza di Spagna 43 and 45 The Roman Silk Manufacturing Co., Piazza del Popolo 17 — Roman Corset Co. 2nd Grade, Via Sistina 25, *Corset*, Via del Babuino 80, Street Via Sistina 25

Spesago Salsomaggiore, Via Pontina 11 (chassis change); Massarotti, Massarotti, Via Due Bocelli 81 and 84; Industria Italiana, Corso Vittorio Emanuele 67 and Via Nazionale 113 (change); Forte, Corso Umberto Primo 216.

TALLERES: Mattheo, Horner, London Street, Corso Umberto Primo 107 (1st floor), 222 (1st floor), nos 428, Gianni Milner, Via de' Lucio, Remijn & Co., Piazza Santi Apostoli 60, Sufaro, Via delle Vergini 11, Remondini, Corso Umberto Primo 101 - Dress suits on hire at Corso Umberto Primo 177 nos 415.

HOSTELS AND TRAVELLING ASSOCIATIONS (see also p 142) De Angeli, Via Capo le Corne 24, Old England, Via Nazionale 119, Surfpost (for address), etc.), Via del Babuino 100 c & 100, Desafium, Via del Tritone 301

HOUSEHOLDY (Lamps, Tea and Coffee Machines, etc.) Avenue (for lamps) Corner Umberto Primo 20. Furniture, Via Propaganda 25, Anagnini, Via Dos Macci 107 - Hardware and Paint Goods, Janetti, Via Capobelli 15, Capone, Piani & Bianchini, Corner Umberto Primo 220 and 277, Old England (see above), Avenue, Corner Umberto Primo 20.

OFFICINE - *Genova, Via del Tritone 24-25.*
OFFICINE - *Genova, Piazza, S. Giuseppe, Corso Umberto Primo N. 40,*
112. 197

FRANCESCO BROSCHETTI, and Pao. Giardina, Corso Umberto Primo 176, *Mafia*, Corso V.lli Emanuele 12, *Giannini*, Corso Umberto Primo 144, etc.

Traslocamento Apparecchio di Co. Cassa Vittorio Emanuele 33. 76. Stanz. di
Figli. Via Condotti 16, Palladium di Pignatelli, Corso Umberto Primo 331 —
Cassero Massimo. Salsbury, Via Capo la Casa 33, Capatti, Corso Umberto
Primo 333, Manfredi, Via Margutta 10, Officina, Via Santa Barbara 11,
Armentieri, Palazzo Ymarin, Ladmann, Via delle Grazie 13.

WATCHMANN *Hausmann*, Corso Umberto Primo 408; *Micheletti*, Via delle Convertite 15; *Kohlmann*, Via Condotti 80; *Conti*, Piazza di Spagna 50.

g. Church Festivals. English Churches.

Church Festivals. Since the annexation of Rome to the kingdom of Italy on 20th Sept., 1870, the public ceremonies at which the Pope formerly officiated in person (such as those of the Holy Week), the benedictions, and the public processions including that of the Fête de Dieu, have been discontinued. The Pope still officiates on high festivals in the Sistine Chapel (p. 534), but visitors are not admitted without an introduction from very high quarters. (Gentlemen are required to wear uniform or evening dress; ladies must be dressed in black, with black veils or caps.) Music in St. Peter's, see p. 528. Details of the various festivals are contained in the *Diario Romano*, published annually (60c.; festivals no longer celebrated are marked by asterisks). The best work on the ceremonies of the Holy Week and their significance is the *Manuale delle cerimonie che hanno luogo nella settimana santa e nell'ottava di pasqua al Vaticano* (1 fr.; list a French edition), obtainable at the bookshops (p. 147). Details are also given in the *Roman Herald* (p. 161) and in bills displayed in the windows at Piale's (p. 142). Bills posted at the parochial churches give information concerning the ceremonies and illuminations connected with the 'Quarantore' or exhibition of the Host for forty hours.

- January 1. *Gesù* (p. 223): High Mass at 10.30 a.m. with illumination.
 — 6. Epiphany. *S. Andrea della Valle* (p. 273): at 10.30 a.m. exhibition of the group of the Adoration of the Magi, presented by Prince Torlonia.
 — — *S. Annasio del Greco* (Pl. 1, 17), Via del Babuino: High Mass according to the Greek ritual, 10 a.m.
 — 17. *S. Eusebio* (p. 183): benediction of horses.
 — 18. *S. Prisca* on the Aventine (p. 200).
 — 20. *S. Sebastiano* on the Via Appia (p. 301).
 — 21. *S. Agnese Fuori* (p. 387): dedication of lambs in the morning.
 — *S. Agnese, Circo Agonale* (p. 221): Mass at 10.45 a.m. (good music).
 — 26. *S. Paolo Fuori* (p. 397).
 — 30. *S. Martin & Lute*, in the Forum (p. 272).
 February 1. *S. Clemente* (p. 200): Lower church illuminated from 8 p.m.
 — 2. Candlemas. *St. Peter's* (p. 319): Mass at 9.45 a.m., with Te Deum and dedication of candles.
 On Ash Wednesday and every Sunday during Lent, celebrated Lent sermons in *Gesù* (p. 223), *S. Maria sopra Minerva* (p. 218), *S. Lorenzo in Damaso* (p. 226), and other churches.
 March. 9. *S. Prassede Romana* (p. 264): Mass at 10.45 a.m.; before 11 a.m. and after 3 p.m. the dwelling of the saint in the nunnery, Via Tor de Specchi (Pl. 11, 17), is open.
 — 12. *S. Gregorio Magno* (p. 286): Mass at 10.15 a.m.; side-chapels open.
 — 16. Festival in the chapel of the *Palazzo Mancini* (p. 235).
 — 26. Annunciation *S. Maria sopra Minerva* (p. 218): Mass at 10.45 a.m.
 — 31. *S. Basilio* (p. 291).
 HOLY WEEK. — Palm Sunday. *St. Peter's* (p. 319): At 10 a.m., after Mass, procession and consecration of palms.
 — Wednesday. Lamentations and Miserere in all churches 2 hrs. before Ave Maria; interesting only in *St. Peter's* (p. 319; relics of the Passion displayed) and in *S. Giovanni in Laterano* (p. 303; best singing).
 — Holy Thursday. Lamentations, Miserere, etc., as on Wednesday; washing of the altar after the Miserere.
 — Good Friday. At 10 a.m. Entombment in all churches; most interesting at *St. Peter's* (p. 319) and *Gesù* (p. 223); the groups remain on view until 8 a.m. evening. — Lamentations, Miserere, etc., 2 hrs. before Ave Maria, as above. — In the evening at *S. Maria alle Colonne* (p. 301), the Seven Sorrows of Mary (often crowded).

- Holy Week.** — *Saturday.* At all churches between 7 and 8 a.m. lighting of the holy fire. — In the *Baptistry of the Lateran* (p. 802): Baptism of converted Jews and heathens; Consecration of priests.
- Easter Day.** High Mass in *St. Peter's* (p. 319), at the high altar at 10 a.m. Exhibition of the Passion relics.
- Ascension.** *S. Giovanni in Laterano* (p. 303): Mass at 10 a.m.
- Corpus Domini.** Processions at the churches, most magnificent at *St. Peter's* (p. 319), *S. Giovanni in Laterano* (p. 303), and *Gesù* (p. 223).
- April 23.** *S. Giorgio in Velabro* (p. 282).
- 29, 30. *S. Maria sopra Minerva* (p. 218): Chapel of *S. Catharine* open to women.
- May 1** *SS. Apostoli* (p. 210).
- May 3.** *S. Croce in Gerusalemme* (p. 186): Mass at 10.45 a.m.; exhibition of relics of the Cross.
- 6. *S. Giovanni a Porta Latina* (p. 293).
- 12. *S. Nerco ed Achilleo* (p. 282; celebrated Easter lights).
- 14. *S. Alessio* (p. 287), on the Aventine.
- 26. *S. Maria in Vallicella (Chiesa Nuova)*, p. 227) Festival of *St. Philip Neri*, whose dwelling is open.
- June 10.** *S. Andrea degli Scossati*: Festival of *St. Margaret of Scotland*, whose relics are exhibited.
- 24. *S. Giovanni in Laterano* (p. 303). Mass at 10 a.m.
- 26. *SS. Giovanni e Paolo* on the Caelius (p. 296): lower church open.
- 29. *SS. Peter and Paul*. — *St. Peter's* (p. 319): Mass at 10 a.m. celebration formerly by the Pope.
- 30. *S. Paolo Fuori* (p. 397).
- July 31.** *Gesù* (p. 223).
- Aug. 1.** *S. Pietro in Vincoli* (p. 188): *St. Peter in Vinculis*.
- 2. *S. Silvestro in Capite* (p. 199) Festival of *S. Stefano*.
- 6. *S. Maria Maggiore* (p. 180): Mass at 10 a.m. (with fall of rose petals to imitate snow).
- 10. *S. Lorenzo in Miranda* (p. 268). *S. Lorenzo Fuori* (p. 184).
- 26. *S. Luigi de' Francesi* (p. 220): Mass at 10.30 a.m.
- Aug. 28.** *S. Sabina* (p. 286), on the Aventine.
- Sept. 27.** *SS. Cosma e Damiano*, in the Forum (p. 263).
- 29. *S. Angelo in Pescheria* (p. 232).
- Oct. 18.** *SS. Martina e Luca* (p. 272), in the Forum.
- Nov. 2.** All Souls' Day (*Giorno de' Morti*). *S. Maria della Concezione* (Capuchin church; p. 162).
- 4. *S. Carlo al Corso* (p. 183): Mass at 10.45 a.m.
- 8. *Quattro Coronati*, on the Caelius (p. 301).
- 9. *S. Teodoro*, on the Palatine (p. 282).
- 12. *S. Martino ai Monti* (p. 186).
- 21, 22. *S. Cecilia in Trastevere* (p. 375): Music at 10.15 a.m.
- 22. Illumination of the Catacombs of *St. Callistus* (p. 401); Mass with vocal quartet at 9.30 a.m.
- 23. *S. Clemente* (p. 269): Lower church illuminated from 3 p.m.
- Dec. 2.** *S. Bibiana*, on the Esquiline (p. 183).
- 6. *S. Saba*, on the Aventine (p. 260).
- 8. *S. Nicola in Carcere* (p. 238), near the Piazza Montanara; distribution of gifts to poor children in the sacristy in the morning.
- 24, 25. *S. Maria Maggiore* (p. 180), Exhibition of the 'Santa Culla'.
- 26. Christmas Day. *S. Maria in Aracoeli* (p. 235): Mass at 10 a.m., procession with the 'Santo Bambino'; beginning of recitations by children, continued daily till Jan 6.
- 26. *S. Stefano Rotondo* (p. 286): German sermon.
- 27. *S. Giovanni in Laterano* (p. 303): Exhibition of the heads of *SS. Peter and Paul*.
- 28. *S. Paolo Fuori* (p. 397).
- 31. *S. Tommaso degli Inglesi* (p. 220). *St. Thomas of Canterbury*.
- 31. *S. Silvestro in Capite* (p. 199).
- 31. Ambrosian Song of Praise at all churches.

English Churches. *All Saints*, Via Babuino 164; services at 8.30 a.m., 11 a.m., and 3 p.m.; in summer 9 a.m. and 5 p.m.; chaplain, *Rev. F. H. Graham, D.D.*, Piazza del Popolo 18. — *Trinity Church*, Piazza San Silvestro, opposite the Post Office (p. 100); services at 11 a.m. and 5 p.m.; chaplain, *Rev. J. Sumner*, Hôtel Beau Site, Via Ludovico. — *American Episcopal Church of St. Paul*, Via Nazionale; services at 8.30 a.m., 10.45 a.m., and 4 p.m.; rector, *Rev. Dr. Neenan*, Via Napoli 98. — *Scottish Presbyterian Church*, Via Venti Settembre 7, near the Quattro Fontane; services at 11 a.m. and 5 p.m.; minister, *Rev. Dr. Gray*, Via Venti Settembre 7, 2nd floor. — *Methodist Episcopal Church*, at the corner of the Via Venti Settembre and Via Firenze; services in English and Italian; pastor, *Rev. Dr. William Hart*. — *Wesleyan Methodist Church*, Via della Scrofa 64; minister, *Rev. Henry Piggott*, Via delle Coppelle 28.

Italian Protestant Churches. *Waldensian Church*, Via Nazionale 108. — *Free Italian Church*, Via Pantoe 48, opposite the Ponte Sant'Angelo. — *Methodist Episcopal Church*, see above. — *Baptist Chapel*, Piazza San Lorenzo in Lucina (Rev. J. Wall) and Via Urbana 161 (Rev. C. Wall). — *Baptist Church* (Rev. Geo. B. Taylor), Via del Teatro Valle 27.

h. Principal Libraries. Learned Institutions.

1. **BIBLIOTHECA APOSTOLICA VATICANA** (see p. 204). Prefect P. Franz Ehrle. Readers admitted from Oct. 1st to Easter 31, from Easter to 24th June 8-12 o'clock; the library is closed on Sun., Thurs., and holidays.

2. **PUBLIC LIBRARIES** (for permission to use, see the placard in the Bibl. Vittorio Emanuele). *Biblioteca Alessandrina* (p. 219, 300,000 printed vols.), daily, Nov. to June 9-5 and 7-10 p.m.; July to Oct. 9-2. — *Biblioteca Angelica* (p. 214; ca. 94,000 vols. and 2125 MSS.), week days 9-5. — *Biblioteca Chigi-Arcivescovile* (p. 219, 112,000 vols. and 508; 2200), daily (Oct. to May 9-5, June to Sept. 7-1). — *Biblioteca Contrasto Vittorio Emanuele* (p. 214), Nov. to June 9-5, July to Oct. 9-5. Besides the large public reading room and well-supplied newspaper-room there is a Sala Riservata with an excellent reference library, for the use of which a permission is necessary. This library (over 800,000 vols. and over 6000 MSS.) was formed in 1871 from the libraries of the Jesuits and suppressed convents, and is yearly increased by the purchase of new works. The institution is the only library in Rome in which books are lent out (on the security of the embassy or consulate, further particulars in the Ufficio del Prestito, on the first floor of the library). The director is *Comendatore Conte Don. Gualt.*

3. **PRIVATE LIBRARIES.** *Biblioteca Santa Cecilia*, Via de' Greci 18, Frid. 9-5 (music). — *Biblioteca Cipriani* (p. 201, valuable MSS.), visitors not admitted. — *Biblioteca Corsiniana* (p. 272) open to the public daily, except Sun. and Wed., Nov. to March 1-4, April to July 2-5. — *Biblioteca Lancisiana* (medical works), in the Hospital of Santo Spirito (p. 317), daily 9.30-2.30. — *Biblioteca Sarti*, in the Academy of St. Luke (p. 277) daily except Sat. and Sun., in summer 9-2, in winter 9-5. *Biblioteca Vaticana* (p. 271, founded by St. Philip Neri, now managed for the government by the Società Romana di Storia Patria, valuable MSS.), open on week-days, 9-5.

LEARNED INSTITUTIONS. *British School at Rome* (archæology; director, H. Stuart Jones, M.A.) Palazzo Ufficiali (p. 201, ante Piazza Santi Apostoli). — *American School of Classical Studies*, Via Vicenza 6 (director, Prof. Richard Norton). *Barrington and American Archaeological Society*, Via San Nicola da Tolentino 72, with a good library. Associates for the season are admitted; subscription 25 fr.

LECTURES on the recent excavations in the Forum and on the Sculpture Galleries are delivered weekly in winter by Mrs. Burton-Brown (8 Via Venti Settembre); tickets (5 fr.) also at Piazza di Spagna 22. — *Daily Roman Lectures* to the sights of Rome are organized by Prof. L. Raymond (Via Capo le Case 24 and Piazza di Spagna 22).

1. Theatres. Concerts. Sport. Popular Festivals. Street Games. Games.

Theatres (comp. p. 141). **Teatro Assoluto** or **Fedre Comique** (Pl. II, 14, p. 141), Via di Tor Argentina; **Teatro Costanzi** (Pl. II, 37), Via Firenze; **Teatro Valle** (Pl. II, 15), near the Capitol, for dramas; **Teatro Drammatico Nazionale** (Pl. II, 21, p. 177), Via Nazionale, near the Palazzo Colonna; **Teatro Quirino** (Pl. II, 10, 21), Via delle Vergine, near the Fontana Trevi; **Politeama Adriatico Piazza Cavour** (Pl. I, 11). Besides these there are the smaller theatres **Teatro Mariavato** (Pl. I, 16), Via di Pallacorda, near the Via delle Sirene; **Teatro Massimo** (Pl. II, 37), Via Urbana 103 — **Galleria Chantarella**, **Antico Marfoglio**, Via Due Bocelli; **Olympia**, Via San Lorenzo in Lucina.

Concerts. The chief concert rooms in Rome are the **Sala Santa Cecilia**, Via de' Quattr' U., and the **Sala Dante Piazza Poli** (Pl. I, 31), but there are several others. — **Military band**, see p. 149. A band also plays daily in the **Piazza del Quirinale** about 5 p. m., when the guard is changed at the palace.

Sport. **Pan Roman** meet twice a week in winter in the Campagna and **Boxing** takes place in winter at Bracciano (p. 100). The meets are announced in the English newspapers (p. 148) and by bills at the circulating libraries (p. 142).

Horse Racing in Italy is conducted under the auspices of the *Jockey Club Italiano* or the *Società degli Amatori d'Italia*. The chief race meetings near Rome are held at **Foro di Quirino** (p. 141), in March and at **La Capotorti** (p. 411), in April. The 'Derby Rome', the chief event of the racing year (average value about 1800) is decided at the latter. — **Swimming** in the Campagna begins in August. **Rescue** (14 ft.) may be obtained at the consulates. — **Rowing** on the Tiber owing to the strength of the current, is recommended only to experienced rowers, who should join one or other of the Roman boat-clubs the *Remora Canottieri Amatori* or *Rowing Club Canottieri Fiume*, both at the **Passeggiata di Ripetta**. **Law Tennis Club** Via Cavour 10, outside the Porta del Popolo.

Cycling (comp. p. 141). The chief clubs at Rome are the *Società Velocipedistica Romana* (bicycling, motor cycling) **Viale dei Bagli** outside the Porta del Popolo, and the *Società Roma* **Via Pantheon** with a private track. The headquarters of the *Fouring Club Ciclistico Italiano* are at Via Nazionale 172. **Public cycle-tracks**, see p. 149. — **Fencing.** The *Circolo Romano di Scherma* admits strangers, on the introduction of a member for an entrance fee and a monthly subscription. — **Fallows.** This national Italian game is interesting to watch and may be seen at the *Sforza-Romano* (Pl. I, 20), **Viale Po** (in fine weather only), and the *Sforza-Spagnolo* (Pl. I, 11), **Piazza Cavour** (covered in).

Popular Festivals (which have lost much of their former interest) —

The night of **January 13-14 (Epiphany)**, celebrated in the **Piazza Navona** (Clen Agnelli, p. 30), array of bonfires and prodigious din of my-trumpets, rattles, etc. (the so-called 'Belfonia').

The **Carneval**, lasting from the second Saturday before Ash Wednesday to Shrove Tuesday gradually declined in interest after 1870, and is now marked only by a greater throng than usual in the Corso a popular merry-making in the Villa Borghese or elsewhere, and masked balls at the theatres. Ladies are advised to eschew the Corso on the chief days of the Carnival.

The **Festa di San Giovanni** is kept on the night of June 23-24th (dancing, etc., on the Piazza S. Giovanni in Laterano).

The **Giocosa Festival**, in the vicinaggio-campagna, once famous, is celebrated with singing, dancing, and sacrifice at the altar outside the gates (e.g. at the Porta Pia and the Ponte Mole).

The **Festa della Statua** or Festival of the Constitution, introduced since the unification of Rome, is on the first Sunday in June. Military parade in the forenoon in the Piazza dell'Indipendenza or the Campo Marzio (p. 149). In the evening fireworks ('Girandola') in the Piazza del Popolo and elsewhere. — On the anniversary of the Foundation of Rome

(21st April). It is usual to illuminate the Colosseum and the Forum with lamps at 8 p.

Street Scenes. The top of the Scala di Spagna and the Via del Babuino (Pl. I 17, pp. 166, 167) are the favourite haunts of artist models, chiefly Hungarians and natives of the Abruzzi, whose costumes are a well known subject of photographs and pictures. The favourite haunts of the country people, especially on Sundays, are in front of the Pantheon (Pl. II 18, p. 216), the Piazza Bonaparte (Pl. II 16, p. 213), and the market place of the Campo di Marte (Pl. II 14, p. 72). Particulars of the rag fair in the Piazza della Conciliazione will be found on p. 227. — Among the Ecclesiastical Customs perhaps the most striking are those of the children of the various seminaries, who are frequently met on the Piazza in the afternoon, etc. The English and French Summerers wear black gowns, the Russian, violet soutanes with red girdles and black shawls, the Irish black with red lapels and binding, the Germans and Hungarians (including Germanians) red, the Spanish black with blue girdles and black capes with blue seams, the Belgians, black with red seams, the Bohemians black with yellow and brown striped girdles, the Poles black with green girdles, the Greeks and Austrians, blue with red girdles, the Scotch Americans, black with blue lining and red girdles, the South Americans black with blue girdles and blue linings, the Germans, wide black gowns with red girdles. The pupils of the Propaganda (p. 162) wear black gowns with red girdles and red linings.

Newspapers. very numerous, almost all 5 c. per number. Several of the best are published in the evening. The most popular with visitors are *Justice* (in French, 10 c.), *Prima*, *Gazzetta d'Italia*, *Padre Romano*, *Popolo Romano* (these five liberal), *Messaggero* (catholic), *Universale Romano* (10 c.) and *Foro della Verità* (these two catholic). *Il Francesco Salvi* (10 c.) and *Argomenti* are comic papers (the latter is the local dialect). The *German Herald* (11 c.) a weekly English paper, contains the most reliable list of the sights of the day.

Garrison. The Infantry of the Line wear the gilette or dark blue coat common to the whole army, blue-grey trousers, black leather boots, and caps, officers distinguished by silver braid on the sleeves and carmine stripe on the trousers. The Bersaglieri or riflemen forming a corps à suite like the Austrian Kaiserjäger wear dark blue uniform with crimson facings and large round hats with cock feathers worn on one side, the officers are distinguished by a broad red stripe on their trousers. The Cavalry have a dark blue uniform, light grey trousers and fur caps. The old Hapsburg regiments wore steel helmets with a gold crest. The Artillery wear a dark blue uniform with yellow facings (officers with a broad yellow stripe on their trousers) and the Engineers have a dark blue uniform with crimson facings. To these we may add the Carabinieri or gendarmes (p. 161) who wear a black uniform, scarlet edging, white belt, and three-cornered hat. The officers and mounted men have a broad red stripe on their trousers. — The royal body guard *Guardia del Re*, Carabinieri about 60 men strong, is recruited from the Arab steeple (dark blue uniform with silver buttons and red facings, dark blue trousers with a wide red stripe for the foot guards, and grey trousers with black stripes for the horse-guards, who in full dress wear white leather breeches and high boots and cuirass, metal helmets with black horsehair plumes, etc.) After three years service the guardsmen may reject the Carabinieri.

J. Best Time for visiting Churches and Hours of Admission to Public and Private Collections, Villas, etc.

Changes in the arrangements take place so frequently that the following data make no pretence to absolute accuracy. The lists of sights contained in some of the daily newspapers is still less trustworthy. Reliable information may however, be obtained from the bills in *Poster's* windows (p. 142) or at *Reynold's Pen and Inkery Office*, Via Capo le Case 23. Intending visitors should, however, make additional enquiry.

Free Tickets for artists, etc., and admission of *Scholars*, see pp. xxii, xxiii. — *Private Collections* are usually closed in summer. *Public Holidays* on which the collections are closed, see p. xxii; *Fees*, see p. xli; *Guides*, see p. xli.

CHURCHES (comp. p. xxi) are closed from 12 till 3. The five patriarchal churches, however, *San Pietro in Vaticano* (p. 319), *San Giovanni in Laterano* (p. 303), *Santa Maria Maggiore* (p. 180), *San Paolo Fuori* (p. 397), and *San Lorenzo Fuori* (p. 184), as well as the two pilgrim-churches, *Santa Croce in Gerusalemme* (p. 186), and *San Sebastiano* on the Via Appia (p. 394), are open all day. Many of the smaller and remoter churches are accessible only by means of the sacristans, except on the festivals of their titular saints.

PARKS AND VIEWS. The gardens on the *Pincio* (p. 158), with their fine view of Rome, are usually crowded towards evening by both natives and foreigners. A military band plays there about two hours before sunset on Tues., Thurs., Sat., and Sun. (except in the height of summer, when the band plays in the Piazza Colonna and on the Pincio on alternate evenings, beginning at 9 o'clock). The gardens are closed (except in midsummer) one hour after Ave Maria. — The park of the *Villa Borghese* (p. 189) is also open to the public and may be visited by carriage. — The *Passeggiata Margherita* (p. 379), commanding picturesque views, may be visited either on foot or by carriage. Visitors should arrange to reach *San Pietro in Montorio* (p. 377; from which our panorama is taken) about an hour before sunset. — The *Palatine* (p. 275) is another admirable view-point. — A drive on the *Via Appia* (p. 393) commands beautiful views across the Campagna to the mountains. — The park of the *Villa Doria-Pamphili* (p. 379) may be visited by carriage, but only two-horse carriages or one-horse carriages without numbers are admitted. If time permit, visits may be paid also to the *Villa Celimontana* (*Mattei*, p. 298; Tues., after 2 p.m., *permessi*, available only as dated, may be obtained on Mon., Tues., and Sat. between 11 and 12 at Via Arcozell 43, 3rd floor) and the *Villa Wolkonsky* (p. 311; Tues. & Sat. in the forenoon; cards of admission from the porter; fee), both of which have pretty grounds. *Villa Madame*, see p. 384.

A Fortnight's Visit.

To obtain even a hasty glimpse of the sights of Rome a stay of at least 14-16 days in the 'Eternal City' is necessary. The visitor who has but a fortnight at his disposal will be helped in making the best use of his time by the plan suggested below, studying this in conjunction with the tabular statement of hours and days of admission on pp. 150, 151. A free use of cabs will also be found necessary.

1st DAY. The first part of this had better be devoted to what may be called an 'Orientation Drive'.

Engage a cab for 2-3 hrs. (tariff, see Appendix) and drive down the Corso as far as the *Piazza di Venezia*, then to the *Fore Trajana* and

	Sun. and holidays	Monday	Tuesday
<i>Accademia di San Luca</i> (p. 272)	10-3	10-3	10-3
<i>Antiquarium</i> (p. 294)	—	8-12 2-5	9-12, 2-5
<i>Barberini Gallery</i> (p. 164)	—	10-4.30	10-4.30
<i>Borghese, Museo e Galleria</i> (p. 190)	10-1	11-5	11-5
<i>Caffarelli, Palazzo</i> (Throne-room, p. 236)	—	11-12	—
<i>Capitoline Museum</i> (p. 214)	10-1	10-3	10-3
<i>Castello Sant' Angelo</i> (p. 314)	10-4	10-4	10-4
<i>Catacombs of St. Calixtus</i> (p. 403)	All day	All day	All day
<i>— of Domitilla</i> (p. 405)	All day	All day	All day
<i>Colonna Gallery</i> (p. 210)	—	—	11-3
<i>Conservatori, Palace of the</i> (p. 239)	10-1	10-3	10-3
<i>Corsini Gallery</i> (p. 371)	10-2.30	10-4	10-4
<i>Doria Gallery</i> (p. 207)	—	—	10-2
<i>— Pamphili, Villa</i> (p. 376)	—	after 1 p.m.	—
<i>Farnesina, Villa</i> (p. 368)	—	10-3.30	—
<i>Forum Romanum</i> (p. 250)	after 9 a.m.	after 9 a.m.	after 9 a.m.
<i>Galleria d'Arte Moderna</i> (p. 174)	10-1	9-3	9-3
<i>Lateran + Collections</i> { <i>Antique Sculptures</i> (p. 306)	—	—	10-1
		10-3	—
<i>Maltese Villa and Santa Maria Aventina</i> (pp. 287, 288)	—	—	—
<i>Medici, Villa, Garden and Castle</i> (p. 159)	—	—	—
<i>Museo Kircheriano, Etnografico & Preistorico</i> (p. 201)	10-3	10-3	10-3
<i>— Nazionale delle Terme</i> (p. 167)	9-3	10-4	10-4
<i>Palatine</i> (p. 215)	after 9 a.m.	after 9 a.m.	after 9 a.m.
<i>St. Peter's, Dome of</i> (p. 323)	—	8-11	8-11
<i>Quirinale, Palazzo del</i> (p. 178)	12-3	—	—
<i>Rospigliosi (Pallavicini), Casino</i> (p. 179)	—	—	—
<i>Thermae of Caracalla</i> (p. 291)	after 10 a.m.	after 9 a.m.	after 9 a.m.
<i>Vatican Collections +</i> { 1. <i>Sistine Chapel, Raphael's Stanze</i> and <i>Picture Gallery</i>	—	10-3	10-3
		—	10-3
		10-3	10-3
		10-3	—
		10-3	—
		—	10-3
		—	—
		10-3	10-3
<i>Villa di Papa Giulio</i> (p. 166)	10-2	10-4	10-4

* All Papal Collections are closed on the last Thursday in October.

Wednesday	Thursday	Friday	Saturday	Admission free except when otherwise stated.
10-3	10-3	10-3	—	1 fr. April 1st-Sept. 30 h, 8-2.
9-12, 2-5	9-12, 2-5	9-12, 2-5	9-12, 2-5	50 c.
10-4.30	10-4.30	10-4.30	10-4.30	1 fr.
11-5	11-5	11-5	11-5	1 fr.; Sun. free.
11-12	—	11-12	—	1/2 fr., Sun. free.
10-3	10-3	10-3	10-3	1 fr. June 1st-Sept. 1st 8-12 and 4-6.
10-4	10-4	10-4	10-4	Conducted parties every 1/2 hr. ●
All day	All day	All day	All day	1 fr.
All day	All day	All day	All day	1 fr.
—	11-3	—	11-3	1 fr.
10-4	10-3	10-3	10-3	1/2 fr., Sun. free.
—	10-4	10-4	10-4	1 fr., Sun. free.
—	10-2	—	—	—
—	—	10-2	—	—
10-3.30	—	10-3.30	—	1 fr. Open also on the 1st and 15th of each month if not festivals; closed July-September.
after 9 a.m.	after 9 a.m.	after 9 a.m.	after 9 a.m.	1 fr., Sun. free. June 1st-Sept. 20th 7-12 (Sun. 8-12) and 3 till dusk.
9-3	9-3	9-3	9-3	1 fr., Sun. free.
—	10-1	—	10-1	1 fr. Christian Museum and Paintings also on the 1st Sat. of each month (antiquities closed). Closed July 1st Oct. 1st.
10-3	—	10-3	—	—
after 9 a.m.	—	—	after 9 a.m.	—
8-12, 2-5	—	—	8-12, 2-5	—
10-4	10-3	10-3	10-3	1 fr., Sun. free.
10-4	10-4	10-4	10-4	1 fr., Sun. free.
after 9 a.m.	after 9 a.m.	after 9 a.m.	after 9 a.m.	1 fr., Sun. free. June 1st-Sept. 20th 7-12 (Sun. 8-12) and 3 till dusk.
8-11	8-11	8-11	8-11	Permessi required, except on Sat. Permessi (10-12) in the Ministero della Casa Reale, Via del Quirinale 30, next to S. Andrea (Pl. II, 24), first floor.
—	12-3	—	—	—
9-3	—	—	9-3	1 fr., Sun. free. June 1st-Sept. 20th 7-12 (Sun. 8-12) and 3 till dusk.
after 9 a.m.	after 9 a.m.	after 9 a.m.	after 9 a.m.	—
10-3	10-3	10-3	10-1	June 1st-Aug. 31st, 9-1 (Sat. 9-12).
—	—	10-3	—	—
10-3	10-3	10-3	10-1	—
10-3	10-3	—	—	—
—	10-3	—	—	1 fr., Sat. free. June 1st-Aug. 31st, 9-1 (Sat. 9-12).
—	—	10-3	—	—
10-3	—	—	—	—
10-3	10-3	10-3	10-1	Reading in the Library, see p. 146.
10-4	10-4	10-4	10-4	1 fr., Sun. free.

through the Via Alessandrina and Via Bonella to the Forum Romanum, past the Colosseum, through the Via di S. Giovanni in Laterano to the Piazza in front of the church, then through the Via Merulana, passing S. Maria Maggiore, through the Via Agostino Depretis (Quattro Fontane) and the Via Vestale to the Piazza Venezia, then through the Corso Vittorio Emanuele to the Via Tor Argentina, through the last street to the Ponte Garibaldi, crossing it to Trastevere, passing S. Maria in Trastevere, and through the Lungara to the Piazza di S. Pietro, then cross the Ponte S. Angelo, and through the Corso Vittorio Emanuele and the Via Alessandrina to the Piazza Alessandrina at the foot of the Capitol, where the cab may be dismissed. Ascend to the Forum del Campidoglio (p. 217), visit the tower on the Senators Palace (p. 213), the Capitoline Museums (p. 214), and the Forum Romanum (p. 218). Spend the evening on the Piazza (p. 219).

Two Day. St. Peter's (p. 219, the dome not after 11 a.m.); *Antiquarium* at the Vatican (p. 215); Appartamento Borghese (p. 217, Tues and Frid only); Walk from S. Onofrio (p. 219) along the Pinciana Margherita (p. 219) to S. Pietro in Montorio (p. 217) whence the sunset should be viewed.

Two Day. Piazza Colonna (p. 213), Temple of Neptune (p. 219), *Forum* (p. 214), S. Maria sopra Minerva (p. 215), *Museo Kircheriano* (p. 211), Galleria Doria (p. 217), Palazzo di Venezia (p. 217), Palazzo (p. 218).

Two Day. Palazzo Giraud (p. 217), *Sanctus Chapel* (p. 211), *Reynolds's House* (p. 215), *Salotto di the Vatican* (p. 214), *Reynolds's Lodge* (p. 215, on Tues. & Frid only); Excursion to Ponte Nolle (p. 215) or visit the Villa Doria Pamphili (p. 219).

Two Day. Piazza del Quirinale (p. 217, also *Quirinal Sanctuary*, on Wed. or Sat., p. 219), Galleria Colonna (p. 213), *Fane of the Emperors* (p. 211), S. Pietro in Vincoli (p. 215), Colosseum (p. 210), Arch of Constantine (p. 210).

Two Day. Piazza Navona (p. 219), S. Maria dell' Anima (p. 211), S. Maria delle Pace (p. 212), S. Agostino (p. 214), Palazzo Borghese (p. 213), after 1 p.m. Villa Borghese, with its antiquities and paintings (p. 219), S. Maria del Popolo (p. 215).

Two Day. *Palazzo Barberini* (pp. 162, 163), S. Maria degli Angeli and *Thermae of Maximian* (Museum, p. 167), S. Agnese fuori (p. 219).

Two Day. S. Clemente (p. 219), *Lateran Museum, Church, and Hospital*, pp. 202 et seq., S. Maria Maggiore (p. 159), S. Francesco (p. 157), S. Lorenzo fuori (p. 164).

Two Day. Grotto (p. 215), Palazzo Massimo (p. 215), *Canalicchio* (p. 215), Palazzo Farnese (p. 215), *Galleria Nazionale* (p. 211, also Villa Farnesina, on Mon., Wed., or Frid., p. 219), S. Maria in Trastevere (p. 214), return across the Lake Titicaca (p. 215), *Thermae of Marcellus* (p. 214), *Porticus of Octavia* (p. 214), *Fontana delle Tartarughe* (p. 211).

Two Day. From the Forum Romanum to the *Janus Quadrifrons* (p. 212), *Cinque Martiri* (p. 215) the two ancient temples adjoining the Ponte Emilio and the Piazza Bocca della Verità (p. 214), S. Maria in Cosmedin (p. 213), walk over the Aventine (S. Sabina, p. 215), Pyramid of Cestius (p. 210), Protestant Cemetery (p. 210), electric tramway to S. Paolo fuori (p. 217) and back.

Two Day. S. Maria in Ardeatina (p. 215), collections in the Palace of the Conservatori (p. 213), *Thermae of Caracalla* (p. 211), *Museo delle Terme*, within and without the city (pp. 210, 211), and the Catacombs of St. Callixtus (p. 211).

Other two or three days should be devoted to revisiting the collections of antiquities in the Vatican and the Capitol and the Museo delle Terme. Lastly, a day should certainly be devoted to the Alban Hills (p. 407), and another to Tivoli (p. 422). These excursions should not be postponed till the end of the visitor's stay at Rome. They may be made on a Sunday, which is not a good day for sight-seeing in the city.

Rome (*Rome* in Latin and Italian), known even in antiquity as 'the Eternal City', once the capital of the ancient world, afterwards of the spiritual empire of the popes, and since 1871 the capital of the kingdom of Italy, with 424,943 inhab. (Feb. 10th, 1901; less than Naples or Milan, 416,299 live in the town proper, 8644 in the Campagna), is situated ($41^{\circ} 53' 54''$ N. lat., $12^{\circ} 0' 29''$ E. long., meridian of Greenwich) in an undulating plain of alluvial and marine deposits, intersected by volcanic masses. This plain extends from Capo Lincaro, S. of Civit  Vecchia, to the Monte Circeo, a distance of about 85 M., and between the Apennines and the sea, a width of 25 M. The *Tiber* (Ital. *Tevere*), the largest river in the Italian peninsula, intersects the city from N. to S. in three wide curves. The water of the Tiber is turbid (the '*fluvius Tiberis*' of Horace). The average width of the river is about 85 yds. and its depth 20 ft., but it sometimes rises as much as 30-35 ft. more. The navigation of the river, by means of which the commerce of ancient Rome was carried on in both directions, with transmarine nations as well as with the Italian provinces, is now comparatively insignificant. An artificial channel has been constructed for the river within the city since 1876. Eleven bridges span the stream in or near Rome, including the railway-bridge at San Paolo and an iron foot-bridge (p. 228), and others are projected.

The city proper lies on the **LEFT BANK** of the Tiber, partly on the plain, the ancient *Campus Martius*, and partly on the surrounding hills. Modern Rome is principally confined to the plain, while the **HILLS** on which the ancient city stood were almost uninhabited in the middle ages and following centuries (comp. p. 156), and have only recently begun to be re-occupied. These are the far-famed **Seven Hills of Rome**: the Capitoline, Palatine, Aventine, Quirinal, Viminal, Esquiline, and Caelian hills (comp. the Plan of Ancient Rome, p. 234). The least extensive, but historically most important, is the *Capitoline* (165 ft.), which rises near the Tiber and the island. It consists of a narrow ridge extending from S.W. to N.E., culminating in two summits, separated by a depression. Contiguous to the Capitoline, in a N.E. direction, and separated from it by a depression occupied by Trajan's Forum, extends the long *Quirinal* (170 ft.). On the N. a valley, occupied by the Via del Tritone and the Piazza Barberini, separates the Quirinal from the *Pincio* (165 ft.), which was not originally regarded as one of the chief hills ('*Collis hortorum*', comp. p. 158). To the E. of the Quirinal, but considerably less extensive, rises the *Viminal* (180 ft.), now almost unrecognizable owing to the construction of new streets; its highest point is near San Lorenzo in Panisperna (p. 180). Farther to the S., beyond the valley now marked by the Via Santa Lucia in Selci and the Via Giovanni Lanza, are the *Caelian* (175 ft. at Santa Maria Maggiore) and the *Oppian* (165 ft. on the plateau of Trajan's Thermæ), both included under the name *Esquiline*. The Oppian,

Caelius, Viminal, Quirinal, and Pincio may all be regarded as spurs of the extensive plateau of the *Esquilæ* (170-195 ft.), which extended from the Prætorian Camp (p. 166) to the Railway Station and the Porta Maggiore. To the S.E. of the Capitoline, in the form of an irregular quadrangle, rises the isolated *Palatine* (165 ft.), with the ruins of the palaces of the emperors. Farther to the S., close to the river, separated from the Palatine by the depression (70 ft.) in which the *Circus Maximus* lay, is the *Aventine* (150 ft.). Lastly, to the S.E. of the Palatine and to the E. of the Aventine, is the long *Caelius* (165 ft.), the E. end of which is occupied by the Lateran. On the low ground between the Caelius, Palatine, and Esquiline is situated the Colosseum; and between the Palatine, Esquiline, and Capitoline stretches the Forum.

On the **RIGHT BANK** of the Tiber lies the smaller part of the city, divided into two halves: on the N. the *Borgo* around the *Vatican* and *St. Peter's*, encircled with a wall by Leo IV. in 852; and to the S., on the river and the slopes of the Janiculum, *Trastevere*. These two portions are connected by the long *Via della Lungara*.

The **WALL** enclosing this area, which was inhabited during the imperial epoch by $\frac{2}{3}$ -1 million souls, has a length of about 10 M. on the left bank and is pierced by 13 gates. It is constructed of tufa concrete with a facing of triangular bricks, and on the outside is about 55 ft. high. The greater part of it dates from 271 to 276. It was begun by the *Emp. Aurelian*, completed by Probus, and restored by Honorius, Theodoric, Belisarius, Narses, and several popes. The wall on the right bank dates mainly from the time of Pope Urban VIII. — Since 1870 Rome has been fortified by a series of detached forts forming a circle of about 30 M. in circumference round the city.

The following description of Rome is arranged in accordance with a division of the city into four districts, the extent of which is marked with blue lines on the clue-map at the end of the Handbook. To each of these its buildings lend a distinct historical character; though numerous monuments from all periods of Roman history are scattered throughout the entire city.

I. The Hills to the North and East: Pincio, Quirinal, Viminal, and Esquiline, the more modern city, the N. part of which is the strangers' quarter.

II. Rome on the Tiber (left bank), the city of the middle ages and following centuries, with the *Corso* as its main thorough-fare; now much altered by the construction of new streets.

III. Ancient Rome, the southern quarters, containing the chief monuments of antiquity.

IV. The Right Bank of the Tiber, including the Vatican, St. Peter's, and Trastevere.

I. The Hills to the North and East: Pincio, Quirinal, Viminal, and Esquiline.

The Pincio, the northernmost height in modern Rome, was covered in antiquity with parks and gardens, and played no conspicuous part in history; but the Quirinal, adjoining it on the S.E., is mentioned in the earliest traditions of Rome. On the Quirinal lay the Sabine settlement whose union with that on the Palatine formed the city of Rome. The Servian Wall (see p. xxx and the Plan of Ancient Rome) ran along the N.W. side of the Quirinal, and then to the S.E. and E. behind the Baths of Diocletian and the railway-station, enclosing besides the Quirinal, the Viminal (to the S.E.), and a part of the Esquiline (the Cispinus and Oppius). According to the division of the city by Augustus (p. xxxii), this quarter comprised two districts, the *Alta Semita* (Quirinal) and the *Esquilias* (Esquiline). The building of Aurelian's wall shows that this quarter was afterwards extended. In the middle ages these hills were thinly populated and formed a single region only, named the *Rione Monti*, the most spacious of the fourteen quarters in the city. Its inhabitants, called *Montigiani*, differed, like those of Trastevere, in some of their characteristics from the other Romans. In the latter half of the 16th cent. Pius IV. constructed the street from the Piazza del Quirinale to the Porta Pia. The second main street, intersecting this one almost at right angles and leading from the Pincio to Santa Maria Maggiore, was made by Sixtus V., who also provided the hills with water. With the exception of these inhabited quarters almost the entire E. part of Rome was until lately occupied by vineyards and gardens. But the selection of the city as the capital of the kingdom of Italy in 1870 gave a strong impulse to its extension, and this quarter has assumed quite a new aspect since that event.

The region known for ages as the *Strangers' Quarter* lies at the W. base and on the slope of the Pincio, its central point being the Piazza di Spagna (p. 160). Thence it stretches N. to the Piazza del Popolo, W. to the Corso Umberto Primo (p. 197), and E. over the Quirinal to the railway-station. — Our description starts from the Piazza del Popolo, at the W. base of the Pincio.

a. Piazza del Popolo. Monte Pincio. Piazza di Spagna.

The N. entrance to Rome is formed by the Porta del Popolo (Pl. I, 13), through which, before the construction of the railroad, most visitors approached the Eternal City. It lies at the beginning of the main highway which connects Rome with Tuscany, Umbria, and N. and E. Italy generally. The gate was constructed in 1661 by Vignola, and the side towards the town by Bernini in 1655, on the occasion of the entry of Queen Christina of Sweden. In 1878

It was enlarged by the addition of two side-portals. The gate is named after the adjoining church of Santa Maria del Popolo. — Outside the gate, on the right, is the *Villa Borghese*, see p. 180.

Within the gate lies the handsome *PIAZZA DEL POPOLO (Pl. I, 13, 16), adorned with an Obelisk between four water-spraying lions, which was erected by Augustus in B.C. 10 in the Circus Maximus to commemorate the subjugation of Egypt, and dedicated to the Sun. The hieroglyphic inscription mentions the names of Meropthah I. and Ramses III. (19-12th cent. B.C.) The obelisk was removed to its present position by order of Sixtus V. in 1589. The shaft is 78 ft. in height, and the whole monument with the pedestal and cross 118 ft. — On the W. and E. the Piazza is bounded by curved walls with groups of Neptune and Tritons, and of Roma between the Tiber and the Anio. The street behind the W. wall leads to the new Ponte Margherita (Pl. I, 14), affording the shortest route between the Piazza del Popolo and the Vatican (p. 329). Behind the E. wall are approaches ascending to the Pincio (p. 187).

— *Santa Maria del Popolo (Pl. I, 16), said to have been founded by Pope Paschalis II. in 1099 on the site of the tombs of the Domitii, the burial-place of Nero, which was haunted by evil spirits, was entirely re-erected under Sixtus IV. in 1477-80. The interior, decorated by Bernini in the baroque style, consists of nave, aisles, transept, and octagonal dome, and contains handsome monuments of the 15th cent. (comp. p. 127) and other works of art. The sacristy shows the choir and chapels; see 1, fr., best light in the morning.

RIGHT AISLE. The 1st Chapel, formerly *della Rovere*, now *Farnesina*, was painted in 1485-89 by Pinturicchio. *Altar piece, Adoration of the Infant Christ; in the lunette, life of St. Jerome. — On the left, the tomb of Cardinal Cristof. della Rovere (d. 1477), by *Alonso de Berruguete* and *Andrea Bregno*; right, that of Cardinal de Castro (1506). — On the pillar to the left, a bust of P. Castelli, the painter (d. 1857), by *Froeschel*. — In the 2nd Chapel (Cappella Cibo), Assumption of Mary altar piece by C. Maratta. — 3rd Chapel, painted by Pinturicchio (ca. 1504) above the altar, Madonna with saints; on the left, Assumption of the Virgin, in the lunette, scenes from the life of Mary; in the predella representations of martyrs in grimalles; on the right, tomb of Giov. Basso della Rovere (d. 1488), on the left, recumbent bronze figure of Cardinal Pietro Farnese (d. 1495), by *Ant. Basso*. — In the 4th Chapel (Cappella Costa) is a fine marble altar of 1450 with statues of St. Catherine between St. Anthony of Padua and St. Vincent; right, tomb of Marcantonio Albertoni (d. 1485); left, that of the founder of the chapel, Cardinal Giorgio Costa of Lisbon (d. 1508); in the lunette are the four church-fathers, by Pinturicchio (1490).

RIGHT TRANSEPT. On the right, tomb of Cardinal Pedomatharus of Cyprus (d. 1500). Near it is a door leading into a passage, with an altar, from the studio of A. Bregno (1497) presented by G. de Foreris, at the end of which is the sacristy, containing the former canopy of the high altar of Alexander VI., by *Andrea Bregno* (1478), with an ancient Madonna of the Siennese school and the beautiful monuments of (left) Archbishop Rocco (d. 1482), and (right) Bishop Gemelli.

LEFT AISLE. On the W. wall, next the entrance, curious allegorical tomb of Giov. Batt. Gialenno (d. 1670). 1st Chapel, on the left and right of the altar, two *alberini* by *Andrea Bregno* (16th cent.); left, tomb of Card. Ant. Pallavicino (erected 1607). By the adjacent pillar the baroque monument of a Princess

Chigi, by *Pest* (1771). — The 2nd Chapel (Capp. Chigi) was constructed under the direction of Raphael by *Agostino Chigi* in honour of Our Lady of Loreto, in the form of a Greek cross, with a lofty dome, in the style affected for such structures in the 16th century. On the vaulting of the dome are "Mosaics" by *Luigi della Pace* (1510) from Raphael's cartoons. Around the central circular scene, which represents the Creator surrounded by angels, are grouped seven planet symbols and a genius leaning on a globe, separated by ornamental divisions. Each planet is represented by an ancient deity: Diana or Luna, Mercury, Venus, Apollo, Mars, Jupiter, and Saturn. They are portrayed in half figure with appropriate action, and each is enclosed within a segment of the sodias, on which rests an angel, either pointing to the Creator above or in the act of adoration. This association of gods and angels recalls the prophets and sibyls of Michael Angelo, each of whom is also accompanied by a genius. But Raphael's composition is entirely independent, with a distinct significance of its own, and one of a kind which shows the master's power in its highest manifestation. — To the right is the tomb of *Agostino Chigi* by *Lorenzetto*, restored in 1003 by *Bernini*; to the left, the tomb of his brother *Stefanuccio Chigi*, also by *Lorenzetto*. The altar-piece, a Nativity of the Virgin with God the Father and angels above, is a late work (much darkened) by *Stefanuccio del Piccolo*; the other pictures are by *Salimbeni* and *Francesco Fontana*. The bronze relief on the front of the altar Christ and the Samaritan Woman, by *Lorenzetto*, was anti. 1003 on *Agostino Chigi's* tomb. In the niches four statues of prophets: beside the altar (left) *Jonah*, probably designed by Raphael, and (right) *Elijah*, by *Lorenzetto*; at the entrance, (left) *Daniel*, by *Bernini*, and (right) *Isaiah*, by *Alpardi*.

LAST TREASURY. Tomb of Cardinal *Bernardino Lonati* (a Florentine work of the 16th cent.). The entire chapel, to the left of the choir, contains a statue of St. Bibiana, by *Bernini*, from the church mentioned at p. 122.

In the Choir, "Ceiling" fresco by *Pontormo* (executed 1508-9) Coronation of the Virgin, the Four Evangelists, and the Four Fathers of the church, Gregory, Ambrose, Jerome, and Augustine, in excellent preservation, and long deservedly admired for the skilful distribution of space. Beneath are the "Tombs of the cardinals *Girolamo Raso della Rovere* and *Alessandro Sforza* by *Andrea Sansone*, erected by order of *Julius II.* (1505-7). The same pope caused the two fine stained glass windows to be executed by *Guillaume de Marillat*.

The church gives title to a cardinal. In the adjacent suppressed Augustinian monastery *Luther* resided during his visit to Rome (1510).

Three streets diverge from the Piazza del Popolo on the S. to the right the *Via di Ripetta*, parallel with the river (p. 213), in the centre the *Corse Umberto Primo* (p. 197), and to the left the *Via del Babuino*. The last, with the Church of *All Saints* (p. 145) and the house (No. 144) in which *John Gibson*, the sculptor, died in 1806, leads to the Piazza di Spagna (p. 160). — Between the last two streets stands the church of *Santa Maria in Monte Santo*, and between the first two that of *Santa Maria de' Miracoli*, both dating from the latter half of the 17th cent., with domes and vestibules, designed by *Rainaldi*, and completed by *Bernini* and *C. Fontana*. — Parallel with the *Via del Babuino*, on the R., runs the *Via Margutta*, the chief artists' street, with innumerable studios.

If we ascend the Pincio by the approaches named at p. 156 (gates closed one hour after Ave Maria), we observe in the first circular space two granite columns from the temple of *Venus and Roma* (p. 205), adorned with the prows of ships (modern). In the niches three marble statues, above, captive *Dacians*, imitations of antiquos.

Beyond these, a large relief. Halfway up are an antique granite basin, with a fountain, and a large *Equestrian Statue of Victor Emmanuel II.*, erected in 1876, under a loggia.

The *Pincio (Pl. I, 16, 17, 20, comp. p. 158), the *collis hortorum*, or 'hill of gardens', of the ancients, was called *Mons Pincius* from a palace of the Pincii, an influential family of the later period of the empire. Here were once the famous gardens of Lucullus, in which Messalina, the wife of Claudius, afterwards celebrated her orgies. A vineyard belonging to the monastery of Santa Maria del Popolo was converted by *Gius. Valadier*, the Roman architect, during the Napoleonic régime (1809-14), into the beautiful pleasure-grounds. This is a fashionable resort towards evening (comp. p. 149), when the Italians pay and receive visits in their carriages. — The projecting terrace above the Piazza del Popolo (150 ft.) commands a magnificent *View of modern Rome, which, however, has been much impaired by the building-over of the Prati di Castello.

Beyond the Piazza del Popolo and the new quarter on the Prati di Castello, on the opposite bank of the Tiber, rises the huge pile of St. Peter's, adjoining which is the Vatican to the right, and near it the city wall. Among the hills which bound the horizon, the point planted with cypresses to the right is Monte Mario, with the Villa Medici. To the left of St. Peter's, close to the Tiber, which is not visible, is the round castle of Sant' Angelo, with the bronze angel which crowns it. The pine on the height to the left of the castle belong to the Villa Lante on the Janiculum, with the *Paseggiata Margherita*, on which the *Statue of Garibaldi* is conspicuous. Farther to the left, on the height, the facade of the *Acqua Paola*, adorned with a cross. Between the spectator and the river is a labyrinth of houses and churches. The following points serve as landmarks. Of the two nearest churches that with the two towers to the right is San Giacomo in the Corso, that with the dome to the left, San Carlo in the Corso, behind the former is the round glass roof of the *Mausoleum of Augustus*, and between the two appears the flat dome of the Pantheon, beyond which a part of the Campagna is visible. To the left of this, on the height in the distance, rises the long, undecorated side of the church of Santa Maria in Araceli, and behind it appears the tower of the senatorial palace on the Capitol. On the right side of the Capitol the upper part of the column of M. Aurelius in the Piazza Colonna is visible. Adjacent to the Capitol, on the left, is the Villa Mills on the Palatine. Farther to the left a low tower by the Quirinal, the so-called Torre di Miliare. To the extreme left, and less distant, is the extensive royal palace on the Quirinal.

Near the middle of the gardens, beside the *Caffè*, rises an *Obelisk*, which Hadrian erected in front of the tomb of Antinous on the Via Labicana. It lay in a vigna outside the Porta Maggiore (p. 185) till 1633, and was erected here in 1822. — The various walks are embellished with busts of distinguished Italians. To the right of the road leading to the S. exit of the Pincio is a monument by *Brocio Rossi*, erected in 1863 to the memory of the brothers *Catrollo* of Pavia, who fell in battle near Rome in 1867 and 1870. A monument in the form of a globe, to the left, near the exit, commemorates *Galileo Galilei*, who was confined from 1630 to 1639, at the instance of the Inquisition, in the Villa Medici. — The exit is closed by an iron gate.

Leaving the Pincio by this S. gate, we observe to the left the Villa Medici. In front of it is an avenue of evergreen-oaks and a fountain, whence a celebrated view of St. Peter's, most striking towards evening or by moonlight, is obtained.

The Villa Medici (Pl. I, 17, 20), erected in 1540 by Annibale Lippi for Cardinal Ricci da Montepulciano, came into possession of Cardinal Alessandro de' Medici about 1600, and afterwards belonged to the grand-dukes of Tuscany. In 1801 the French academy of art, founded by Louis XIV. in 1666, was transferred hither (comp. p. 201). Ancient reliefs (e.g. from the Ara Pacis, p. 172), are built into the walls of the tastefully decorated garden-façade of the villa (adm., see pp. 150, 151; by the gate to the left, or by the staircase to the right in the house). The wing contains a *Collection of Casts*, comprising many from statues not preserved at Rome, e.g. from the Parthenon of Athens, which are valuable for students. To the right, in the garden, between two columns with an architrave, is an antique statue with an admirable head of Meleager not belonging to it, perhaps by Scopas (p. xlix). From the terrace (20-25 a if the door is shut) we enter the upper garden (the 'Boschetto'), from the highest point of which, the Belvedere, a fine view, now somewhat circumscribed, is enjoyed.

The street passing the front of the Villa Medici ends in the PIAZZA DELLA TRINITÀ (Pl. I, 20, 21), where to the left rises the church of Santissima Trinità de' Monti. The Obelisk in front of it, a conspicuous object from many points, is an ancient imitation of that in the Piazza del Popolo, and once adorned the gardens of Sallust.

Santissima Trinità de' Monti (Pl. I, 20), erected by Charles VIII. of France in 1495, and devastated during the French Revolution, was restored by Mascetti in 1816 by order of Louis XVIII. It is seldom open except in the evening at vespers (1 hr. before Ave Maria). At vespers on Sunday the nuns of the convent connected with the church (Dames du Sacré Cœur), for whom Mendelssohn composed several pieces, perform choral service with organ-accompaniment. When the door is closed, visitors ascend a side-staircase on the left, and ring at a door under a metal roof.

Left, 2nd Chapel. Descent from the Cross, altar-piece *ai fresco*, by Daniele da Volterra, his masterpiece (freely restored and scarcely ever in a good light); the excellence of the drawing and composition is better seen in a sepia-drawing at the Lateran. 3rd Chapel. Madonna, altar-piece by P. Per. 4th Chapel. St. Joseph, by Lanzi. 5th Chapel. Christ, the Wise and Foolish Virgins (left), and Return of the Prodigal (right), an altar-piece by Belli. — Right, 3rd Chapel. Assumption of the Virgin, Dom. da Volterra (school piece, with a portrait of Michael Angelo, who is said to have worked on it). 5th Chapel. Presentation in the Temple, Adoration of the Magi, Adoration of the Shepherds, of the *School of Raphael*. 6th Chapel: Resurrection, Ascension, Descent of the Holy Ghost, *School of Perugino*. — In the Transept, which is supported by Gothic arches, paintings by *Perin del Vaga* and *F. Saccaro*.

To the S.E. from the Piazza the broad *Via Sistina* (p. 162) runs to the left, and to the right the small *Via Gregoriana*, which ends

in the cross-street, *Via Capo le Case*. — Lift from the *Piazza di Spagna*, see below.

The *Scala di Spagna* (Pl. I, 20, 21; 'Gradinata della Trinità de' Monti'), which descends from *Santissima Trinità* to the *Piazza di Spagna* by 137 steps, was constructed by *Al. Specchi* and *De Sanctis* in 1721-25. Models for artists with their picturesque costumes frequent its vicinity. At the foot of the steps (to the left as we descend) is the house where *John Keats* died in 1821 (inscription).

The *Piazza di Spagna* (Pl. I, 17, 18; 82 ft.), with its hotels and attractive shops, is the central point of the strangers' quarter. Opposite the steps is *La Barcaccia* (barque), a fountain by *Bernini* in the shape of a war-ship, spouting water from its cannons. This form was chosen by the artist because his supply of water, from a branch of the *Acqua Vergine*, had very little 'head'. — The *Via del Babuino*, leading to the N., is mentioned on p. 157; the *Via Condotti*, leading to the W. opposite the steps, on p. 212. From the N.E. corner of the piazza, next the *Hôtel de Londres*, a lift (ascensore) plies to the *Pincio* until dusk (up 10, down 5 c.). — The square derives its name from the *Palazzo di Spagna*, in the S. part of the W. side, which has been the Spanish embassy to the Curia since the 17th century. In front of the embassy rises the *Column of the Immacolata*, erected by *Pius IX.* in honour of the 'Immaculate Conception of the Virgin', a dogma promulgated in 1854, on the top of the cipollino column stands the bronze statue of *Mary*; beneath are *Moses*, *David*, *Isaiah*, and *Ezekiel*. — The small E. expansion of the *Piazza* at this point, known as the *Piazza Mignanelli* (Pl. I, 21), is the starting-point of several lines of omnibuses (comp. the Appx.).

To the S. is the *Collegio di Propaganda Fide* (Pl. I, 21), founded in 1622 by *Gregory XV.*, and extended by his successor *Urban VIII.* (whence '*Collegium Urbanum*'), an establishment for the propagation of the Roman Catholic faith, where pupils of many different nationalities are educated as missionaries. An annual celebration takes place in Jan., with speeches in various languages by the students (adm. by ticket). The printing-office (*Tipografia Poliglotta*) of the college was formerly celebrated as the richest in type for foreign languages. On the second floor is the *Museo Bоргiano* (mostly ethnographical, open free on Mon., Thurs., and Sat., 10-1).

To the S.E. from the *Piazza di Spagna* the *Via de' Due Macelli* (to the left of the *Propaganda*) runs straight to the tunnel (p. 178) under the *Quirinal* (tramway, see Appendix, pp. 1, 2, Nos. 7 and 10); while the *Via di Propaganda* (to the right) leads to the church of *Sant' Andrea delle Fratte* at the corner of the *Via Capo le Case* (p. 161).

Sant' Andrea delle Fratte (Pl. I, 21) is by *G. B. Guerra* (1612); the dome and campanile are by *Borromini*; the façade was added 1826 by *Gius. Valadier*.

The pictures in the interior are poor works of the 17th cent.; the two angels to the right and left of the choir, by *Bernini*, were originally destined for the Ponte Sant' Angelo. In the 2nd Chapel on the right is (on the right side) the monument of Miss Falconnet by *Harriet Hosmer*; on the last pillar to the right, in front of the aisle, the monument of the artist R. Schadow (d. 1822), by *Em. Weiff*. To the left of the exit to the Via Capo le Case is the tomb of Angelica Kauffmann (d. 1807).

In the Via Capo le Case stands the church of *San Giuseppe a Capo le Case* (Pl. I, 21), adjoining which is the Museo Antisemio-INDUSTRIALE, an unimportant collection of terracottas, majolles, glass, and ivory and wood carving (open daily 9-3, Sun. 10-2; adm. 50 c.).

We follow the Via di Propaganda farther on, and then turn to the left into the VIA DEL NAZARENO (Pl. I, 21). To the right in the court of No. 12 are remains of three arches, with engaged columns between them, belonging to the *Aqua Virgo*, with a long inscription to the effect that the Emperor Claudius restored the aqueduct that had been 'disarranged' by his predecessor Caligula (comp. below). The Via del Nazareno leads to the VIA DEL TIRRORE (Pl. I, 21), the narrow but busy thoroughfare between the quarter on the N. hills and the Corso Umberto Primo, which ends to the left (E.) in the Piazza Barberini (p. 162), and to the right (W.) in the Piazza Colonna (p. 200).

The Via del Nazareno is continued to the S. by the winding Via della Stamperia (Pl. I, II, 21), which passes the *Ministry of Agriculture* and the royal *Engraving Establishment* (*Regia Calcografia*, p. 149), and ends at the Fontana di Trevi.

The Fontana di Trevi (Pl. II, 21), the most magnificent of the public fountains of Rome, is erected against the S. side of the Palazzo Poli, and was completed in 1762 from a design by *Nic. Salvi* (1735) aided by a drawing by *Bernini*. In the central niche is a figure of Neptune, by *Pietro Bracci*; at the sides, Health (right) and Fertility (left); in front, a large stone basin.

The ancient *Aqua Virgo*, which issues here, was conducted by M. Agrippa from the Campagna, chiefly by a subterranean channel 14 M. in length, to supply his baths beside the Pantheon (p. 215), in B.C. 19. It enters the city near the Villa Medici (p. 150). The name originated in the tradition (perhaps not unconnected with the virgin purity of the water) that a girl once pointed out the spring to some thirsty soldiers. The fountain was restored by Claudius in 48 A.D. (to which fact the inscription mentioned above refers), and later by the popes Hadrian I. and Nicholas V. In 1430 the latter pope conducted hither the main stream of the aqueduct, and the fountain then exchanged its ancient name for its present name of Trevi (a corruption of 'Trivio'), which it derives from its three outlets. This aqueduct yields daily upwards of 15 million cubic feet of water, perhaps the best in Rome. The fountains in the Piazza di Spagna, the Piazza Navona, and the Piazza Farnese are supplied from the same source. — On quitting Rome, travellers take a draught from this fountain, and throw a coin into the basin, in the pious belief that their return is thus ensured.

The Via delle Muratte (at No. 78 in which Donizetti lived; tablet) leads to the S.W. from the fountain to the Corso (p. 197). Opposite the fountain is *Santi Vincenzo ed Anastasio* (Pl. II, 21), erected in

1650 by Cardinal Mazarin, from designs by M. Lunghi the Younger. In its subterranean chapel are preserved the hearts of the popes since Sixtus V. — The Via di San Vincenzo, called farther on Via de' Lucchesi, and then (beyond the Piazza Pilotta, p. 177) the Via Pilotta (pp. 177, 210), leads to the *Palazzo Colonna* (p. 210). (From the Via de' Lucchesi the Via della Dataria leads on the left to the Quirinal; p. 178.)

**b. Via Sistina. The Ludovisi Quarter. Quattro Fontane.
Via Venti Settembre.**

The VIA SISTINA (Pl. I, 21), which begins at the top of the Scala di Spagna and runs thence to the S.E., was, as already mentioned on p. 166, one of the new streets constructed by Sixtus V. From the top of the Pincio it descends into the hollow between that hill and the Quirinal, then, with its continuation the Via Quattro Fontane (p. 163), crosses first the crest of the Quirinal and, beyond another hollow, that of the Viminal, and finally, under the name of Via Agostino Depretis, ends on the Esquiline at the church of Santa Maria Maggiore (p. 180), which fills in the vista from the higher points along the entire line of streets.

To the right, immediately at the beginning of the street, close to the Piazza Santissima Trinità de' Monti, Via Sistina 64, is the Casa Zuccari, once the house of the family of the artists of that name.

The Via di Porta Pinciana, which diverges to the left farther on, forms the W. boundary of the new Ludovisi Quarter and leads past the *Villa Malta* (Pl. I, 20; no admission) to the Porta Pinciana (p. 163). — Farther on in the Via Sistina, No. 126, to the left, is the house where Gogol, the Russian author, lived in 1838-42 (inscription).

To the right, at the end of the Via Sistina, diverges the Via del Tritone (p. 161), while on the slope ascending to the left lies the PIAZZA BARBERINI (Pl. I, 21, 24), the chief decoration of which is the *Fontana del Tritone, by Bernini, with a Triton blowing a conch. — Opposite the S. side of the fountain is an annexe of the *Palazzo Barberini* (p. 163).

To the left of the Piazza Barberini lies the Piazza de' Cappuccini, in which is situated the church of Santa Maria della Concezione (Pl. I, 21, 24), or dei Cappuccini, founded in 1624 by Card. Barberini. In the interior, over the door, is a copy of Glottio's Navicella (in the vestibule of St. Peter's, p. 321), by Franc. Beretta. 1st Chapel on the right: St. Michael, by Guido Reni; in the 3rd, remains of frescoes by Domenichino. Beneath a stone in front of the steps to the choir lies the founder of the church ('hic jacet pulvis cinis et nihil').

Beneath the church are four BURIAL VAULTS (shown by one of the monks), decorated in a ghastly manner with the bones of about 4000 departed Capuchins. Each vault contains a tomb with earth from Jerusalem. In the case of a new interment, the bones which had been longest undisturbed

were used in the manner indicated. The vaults are illuminated on 2nd Nov. (All Souls' Day), after Ave Maria.

The **VIA VENETO** (Pl. I, 21, 23), winding up the hill from the Piazza de' Cappuccini, leads to the new quarter which has sprung up since 1886 on the grounds of the former *Villa Ludovisi*. In this street, a short distance before its intersection with the Via Ludovisi and the Via Boncompagni, rises, on the right, the handsome *Palazzo Margherita* (Pl. I, 23), formerly called the *Palazzo Boncompagni-Piombino*, erected by G. Koch (1886-90) and since 1900 the residence of the Queen-Dowager Margherita. The celebrated collection of antiques has been transferred to the Museo delle Terme (p. 172). The district on which the present Ludovisi quarter stands was occupied in antiquity by the splendid *Gardens of Sallust*, the historian, which were afterwards acquired by the emperors. The numerous edifices in these gardens are now represented by a large domed building with eight niches in the Piazza Sallustiana (Pl. I, 26), called without foundation 'Tempio di Venere', but most probably a nymphæum.

Beyond the Palazzo Margherita the broad **VIA VENETO**, flanked with trees, leads to the Porta Pinciana (see below). In the Via Lombardia, the second side-street on the left, is the entrance to the **CASINO DELL' AURORA** (Pl. I, 20), a garden-house belonging to the former Villa Ludovisi, now occupied by the American School of Art (p. 141). On the ground-floor is a ceiling-painting of Aurora, and on the first floor one of Fama, both by *Guercino* (no admission). On the inner side of the town-wall, near the gate, to the E. is an antique bust of the type of Alexander the Great, which with the surrounding decoration was brought from the Villa Ludovisi (see above).

Outside the *Porta Pinciana* (Pl. I, 20, 23) is the E. entrance to the *Villa Borghese* (see p. 189).

From the Piazza Barberini (p. 162), the Via Sistina is continued by the **VIA QUATTRO FONTANE** (Pl. I, II, 24), in which, to the left, is the —

***Palazzo Barberini** (Pl. I, 24), an imposing structure in the baroque style, begun by *Moderna* under Urban VIII., and completed by *Bernini* (p. lxxiv). The garden in front contains a marble statue of *Thorvaldsen*, by E. Wolff, after a work by the master himself, erected here, near his studio, by his pupils and friends in 1874.

— The principal staircase is to the left under the arcades; built into it is a Greek tomb-relief (top half modern); on the landing of the first floor, a lion in high-relief, from Tivoli. At the top of the staircase is the *Sculpture Saloon*, with a large ceiling-painting ('Il Trionfo della Gloria') by *Pietro da Cortona*, and containing a number of ancient and modern sculptures. This room is shown only in the absence of the Spanish ambassador to the Quirinal, who occupies this part of the palace.

The **GALLERIA BARNABINI**, on the S. side of the right wing (entrance through the garden; *adm.*, see p. 160), now contains only a limited number of important pictures, the principal ones having been removed to the prince's private apartments.

I. Room 10. *Pompeiane, Magdalen*; 11. *After Raphael, Madonna*. — II. Room. Admirable "Stucco" by a Greek master, representing a suppliant for protection at an altar (comp. p. 363) — 11. *Mengo, Portrait of his daughter*; 12. *Annals Urban VIII*; *Quinto Anno*; 13. *Sleeping child*; 14. *St. Andrew Cornuti*; 15. *Spum at School, Anna Colonna*. — III. Room 72. *Pr. Primate (?)*, *Madonna with St. Jerome*; 73. *Braccio (?)*, *Portrait*; 74. *Imitation of Paimo Venetian (not Titian)*. *La Schiava*, female portrait. 75. *Dürer, Christ among the Scribes*, painted at Venice in five days in 1606 ("opus quinquidierum"). The numerous heads in this picture are ungrouped, some of them resemble caricatures, and it is in the execution of the expressive hands alone that the workmanship of the master is apparent. 76. *Anna de Amato, Betrothal of St. Catharine*; 77. *Pontorno* (according to Morelli), *Pygmalion*. 78. *Raphael (ca. 1610)*, *Portrait of the so-called Fornarina*, so frequently copied, sadly injured. The Fornarina is merely a round-faced Roman girl, such as may frequently be met in the streets of Rome to-day — no radiant beauty but full of living charm. 79. *School of Otto Bellini, Madonna*; 80. *Pompeiane, Betrothal of St. Catharine*; 81. *N. Poussin, Death of Germanicus*; *Claude Lorraine*; 103. *Landscape*; 117. *Sea-piece*; 119. *Acqua Acetosa*; 104. *Pr. Primate (?)*, *Madonna*; 105. *Sedona (?)*, *Madonna*; 106. *And. del Sarto, Holy Family*. In the middle is the model of *Servius's Elephant* in the *Pinna della Miserve* (p. 318). — IV. Room 120. *Quinto Anno (?)*, *Beatrice Cenci* (so called, p. 267); 121. *San Gennaro, Lucretia Cenci, stepmother of Beatrice*; 122. *Europa and the Bull* (ancient mosaic from Palestrina, badly preserved). — The *Stella-Anna Barberiniana* was sold to the Pope in 1807 (see p. 300).

The **Via Quattro Fontane** ascends the Quirinal, at the top of which it intersects the **Via Venti Settembre**. At the point of intersection are the **Quattro Fontane** (Pl. I, 24), the four fountains after which the street is named. To the right, in the **Via del Quirinale** (p. 177), which leads to the Quirinal, is the small church of **San Carlo of San Carino**, built by Borromini in the most extravagant baroque style. Straight on, in the direction of **Santa Maria Maggiore**, the street descends to the **Via Nazionale** (p. 174).

The **Via Venti Settembre** (Pl. I, 24, 27, 28), leading to the N.E. along the ridge of the Quirinal hill to the **Porta Pia**, derives its name from the entry of the Italian troops on Sept. 20th, 1870 (p. xxxviii). It is traversed by electric tramways (Nos. 1, 2, 6, and 11 in the Appendix).

The corner-house in this street, to the right, at the **Quattro Fontane**, is the **Palazzo Albani**, originally built by Dom. Fontana, and once inhabited by Cardinal Al. Albani (p. 381). Farther on, to the right, is the **War Office** (1888). — The **Vicolo San Niccolò da Tolentino**, passing the church of the same name, adorned with 17th cent. frescoes and sculptures, leads to the left to the **Ludovisi quarter** (p. 163).

In the **Piazza San Bernardo**, which opens on the right, is the round church of **SAN BERNARDO** (Pl. I, 24), originally one of the corner-halls of the **Thermae of Diocletian** (p. 167), consecrated in 1600. The vaulting is ancient, and, like the Pantheon, was originally open in the centre.

Opposite, on the other side of the *Via Ventì Settembre*, is the ancient church of *SANTA SUSANNA* (Pl. I, 24), altered to its present form in 1600 by *C. Maderna*. Paintings from the history of St. Susanna (martyred under Diocletian) and of Susanna of the Apocrypha, by *Baldassare Croce* and *Cesare Nebbia*. Adjoining the church is the *United States Embassy and Consulate* (p. 139).

Near this point (entrance in the *Via Santa Susanna* 1) is the *Museo Agrario* (Pl. I, 24), or *Agricultural Museum*, open free on Tues., Thurs., and Sun., 11-4.

Farther on, on the same side of the street, is the church of *SANTA MARIA DELLA VITTORIA* (Pl. I, 24), so called from an image of the Virgin which is said to have been instrumental in gaining the victory for the imperial troops at the battle of the 'White Hill' near Prague (1620), afterwards deposited here, but burned in 1833. The church, with the exception of the façade, was designed by *C. Maderna*.

In the 2nd Chapel on the right, an altar-piece (Mary giving the Infant Christ to St. Francis) and frescoes (the ecstasy and 'stigmata' of St. Francis) by *Domenichino*. In the 3rd Chapel on the left, the Trinity by *Guercino*. In the left transept is the notorious group of St. Theresa by *Bernini*, the execution of which is masterly, whatever may be thought of the spirit. The apse was gorgeously restored in 1881 at the cost of Prince Al. Torlonia, and adorned with frescoes by *Serra* (Procession after the battle of the White Hill).

At the opposite corner, whence a short street leads to the *Piazza delle Terme*, is the conspicuous *FONTAINE DELL'ACQUA FELICE* (Pl. I, 24), erected by *Domenico Fontana* under Sixtus V. (Felice Peretti). The badly-executed Moses, an imitation of Michael Angelo, is by *Prospero Bresciano*, who is said to have died of vexation on account of his failure, at the sides, Aaron and Gideon by *Giov. Batt. della Porta* and *Flaminio Vacca*; in front, four modern lions (antique originals in the Vatican, p. 360). The *Acqua Felice* was conducted hither in 1583 from Colonna in the Alban Mts., a distance of 13 M.

The *Via Ventì Settembre* proceeds, past the *Finance Office*, built by Canevari in 1870-77 (behind which is a monument to *Silvio Spaventa*, the statesman; 1822-93), and the statue (by Ferrari) of *Quintino Sella* (d. 1884), statesman and several times minister of finance, to the *Porta Pia* (p. 388, 15-20 min. from the *Quattro Fontane*). To the right, just inside the gate, is the *British Embassy* (Pl. I, 26), in the former *Villa Torlonia*.

The *Porta Pia* (Pl. I, 29), famous in the annals of Rome for the attack of the Italians on Sept. 20th, 1870, was begun from designs by *Michael Angelo* in 1564. On the outside, to the left, three memorial tablets, placed in 1871, 1874, and 1895, mark the place where the breach was made through which the Italians entered the city. Opposite, in the *Corso d'Italia*, rises a *Column of Victory* (Pl. I, 26), by *Aureli* and *Guastalla*. To the right of the gate is the old *Porta Nomentana*, walled up since 1564.

From the *Porta Pia* to *Sant' Agnese*, see p. 388.

The road skirting the outside of the city-wall to the right from the *Porta Pia* leads in a few minutes to the *Castro Pretorio* (Pl. I, 29, 30, 32, 33), a fortified camp, originally established by Tiberius for the imperial body-guard of 10,000 men (who were, down to the time of Aurelian, reinforced by the four 'Cohortes Urbane' with their 4000 men). The camp occupies a quadrangular space, 430 yds. long by 380 yds. wide, and was originally enclosed by a battlemented wall, 12 ft. in height, against which vaulted chambers were built on the inside. Aurelian included the camp in his fortifications (p. 164) and doubled the height of the wall. Constantine, who disbanded the *Prætorian* guards, destroyed their camp so far as it did not form part of the town-wall. The *Castro*, which now contains modern barracks, is again devoted to military purposes and accessible only by special permission.

Two of the ancient gates (on the N. side, nearly opposite the 'Officina Elettrica', and on the E. side), both dating from the reign of Tiberius, are still extant and are good examples of Roman brickwork. The wall on the S. side was hastily repaired in the early middle ages with blocks of stone from ancient buildings.

To the E. is the large *Policlinica* (Pl. I, 32, 33), or clinical hospital, a handsome building designed by G. Podestà and completed in 1896, but not yet in use.

In the town-wall at the S.W. angle of the *Castro Pretorio* is a *Gateway*, of the time of Aurelian, the ancient name of which is unknown. It seems to have been built up in the reign of Honorius. — Hence to the *Porta San Lorenzo* (p. 183), 12 minutes.

c. Piazza delle Terme. Via Nazionale. The Quirinal.

On the S. side of the *PIAZZA DELLE TERME* and the adjoining *PIAZZA DEI CINQUECENTO* (Pl. I, 27) is the *Railway Station*, constructed in 1872. Opposite the arrival-platform begins the wide *Via Cavour*, leading to the *Piazza dell' Esquilino* and the *Forum* (see p. 188). — In front of the main façade of the station, which faces the *Thermæ of Diocletian*, is a *Monument* to the 500 Italian soldiers who were surprised and slain at Dogali by the Abyssinians in 1886. A small obelisk from the temple of Isis (p. 203), found in 1882, has been incorporated in this monument. — Excavations to the E. of the station have revealed the most important extant fragment of the *Fortifications of Servius* (p. xxx), which consisted here of a rampart about 100 ft. in breadth and 60 ft. in height. The extant wall, about 40 ft. high, was originally banked up with earth on the inner side. Near the custodian's hut (reached through the first gateway in the *Via di Porta di San Lorenzo*) is a small construction of travertine and tufa, identified by Prof. Middleton as a 'puteus' or inspection-shaft on the *Anio Vetus* aqueduct.

Tramways and Omnibuses, see Appendix.

The *Thermæ of Diocletian* (Pl. I, 27), which give name to the *Terme*, were the most extensive *thermæ* in Rome, and were completed

1

1

1

1

1

by Diocletian and his co-regent Maximian in 305-6 A.D. The principal building was enclosed by a peribolus, the outline of the round central portion ('exedra') of which is preserved by the modern houses at the beginning of the Via Nazionale (p. 174). The corners were occupied by circular domed structures, one of which is now the church of San Bernardo (p. 184), and another is built into a girls' school on the Via Viminale. The circumference of the baths is said to have been about 2000 yds, or half as much again as that of the Baths of Caracalla (p. 291), and the number of daily bathers 3000. The front faced the E., the exedra being at the back. Tradition ascribes the execution of the work to condemned Christians, in memory of whom the church of St. Cyriacus, no longer existing, was erected here in the 5th century.

Pius IV. entrusted *Michael Angelo* with the task of adapting part of the Thermæ for a Carthusian Convent. The large vaulted central hall was accordingly converted into the church of *Santa Maria degli Angeli* (Pl. I, 27) in 1563-66. The present transept was then the nave, the portal was at the end on the right, and the high-altar on the left. In 1749 *Vanzetti* disfigured the church by converting the nave into the transept and placing the entrance on the W. side (opposite the fountain, p. 174), where a new façade is about to be erected.

A small *Rotunda* is first entered. The first tomb on the right is that of the painter *Carlo Maratta* (d. 1713), the first on the left is that of *Salvator Rosa* (d. 1673). In the Chapel, *Christ appearing to Mary Magdalen*, an altarpiece by *Arrigo Fiammingo*.

We next enter the great TRANSEPT. The niche on the right in the passage contains an admirable colossal statue of St. Bruno, founder of the Carthusian order, by *Donetti* (ca. 1700); in the chapel on the left, the Delivery of the Keys, an excellent altar piece by *Stef. Marone*. The transept (formerly the nave) is 100 yds long, 20 yds. wide, and 90 ft. high. Of the 16 columns, each 40 ft. in height, eight are antique, of oriental granite, which were barbarously white washed by *Vanzetti*, and the others were built of brick when the church was restored. — Most of the large pictures were brought from St. Peter's, where they are replaced by copies in mosaic. In the right half (on the pavement the meridian of Rome, laid down by *Blanchini* in 1708) on the right, *Crucifixion of St. Peter* by *Baroccio*, *Fall of Simon Magus*, after *Praxiphanes* (original in St. Peter's), on the left, *St. Jerome among the hermits*, an excellent work by *Marone* (landscape by *Brizi*), *Miracles of St. Peter*, *Baptism*. At the narrow end chapel of St. Niccolò Albergati. In the left half on the left, *Race of St. Basil* with the Emperor *Valens*, *Sublegrus*, *Fall of Simon Magus*, *Pompeii* *Sublegrus*; on the right, *Immaculate Conception*, *P. Bonatti*; *Raising of Tabitha*, *P. Contini*. At the narrow end chapel of St. Bruno.

In the Transept right, *Annunciation*, *Presentation of the Virgin*, *Dormition*, *Martyrdom of St. Sebastian* (painted in oil on the wall); left, *Baroccio*, *Death of Ananias and Sapphira*; *Maratta*, *Baptism of Christ*. The choir contains two monumental tombs (L. Pius IV., r. Ant. Barberini), designed by *Michael Angelo*.

The remaining parts of the Thermæ, formerly occupied by the Carthusians, now accommodate various charitable and educational institutions and the —

Museo Nazionale Romano delle Terme Diocleziane (Pl. I, 27).


The Museum is intended mainly for the reception of antiques discovered on public property within the city-limits, but its scope has been enlarged by the addition of the splendid Boncompagni Collection (p. 172). Frequent alterations are made in the arrangement of the exhibits. Admission, see pp. 150, 151. The ENTRANCE is by the door to the right in the corner opposite the railway-station (marked 'Ospizio Margherita per i Poveri Ciechi') and then to the left in the court (at *a* in the adjoining plan of the Thermæ). Catalogues 1½ fr. and 30 c.; comp. *Helbig*, *Antiquities in Rome*, vol. ii, pp. 188-263.

We first ascend at the end of the corridor to the —

FIRST FLOOR. — Room 1. In the centre, *Fragment of a Hellenistic Group*, representing the Rape of Oreithyia by Boreas or a Centaur and a Lapitha, marble vase with reliefs of cranes. On the walls are some good mosaics (fish and ornamental work), also one (rudely executed) of a skeleton,

with the legend Γνωστὸς σαυτοῦ ('know thyself'), from a tomb on the Via Appia. To the right, two large *Pillars with Inscriptions* relating to the sacrifices and games at the Secular Festivals of the city of Rome (found on the Tiber, near the Ponte Sant' Angelo). Those on the pillar to the right relate to the games celebrated under Augustus in B.C. 17, and mention the 'Carmen Sæculare' composed for the occasion by Horace. The inscriptions on the other pillar refer to the festival under Septimius Severus in 204 A.D. On the left wall by this pillar are the *Fasti Praenestini*, or lists of officials, which were originally built into the walls of the curia at Praeneste (p. 428). — To the left of Room 1 is —

Room 2. Sculptures from the tomb of *C. Sulpicius Platorinus*, a man of rank of the time of Augustus, found in 1880 in the garden of the Villa Farnesina (p. 368; drawing of the monument near the exit-door): richly decorated marble urns; excellent bust of a girl, probably *Minattia Polla*, whose urn (by the window, to the left) was found in the tomb. This room also contains **Stucco Reliefs* from a Roman house of the early imperial period discovered in the same garden. These reliefs, from the vaulted ceiling of one of the bed-

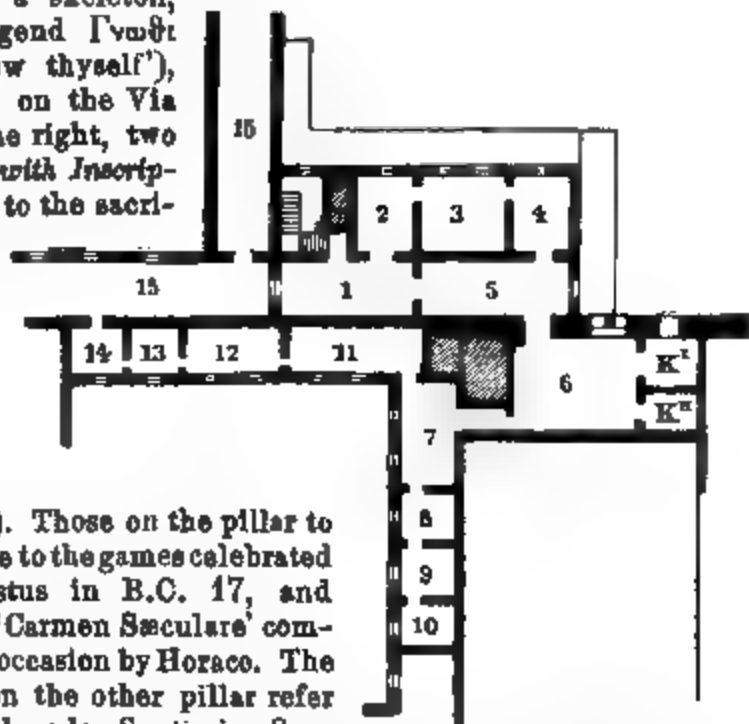

rooms, depict landscapes and scenes from the cult of Bacchus and the Orphic mysteries within delicate ornamental borders, all of most masterly conception and execution.

Room 3. Fine *Bronze Figure of a Man leaning on a staff*, with short incised beard, probably a Hellenistic prince. It was found in 1884 during the building of the Teatro Nazionale (p. 177), as was also the **Bronze Figure of a Pugilist*, evidently represented as conversing with a comrade or an umpire, an admirable work of the Hellenistic period. The realism of this repulsive figure extends even to the marks of injury received in fighting, attention should also be paid to the accurately reproduced covering of the hand (*cestus*) of strong leather bands fastened with metal hooks. *Bronze Statue of Dionysus*, apparently a Campanian work of the 3rd cent. B.C. The colour-effect of the different materials should be noted, the eyes being of silver, the lips of copper, and the diadem ornamented with silver and copper. The pendant right hand held a two-handled beaker.

Room 4. In the middle of the wall opposite the entrance: **Statue of Apollo*, after an original by Phidias in his early period; to the left, *Head of Venus*, dating from the time of Praxiteles; **Head of a girl with a fillet in her hair* (Hygieia; end of 5th cent. B.C.); to the right, *Head of a boy with long curls*; colossal head of *Asclepius* (*Æsculapius*), the god of medicine (copy of a celebrated statue at Pergamum), to the right of the entrance, Smaller head of the same, *Female Greek Portrait-Head*, archaic, *Statue of Athena*, still almost archaic in style; **Female Statue*, with delicate drapery, perhaps *Charis*, the goddess of grace; torso of an athlete, after Polyclitus.

Room 5. Admirable *Stucco Reliefs* from the Roman house near the Farnesina (see p. 168). In the middle: **Marble Statue of Dionysus* from Hadrian's Villa (p. 420), an admirably executed copy of a Greek bronze original of the 5th cent. B.C. (p. xlvii), but with a slight tendency to soften the forms.

Room 6. In the centre. ***Marble Statue of a Kneeling Youth*, found in Nero's Villa at Subiaco (p. 426), an admirable Greek original; subject not yet identified. In front of the window: **Head of a Dying Persian*, of the first Pergamenean school (p. li), found on the Palatine; **Head of a Sleeping Girl*. — On the walls are **Paintings on a Black Ground*, from the above-mentioned Roman house. The black panels originally bore fantastic landscapes sketched in yellow (now traceable at only a few points); above is a coloured frieze of figures (scenes from a court of justice). — In the adjoining cabinet (to the left) are fragments of *Portrait Statues of Vestal Virgins*, found in the Atrium Vestæ (p. 262), all of which have the characteristic coiffure of their order. The best is the **Half-length figure* opposite the entrance. — A cabinet to the right contains a *Hermaphrodite*, the best extant specimen of this type, found in the peristyle of an ancient mansion, during the building of the Teatro Costanzi in 1870.

Room 7. On the walls are **Paintings on a Red Ground*, from the above-mentioned Roman house. The paintings on a white ground (e.g. B 5. Adornment of Aphrodite, and B 4. Genre scenes) recall the severe archaic style of Greek art in the 5th cent. B. C.; while the central painting in B, 4 (Education of Bacchus) corresponds with the style prevalent when the house was built. The owner of the house, unable to secure ancient originals, seems to have resorted to copies instead. In the centre is a glass-case containing glass, ornaments and utensils in gold and amber, etc. — To the left is —

Room 8. *Paintings on a White Ground*; the beautiful female figure on the exit-wall should be noticed. — In the glass-case: bronze helmet; sistrum and leaden playthings from the temple of Venus at Terracina (p. 448; Roman maidens used to dedicate their playthings to Venus before marriage). Glass vessels.

Room 9. *Paintings on a Red Ground*. The painter's name *Seleukos* is scratched on the piece marked D, 1 (on the second green column, counted from the right). On the exit-wall is an excellent Roman portrait-head, of the republican period.

Room 10. *Paintings on a White Ground* and various other fragments. In the middle, a seated female figure in black marble. — We now return to Room 7 and turn to the left into —

Room 11. *Paintings on a White Ground*. Greek portrait heads: to the right, Socrates; in the corner, Hellenistic poet with an ivy-wreath; in the corner to the left, fine head of a youth in the style of Scopas.

Room 12. Most of the *Mosaics* on the walls come from a Roman villa near Baccano (p. 103): mythological scenes and figures of Muses. — Busts of Roman Emperors. Nero, Vespasian, Caligula, Marcus Aurelius, Caracalla (a youthful likeness; not Geta), the same in later life, Sabina, Clodius Albinus, Lucius Verus, Gallienus, Antoninus Pius.

Room 13. Hermæ of charioteers. Mosaic representing four charioteers attired in the colours of the four parties (factiones) of the circus. In the centre of the room, Statue of a boy, in basalt.

Room 14. Fragments of frescoes. Above, *Wall Paintings* found in a columbarium of the 1st cent. A.D. near the Porta Maggiore, with scenes from the stories of Æneas and Romulus, injured by a fresh coating of stucco in the 3rd cent. when the tomb was brought into use again. — By the window is a *Marble Vase*, with scenes in relief from the Eleusinian mysteries. — We now enter a corridor (15.) containing the **Treasure* found in the Longobardic necropolis at Castel Trovino near Ascoli Piceno (7th cent.), consisting of gold ornaments, weapons, and glass; also sculptures of the same period. These ornaments, which show antique patterns and motives treated in a true northern taste, illustrate the manner in which Germanic artistic feeling and industry were rekindled into activity during the wanderings of the Germanic tribes on Italian soil. Similar

articles found at Necora Umbra (p. 126) are also exhibited here. In the N. wing of this corridor are two glass-cases containing gold coins (336-474 A.D.), found in a sewer in the Atrium Vestæ (p. 262), and another containing a treasure of 830 *English* Coins buried in the Atrium Vestæ in the reign of Pope Marinus II. (842-46) and discovered there in 1893. The coins, sent to Rome as 'Peter's Pence', bear the stamps of Alfred the Great (871-901), Edward I. (901-24), Athelstane (924-40), and Edmund I. (940-46). — We now return to the staircase and descend to the —

GROUND FLOOR. We pass through the glass-door and enter the *Carthusian Cloisters*, constructed after *Michael Angelo's* designs. We begin with the **WEST CORRIDOR**. The numbers (often indistinct) are painted in red on the pedestals. 5. *Muse* seated on a rock, found in the Stadium on the Palatine; 9. Statuette of Diomedes; *23. *Statue of Hera*, a replica of a statue closely allied to the so-called Barberini *Juno* in the Vatican (p. 352), with details worked entirely in the later Roman taste of the time of the Antonines, a masterpiece of technical skill (found in the Stadium on the Palatine); 30. Statuette of Nike, in the severe style (wings fastened on); 31. Statue of a suppliant (hands wrongly restored; comp. the so-called *Pietà* in the Vatican, No. 352, p. 354).

NORTH CORRIDOR. Opening off this corridor are a number of the small dwellings (casette) of the monks (comp. Plan, p. 167), interesting from their arrangements to secure absolute seclusion from the outer world. They are now used for the purposes of the museum (closed on Sun.). — Casetta A, used as an office, contains a seated figure of a goddess, from the Palazzo Giustiniani.

Casetta B. 1st Room. 3. *Altar* from Ostia: on the front are Mars, Venus, and Cupid; on the back, the she-wolf with the twins, shepherds, and the Tiber; on the sides, Cupids with weapons and a war-chariot. At the window: *Portrait Head of the republican era; late Roman portrait-heads.

Casetta C and Casetta D. *Inscriptions from the Sacred Grove of the Arval Brotherhood* (p. 435), relating to sacrifices, games, prayers, and vows, from the time of Augustus to that of Gordian III. (241 A.D.). These inscriptions are of great historical importance, as the emperors and most prominent citizens of Rome were members of the brotherhood. — Casetta D also contains an **Altar* from Ostia (No. 7, Room I), the *Tabula Ligurum Baebianorum* (R. II), a large bronze tablet from the neighbourhood of Benevento, with an inscription referring to a benevolent institution (*alimenta*) for poor children, founded by Trajan (comp. p. 256); and monuments illustrating the cult of Mithras (Room III).

Casetta E. 1st Room. Fragments of Greek and Roman reliefs; 6. Roman Sacrifice; 8. Two Greek heroes. In front of the window: *18. *Head of a Woman*; 20. Votive relief of Zeus, with inscrip-

tion. — 2nd Room. 2. Replicas of the Hermes in the relief of Orpheus in the Villa Albani (p. 386); 5. Fragment with the figure of the philosopher Anaximander (inscription); 8. Relief of three women; 9. Prometheus and the eagle; 11. Statuette of a satyr looking at his tail. — 3rd Room. Half of a *Female Head in a close veil, with portrait-features (from an original of the Hellenistic period).

Cassette F. 1st Room. 8, 4. Fragments of two statues of a *Satyr playing the Flute*; 7. Torso of a satyr pouring wine from a flask (after Praxiteles); 2. *Head of Penelope*, a replica of the head originally belonging to the figure of the so-called Penelope (comp. p. 353); Torso of the Minotaur. — 2nd Room. 19. Statue of Hermes; 17. Head of Dionysus (the holes in the forehead are for the insertion of short horns); 18. Head of a youth (Attic). — 3rd Room. Torso of a boy (after Polycleetus).

Farther on in the N. Corridor: 37. Fragment of a relief representing the façade of the Temple of Venus and Roma (p. 286), with Mars and Rhea Silvia in the pediment, to the right, and the she-wolf with Romulus and Remus, to the left (comp. p. 306). Large *Mosaic of a Nile Landscape*, found on the Aventine.

EAST CORRIDOR. In the centre is a reconstruction of one of the walls of the *Ara Pacis*, a sanctuary of the Goddess of Peace, consecrated by Augustus (9 B.C.), which stood on the site of the present Palazzo Fiano in the Corso (p. 199). Other fragments of the *Ara Pacis* may be seen here and in the S. Corridor (p. 173); at the Vatican (p. 336), the Villa Medici (p. 159), the Uffizi at Florence, and the Louvre. — This corridor contains also several interesting sarcophagi; 10. Roman portrait-head of the Republican period; 25. So-called *Brutus* (perhaps Virgil); Roman colossal statue of a woman.

SOUTH CORRIDOR. Portrait statue of a Roman jurist (late period).

The next door (left) leads to eight small rooms (comp. Plan, p. 167), in which the **Museo Boncompagni*, the collection of antiquities formerly in the Villa Ludovisi (p. 163), finds temporary accommodation. The collection was founded by Cardinal Ludovico Ludovisi, a nephew of Gregory XV. (1595-1632), and came by inheritance to the princes of Piombino (Boncompagni-Ludovisi). In 1900 it was purchased by the state for 1,400,000 fr. Some of the chief works (Gaul and his wife; Orestes and Electra) were probably used as adornments for the Gardens of Sallust (p. 163). The earlier examples have been restored by A. L. Algardi. — Room I. *7. *Marble Throne for a Colossal Statue of Venus* (found in 1887), a fine example of developed archaic art, on the back, which is turned towards the spectator, is shown the birth of the goddess from the sea; on the right side is a veiled matron holding an incense-box, and on the left side the nude figure of a girl playing the flute. 12. Archaic draped statue of a woman; 33. Archaic Greek *Colossal Head of a Goddess*, usually called *Hera* (6th cent. B.C.); it perhaps belonged to a acrolithic statue (i.e. a statue in which the nude portions were

in marble and the drapery in wood) of Aphrodite from the temple on Mount Eryx, in Sicily, which was transferred in B.C. 181 to the Roman temple of Venus Erycina (near the former Villa Ludovisi, p. 169). 46. Hercules; 62. Theseus. — Room II. (to the right of Room I) 10. Greek Portrait-Head (recently identified as Aristotle); *87. *Aras Resting* (after Lysippus); the dreamy and pensive pose of the god is explained by the presence of the little god of love, the group is imperfect on the left side. — Room III. 59. Hermes as god of eloquence (the right arm is faultily restored, the left hand held a caduceus or herald's wand). — Room IV. *43. *A Gaul and his Wife*, a colossal group. The Gaul, hard pressed by the foe, has found time to deal his wife the fatal blow, and now stabs himself in a mortal part (the right arm is erroneously restored and the hand should grasp the hilt of the sword from the other side). This group probably formed the centre of a cycle of statues, the right extremity of which was occupied by the Dying Gaul in the Capitoline Museum (p. 248), and of which the bronze originals were placed on the Acropolis of Pergamum in honour of the victory of Attalus I. (241-197 B.C.; comp. p. 111). **86. *Head of a Sleeping Eryx* (so-called Medusa Ludovisi). — Room V. **86. *Juno Ludovisi*, the most celebrated head of Juno known and certainly one of the most beautiful. Goethe wrote that 'no words can give any idea of it; it is like a poem by Homer'. The head was not originally intended to be exhibited alone, but was designed for a colossal statue. The type corresponds to the ideal elaborated by the later Attic School in the 4th cent. B.C. 57. *Athena Parthenos*, the largest and one of the most faithful copies extant of the celebrated work of Phidias, executed, according to the inscription, by *Antiochos* (or Metiochos) of Athens (about the beginning of the imperial epoch). The statue has been freely and unskilfully retouched and the arms erroneously restored (the outstretched right hand held a goddess of victory, and the left hand rested on the rim of the shield). 31. Colossal bust of Demeter. — We return to Room I and enter Room VI. In the right corner, 32. *Satyr pouring Wine*, after Praxiteles; instead of a bunch of grapes, the right hand should hold a pitcher, in the left should be a drinking-vessel), 36. Fine torso of a boy (badly restored). — Room VII. So-called *Group of Orestes and Electra*, probably from a tomb, according to the inscription by Menelaus, pupil of Stephanos, of the school of Praxiteles (1st cent. B.C.; comp. p. 111). — Room VIII. 83. Statue of Antoninus Pius; late Roman sculptures.

We now return to the S. Corridor. At the end of this is a *Fragment of a relief depicting sacrificial scenes, from the enclosing wall of the *Arx Pacis* (p. 172).

In the GARDEN in the centre is a collection of architectural and sculptured fragments, including numerous boundary-stones dating from the Tiber regulation-works of Augustus, Trajan, and other

emperors. Round the fountain in the middle are seven colossal heads of animals from a fountain found near Trajan's Forum. The cypresses are said to have been planted by Michael Angelo.

In the middle of the *PIAZZA DELLE TERME* (Pl. I, 27), opposite the entrance to Santa Maria degli Angeli (p. 167), is a *Fountain*, fed by the Aqua Marcia (p. 392), which sends up a copious and lofty jet especially conspicuous at night, when the piazza is lighted by electricity. Surrounding it are four bronze groups of naiads and sea-monsters, by M. Rutelli (1900). — To the N. is the *Grand Hôtel*, beyond which, at the corner of the Via Ventì Settembre, is the *Fontana dell' Argua Felice* (p. 165).

Opposite the entrance of the church of Santa Maria degli Angeli (p. 167), and intersecting the 'exedra' (p. 167) of the *Thermae*, runs the broad *VIA NAZIONALE* (Pl. I, 27; II, 24, 20), begun after 1870, now one of the busiest streets of the city, and during the season as thronged with passengers and vehicles as the Corso itself (trams, Nos. 2, 6, & 9, p. 1 of the Appendix). — On the right the Via Torino leads to *San Bernardo* (p. 184).

In the Via Nazionale, to the left, stand the *Hôtel Quirinal* and (farther on) the American Episcopal Church of *St. Paul*, a Gothic structure built by Street in 1879, with chimæ and a mosaic in the apse by Sir Edward Burne-Jones. — The most important intersecting thoroughfare is formed by the *Via Quattro Fontane* and the *Via Agostino Depretis*, the former leading on the right to the Pal. Barberini (p. 163), the latter to the left to Santa Maria Maggiore (p. 180).


To the left in the Via Nazionale, at the end of the Via Genova, is a fountain by *Don. Fontana*, formerly in the Villa Massimo. — To the right is the small church of *San Vitale*, founded in the 5th cent. under Innocent V., on a site considerably lower than the new street-level. Farther on, on the same side, is the handsome building of the —

Galleria Nazionale d'Arte Moderna (Pl. II, 24), built in 1880-83 by Piacentini, and mostly arranged for exhibitions. The entrance to the 'Gallery of Modern Art', the largest existing collection of Italian art of the 19th cent., is to the left in the vestibule (adm., see pp. 150, 151). Director *Prof. Jaconacci*. We mention a few of the most important works.

GROUND FLOOR. A small room to the left of the entrance (below Room 1 of the Plan) contains *SCULPTURES*: 59. *Cenci*, Innocence; 28. *Masini*, Fabiola; 48. *Ginoiti*, Euclid as a child; 29. *Cecioni*, Mother and child; 39. *Bellicani*, Sleeping shepherd-boy (all these in marble). In the centre: 62. *Caricelli*, Jesus and Mary Magdalen, a bronze group. — We now ascend the staircase to the —

FIRST FLOOR, on which is the *PICTURE GALLERY* (comp. Plan). — **Room 1.** Entrance-wall: historical pictures and oriental scenes by *Ussi*; back-wall, 85. *Gamba*, Sea-piece; *G. Ferrari*, Gethsemane,

opposite, 206. *Ciseri*, *Ecce Homo*; exit-wall, Sketches by *C. Mariani*. — In the adjoining CABINET (2): 91. *Podesti*, *Triumph of Venus*, an interesting example of Italian art in the middle of the 19th century; 11. *Death-mask of Canova*. — Rooms 3 and 4. Sketches, cartoons, and paintings by *Bernardo Celentano* (1835-63). — Rooms 5 and 6. Interesting series (chronologically arranged) of sketches by the Neapolitan *Filippo Palissi* (b. 1813). — Room 7. 65. *Taruffini*, *Victim of the Nile*; *Sciuti*, *Temple of Venus*; *Musioli*, *Temple of Bacchus*; *Morelli*, *Last rites*; 5. *Palissi*, *Forest of Fontainebleau*. —

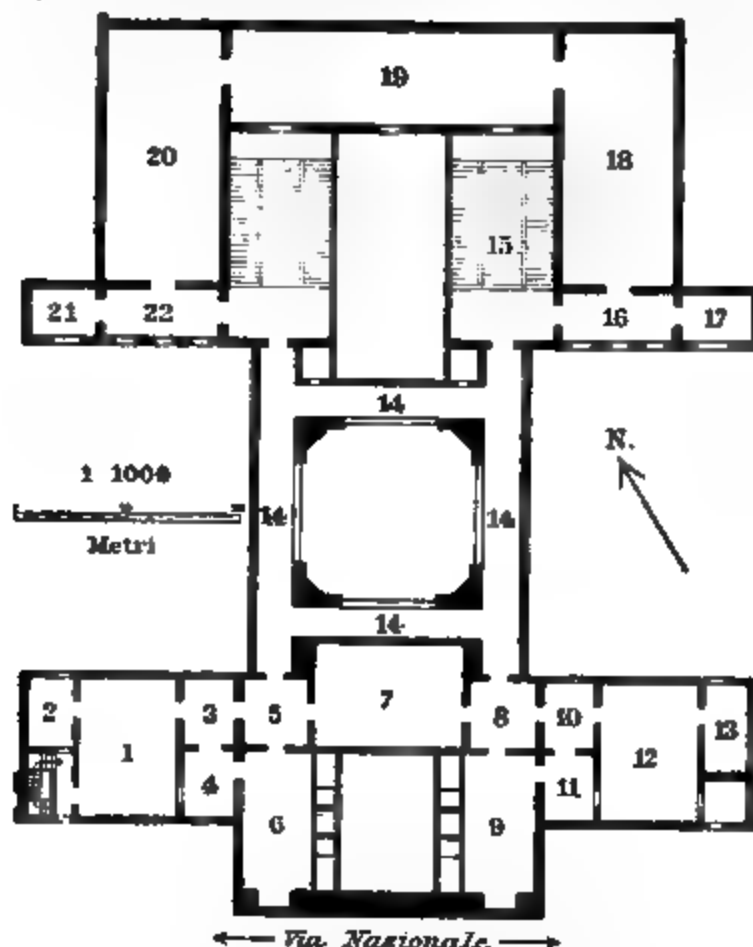

Rooms 8 and 9: 223. *Carlandi*, *Sunset*; 197. *Bassani*, *Trajan's Column*; 178. *Vannutelli*, *Juliet's funeral*. — Rooms 10 and 11: Watercolours by *Faustini* and sketches in oil by *Barabino*; 217. *Costantini*, *Village-school*. — CORRIDOR: *79. *Michetti*, *Shepherdess*. — Room 12: 14. *Michetti*, *The Vow* (scene in a church in the Abruzzi); *71. *Nono*, *Refugium Peccatorum*; opposite, 105. *Favretto*, *Loggetta at Venice*. — Room 13: *Bassani*, Water-colours and drawings of the House of the Vettii at Pompeii.

We now return to R. 8 and pass to the right into the GALLERY (14), which contains sculptures, paintings, and engravings. The

staircase (Pl. 15) in front descends to the **LARGE SCULPTURE ROOM** (below Pl. 18): 5. *Maccagnani*, Boy entering a bath (bronze); 20. *Norzi*, Scene in an inundation; **Ximenes*, Resurrection; *76. *Vela*, Victims of labour (bronze relief); 68. *M. Batelli*, The Wrathful (from Dante's 'Inferno', bronze); 74. *Rosa*, Diana (unfinished); *Parlatore*, The Plebeian; *Ercola Rosa*, Plaster-cast of the base of the Victor Emanuel Monument at Milan.

We again ascend the staircase and turn to the left into Rooms 16 and 17. *Ricci*, Sketches; *Ferrari*, Female portrait, *Reverie*; *Montesi*, Fame (triptych). — Room 18: 176. *Lalacano*, Gulf; *40. *Calderini*, Winter; *Segantini*, Cattle in the mountains. — Room 19: 9. *Calderini*, Autumn; 195. *Sassi*, Monte Rosa, *Visconti-Alberti*, Peasant-girl; 84. *Castelli*, Kingdom of Pan; 104. *De Martino*, Ironclad 'Lepanto'. In the middle, 54. *Ximenes*, The eleven scholars (from 'Il Quora', by De Amicis). — Room 20: 115. *Postiglione*, Pier Damiano and Countess Adelaide of Susa; 237. *Scutti*, Roman matrons offering their jewels for the public service; *82. *Sini*, Rural Grasses (inspired by Botticelli's 'Spring', at Florence). — Room 21: *Cabianca*, Early morning in Venice, Winter in the Ciociaria; 67-69. *De Nittis*, Races in the Bois de Boulogne. — Room 22. *Sartorio*, Medusa, Diana of Ephesus (unfinished), *Blondi*, Roman saturnalia, colossal bronze group.

The flight of steps at the side of the Galleria and the Via Milano, the next side-street on the right, both lead to the Quirinal (p. 178).

Farther on in the Via Nazionale, to the right, is the S. entrance to the Tunnel (380 yds. long, 16 yds. wide), completed in 1902, which passes under the Quirinal, affording direct communication between the Via Nazionale and the Piazza del Popolo (tramway, see p. 160). At the corner rises the *Palazzo Hüffer*. — To the left are the handsome *Bancos d'Italia*, built in 1886-94 by Gast. Koch, and, farther on, the high-lying gardens of the *Villa Aldobrandini*.

At the beginning of the *Via del Quirinale* (p. 179; to the right) the Via Nazionale expands into the triangular **PIAZZA MANAPOLI** (Pl. II, 20), in the middle of which, within a railing, is a fragment of the *Servian Wall* (p. 166). Another fragment, with a well-preserved small gateway, has been built into the *Pal. Antonelli*, on the right (No. 158; staircase on the right of the court). — To the S., behind the 17th cent. church of *Santa Caterina di Siena*, rises the *Torre delle Milizie*, erected about 1200 by the sons of Petrus Alexius, also called *Torre di Nerone*, because Nero is popularly believed to have witnessed the conflagration of Rome from the top (comp. p. 212). — In the S.E. angle of the little piazza, at the beginning of the *Via Panisperna*, is the church of *Santi Domenico e Sisto*, with its lofty flight of steps, built by Vincenzo della Gropa about 1640.

The *Via Panisperna* leads to *Santa Maria Maggiore* (comp. p. 172). In a street, to the left, is *Santa Agata in Subura* (Pl. II, 26) or *dei Gatti*,

the ancient church of the Arian Goths, rebuilt in 1838, and now possessing 19 granite columns only of the original edifice. It belongs to a seminary for Irish priests, and contains the *Monument of Daniel O'Connell* (1775-1847, who bequeathed his heart to this church), with a relief by Bionini, erected in 1856. The tomb of *John Lascaris*, author of the first modern Greek grammar (d. 1866), is also in this church. — Farther on is the church of *San Lorenzo in Panisperna* (p. 180).

The *Via Nazionale* now descends the slopes of the *Quirinal* (95 ft.) in a wide curve. The flight of steps on the left descends to *Trajan's Forum* (p. 274). Farther on, to the left, is a mediæval tower of the *Colonna*, with immured fragments from the *Forum of Trajan*. At the next corner, to the left, stands the *Waldensian Church*, and to the right the *Teatro Drammatico Nazionale*. The cross-street diverging at this point to the right (N.) is the *Via Pilotta* (pp. 162, 210), which skirts the rear of the *Palazzo Colonna* (p. 210), crosses the small *Piazza Pilotta*, with the picturesque and unsymmetrical *Pal. Muff-Papassaveri*, by *Mattia de' Rossi* (1544), and leads to the *Fontana di Trevi* (p. 161).

The *Via Nazionale* passes the S. façade of the *Pal. Colonna* and then skirts the S. end of the long *Piazza di Santi Apostoli* (p. 210) to the *Piazza di Venezia* (p. 204).

From the *Quattro Fontane* (p. 164) the *VIA DEL QUIRINALE* (Pl. II, 24, 21) leads to the S.W. to the *Piazza del Quirinale*. To the right in the *Via del Quirinale* are buildings connected with the royal palace, known as the *Manica Lunga*; to the left the church of *SANT' ANDREA AL QUIRINALE*, elliptical in ground-plan, built by *Bormini* in 1678 and richly decorated. Farther on is a small public garden, with a bronze equestrian statue of *Carlo Alberto*, father of *Victor Emanuel II.*, by *Romanelli* (1900).

At the end of the street, to the right, lies the royal palace, the chief façade of which is in the *PIAZZA DEL QUIRINALE* (Pl. II, 21). In the centre of the piazza are a *Fountain* with an antique granite basin, erected in 1818 and fed by the *Acqua Felice*; an *Obelisk*, 48 ft. high, removed hither from the mausoleum of *Augustus* (p. 198) in 1787; and the two colossal marble *"Horse Tamers"*. These admirable groups, 16½ ft. high, are works of the imperial age, and once stood in front of the *Thermae of Constantine*, on the ruins of which the *Palazzo Rospigliosi* (p. 178) and other edifices have been erected. They have never been buried nor concealed from view, and for centuries the piazza derived its name from them ('*Monte Cavallo*'). The inscriptions on the pedestals, *Opus Phidias* and *Opus Praxiteles*, were probably first added in a restoration of the *Thermae* about 450 A.D., though in their present form they date only from the time of *Sixtus V.* In the middle ages these were supposed to be the names of two philosophers, who, having divined the thoughts of *Tiberius*, were honoured by the erection of these monuments in recognition of their wisdom.

The piazza commands a fine view of the town, to the W., with the dome of St. Peter's in the background. The *Via della Dataria*, reached by descending a flight of steps from the N.W. corner of the piazza, is continued to the N.W. by the *Via San Vincenzo* to the *Fontana di Trevi* (p. 161), and to the W. by the *Via dell' Unità* to the *Corso*, near the *Palazzo Sciarra* (p. 200).

The *Regio Palazzo del Quirinale* (Pl. II, 31) was begun in 1674 under Gregory XIII. and largely added to under subsequent popes, who frequently occupied it in summer on account of its lofty and healthful situation. The original architect was *Flaminio Ponzio*, among whose successors were *Dom. Fontana*, *Bernini*, and *Fuga*. Since 1870 the palace has been the residence of the king of Italy, and during his presence a small part only is shown to the public.

Pardon and admission, see pp. 150, 151. — Visitors show their pardon to the porter and ascend the wide staircase to the left at the end of the vestibule. A fine fresco by *Milanesi* de *Fuga* has been built into the wall on the landing, representing Christ in a cloud of eagles (formerly in the church of *Santi Apostoli*, p. 210). — At the top of the staircase we write our names in a book, and obtain an escort (no fee). Adjacent to the *Sala Reale* with fresco by *Leone* and *Barocci*, is the *Cappella Paolina*, erected by *Carlo Maderno*, and decorated with gilded stucco-work and copies in grisaille of Raphael's Apostles in *Santi Vincenzo ed Anastasio alla Tru Fontana* (p. 300) and with tapestry of the 18th century. The chapel contains a large number of wreaths and addresses sent by Italians in all parts of the world on the occasion of Victor Emmanuel II.'s death. — To the right lies a suite of Drawing Room and Reception Rooms, adorned with pictures and tapestry, chiefly modern. The reception-room of the ambassadors, beyond the throne room, contains several portraits of sovereigns and princes. In the 10th room, mosaics on the floor from Hadrian's Villa (quite concealed by the carpet). In the 11th a fine ceiling painting by *Corbelli* (1859), to commemorate the flight of Pius IX. in 1848. Christ gliding the Jews who endeavoured to cast him over a precipice (Luke iv. 23, 24). In the 12th, views from the Vatican. — Towards the garden are the *Royal Guard Chambers*. The fresco of the former audience-chamber here is a cast of *Pharos*'s *Triumphal Procession of Alexander the Great*, ordered by *Napoleon I.* for this palace. After 1815 the original was removed to the *Villa Bonaparte*, now *Castello*, on the Lake of Como. In the small *Cappella dell' Annunciazione* is an *Annunciation*, an altar-piece by *Guido Reni*.

The Garden, which is not shown, was tastefully laid out by *C. Maderno*.

The E. side of the Piazza del Quirinale is occupied by the *Consulta*, a palace built by *Fuga* for the tribunal charged with the internal administration of the Papal States; it is now the *Ministry of Foreign Affairs*. — Opposite, *Via del Quirinale* 16, is the garden of the *Pal. Colonna* (p. 212).

Immediately to the left in the continuation of the *Via del Quirinale* is the *Palazzo Rospigliosi* (Pl. II, 31), or *Pal. Rospigliosi-Pallavicini*, erected in 1803 by *Card. Scipio Borghese*, nephew of *Paul V.*, on the ruins of the *Thermae of Constantine* (p. 177). It afterwards became the property of the prince *Rospigliosi*, and now belongs partly to the prince *Pallavicini*, who also owns the art treasures. The palace (adm. on special introduction only) contains a beautiful *Claude Lorrain* (*Temple of Vesta*), etc., but the chief

treasures of art (Galleria Pallavicini) are preserved in an adjoining building, the Casino Rospigliosi (adm., see pp. 150, 151; 26-50 a.).

We enter the court by a gate, pass through the door marked 'Galleria' immediately to the left, and ascend the steps. Along the external wall of the Casino are placed ancient sarcophagus-reliefs (Emperor hunting, Procession of Bacchus, Rape of Proserpine, etc.). — By the door to the right we enter the —

PALATIAL HALL. — Ceiling painting by Guido Reni Aurora strewing flowers before the chariot of the god of the sun, who is surrounded by dancing Hours, the master's finest work. The colouring deserves special notice. The strongest light is thrown upon the figure of Apollo, whose hair and flesh are of golden hue. Of a corresponding tint are the yellowish-red robes of the nymph nearest to Apollo. The colours are then gradually shaded off from blue to white, and from green to white, while the discoloured horses accord with the clouds (p. lxxiv). On the table opposite the entrance is a mirror, in which the painting may be conveniently inspected. — On the frieze, landscapes by Paul Stru, and at the ends of the room, Triumph of Fame and Cupid (from Petrarch), by Tempesta. Left wall & Stanzas de' Paoeri, Holy Family; 2. School of Leonardo da Vinci, St. John. Back-wall: 14 Three antique mural paintings; 21 Adam (?), Vanity — Right wall: 21 Van Dyck, Portrait; Statue of Athena Tritogeneia.

Room on the Right. Opposite the entrance, 68. Domenichino, Fall of man. Left wall 69. Lorenzo Lotti, Triumph of Chastity. Right wall 61. Ribera (?), St. Bartholomew; 62. Luca Signorelli, Holy Family. Entrance-wall 65. L. Carracci (?), Samson. — Room to the Left. Entrance-wall (right) 100. Guido Reni, Andromeda; 98. F. Fontana, Putto; 99. Portrait of N. Poussin, a copy of the original in the Louvre; 101. Three small antique Wall Paintings of putti (two not numbered); no number, Victoria, fragment of an antique Stucco Ornament. On this wall (94-98, 102-101) and the two following (90) on the left wall, opposite, 87-89, 73-75) Christ and the Apostles, pictures by Rubens, studio-replicas of the paintings executed by him in 1626 for Madrid. Wall opposite the entrance 70. Domenichino, Triumph of David. Right wall. 82. Pietro Stevens, Adam and Eve.

Farther on in the Via del Quirinale, to the right, is the church of SAN SILVESTRO AL QUIRINALE (Pl. II, 21), erected at the beginning of the 16th century.

In the Dome four oval frescoes by Domenichino: David dancing before the Ark, Solomon and the Queen of Sheba, Judith, Esther and Ahasuerus. In the 2nd Chapel to the left, two landscapes by Polidoro da Caravaggio and his assistant Martino; Burial of St. Catharine, and Christ appearing to Mary Magdalen.

The Via del Quirinale ends at the Via Nazionale (p. 175).

d. From the Via Nazionale to Santa Maria Maggiore and San Lorenzo fuori le Mura or the Porta Maggiore.

From the intersection (p. 174) of the Via Nazionale and the Via Quattro Fontane, the S. E. continuation of the latter, the Via ANCONINO D'AMARIS (Pl. I, II, 24), leads directly to the choir of Santa Maria Maggiore. We turn to the right before reaching the sloping piazza in front of the latter, enter the Via Urbana, and after a few paces reach —

Santa Pudenziana (Pl. II, 27, open till 9, Sun. till 10 a.m.; custodian, Via Urbana 161, to be found from 1 to 4), traditionally the oldest church in Rome, erected on the spot where St. Pudens

(2nd Timothy, IV, 21) and his daughters Praxedes and Pudenciana, who entertained St. Peter, are said to have lived. The church, restored as early as the reign of Pope Sixtus (304-308), has been frequently altered, especially in 1688, and has recently been modernised in very bad taste. In the façade, adorned with modern mosaics (St. Peter with SS. Pudens and Pudenciana; on the left Pius I., on the right Gregory VII.), is an ancient portal borne by columns, which also has been restored. Planning campanile of the 9th century.

INTERIOR. The nave and aisles are of unequal length. In the pillars are still to be seen the ancient marble columns which originally supported the cloister. The *Apse* in the *Transseptum* (300 A.D.), Christ with the Apostles, and St. Praxedes and St. Pudenciana, with a rich architectural background, and above, the emblems of the Evangelists on each side of the cross, are among the finest in Rome (p. 12; several of those on the right are modern). The *Dome* above the high-altar was painted by *Pomaranico*. The *Apsis* contains remains of an ancient mosaic pavement. At the extremity of the left aisle is an altar with relics of the table at which St. Peter is said first to have read mass. Above it Christ and Peter, a group in marble by *Stev. Batt. della Porta*.

Below the church are ancient vaults in a good style of architecture, with some mosaic-pavement and a small fresco, which the custodian shows if desired.

On the summit of the *Viminal*, not far off, stands the church of *San Lawrence in Panisperna* (Pl. II, 24), on the spot where St. Lawrence is said to have suffered martyrdom, an old edifice, but frequently restored. The convent formerly connected with this church is now occupied by the *Reale Istituto Clinico*. — Hence to the *Via Nazionale*, see p. 177.

In the *PIAZZA DELL' ESQUILINO* (Pl. II, 27), the square in front of the choir of *Santa Maria Maggiore*, stands one of the two *Obelisks*, 48 ft. in height, which formerly rose in front of the mausoleum of Augustus (the other is on the *Quirinal*, p. 177). It was erected here by Sixtus V. in 1587. — The piazza is intersected by the broad *Via Cavour* (p. 188).

The façade of the church overlooks the *PIAZZA SANTA MARIA MAGGIORE*, embellished with a handsome Column from the basilica of Constantine, 16 ft. in circumference, and 46 ft. in height, placed here and crowned with a bronze figure of the Virgin by Paul V.

Santa Maria Maggiore (Pl. II, 27), also named *Basilica Liberiana*, or *Sancta Maria ad Nives*, or *Sancta Maria ad Praesepe*, from the manger which it contains, is the largest of the eighty churches in Rome dedicated to the Virgin. It is one of the five patriarchal churches (p. XXIV), and has a special 'jubilee entrance'. According to a legend which cannot be traced farther back than the 13th cent., the Virgin appeared simultaneously in 352 A. D. to the devout Roman patrician Johannes and to Pope Liberius in their dreams, commanding them to erect a church to her on the spot where they should find snow on the following morning (5th Aug.). The *Basilica Liberiana*, which they are said to have built, was re-erected by Sixtus III. (482-40), who named the church *Sancta Maria Mater Dei*, shortly the Council of Ephesus had sanctioned this appellation of the

Virgin (431). Of this edifice the nave with its ancient marble columns and mosaics is still preserved. In the 12th cent. the church was farther altered in the mediæval style. Eugene III. added a new porch, Nicholas IV. a new tribune adorned with mosaics, and Gregory XI. gave the campanile its present form and its pointed roof. About the end of the 15th cent. began a new period in the history of the church, when the irregularities of the mediæval additions were removed, and symmetrical straight lines were formed by the erection of accessory buildings and masking walls. The two large side-chapels, covered with domes, were added by Sixtus V. in 1586 and Paul V. in 1611. The exterior of the tribune was remodelled to its present form by Clement X., and the final restoration was entrusted by Benedict XIV. to Puga.

The *Façade* was designed by Puga in 1743; the porch has a loggia above it, which opens in three arches. The five portals in this porch correspond with four entrances to the church (the last of which on the left, the *Porta Santa*, is now built up) and a blind door. To the right is a statue of Philip IV. of Spain. The loggia (staircase to the left in the vestibule; one of the vergers opens the door) contains mosaics from an earlier façade, executed about 1300 by *Gaddo Gaddi* (?) and *Philippus Rusuti*, restored in 1825.

Above, in the centre, Christ enthroned, on the left the Virgin, St. Paul, John, and James; on the right St. Peter, Andrew, Philip, and John the Baptist. Below, on the left, the vision of Pope Liberius and the *Patricius Johannes*; on the right, the meeting of the two, and the tracing of the site of the church on the snow.

The interior, dating from the pontificate of Sixtus III., 88 yds. long and 19 yds. wide, and subsequently enlarged, produces a rich and imposing effect. The pavement of the Nave dates from the middle of the 12th cent. (p. lxiii) and the handsome ceiling, presented by Alexander VI., has hitherto been ascribed to *Sim. de Sangallo*; it is richly gilded with the first gold brought from America. The architrave, adorned with mosaics, is supported by 40 Ionic columns, 38 in Hymettian marble and 2 in granite, above which, and on the chancel arch, are "Frescoes of the time of Sixtus III., still antique in spirit and interesting in subject (p. lxiii), good light early in the morning). Those on the arch apparently refer to Mary as the Mother of God; Annunciation, Infancy of Christ, Slaughter of the Innocents, etc.; left wall, history of Abraham and Jacob; right wall, Moses and Joshua (a few of the pictures were restored in 1825). — In front of the chancel arch is the *High Altar*, consisting of an ancient basin of porphyry, said to have been the tomb of the *Patricius Johannes*, and containing the remains of St. Matthew and other relics; the canopy is borne by four columns of porphyry. Below the high-altar is the richly decorated *Confessio* of *San Matteo* in which are preserved five boards from the 'Santa Culla' or 'Cradle of the Infant Christ'. Between the flights of steps descending to the Confessio is a *Quitting Statue of Pius IX.*, by *Jaconetti*. — In the apse of the Tribune are 'Mosaics by *Jacobus Forster* (1226): Coronation of the Virgin, with saints, near whom are Pope Nicholas IV. and Card. Jac. Colonna (comp. p. lxiv). The four reliefs by *Sim. de Puga* were executed in 1688-84, at the expense of Card. d'Esteoiville, for the altar over the high-altar. The subjects are the Nativity, the Adoration of the Magi, the Assumption (with portrait of the cardinal to the right), and the Foundation of *Santa Maria Maggiore*.

At the beginning of the nave are the tombs of Nicholas IV. (d. 1291) on the left, and Clement IX. (d. 1669) on the right, erected by Sixtus V. and

Clement X. respectively. **RIGHT AISLE.** First chapel: Baptistry with fine ancient font of porphyry. Adjacent, to the right, is the *Apostle*, with an altar of the school of Andrea Bregno and further portions of the ciborium by Mino da Fiesole (see p. 184). — A pillar in the open space to the left of the baptistry commemorates the conversion to Roman Catholicism of Henri IV of France. Further on is the Cappella del Crocifisso with 10 columns of porphyry. — In the RIGHT TRANSEPT is the sumptuous Sixtine Chapel, constructed by Don. Fontana under Sixtus V., and gorgeously restored, in the niche on the left, an altar-piece (St. Jerome) by *Andrea*; on the right, occupying the whole wall, the monument of Sixtus V., with a statue of the pope by *Valerio*, on the left, monument of Pius V. by *Leonardo da Sarsina*. Over the altar, a canopy in gilded bronze represents angels bearing the chapel; in the 'Confessio' under the staircase a statue of *Ilia* *Gustavo*, by *Baratta*, and by the altar a group of the Holy Family, by *Cassiano da Padernone* (1688). — At the end of the right aisle, the Gothic monument of *Card. Consalvi* (Consalvi, d. 1859), by *Joachim Casati*.

LEFT AISLE. Tomb of *De Leva* composed of two monuments, by a pupil of Andrea Bregno. 1st Chapel (of the East) Martyrdom of St. Catherine, altar-piece by *Girol. da Sarnano*, on the right and left two recumbent bronze statues in the memory of cardinals of the family. 2nd Chapel (of the Pallavicini-Sarnani), said to have been designed by *Mich. Angelo*. Assumption of Mary altar-piece by *Sarnano*. — In the Left Transept opposite the Sixtine Chapel, is the *Borghese Chapel*, constructed by *Flaminio Piccini* in 1611, and also covered with a dome. Over the altar, which is gorgeously decorated with lapis lazuli and agate, is an ancient and miraculous picture of the Virgin (almost black), painted according to tradition by St. Luke, which was carried by Gregory I. as early as 580 in solemn procession through the city. The frescoes in the large arches are by *Guido Siroi*, *Leonfranco*, *Cignelli*, etc. The monuments of the Popes (i.) Paul V. (*Camillo Borghese*, d. 1621) and (v.) Clement VIII. (*Aldobrandini*, d. 1623) are by pupils of *Baratta*. The crypt contains tombs of the *Borghese* family.

For the neighbouring church of *Santa Prassede*, see p. 187.

To the S.E. and S. from the Piazza Santa Maria Maggiore run two important thoroughfares: the Via Carlo Alberto (p. 183), on the left, and the Via Merulana (Pl. II, 26, 28), on the right, leading to the Lateran (p. 302, tramway No. 11 in the Appendix).

In the Via Merulana the so-called Auditorio di Mecenate (Pl. II, 30), a building in 'opus reticulatum' was discovered in 1874. The walls were decorated with paintings, which are now almost obliterated. Outside the S. and E. walls are seen fragments of the Aureian Wall (p. 121). It is very doubtful whether the Gardens of Mucrona which lay between the Servian Wall and the cemetery of paupers and slaves (remains of its 'putruli' or well graves found near the Via Nap. Leone Terzo), extended to this point. It is, however, certain that this building was not a lecture-hall, but more probably a greenhouse. The antiquities it contains, mainly from the *Requies*, are of little general interest. Adm. on Thurs., 9-11 and 2-5.

Opposite is the large Palazzo Field-Francesco (Pl. II, 30), built in 1603-50. Its extensive garden embraces the area of most of Trajan's *Thermae* (comp. p. 153). — Hence to San Martino ai Monti, see p. 193.

We follow the Via Carlo Alberto. On the left is the church of *Santi Antonio Abate*, now a hospital, with a portal of 1260. *Santi Antonio* is the tutelary saint of domestic animals.

The Via San Vito, a cross-street to the right, leads from the Via Carlo Alberto past the church of *Santi Vito e Modesto*, with an altar-piece (fresco) by *Antoniazio Romano* (1453), to the simple Arch of *Gallienus* (Pl. II, 30). This honorary arch was erected in 262 by a

certain M. Aurelius Victor, in honour of the Emp. Gallienus, 'on account of his bravery, surpassed only by his piety'. Farther on in the Via San Vito is the Gothic church of *Sant' Alfonso de' Liguori*, built by a Mr. Douglas in 1855. St. Alphonso (1696-1787) was the author of the 'Theologia Moralis' and founder of the Order of the Redemptorists. Beyond the Via Merulana are the churches of Santa Prassede and San Martino ai Monti (pp. 187, 188).

The Via Mazzini and Via Rattazzi lead to the left from the Via Carlo Alberto to the Piazza Manfredo Fanti (Pl. II, 30), adorned with gardens. A fragment of the wall of Servius is preserved in this piazza (comp. p. 166).

The Via Carlo Alberto ends at the large PIAZZA VITTORIO EMANUELE (Pl. II, 29), which also is laid out in attractive gardens. Here, on the left, are considerable remains of a water-tower of the *Aqua Julia*, in the niches of which the so-called Trophies of Marius (p. 237) stood until 1590. The name *Trofei di Mario* has been commonly but groundlessly in use since the 15th century. On the adjoining walk (to the left) is the so-called *Porta Magica* of the former Villa Palombara. The cabalistic characters on the outside contain a formula for making gold, communicated in 1680 by a stranger to the Marchese M. Palombaro, who, however, was unable to decipher it, and caused it to be carved in marble at the entrance to his villa, in the hope that some passer-by might be able to solve the riddle. — At the N. angle of the piazza rises the church of *Sant' Eusebio* (Pl. II, 29), re-erected in the 18th cent., with the exception of the campanile. The fine ceiling-painting, the transfiguration of St. Eusebius, is one of the earliest works of Raphael Menga.

About 5 min. to the E. of the Piazza Vittorio Emanuele is the church of *Santa Bibiana* (Pl. II, 32), consecrated in 470, and rebuilt for the last time in 1625 by Bernini. It contains eight antique columns. On the high-altar is a statue of St. Bibiana, a restrained and successful early work of Bernini. To the left by the entrance is the stump of a column, at which the saint is said to have been scourged to death.

The street known as the *Arco di Santa Bibiana*, passing beneath the railway, leads to the Porta San Lorenzo and the basilica of that name, which may be conveniently visited at this juncture. We may return in that case by tramway (No. 12 in the Appx.) The tramway to Tivoli starts outside the gate, to the left (p. 419).

The Porta San Lorenzo (Pl. II, 32, 33) stands on the site of the ancient *Porta Tiburtina*, which led to Tivoli. The gateway, constructed by the emperor Honorius against an arch, over which, according to the inscription, passed the three aqueducts Marcia, Tepula, and Julia, is now shut. The new road starts from an opening in the wall to the S.E. of the gate, and farther on joins the ancient *Via Tiburtina* (p. 419). It is bounded by lofty new buildings, and does not afford views of the Sabine Mts. until the church is reached,

$\frac{3}{4}$ M. from the gate. In the little piazza in front of the church is a Column with a bronze statue of St. Lawrence.

The basilica of *San Lorenzo fuori le Mura* (Pl. I, 36) occupies the spot where Constantine founded a church on the burial-place of St. Lawrence and St. Cyriac. In 578 it was rebuilt by Pelagius II. This ancient edifice, which was entered from the E., was entirely remodelled by Honorius III. (1216-27), who added the present nave to the apse, and transferred the façade with the porch to the W. end. An angle formed by the outer walls shows where the new part was added. Under Nicholas V and Innocent X., and lastly under Pius IX. in 1864-70, the church underwent extensive alterations, and the older half is now at least partly freed from disfiguring patchwork. *San Lorenzo* is a patriarchal church, and one of the seven pilgrimage-churches of Rome (p. xxiv).

In 1864 the Façade was embellished with paintings resembling mosaic, on a gold ground, representing the founders and patrons of the church: Pelagius II., the Emp. Constantine, Honorius III., Pius IX., Sixtus III., and Hadrian I. The vestibule is borne by six ancient columns, above which is an architrave with mosaics (St. Lawrence and Honorius III.); it contains retouched frescoes (and of the 13th cent.), two tombs in the form of temples, and two rude early-Christian sarcophagi. The door-posts rest on lions.

The Interior consists of two parts. The anterior *Lavra Commun*, which chiefly dates from Honorius III., consists of nave and aisles, separated by 22 antique granite and cipollino columns of various sizes. On the capital of the 8th column on the right are a frog and a lizard, and it is therefore supposed, but without authority, to have been brought from the porticus of Ostia, where two sculptors *Batrachus* (frog) and *Saurus* (lizard) are said to have adopted this method of perpetuating their names. The wall above the straight ambulatory is adorned with frescoes by G. Ponzetti (d. 1687): on the right, history of St. Lawrence; on the left, that of St. Stephen. The open roof also was recently freshly painted. The rich pavement, in *opus Alexandrinum*, dates from the 13th cent. (p. lxii). Under a mediæval canopy to the right of the entrance is an ancient *Sarcophagus* with a representation of a wedding, in which in 1288 the remains of Carl. Fieschi, nephew of Innocent IV., were placed. To the left are old frescoes of the life of St. Lawrence. In the nave are the two elevated pulpits, that to the right (p. lx) for the gospel, near which is a spiral candelabrum for the Easter candle, that to the left for the epistle (12th cent.). On the triumphal arch are modern paintings (resembling mosaics) of the Madonna and saints. At the extremity of the N. aisle a flight of 13 steps, on the left, descends to a chapel and the catacombs.

Adjoining this building of Honorius on the N. is the *Oratorio Commun*, erected by Pius IV., the pavement of which lies about 10 ft. lower. The raised central space, to which seven steps ascend on each side of the Confession, dates from the time of Honorius, who converted the nave of the older church into a choir with a crypt by laying a pavement halfway up the columns, and caused the aisles to be filled up. The rubbish was removed in 1870 and the original level of the aisles exposed to view. The church of Pelagius, a basilica in the style of *San Agnese fuori* (which is the only other church at Rome with galleries), was originally entered at the opposite (E.) end. Twelve magnificent Doric columns of pavonazzetto with Corinthian capitals (those of the two first are formed of trophies, as the benches in front of them are mediæval lions) support the straight ambulatory, which consists of antique fragments and bears a gallery with graceful smaller columns and

arches. On the triumphal arch, of which this is the original front, are restored mosaics of the time of Pelagius II. (578-590; the earliest showing traces of the influence of the E. empire). Christ, right SS. Peter, Lawrence, and Pelagius; left SS. Paul, Stephen, and Hippolytus. The canopy dates from 1148; its dome is modern. By the wall at the back is the handsome episcopal throne (1261). — We now descend the flight of steps from the prolongation of the aisle of the anterior church and reach the aisles of the church of Pelagius. The nave of the old church is now partly occupied by the crypt, entered from above, partly by the modern marble columns supporting the floor of the above-mentioned choir. In the vestibule of the original church, behind an iron railing, is the Tomb of Pius IX. (p. xliii). The vestibule is gorgeously decorated with mosaics, from designs by L. Satta, but the tomb itself, according to the injunctions of the deceased pope, is of the plainest character, consisting of a marble sarcophagus in a niche painted like those in the catacombs.

The handsome Romanesque Cloisters (*Cloître*; generally closed) contain numerous fragments of sculptures and inscriptions built into the walls; in the corner to the right of the principal entrance is the lid of a sarcophagus adorned with a representation of the Pompe Circumcis.

Adjoining the church is the Campo Verano, an extensive cemetery, opened in 1837, and repeatedly enlarged since. By the entrance are colossal figures of Silence, Charity, Hope, and Meditation. Among the numerous handsome monuments is one commemorating the Battle of Mentana (p. 97), with appropriate inscriptions. Fine view of the mountains and the Campagna from the higher part of the cemetery, reached by several flights of steps.

The VIALI PRINCIPessa MARGHERITA (Pl. II, 30, 32) leads from Santa Bibiana (p. 183) to the N.W. to the Piazza Guglielmo Pepe (with remains of the above-mentioned Aqua Julia) and the (10 min.) Railway Station (p. 166). To the S.E. it leads in 5 min. to the so-called TEMPLE OF MINERVA MEDICA (Pl. II, 32), the ruin of an ancient Nymphæum in the form of a decagon, 55 yds. in circumference, with deep niches in the walls, and originally covered with marble below and stucco above. In the middle ages the ruin was called *Le Galluzzo*, a name which has been conjectured to be a corruption of (the Thermæ of) 'Gaius and Lucius Caesar', of whose existence, however, there is no other hint. The vaulting existed down to 1828. This interesting building dates from the imperial period.

The Via Conte Verde, the middle street running from the S.E. side of the Piazza Vittorio Emanuele, leads to the church of Santa Croce in Gerusalemme (p. 186); the Via Emanuele Filiberto, the street to the right, leads to the Lateran (p. 302); and the Via Principe Eugenio, on the left, to the Porta Maggiore.

The Porta Maggiore (Pl. II, 34) was originally an archway belonging to the Aqua Claudia, above which the Anio Novus flowed through a second conduit. The Aqua Claudia, 42 M. in length, brought water from the neighbourhood of Subiaco (p. 426), and the Anio Novus from the sources of the river of that name, a distance of 51 M. The inscriptions record the construction of both aqueducts by the Emp. Claudius, A.D. 52, and also their restoration by Vespasian.

in 71, and by Titus in 81. Aurelian converted the monument into one of the gates of his city-wall, and Honorius restored and extended it, while the Colennas used it in the middle ages as the nucleus of a castle. Remains of the constructions of Honorius and a long inscription of 405 A.D. may be seen outside the gate, to the right. The gate was purged of the later additions by Gregory XVI.

Two roads diverged hence in antiquity — to the left the *Via Praenestina*, and to the right the *Via Labicana*, now named *Via Cassina*. Between these, outside the gate, was discovered in 1838 the remarkable *Monument of the Baker Euryseus*, erected in imitation of kneading-bowls and grain-measures laid in alternate rows.

The monument, dating from the close of the republic, was erected by the baker himself, and the principal inscription, thrice repeated, is to the effect that — 'This is the monument of Marcus Vergilius Euryseus, baker and public purveyor of bread.' Some of the reliefs represent grinding, baking, and other processes in his trade, and others refer to his post of purveyor to the state.

From this point to the *Amphitheatrum Castrense* and the *Porta San Giovanni*, see pp. 312, 311; to the Campagna, see p. 390

From the *Porta Maggiore* a road leads to (5 min.) *Santa Croce in Gerusalemme*, passing under the arches of the Claudian aqueduct, and skirting the town-wall on the inside — From *Santa Maria Maggiore* (p. 180) to this church by the *Via Conte Verde* is a walk of 20 minutes.

Santa Croce in Gerusalemme (Pl. II, 34), one of the seven pilgrimage-churches, once named *Basilica Sessoriana*, because the *Sessorium*, perhaps an ancient court of law, formerly stood here, is said to have been erected by St. Helena in honour of her discovery of the Cross. As early as 433 a Council met here. The church was rebuilt by Lucius II. in 1144, and was modernised under Benedict XIV. in 1743, by Gregorini, who added the baroque façade.

Interior. The nave was originally borne by 12 antique columns of granite, of which 8 only are now visible. An ancient sarcophagus of basalt below the high-altar contains the relics of St. Anastasius and Celerius. In the tribune are modernised frescoes of the invention of the Cross, of the school of *Pinturicchio*. The church contains numerous relics, including the 'Inscription on the Cross'.

To the left of the tribune a staircase descends to the *Crypt*, where on the left is an altar with a marble relief (Floth; 17th cent.); at the sides are statues of St. Peter and Paul of the 17th century. On the right the chapel of St. Helena (to which ladies are admitted on 24th March only). On the vaulting are five *Mosaics*, after *Dadd Peruzzi*, representing the Four Evangelists. In the centre, Christ. In the arch over the entrance, on the left St. Helena, right St. Sylvester; over the altar, on the left St. Peter, on the right St. Paul. The body of the altar statue of St. Helena belonged to an ancient statue resembling the *Barberini Juno* in the Vatican (p. 352), with a cross for the sceptre in the right hand, and a nail of the cross for the vase in the left. The head also is modern (17th cent.).

The Cistercian monastery formerly belonging to the church is now used as a barrack. — On the other side of *Santa Croce* is an apse with arched windows and the beginning of adjoining walls, perhaps relics of the *Sessorium* mentioned above.

From *Santa Croce* to the *Lateran* is a walk of 5 min. (p. 311).

c. From Santa Maria Maggiore to the Forum Romanum.

The *Via Cavour* (p. 188) is the most direct route from Santa Maria Maggiore to the Forum Romanum. We follow the small *Via Santa Prassede*, leading to the S. from the Piazza Santa Maria Maggiore (p. 180), to which is a side-entrance to the church of —

**Santa Prassede* (Pl. II, 26), mentioned as early as 491, erected by Paschalis I in 822, and dedicated to St. Praxedis, the daughter of St. Pudens with whom Peter lodged at Rome (p. 180). It was restored about 1450 by Nicholas V., again in 1632, and finally (though not very successfully) in 1800.

Interior. The nave is separated from the aisles by 16 granite columns (six others, bearing arches, having been replaced by piers). The *Mosaic* (8th cent., p. 141) deserves notice. On the triumphal arch the New Jerusalem guarded by angels. Christ in the centre, with angels on each side; on the arch of the tribune the Lamb, at the sides the seven ecclesiasticks and the symbols of the Evangelists, lower down the twenty-four elders (in order to follow the curve of the arch, the arms of the foremost elders in the middle and upper rows gradually increase in length), in the round part of the apse, Christ surrounded with saints (on the right Paul, Praxedis, and Pope Paschalis with the church, on the left Peter, Pudenciana, and Lucius). On either side of the tribune are galleries — *Lower Aisle.* The 1st chapel is the *Chapel of St. Agne* (ladies admitted on the Sundays in Lent only; the maristans open the door when desired). At the entrance are two columns of black granite with ancient capitals. Above are mosaics (8th cent.) Christ and the Apostles, the Madonna St. Lawrence and Stephen, and eight holy women; the figures of the two popes, in the right and left below, are additions probably of the 13th century. On the vaulting in the interior, a medallion with the head of Christ, supported by four angels. Above the aisle a Madonna between St. Praxedis and Pudenciana. The niche in the right contains the column of which Christ is said to have been scourged. Above the niche to the left are four faint portraits, the first, with a square nimbus being named *Theodora Synesio* (Theodora, mother of Paschalis I, was buried in this chapel). The 2nd chapel contains the tomb of Card. Alanus (d. 1478) by Andrea Bregno. At the extremity of the right aisle the *Cap. del Crocifisso* contains the tomb of the French cardinal Ancherus (d. 1388). — In the *Lower Aisle* by the entrance wall is a stone slab, on which St. Praxedis is said to have slept. The 2nd *Cap. di San Carlo Borromeo* contains a chair and table once used by the saint. The 3rd *Cap. Oratorio* contains paintings by the Cavalier d'Arpino. — The marble top of a well in the nave indicates the spot where St. Praxedis buried the bones of martyrs.

The *Conventus* (keys kept by the maristans) contains ancient sarcophagi with the bones of the sister-saints Praxedis and Pudenciana on the right, and those of martyrs on the left. The altar is decorated with fine mosaics of the 13th century. Above it an ancient fresco of the Madonna between the sisters. — The Sacristy, at the end of the left aisle, contains a Sarcophagus by *Quinto Romano*.

The former main entrance of Santa Prassede is in the *Via San Martino al Monti*, on the S. side of the church, a side-street diverging from the *Via Merulana* (p. 182) not far from the church of Sant' Alfonso de' Liguori (p. 183). In this street, to the right, a tablet marks the house (No. 20) in which Domenichino lived. The *Via San Martino* ends at the *Via delle Statore*, which begins at the Piazza Vittorio Emanuele (p. 189) and is continued by the *Via Giovanni Leone* (p. 186) to the W. as far as the *Via Cavour*. In

the open space at the end of the Via San Martino stand two mediæval towers: the Torre Cantarelli (right) and the Torre del Capocci (left). The latter belonged about 1500 to Vanezza Borgia, mother of Alexander VI. A short flight of steps ascends to the church of —

San Martino al Monti (Pl. II, 26), erected by Symmachus about the year 500, adjacent to the Baths of Trajan and to an old church of Pope Sylvester I. It was rebuilt in 844 by Sergius II. and Leo IV., gorgeously modernized about 1650, and again restored quite recently.

The **INTERIOR**, a basilica with a roof of straight beams, contains 24 antique marble columns. In the S. aisle are six fine frescoes by Gasp. Puzzi, landscapes with scenes from the life of Elijah, the patron of the order of Carmelites (marred by restoration). In the N. aisle six smaller landscapes, also interesting. Also two pictures representing the interior of the old churches of the Lateran and of St. Peter. — The **PANATHEON** is eleven steps higher; below is the **CURT**. From the latter we enter a large vault, probably once belonging to a **therma**, but at an early period converted into a church. The vaulting bears traces of ancient painting. This is supposed to be the site of Pope Sylvester's church, of the period of Constantine.

From the S. side of San Martino al Monti the *Via delle Sette Sale* runs to San Pietro in Vincoli. This street derives its name from the *Sette Sale* (Pl. II, 26), seven, or rather nine, parallel vaulted chambers on the top of the Esquiline, which appear to have been used as reservoirs for the **Therma** of Trajan (p. 271), visitors ring at door No. 11 the gardener's house of the Pal. Field-Brancaccio (p. 182).

The wide **VIA CAVOUR** (Pl. II, 27, 28, 23; tramway No. 1 in the Appx.), beginning at the railway-station, crosses the *Piazza dell' Esquilino* (Pl. II, 27; p. 180), and after being joined by the *Via Giovanni Lanza* (p. 187, tramway No. 3), bends to the W. and leads direct to the Forum Romanum (p. 260). On the left, above the street, is the church of *San Francesco di Paola* and on the right, farther on, rises the *Tor de' Conti* (p. 273, comp. Plan, p. 270).

A flight of steps beside San Francesco di Paola leads up from the Via Cavour through an archway to the piazza in front of San Pietro in Vincoli (150 ft. above the sea-level). The old Franciscan monastery on the N. side of the piazza is now the *Reale Istituto Tecnico*. To the W. rises a mediæval tower, beside which is a fine palm-tree. — The church of —

San Pietro in Vincoli (Pl. II, 23) is also named *Basilica Eudoxiana* after Eudoxia, wife of Valentinian III., who founded the church about the year 442, as a receptacle for the chains of St. Peter which had been presented by her to Pope Leo I. It was restored by Pelagius I. and Hadrian I.; the vestibule is a work of the early Renaissance, and was the gift of the Rovere, who for some decades monopolized the cardinal's title connected with this church. Admission before 11 a.m. (Sun. till after 12) and after 3 p.m.; at other times visitors ring at the adjacent door to the left, No. 4 ($\frac{1}{3}$ fr.).

INTERIOR. The nave and aisles are separated by 20 antique Doric columns. To the left of the entrance, by the pillar, is the monument of the Florentine painter Pietro and Antonio Pollajuolo (d. 1498). The fresco

above it, a votive picture given by Sixtus IV. as a protection against the plague of 1476, is probably from the studio of Antonino Romano. — The *LAST ALTAR* contains, on the pavement and wall, the monument (in the corner) of the learned Card. Nicholas Cusanus (from Cues on the Moselle, d. 1464). Above it a relief St. Peter with keys and chains, on the left the donor (Nic. Cusanus), right an angel, a good early work by Andrea Bregno. The marble slab in the floor, by *Jacopo Sansovino*, marks the tomb of Card. Leon. Grosso della Rovere (d. 1520). On the 2nd altar to the left, a mosaic of the 7th cent. with St. Sebastian (bearded). — In the *RIGHT TRANSEPT* is the monument of Pope Julius II (p. 127) by *Michael Angelo*, with the "Statue of Moses, represented as on the point of springing from his seat, in indignation at the idolatry of the Jews, or (according to a later interpretation), summoning the twelve tribes of Israel together in order to bid them farewell. (Moses is here represented with horns owing to an erroneous translation in the Vulgate of Exodus xxxiv 25). This is one of Michael Angelo's most famous and most characteristic works, he has sacrificed details in order to bring the total effect into more dominating prominence. The proportions of the figure are inexact; the small head, the powerful arms, and the gigantic torso are certainly out of harmony while the robe hangs from the celebrated knee in quite impossible folds. But all the same the general effect is most imposing. Besides the Moses, the statues of Rachel and Leah (as symbols, on the left of meditative, on the right of active life) alone were executed by the great master, and even these were not entirely his own workmanship. These figures are an allusion to the complaint of St. Gregory after he was elected pope that his life instead of being the beautiful Rachel whom he sought was the more fruitful Leah (comp. Dante, *Purg.* xxvii 105). The grouping only of the remainder was from Michael Angelo's design. The figure of the pope (who is not interred here, comp. p. 124), by *Maso del Rosso*, is a failure; the prophet and the sibyl at the side are by *Raf. de Montepulciano*. — To the right of the choir is St. Margaret, an altar-piece by *Guercino*.

The Choir contains an ancient marble seat from a bath, converted into an episcopal throne. A cabinet under the high-altar, with bronze doors (1477) attributed to *Ant. Filarete*, was presented by Sixtus IV and his nephew Giuliano, and contains the chains of St. Peter, which are exhibited to the pious on August 1st.

The adjacent monastery of the Canonici Regolari is now the seat of the physical and mathematical faculty of the university. The monastery-court, by *Giuliano da Sangallo*, is embellished with a fountain, presented in 1513 by Leon Grosso della Rovere (entrance by No. 6, to the right of the church).

From the Via di San Pietro in Vincoli, which descends hence to the S.W., the continuation of the Via dei Serpenti leads to the Colosseum (Pl. II, 23, 23; p. 206).

I. The Villa Borghese. Villa di Papa Giulio.

A visit to the Villa Borghese is attractive not only on account of the beautiful park, but also on account of the art-gallery now preserved in the casino, which, though many masterpieces have been removed, still ranks as one of the most important collections in Rome. The park is open to the public daily from 9 till dusk (free). Besides the principal entrance near the Porta del Popolo (Pl. I, 16), there is another near the Porta Pinciana (Pl. I, 20, 20). Admission to the Casino, see pp. 150, 151. — The antiquities in the Villa di Papa Giulio (p. 130) are also well worth a visit.

The Villa Borghese extends to the N. of the city, immediately outside the walls. The principal (W.) entrance is to the right, just outside the Porta del Popolo (Pl. I, 16; p. 155), a small horse-

tramway (10 c.) plies thence to the Giardino del Lago (see below). The E. entrance is just outside the Porta Pinciana (Pl. I, 20, 28; p. 163).

The *Villa Borghese* (Pl. I, 16, 19, 20, 22) was founded in the first half of the 17th cent. by *Cardinal Scipio Borghese*, nephew of Pius V., and afterwards enlarged by the addition of the Giustiniani gardens. Purchased by the state for 3 million francs in 1902, the *Villa Comunale Umberto Primo*, as it is now officially called, was transferred to the city of Rome. King Victor Emmanuel III. intends to erect an equestrian statue of his father Humbert in the grounds, which are to be connected with the Pincio (p. 156) by a bridge. The beautiful grounds contain a number of ornamental erections, small temples, artificial ruins, fountains, antique statues, inscriptions, etc., the more important of which are marked on our plan. Near the W. entrance are the remains of the so-called *Villa of Raphael* (destroyed in the war of 1849); farther up, to the right of a fountain with a statue of *Æsculapius*, a large *Gateway* in the Egyptian style; to the left is the *Giardino del Lago*, formerly the private garden of the prince. — In the E. part of the grounds, to the right of the entrance near the Porta Pinciana, is an arch with a *Statue of Apollo*. To the left is a dairy. — In the N. part of the villa are the so-called *Medieval Castle* and an imitation of the *Temple of Faustina* (p. 263).

The *Casino* (Pl. I, 22) of the Villa Borghese, which was rebuilt by Marcantonio Borghese in 1782 (view of its 17th cent. appearance, see p. 193), contains a collection of sculptures in the rooms of the groundfloor (indicated by Roman numerals on the annexed plan), while those of the upper floor (Arabic numerals) contain the important picture gallery removed from the Palazzo Borghese (p. 218). The decorations are partly by Gavin Hamilton, David Moore, and J. P. Hackaert. Both collections were purchased by the state in 1901. Illustrated catalogue by Venturi (1893) 1½ fr., bound 2 fr.; director, Signor Pincastelli. Admission, see pp. 160, 161; rooms closed on Sun., see p. 193.

The Borghese Collection of Antiques was founded about 1820 to replace an earlier collection purchased by Napoleon I. and sent to the Louvre. It consists largely of objects discovered on the Borghese estates. Comp. *Helbig*, *Antiquities in Rome*, vol. II, pp. 129-160.

I. VESTIBULUM ('Atrio'). On the narrow walls: VII. (I.) and XXV. (r.), and on the back-wall, x. three reliefs from a triumphal arch of Claudius that once stood in the Corso near the Palazzo Sciarra, erected, according to an inscription, in A.D. 51-52 by the senate and people in memory of the victories in Britain. — To the left, VIII. Torso of Pallas, a copy of the Parthenos of *Phidias* (p. xlvii).

II. SALOON ('Salone'), with ceiling-painting by *Mario Rossi*.

On the floor, mosaics, discovered near Torre Nuova, with gladiatorial and wild beast combats. Left wall: xxxvi. Dancing Faun (largely restored), under it a delicately worked Bacchic relief. Long wall: xl. Meleager; xxxix. Augustus; vii. Statue of a woman; below, Roman tombstone. Right wall: l. Antoninus Pius (colossal bust). ii. Colossal Dionysus; below, slab with Bacchic relief, belonging to the same work as the fragments under xxxvi and over the door in the back wall. The body of the horse is the only antique portion of the alto-relief of a horseman above the latter.

III. Room (first to the right) In the centre, *Canova, Pauline Borghese, sister of Napoleon I., as Venus (1805). Entrance-wall: lxxl. Tomb-relief, executed about the time of Hadrian under the influence of Greek models. On the opposite wall: *lxiv. Ajax the Younger tearing Cassandra from the Palladium (relief). — Paintings: *Dosso Dossi*, Apollo; *Caravaggio*, David with the head of Goliath.

IV. Room. In the centre, David with the sling, a youthful work by *Bernini*. Entrance-wall: lxxviii. Hermes of Pan; lxxix. Front of a sarcophagus, with the labours of Hercules (back of the sarcophagus opposite, No. vc.). Upon it, lxxx. Lid of another sarcophagus, with relief of Penthesilea and her Amazons coming to aid the Trojans after the death of Hector. Rear-wall: lxxxv. So-called Sappho. Upon No. iiii c: Sarcophagus-relief, with the history of Leto, to the left, the goddess in her wanderings, with the local deities of Delos; in the centre Zeus with the infants Apollo and Artemis; to the right, assembly of the gods. — On the rear-wall: 7. *Padovanino*, Venus.



V. Room. In the centre, *Apollo and Daphne*, a much admired work of *Bernini*, executed in his 18th year (1616). Right wall: cxvii. Apollo with a griffin and tripod, an archaistic work; cxvi. Three-sided base, with Mercury, Venus, and Bacchus. Wall opposite the entrance. cxv. *Statuette* of a boy playing with a bird; cxiii. *Statuette* of a fettered boy. Exit wall: cxvii. Fisherman and herdsmen, a genre group, intended for the decoration of a fountain.

VI. Room ('Galleria') with modern porphyry busts of emperors. In the centre, a porphyry bath said to have been found in the mausoleum of Hadrian. In the doorway to the Salone is a beautiful antique vessel of ophite, the only specimen of the kind in Rome. The marble incrustation of the walls deserves notice. The statues in the recesses are for the most part mediocre and freely restored. The hermes of Bacchus, a bronze head with a beautiful alabaster pedestal, at the exit, is modern.

VII. ROOM. To the right, CLXXXI. Archaic female bust, perhaps a portrait. By the window to the right, CLXXVII. Torso of Venus with Cupid. To the left, CLXXVI. Modern copy of the 'Thorn Extractor'. Exit-wall: CLXXXII. Sleeping hermaphrodite.

VIII. ROOM. In the centre, *Bernini*, Aeneas and Anchises, the first large work of the artist, then in his 15th year (1619). By the entrance, CXC. Aesculapius and Telesphorus, gods of healing. Right wall: CVIIC. Leda and the swan. Opposite the entrance, CLXXXVIII. Late-Roman tombstone. Exit-wall: CLXXXIV. *Algardi* (?), Putti in relief; CLXXXIII. Athena.

IX. ROOM. In the centre, CC. *Satyr on a Dolphin* (fountain-figure), the model of the Jonah in Santa Maria del Popolo formerly ascribed to Raphael (p. 157). Entrance-wall: CCI. Youthful Menad; CCIII. Paris. Exit-wall: CCXV. Venus; CCXVI. Archaic female figure, a Greek original work.

X. ROOM. In the centre, CCXXV. *Dancing Satyr*, wrongly restored (he originally played on a double flute). Opposite the entrance, CCXXXVII. Seated figure of a philosopher, resembling the Menander in the Vatican (p. 353). Exit-wall: CCXXXII. Satyr resting, after Praxiteles. Fine ceiling-paintings by *Conca*.

We now return to the Galleria (B. VI) and ascend the staircase to the —

Picture Gallery, the rooms of which are marked on our plan with Arabic figures. Next to the Vatican, the Borghese gallery contains more masterpieces than any collection in Rome, and this in spite of the recent removal of several of its treasures. The 16TH CENTURY is naturally less fully represented than subsequent epochs, as the gallery was founded at a time when the works of that period were not yet generally appreciated. It contains, however, some admirable works of the end of the century, such as *Lorenzo di Credi's* Madonna with the flower-glass (I. Room, No. 433). — The MILANESH SCHOOL OF LEONARDO DA VINCI has numerous representatives, though the authenticity of most of the examples may be doubted. The best are Christ imparting his blessing, a small work by *Marco da Oggiono* (I, 435), and Christ bearing the Cross, by *Solario* (I, 481). — Among painters of the older NORTH ITALIAN SCHOOL, *Francesco Francia* enjoys a high reputation, and his claim to it is amply vindicated by his St. Stephen (V, 65), a small kneeling figure in the red robe of a deacon.

Among the works ascribed to RAPHAEL, the *Entombment* (IV, 369) alone is authentic. The picture is not well preserved, and is perhaps not entirely by Raphael's own hand. The impression produced by it is disappointing, the composition seems too studied, and the colouring cold (p. lxviii). The predelle belonging to it are in the Vatican (p. 344). The so-called *Fornarina* (IV, 355), the *Madonna di Casa d'Alba* (I, 424) and the *Pope Julius II.* (IV, 418) are copies. The IX. Room contains several *Frescoes* transferred

hither from the so-called Villa of Raphael (p. 180), and ascribed to that master; but they are unlike his workmanship, both in composition and execution.

The SCHOOL OF FERRARA of the 16th cent. is copiously and well represented (Room VII). A fine example of *Massolino's* richness of colouring is his Adoration of the Magi (VII, 218). *Dosso Dosso's* Circe (VII, 217) conducts us into a world of fancy, similar to that depicted by Ariosto in his Orlando. Lastly there are several excellent works by *Garofalo*, the Raphael of Ferrara.

The COLOURISTS OF THE 16th CENT. will not fail to attract the visitor. To *Sodoma* the gallery is indebted for a *Pietà* (I, 482) and a *Holy Family* (I, 459), in which the head of the Madonna is radiant with beauty. An important work by *Correggio*, acquired in 1824, represents Danaë with Cupids sharpening their arrows (X, 126). The figure of Danaë is rather graceful than strictly beautiful, but the Cupids are very charming, and the chiaroscuro masterly. — A room is devoted to the VENETIAN SCHOOL. *Titian's* so-called Earthly and Heavenly Love (XI, 147) is one of those creations that produce an indelible impression on the beholder. The picture rivets the attention like a poetical dream, and after the eye has feasted on the charms of the colouring the composition still captivates the imagination. The Arming of Cupid (XI, 170) is one of the finest mythological works by the same master. *Bonifazio* is another master affording examples of the richness of colouring of the Venetian School (XI, 186, being the finest).

As is generally the case in the Roman galleries, the painters of the later revival of art, the ADHERENTS OF THE CARBACCI and the NATURALISTS, figure very numerous here. *Domenichino's* Diana (V, 53) contains a number of nymphs with lifelike heads, and an excellent background of landscape; and *Albani's* Four Elements (V, 35, 40, 44, 49) are superb decorative pictures. On the other hand, the works of *Michael Angelo da Caravaggio*, the chief of the naturalists (XI, 110), are repulsive. The pictures by German and Netherlandish masters are unimportant. Rooms 1, 2, 7, 8, and 9 are closed on Sun.

At the top of the staircase is a small vestibule, to the left of which is —

Room 1 (chiefly Florentine and Lombard schools). Right wall: 421. *Albertinelli*, Head of Christ; 424. *Raphael*, Madonna di Casa d'Alba, an early copy; 425, 427, 440, 442 *Bacchiacca*, Story of Joseph; *433. *Lor. di Credi*, Madonna with the flower-glass; 434. *School of Leonardo da Vinci*, Leda; *435. *Marco da Oggiono*, Christ imparting a blessing; 439. *School of Verrocchio*, Holy Family; 444. *Bronzino*, John the Baptist. — Left wall: 458. *Bugiardini*, Madonna; *459. *Sodoma*, Holy Family; *461. *Andrea Solario*, Christ bearing the Cross; 462. *Sodoma*, *Pietà*, darkened by time. — To the left is —

Room 2. Curiosities. Also, by the entrance: 519. View of the Casino Borghese in the 17th cent.; 527. *Vanni*, Three Graces; 514. *School of Leonardo da Vinci*, Study of a female head, in silver-point. Mosaics by *Marcello Provenza*: 498. Madonna, 495. Portrait of Paul V. — We return to Room 1 and enter —

Room 3 (Florentine school). Entrance-wall: 318. *Carlo Dolci*, Madonna; 310. *Fra Bartolomeo*, Holy Family; 308. *Carlo Dolci*, Christ. — Right wall. 352. *Florentine School*, Holy Family, 348. *School of Sandro Botticelli*, Madonna, *346. *Sassoferrato*, Copy of Titian's Three Ages (original in London); 343. *Piero di Cosimo*, Madonna. — Exit-wall: 340. *C. Dolci*, Mater Dolorosa; *Andrea del Sarto*, 334. Madonna, 328. Mary Magdalen; 336. *Bugiardini*, Madonna. — Between the windows. 326. *Lucas Cranach*, Venus and Cupid; 324. *Franciabigio*, Venus.

Room 4. Entrance-wall: in the centre, *369. *Raphael*, Entombment, painted in 1507 for the Baglioni chapel in San Francesco al Prato in Perugia (p. 67), just before the master went to Rome, afterwards purchased by Paul V., 371. *Ghirlandajo* (?), St. Catherine; 373, 374. *Giulio Romano*, Madonna; 376. *Andrea Sacchi*, Portrait of Oratio Giustiniani; 377. *Fiorino di Lorenzo*, Crucifixion, with SS. Jerome and Christopher. To the left. 355. Portrait of the so-called *Fornarina*, a good copy of Raphael's original (p. 164), by *Sassoferrato*. — Wall to the right. Copies after *Raphael*, 420. John the Baptist, 413. Julius II.; 411. *Van Dyck*, Entombment; *408. *Pontorno*, Cardinal Marcello Cervini. — By the first window: to the right, *Perugino*, 401. Madonna, 402. Mary Magdalen; to the left, *399. *Timoteo Viti*, Portrait of a boy. — By the second window: to the right, *396. *Antonello da Messina*, Portrait; 397. *Perugino*, Portrait. — Last wall: 390. *Ortolano*, Plèth, 382. *Sassoferrato*, Madonna; 386. *Perugino*, St. Sebastian. — We now return to the vestibule and enter the —

GALLERIA (R. 5). In the centre is an antique marble group of an Amazon riding down two warriors. Entrance-wall: 68. *Baroccio*, Flight of Aeneas from Troy. — By the first window: *65. *Franc. Francia*, St. Stephen, a youthful work; by the third window. 61, 60a. *School of Fr. Francia*, Madonnas; by the last window: 57. *School of Fr. Francia*, St. Francis. — Back-wall: 85, 40, 44, 49. *Franc. Albani*, The four Elements, landscapes with mythological accessories; 42. *Guerchino*, Return of the Prodigal Son. — Exit wall: *Domenichino*, *53. Diana and her nymphs practising with their bows, 55. *Cumman Sibyl*.

Room 6. Chiefly portraits: 97. *Moroni*, 94. *Bronzino*, 74. *Pontorno*. Also, on the entrance-wall, 92. *Andrea del Bressanone*, Venus. Opposite, 90. *Elisabetta Sirani*, Lucretia. — We traverse a small anteroom opposite the entrance and enter —

Room 7 (School of Ferrara). Left wall: *217. *Domenico*, Circe the sorceress, with fine sylvan landscape, one of the artist's

masterpieces; 218. *Menzolino*, Adoration of the Magi; 211. *Dossi*, Madonna. Numerous paintings (mostly small) by *Garofalo*: at the entrance, 205. Entombment, 210. Madonna, 208. Madonna and St. Francis, 213. Madonna and SS. Peter and Paul; right wall, 237. Scourging of Christ, 239. Adoration of the Magi, 240. Madonna and saints.

Room 8 (Netherlandish School). 268. *Van Dyck* (?), Crucifixion; 269. *Pieter de Hoogh*, Tavern scene; 274. *Rubens* (?), Visitation; 272. *Pieter Codde*, Military-scene; 273. *Lundens*, Surgical operation; 291. *D. Tintore*, Genre scene.

Room 9. Three frescoes (under glass) by *Pupils of Raphael*, from the so-called Villa of Raphael (p. 190): 303. Marriage of Alexander and Roxana, from a drawing in the Albertina in Vienna, which bears the name of Raphael; 294. Nuptials of Vertumnus and Pomona, of inferior value; *300. *Perin del Vaga*, so-called 'Bersaglio degli Dei' (shooting-contest of the gods), from *Michael Angelo's* drawing in red chalk, now at Windsor.

This composition was borrowed from *Lucian* (*Nigrinus*, C. 36), who likens the words of philosophers to arrows launched by various archers at the mark (the heart of man). 'Some stretch their bow too tightly, and their bolt does not remain in the mark, but only splits and wounds it; others have no strength and graze but the surface; but the true archer chooses an arrow, not too sharp and not too blunt, looks straight at the mark, and hits it so that the arrow remains fast'.

We now return to the anteroom between Rooms 6 and 7 and turn to the right to —

Room 10. Entrance-wall: 137. *School of Paolo Veronese*, John the Baptist preaching; 133. *Marcello Venusti*, Copy of Seb. del Piombo's Scourging of Christ (p. 377). — Left wall: 101. *School of Paolo Veronese*, St. Anthony preaching to the fishes, 108. *Palma Vecchio*, *Lucretia*; 157. *Venetian School*, Madonna with the donors and saints; 115. *Bern. Licinio*, Family portrait; 119. *Paris Bordone*, Satyr and Venus. — By the second window: 61. *Guido Cagnacci*, Sibyl; 129, 131. *Bellini*, Adam and Eve (school-pictures). — Exit-wall: *125. *Correggio*, Danaë, one of the artist's finest easel-pictures; 127. *L. Bassano*, The Trinity.

Room 11 (Venetian School). In the centre is a good *Copy of the *Farnese Hercules* (after *Lysippus*). Left wall: 143. *Venetian School*, Portrait. — *147. *Titian*, 'Amor sacro e profano' ('Earthly and Heavenly Love'), one of *Titian's* first great works, painted under the influence of *Giorgione*, probably not before 1512.

The above title was first suggested at the end of the 18th century. Some critics hold that the painting represents the Fountain of Love in the *Ardenne*, as described in *Ariosto's* 'Orlando Furioso'; but other modern authorities maintain that it is a mythological scene conceived in the Renaissance manner, viz. *Venus* persuading *Hedon* to fly with *Jason*, and that the theme was suggested by the description of the episode in the 'Argonautica' of *Valerius Flaccus*.

Between the windows: 110. *Correggio*, Holy Family with the serpent. — Right wall: 163. *Palma Vecchio*, Madonna with saints

and donors, 164. Corioni, Madonna; *170. Titian, Arming of Cupid by Venus and the Graces, painted about 1500. — Entrance-wall, 170. *Uice Bellini* (?), Madonna; *186. *Lor. Lotto*, Portrait; *188. *Bontasie*, Return of the Prodigal Son; *189. Titian, St. Dominic; 192. *Ribera*, Liberation of St. Peter; *193. *Lor. Lotto*, Madonna; 194. Titian, Scourging of Christ.

About $\frac{1}{2}$ M. outside the Porta del Popolo the *Vicolo dell' Arco* *Cavour* diverges to the right from the road to the Ponte Molle (p. 383, tramway No. 14 in the Appx.), beside the *Casino of Justin III*, built about 1650 from designs attributed to Jac. Sansovino and Bald. Peruzzi, but now much dilapidated and not open to visitors. About 8 min. farther on the *Vicolo* leads to a small piazza, in which is the entrance to the —

Villa di Papa Giulio, built by Vignola, with the assistance of Vasari and Michael Angelo, fitted up in 1888 as a museum for antiquities found in the province of Rome. Admission, one pp 150, 151.

GROUND FLOOR. *Room to the Right.* The ceiling is tastefully decorated in stucco (Christian virtues) and with paintings (Story of the nymph Callisto) by *Fedele Zuccaro*. In the centre is a sarcophagus from Cervetri; and in the glass-cases are vases from Corchiano (near Viterbo). On the walls are copies of paintings in Etruscan tombs and of a sarcophagus at Florence. — *Room to the Left*, with tasteful ceiling. Terracotta wall-coverings from the Etruscan temples of ancient Falerii (p. 96), freely restored. In the centre is a very ancient coffin, hollowed out of a tree-trunk, with the skeleton and the coarse early Italic earthenware which it contained (found in 1880 near Grotti). — We now enter the *Semicircular Passage* surrounding the court, with elegant grotesque decorations. Here, to the left, is the staircase to the —

FIRST FLOOR. / Room. Earliest period of Falerii (before the 6th cent. B.C.) in which importations from Greece and the East are still scanty. The ceiling of hollowed tree-trunks, at the foot of the entrance wall, should be observed. In the central glass case are a bronze cinerary urn in the form of a house, two bronze tripods with cauldrons, bronze buckles, etc. The earthenware, bronze weapons, ornaments, etc., are as far as possible arranged as they were found in the tombs. In Case VI and the following cases are a few isolated vases of Greek origin.

II Hall. Period of the Greek importations, about 500-350 B.C. Vases with black and with red figures, arranged in chronological order, beginning with Case XI to the left (black figured vases). The next cases contain vases representing the severer and then the freer style of red-figured decorations. In XVIII and the following cases are poor Italic imitations placed beside imported Greek examples. The central glass case contains the finest specimens: *Vase in the form of a *Leontis*-bowl, with a lion, a Cupid, and a Nike, made, according to the inscription, by a certain Syriakos, large centers with dancing girls; *Destruction of Troy*; *Hercules admitted to Olympus. Also two bronze vessels. In Case XXII is a skull with false teeth, set in gold. — The interesting frieze to this room exhibits views of Rome to the 16th century.

III Room. Imitations of Greek art, from the 4th cent. down to the destruction of Falerii by the Romans, in 241 B.C. The finest specimens are in the central glass case: in front are two vases of similar shape, that to the right inscribed in Latin 'Gentilis, Dracupator, Cupido, Minerva', to the right are two drinking bowls with the Faliscan inscription 'Fecit vino piasis, era carafe (perhaps = 'bottle vinum bibo, era carafe'). Cases A and B contain large vases with silver glass.

I Cabinet. From the Tomb of a *Proetus* found near Todi (p. 98). *Gold ornaments, gems, remains of the golden ornamentation of a dress, trans-

ferred to modern cloth; fine bronze ewer with a figure of Hercules as handle. — II. *Cabinet*. Terracotta figures from the temples at Falerii, some with admirably preserved painting and of striking beauty. **Statue of Apollo*; antefixæ with Medusa; to the right, small terracotta figures of Greek workmanship, etc. — We now return and from Room II enter the —

Semicircular Corridor of this floor, which contains terracottas, bronze weapons, ornaments, and other objects found in tombs in the neighbourhood of Falerii. In the right wing are specimens dating from the earlier Faliscan period; in the left wing, those of the later period, when imports from Greece began to appear. Case LXII. Bronze vessels in admirable preservation. LXVI. Corinthian vessels. LXXVI. Vase of the best style, Apollo Oitharæus and the Muses. — We now return and descend to the —

COURT. The pleasing and somewhat baroque *Fountain*, with a small sunken basin in the E. colonnade, is said to have been executed by Vignola and Ammanati from a design by Vasari. In a side-court to the right is a full-size *Model of an Etruscan Temple*, the remains of which were discovered in 1882 at Alatri, in the territory of the Hernici.

On the N. side of the piazza in front of the villa a road leads under the *Arco Oscuro*, a long vaulted archway. A little to the left, beyond the archway, lies the frequented *Osteria dell' Arco Oscuro*. The road goes on to the Monti Parioli (p. 383) and the Acqua Acetosa (p. 384).

II. Rome on the Tiber (Left Bank).

That part of the city which extends to the W. from the Quirinal and Capitol as far as the river was uninhabited in the most ancient times (*Campus Martius*), but was gradually covered with buildings as Rome extended her sway, and as far back as the Republic, but more particularly in the reign of Augustus, it became the site of many palatial edifices. This new town of ancient Rome was almost the only inhabited district during the middle ages and following centuries, and it is still the most densely peopled quarter. The present government has undertaken the task of improving this quarter by the construction of new and broad streets; but apart from these it still retains the characteristics of the mediæval and Renaissance city in its network of narrow and dirty streets and lanes, enlivened by the busy traffic of the lower classes, and containing many highly interesting churches and palaces. The *Corso*, the principal thoroughfare, is characterized by its imposing Baroque façades of the 17th and 18th centuries.

a. The Corso and Adjacent Side Streets.

The **Corso*, officially called *Corso Umberto Primo*, is the central street of the three running to the S. from the Piazza del Popolo (p. 158). It corresponds with the ancient *Via Lata* beginning at the Capitol and continued outside the ancient city as the *Via Flaminia* (comp. p. 383). Its length from the Piazza del Popolo to the Piazza Venezia is 1660 yds., or nearly a mile.

The N. part of the street is little frequented. No. 518, to the

right, between the first two cross-streets, is the *Pal. Rondanini* (Pl. I, 17), the court of which contains an unfinished Pietà by *Michael Angelo*, on which he worked up to a few days before his death. No. 18, on the left side, was once inhabited by *Goethe*; inscription (placed there in 1872): 'In questa casa immaginò e scrisse cose immortali *Wolfgang Goethe*.'

On the right, farther on, is the church of *San Giacomo in Augusta*, or *degli Incurabili*, with a façade by *C. Maderna*. It belongs to the adjoining surgical hospital, which extends to the *Via di Ripetta*; one of the landings inside bears a fine relief of the *Madonna* by *Maestro Andrea* (15th cent.; apply to the porter). Nearly opposite, on the left, is the small Augustinian church of *Gesù e Maria*, with a façade by *Girol. Rainaldi*.

In the *Via del Pontefice*, the third turning on the right, is the entrance (No. 57; on the left) to the *Mausoleum of Augustus* (Pl. I, 17, 18), erected by that emperor in 28 B.C. as a burial place for himself and his family, and in which many of his successors down to *Nerva* were interred. On a square travertine basement, now wholly beneath the level of the ground, rises a huge circular edifice in two stories, which contained the mortuary chambers, above which arose a terraced mound of earth, embellished with cypresses and surmounted by a statue of the emperor. The obelisks mentioned at pp. 177 and 180 were erected beside the entrance to the *Mausoleum* in the 1st century. The whole was environed with a park. *Augustus* was interred in the large central chamber, from which radiated fourteen smaller chambers, most of which are preserved, though in a ruinous condition. In the 12th cent. the *Mausoleum* was converted into a fortress by the *Colonnas*. — Visitors may here inspect a plaster model of the equestrian statue of *Victor Emanuel II.*, by *Enrico Chiaradia* (d. 1901; comp. p. 287), fee 1/2 fr.

On the right, in an expansion of the *Corso*, is *San Carlo al Corso* (Pl. I, 18), the national church of the *Lombards*, and the resort of the fashionable world. It was begun in 1612 by *Orazio Longhi* and continued by *Martino Longhi the Younger* and *Pietro da Cortona*; the tasteless façade was added in 1690 by *Cardinal Omodei*. Ceiling paintings in the interior by *Giacinto Brandi*. Over the high-altar is one of the finest works of *Carlo Maratta*: the *Virgin* recommending *San Carlo Borromeo* to *Christ*. (The heart of *San Carlo* is deposited under this altar.)

Beyond the *Via Condotti*, leading to the *Piazza di Spagna* (p. 160), and the *Via Fontanella di Borphese* (p. 213), prolonging the *Via Condotti* towards the W., begins the frequented part of the *Corso*, with numerous shops, and enlivened, especially towards evening, by crowds of carriages and foot-passengers.

On the right, No. 418 a, is the spacious *Palazzo Ruspoli*, built by *Ammanati* in 1586, with a fine marble staircase.

To the left, at the corner of the *Via Frattina* (No. 151), is the *Palazzo Bernini*, the vestibule of which contains a large figure representing 'Truth brought to light by time', by *Bernini*, an exaggerated example of the allegorical style of the time, but admirably executed.

In a long piazza on the right rises *San Lorenzo in Lucina*

(Pl. I, 16), founded in the 4th cent. by a pious matron named Lucina, but frequently altered, for the last time in 1808. In the interior, by the 2nd pillar to the right, is the tomb of Nic. Poussin (d. 1665), erected by Chateaubriand, above the high-altar a Crucifixion by Guido Reni. This church was the scene of Pompili's marriage (in Browning's 'The Ring and the Book').

On the right, at the corner of the Piazza in Lucina and the Corso, is the *Pal. Fiano* (Pl. I, 18), on the site of the *Atr. Paris*, set up by Augustus in B.C. 9 (remains, see p. 172). In front of this palace an ancient arch once spanned the Corso (reliefs, see p. 165). An inscription on the house No. 167 (on the left), records that Alexander VII. widened the street and removed the arch in 1662, for the benefit of the horse-races during the Carnival.

The Via delle Convertite on the left leads to the Piazza di San Silvestro (Pl. I, 18), which is embellished with a monument to the poet *Pietro Metastasio* (1698-1782), by Gallori (1886). In the N.W. corner of the piazza rises the venerable church of *San Silvestro in Capite*, erected by Paul I. (757-67) on the site of his own house, in honour of a piece of the head of John the Baptist still preserved here. The entrance-court is ancient, but the church has been frequently rebuilt. The church now belongs to English Roman Catholics. Part of the monastery formerly connected with the church has been converted into the handsome Post and Telegraph Office, which has entrances from the piazza and the Via della Vite (p. 138). Another part of the old monastery contains the ministerial Office of Public Works. — Opposite San Silvestro is the English Church of the Trinity (p. 144), erected in 1874, with a handsome façade in the early-Renaissance style. — At No. 11, Via di Mercede, which leads to the E. from the Piazza di San Silvestro, is a tablet recording that *Sir Walter Scott* lived here when at Rome in 1832.

Electric TRAMWAY from the Piazza di San Silvestro to the Railway Station and thence to the Piazza Venezia, see No. 1 in the Appendix.

Farther on in the Corso, to the right, is the *Palazzo Verospi* (No. 374), now *Torlonia* (Pl. I, 18), erected by Onorio Lungbi, and restored by Alessandro Specchi. A loggia on the first floor is adorned with pleasing mythological frescoes by Fr. Albani. A tablet placed on this house in 1892 records that *Shelley* lived here in 1819.

On the left, at the corner of the Via delle Convertite, is the large new *Palazzo Marignoli*, on the ground-floor of which is the Caffè Nazionale, better known as the Caffè Aragno. On the same side is the large establishment of the *Fratelli Bocconi*, built in 1886-87, beside which begins the Via dei Tritoni (p. 163). The Via San Claudio, between these 'palazzi', leads to the Piazza di San Claudio, in which is the British Consulate (p. 139).

To the right, at the corner of the Piazza Colonna, is the extensive *Palazzo Chigi*, begun in 1562 by *Glac. della Porta* and completed by C. Moderna, now occupied by the Austrian Embassy to

Quirinal. Neither the small collection of antiques and pictures nor the library (p. 146) is open to the public.

The handsome PIAZZA COLONNA (Pl. II, 18; named from Ital. *colonna*, column), which here interrupts the Corso, is one of the busiest squares in Rome (military music on summer-evenings, comp. p. 149). In 1889, by the pulling down of the Palazzo Piombino, the piazza was extended on the E. as far the church of *Santa Maria in Via*, built by Mart. Lunghi the Elder in 1604.

The *Column of Marcus Aurelius, rising in the centre of the piazza named after it, is embellished like that of Trajan with reliefs from the emperor's wars against the Marcomanni and other German tribes on the Danube. The column consists of 28 blocks, besides the pedestal and capital, in all 96 ft. (100 ancient Roman ft.) in height, and has a staircase in the interior. In 1689 Sixtus V. caused the column to be restored and crowned with a statue of St. Paul, while he strengthened the pedestal and covered it with masonry. At that period it was ascribed to Antoninus Pius, after whom it was erroneously named.

The reliefs, which form 28 spirals around the column, are divided into two series by the figure of Victory writing upon her shield, about half-way up, on the E side. The reliefs above refer to the *Bellum Germanicum* (172-178) against the Marcomanni and Quades; those below to the *Bellum Sarmaticum* (174-176) against the Sarmates, Iazyges, and Quades. The third spiral from the foot, on the E side, illustrates the preservation of the Roman army by a sudden rain storm, an incident which in the 4th cent. was explained as a miraculous response to the prayers of some Christian legionaries.

On the W. side of the piazza is a building with a portico of ancient Ionic columns from Veii, erected here in 1838 (on the ground-floor the restaurants 'Colonna' and 'Fagiano', see p. 137).

The streets running to the W., on the right and left of the portico, lead to the *Piazza di Monte Citorio* (p. 215). The street running to the S. leads to the left to the PIAZZA DI PIETRA (Pl. II, 18), on the S side of which are eleven Corinthian columns, 41 ft. high, of a *Temple of Neptune, built by Hadrian and once possessing 15 in its length and 8 in its breadth. The eleven extant columns belonged to the N. side of the temple. A portion of the wall of the cella is preserved in the adjoining building, once used as a custom-house (*Dogana di Terra*), now the Exchange. The reliefs representing conquered provinces, mentioned on p. 299, were among the decorations of the temple or of the colonnade surrounding it. — The *Via de' Pastini* leads hence to the Pantheon (p. 216), while the Corso is regained by the *Via di Pietra* to the left.

From the Corso to the Fontana di Trevi by the *Via delle Muratte*, see p. 161.

Farther on in the Corso, also on the left, where the street expands, we reach the *Palazzo Sciarra-Colonna (No. 239; Pl. II, 18), the finest of the whole street, erected at the beginning of the 17th

cent. by *Flaminio Piccio*, with a portal of later date. This palace once contained a famous picture-gallery (comp. p. 371).

Opposite is the imposing *Cassa di Risparmio*, or *Savings Bank*, by *Oipolla* (1868). The first side-street on the right leads to the church of *Sant' Ignazio* (p. 203), the next two side-streets to the *Collegio Romano* (*Museo Kircheriano*; p. 203). No. 807 in the Corso, between the last two side-streets, is the *Palazzo Stemonetti*. Opposite, a little back from the street, is the church of —

San Marcello (Pl. II, 18), mentioned as early as 499, re-erected by *Jac. Sansovino* in 1519, and entirely modernised in 1874. The façade (1708) is by *Carlo Fontana*.

INTERIOR. To the left of the entrance is the double tomb of the Venetian cardinals *Giov. Michiel* (d. 1508) and *Ant. Orso* (d. 1511). — The 4th Chapel on the right contains ceiling paintings by *Perin del Vaga*, completed after his death by *Don. de Volterra* and *Philippino da Modena*, and the monument of *Card. Commi* (d. 1824), minister of *Pius VII.*, by *Stuckle Stuckli*. — The tomb of the English Cardinal *Weld* (d. 1837) and that of *Pierre Gilles* (d. 1866), the traveller, are also in this church.

The next side-streets are the *Via Lata*, leading to the right to the *Collegio Romano* (p. 203), and the *Via Santi Apostoli*, leading to the left to the *Piazza Santi Apostoli* (p. 210).

On the right side of the Corso, farther on, is the small church of *Santa Maria in Via Lata* (comp. p. 197), mentioned as early as the 7th cent., but in its present form dating from the 17th; tasteful façade executed in 1680 from designs by *Pietro da Cortona*. From the vestibule a staircase descends to an oratory (built by *Vignola*) in which *St. Paul* and *St. Luke* are said to have taught. Below this church and the *Palazzo Dorio* lie extensive ancient walls, which once belonged to the *Scipio Julia*, an edifice begun by *Cæsar* and completed by *Agrippa*, for taking the votes of the national assembly, but afterwards used for games and as a market-place.

Adjoining *Santa Maria in Via Lata* is the beautiful *Palazzo Dorio* (Pl. II, 18), with a 17th cent. façade towards the Corso; see p. 207.

Opposite rises the *Palazzo Odescalchi*, erected in 1887-88 in the Florentine style; it is the residence of the Prussian ambassador to the Vatican. The *British School at Rome* (p. 146) occupies part of the palazzo; entrance from the *Piazza Santi Apostoli* (p. 210). Adjacent is the *Pal. Salviati*, by *Carlo Rainaldi*, occupied in 1725-1800 by the French Academy of Art (p. 159).

The last corner-house on the right is the *Pal. Bonaparte*, formerly *Rinuccini*, erected in the 17th cent. by *Mattia de' Rossi*, where *Madame Lætitia*, mother of *Napoleon I.*, died in 1836.

On the S. the Corso is terminated by the *PIAZZA DI VENERIA* (Pl. II, 17; 48 ft. above the sea-level), from which the *Via Nazionale* (p. 174) runs to the left and the *Via del Plebiscito*, continued by the *Corso Vittorio Emanuele* (p. 223), to the right. The piazza, which is the central point of the tramway-system (comp. the Appx.), is named after the imposing —

***Palazzo Venezia**, begun before 1455 by Cardinal Barbo (afterwards Pope Paul II.) in the Florentine style, in which the effect is produced by massiveness (p. lxiv). The stones were obtained from the Colosseum. The architect is unknown, but Vasari is certainly wrong in ascribing the design to Giuliano da Majano, who never worked in Rome. Meo del Caprino and Giuliano da Sangallo merely superintended its erection. The palace was presented in 1560 by Pius IV. to the Republic of Venice, with which it came in 1797 into the possession of Austria, and it is still the residence of the Austrian ambassador to the Vatican. The handsome two-storied court with arcades, by *Giacomo da Pietrasanta*, is little more than begun. The *Palazzetto Venezia*, built in 1466-69, which adjoins it on the S.E. side, is to be pulled down, and the loggia over the court re-erected to the W. of the undermentioned Piazza San Marco.

The N. Slope of the Capitol, in front of which we now stand, has been undergoing much alteration since 1885. In order to make room for the substructure of the *Victor Emanuel Monument* (p. 287), and to afford an unimpeded view from the Corso, several blocks of buildings have been pulled down, including the *Palazzo Torlonia*, built about 1650 by C. Fontana, which occupied the E. side of the Piazza Venezia. — The streets running to the E. debouch in the Forum Trajanum (p. 274).

To the left, at the beginning of the Via di Marforio (p. 211; foot-traffic only), which leads hence to the S.E. to the Forum (p. 250), is the Tomb of *Cornelius Publicus Sabinus* (Pl II, 20), to whom the ground was granted by the Senate as a burial-place for himself and his family ('honoris virtutisque causa', as the inscription records) towards the end of the republic. This point must therefore have lain outside the walls of Servius, as interments within their limits were prohibited.

Turning to the W., a few paces bring us to the small Piazza San Marco, with its gardens, and to —

San Marco (Pl II, 17), incorporated in the S. side of the Palazzo Venezia. This church, said to date from the time of Constantine, was re-erected in 833 by Gregory IV., and adorned in 1466 by *Giacomo da Pietrasanta* with a fine vestibule. The interior, restored in the 17th cent., was modernised by Card. Quirini in 1744.

VESTIBULE. Roman and ancient Christian inscriptions, built into the walls. St. Mark in relief, above the handsome inner principal portal. The entrance is approached by a descent of several steps. With the exception of the tribune and the beautiful coffered ceiling (by *Marco de' Doici*; 1467-71), all the older parts have been disfigured by restorations in the baroque style. The Tribune, with its handsome pavement (*opus Alexandrinum*), lies several steps higher than the rest of the church. The mosaics (in the centre Christ, to the left, SS. Mark, Agapetus, and Agnes, to the right, SS. Felicianus and Mark escorting Gregory IV.) date from the most degraded period of this art and have been justly described as 'utter caricatures'. In the **FRONT AISLE** 1st Chapel, Altar-piece by *Palma Giovane*, the Resurrection; 3rd Chap., Adoration of the Magi, by *Moretto*, at the end, adjoining the tribune, an admirable portrait of Pope Mark, by *Melazzo da Forlì*. In the **LAST AISLE** 2nd Chap., Altar-relief, Greg. Barbedigo distributing alms, by *Ant. G. Eder*. — The **SACRISTY** contains an altar and canopy by *Mino da Fiesole* and *Giov. Battista*.

On the same side of the square is the so-called *Madonna Lucrezia*, the mutilated marble bust of a colossal female statue (priestess of Isis), which carried on conversations with the Abbate Luigi (p. 224), similar to those of Pasquino with the Marforio (comp. p. 226).

The Via di San Marco terminates in the Via Aracozì, which to the left leads to the Piazza Aracozì (p. 226) and the Capitol, and to the right to the Piazza del Gesù (p. 228).

b. *Museo Kircheriano and Ethnographical and Prehistoric Museum. Doria and Colonna Galleries.*

To the right and left from the S. end of the Corso, 2-6 min. from the Piazza di Venezia, are several interesting collections. The *Museo Kircheriano and Ethnographical and Prehistoric Museum* is open daily; the *Doria Gallery* on Tues. and Frid. only; and the *Colonna Gallery* on Tues., Thurs., and Sat. (comp. pp. 180, 181).

The Via del Caravita, which diverges to the W. from the Corso beside the Savings Bank (p. 201) to the S. of the Piazza Colonna, leads via the small PIAZZA SANT' IGNAZIO (Pl. II, 18) almost straight on to the Pantheon. In the Piazza Sant' Ignazio rises the Jesuit church of —

Sant' Ignazio (Pl. II, 18), designed by the *Padre Grassi*, with a façade by *Alghardi*. The building, begun by Card. Ludovisi in 1626, after the canonisation of the saint, was not completed till 1675.

The interior is decorated in the baroque style. The paintings on the vaulting, dome, and apse, and the picture over the high-altar are by the *Padre Pucci*, an able master of perspective, by whom the chapel of San Luigi Gonzaga, in the aisle to the right, was also designed. The paintings on the ceiling and dome are seen in correct perspective from the round marble slab in the centre of the nave. In the transept are two large marble reliefs to the right, *Apotheosis of San Luigi Gonzaga*, on the left, *Annunciation*.

On the roof of this church is a *Fire Bell*, regulated from the Observatory (p. 207), the fall of which at noon is the signal for the discharge of a gun at the Forte Monc Mario (p. 205).

The space between Sant' Ignazio and the Palazzo Grazioli (p. 223), to the S., was occupied in antiquity by a famous *Temple of Isis*, and the excavations on this site have brought numerous ancient remains to light. Among these are the lions, sphinxes, and canopy in the Capitoline Museum (p. 245), and the obelisks now in front of the Pantheon (p. 216), Santa Maria sopra Minerva (p. 218), and the railway-station (p. 166).

On the W. side of the Piazza Sant' Ignazio, at the corner of the Via del Seminario, is the *Palazzo Borromeo*, which since 1873 has been the seat of the *Universitas Gregoriana*, belonging to the Jesuits. This institution, which has superseded the Collegio Romano (see below), confers degrees (laurea) in theology, canon law, and philosophy. — Opposite is the *Ministry of Posts and Telegraphs* (Pl. II, 18).

On the S. the choir of Sant' Ignazio adjoins the —

Collegio Romano (Pl. II, 18), an extensive building erected at the end of the 16th cent., under Gregory XIII and Sixtus V., by *Bart. Ammannati*. The massive principal façade looks S. towards the Piazza del Collegio Romano, where also is the entrance to the *Liceo*

Ennio Quirino Visconti, established in this wing. — A side-entrance, on the E. side of the building, in the *Via del Collegio Romano*, parallel to the *Corso*, admits to the *Biblioteca Vittorio Emanuele* (p. 146) and (on the third story) to the —

***Museo Kircheriano**, founded by the learned Jesuit father, *Athanasius Kircher*, born near Fulda in 1601, professor of mathematics at the *Collegio Romano* (d. 1680). In 1876 the museum was incorporated with the rich and much more extensive ***Ethnographical and Prehistoric Collection** (*Museo Etnografico-Preistorico*). The director is *Commendatore Pigorini*. Adm., see pp. 150, 151; catalogue, see *Helbig and Reisch*, *Collections of Antiquities at Rome*, vol. II, pp. 415-459.

We first enter (to the left) a passage (Pl. 1) with an antique mosaic floor, at the end of which is an image of Buddha. Adjoining it on the right is a long corridor (Pl. 2), in which the **ETHNOGRAPHICAL COLLECTION** begins (objects from the *Polar Regions*, and from *North and South America*).

The next six rooms (Pl. 3-8) represent the *South Sea Islands*, divided into three groups. *Melanesia*, *Polynesia*, and *Micronesia*. — In the next corridor (Pl. 9), Boats and other objects, from various countries. In the adjoining cabinet (Pl. 10), Embroidered mantle from Mexico, time of *Fernando Cortez*. — Then a series of rooms with articles from *Australia* and *Oceania* (Pl. 11-13), *South Africa*, the *Sudan*, and districts of the upper Nile (Pl. 14, 15), *Abyssinia* and *Shoa* (Pl. 16, 17, numerous *Gifts from African chiefs to the king and queen of Italy), and other countries of *East Africa* (Pl. 18-21); *Burma* (Pl. 22); *China* (Pl. 23); *India* (Pl. 24); *Indo-China* (Pl. 25); *Japan* (Pl. 26, 27), *Syria*, *Arabia*, *Siam* (Pl. 28).

The **PREHISTORIC COLLECTION** (mainly of Italian origin) begins here. Rooms 29-32 are devoted to the stone age. — The following rooms (Pl. 33-35) contain objects of the bronze age. Weapons of the bronze and iron ages; statuette of a warrior with double-borned helmet from *Sardinia* (Pl. 36). — Iron age (Pl. 37-39).

The last room in this series (Pl. 40) contains the chief boast of the collection, viz. the **Treasure of Praeneste*, found in a tomb at *Palestrina* (p. 428) in 1876, probably once in the possession of a ruler of *Praeneste* at the beginning of the 7th cent. B.C.

The chief objects are exhibited on the **CENTRAL SHELF**: No 1. *Gold Personal Ornament*, with 151 lions, horses, and other fantastic animals attached to it in rows, adorned with rows of minute gold points; 4, 5, 6. *Cylinders of thin gold*, ornamented with delicate granulated work. No 2. *Golden fibula*; 26. *Fragments of a Silver Bowl with Gilt Reliefs*, in the Egyptian style. Victorious king and Ammon Ra, History of Osiris; above the wing of the hawk in the interior design, in Phœnician letters, is the name of the maker or original possessor 'Esmunjal ben Asto'; 2). *Two-handled Beaker* of dull gold; 25. *Flat Silver Bowl with Gilded Reliefs* (royal hunting-scenes, horses, and birds). 23. *Large Globular Silver-Gilt Goblet*, with six snakes forming the handles, the bowl is decorated with rows of figures of armed men, wild beasts, and birds. 24. *Silver-gilt bowl*, the interior of which is enriched with two rows of horses, oxen, birds,


and trees. — On the central shelf also: 27, 28. Two diggers; blue glass bowl; ivory reliefs to be inlaid with wood; etc.

UPPER SHELF. 72 Very primitive Tripod of bronze and iron, with three human figures on the edge looking into the interior, and three animals; 81. Large bronze stand, in the form of a blunted cone. — LOWER SHELF: 75. Fragmentary Cauldron of hammered bronze, with griffins' heads as handles; fragments of bronze plates hung on the walls of the to mb.

We next enter another corridor (Pl. 41) containing models of megalithic monuments (menhirs and dolmens) from the neighbourhood of Otranto, model of a Sardinian *Nuragh*, i.e. one of the conical towers which served both as sepulchral monuments and as places of refuge, and probably date from the bronze age (extending to 1000 B.C.). — Then come three cabinets (Pl. 42-44) with prehistoric relics from Switzerland, France, Scandinavia, and Hungary, etc., and a corridor (Pl. 45) leading to three further cabinets (Pl. 46-48) with American antiquities (Mexican masks, Peruvian vessels and mummies).

From Corridor 45 we pass through a glass-door to the rooms containing the collections of the old MUSEO KIRCHERIANO. Corridor 49 contains sculpture (mostly unimportant). The two fine female heads (one in black marble) at the farther end, to the right and left of the exit, should be noticed; also a hermes with an ancient Greek head of a boy

between the two doors of Cabinet 53. Opening off the corridor on the left are four cabinets (Pl. 50-53). — Cab. 50: Christian inscriptions and lamps found in the catacombs; small paintings; enamelled picture of Christ; bronze objects; large hanging-lamps.

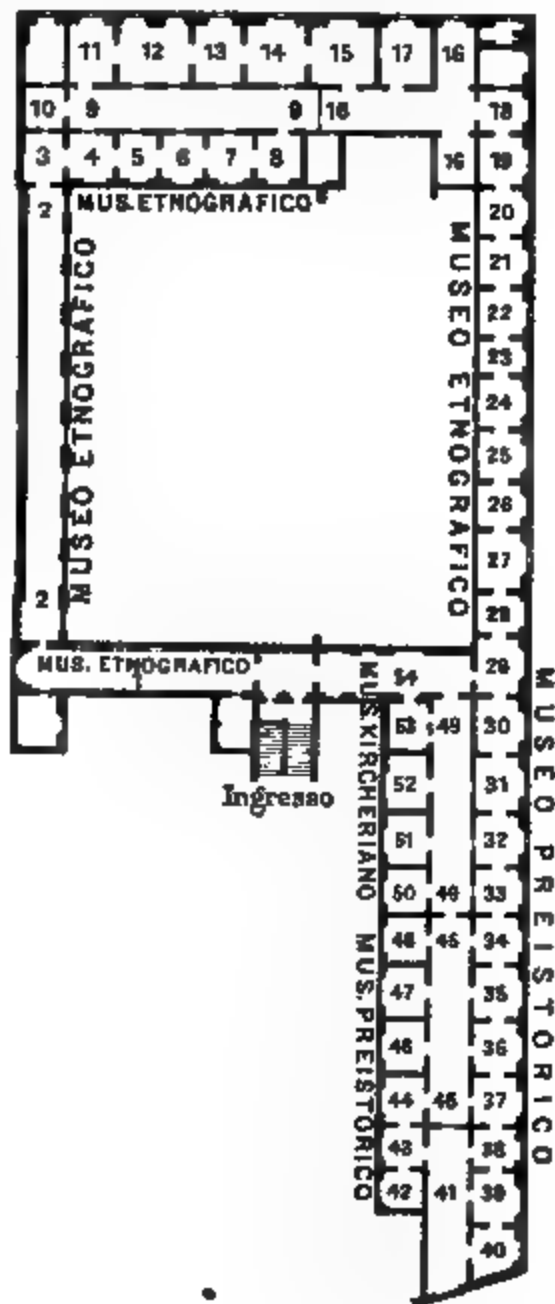

Small mosaics. The glass-case in the centre contains carvings in ivory, amber, and wood (medieval and Renaissance periods). — Cab. 51: Fragments of Christian sarcophagi. In the centre, a large, very fragmentary vessel of grey marble, with the Adoration of the Shepherds and Christ enthroned with the Apostles in relief. In front of the window is a piece of wall-plaster from the *Padagogium* on the Palatine (comp. p. 281), with a *Caricature of the Crucifixion* scratched upon it: a man with the head of an ass, affixed to a cross, with a praying figure at the side, and the words *Ἀλεξάμενος σέβει θεόν* (Alexamenos worshipping his god).

This is usually supposed to represent the sarcastic wit of an imperial page at the expense of some Christian companion, and to have been perpetrated about the 3rd century. There is other evidence to show that the worship of asses was attributed to Christians and Jews. A more recent theory, however, is that the draughtsman may have belonged to the Gnostic sect of the Sethians, who hailed from Egypt and identified Christ with Seth, the son of Adam, and Seth again with the ass-headed Egyptian deity *Seth* or *Sethi*. On this hypothesis the sketch is a kind of confession of faith.

Cab. 52: Glass and Terracotta work. — Room 53: *Collection of Coins*, mainly ancient Roman and Italic bronze coins (*as grave*). At the window, gems and cut stones. Opposite is a large bronze tablet with a dedicatory inscription to Minerva in the Faliscan dialect, above, an iron ring with a bronze label bearing the inscription 'I have run away, catch me, if you restore me to my master Zonino, you will receive a solidus', generally supposed to have been intended for a slave, but more probably a dog-collar. Lead tablets inscribed with curses (invocations to subterranean spirits to destroy or injure an enemy; they used to be buried in the earth or deposited in tombs). Relief of a warrior and horse, in coloured marble. Statuettes of no importance adorn the walls. — Room 54: *Bronzes*. By the wall near the window, an ancient bronze chair (*blestium*) inlaid with silver. Statuette of a boy (for a fountain), originally holding a goblet or a shell. The *Ficoronian Cista* (formerly in the possession of Ficoroni, the antiquarian), found near Palestrina in 1738, is a toilet-casket of cylindrical form, adorned with admirably engraved designs from the story of the Argonauts, which rank among the most beautiful antique works of the kind.

When the Argonauts on their voyage to Colchis reached the land of the Bebrykes, the king Amycus prevented them from using a spring of water until he had been vanquished by Pollux in a boxing contest. The central point of the design (compare the copy hanging to the left of the door) represents the punishment of the vanquished king, who is bound to a tree by the victor. To the right is Athena, above whom is a Nike with a victor's wreath for Pollux. In front are Jason and Hercules. Then appears the ship *Argo*; the Greeks drinking at the spring; and an Argonaut practising boxing, mimicked by a corpulent Silenus. — The feet and the figures on the lid are of inferior workmanship. On the latter are the inscriptions (3rd cent. B.C.) *Ἡρώδης Πλατῆος μετ' ἑσέως (me Herodas) fecit*, and *Ἰνδία Μελκίσις ἑσέως dedit*.

Bronze statuette of Dionysus. Silver goblets found at Vicarello (186), among which are four in the form of milestones and in-

scribed with the names of the chief stations on the route from Gades (Cadiz) to Rome. The wall-case contains lead pipes, weapons, vessels, ladies, scale with weights, sacrificial forks; *Head of Apollo*, after Praxiteles (eyes originally inserted); busts, heads, statuettes, mirrors, cists, small reliefs, torch-holders.


The small OBSERVATORY in the Collegio Romano, which acquired a European reputation under *Padre Sacchi* (d. 1878), is shown in the morning to visitors with an introduction. The present director is *Commendatore Tacchini*.

From the small PIAZZA DEL COLLEGIO ROMANO (Pl. II, 18), the *Via di Pietà di Marmo* (so called from a colossal marble foot at the corner of the *Via Santo Stefano del Caccio*) leads to the W. in a few minutes to Santa Maria sopra Minerva (p. 218). — Opposite the Collegio Romano, next to the choir of Santa Maria in Via Lata (p. 201), rises the extensive —

*PALAZZO DORIA (Pl. II, 18), one of the most magnificent palaces in Rome. The E. façade fronts the Corso, see p. 201. The court in the interior is surrounded by arcades. The N. façade, by *Pietro da Cortona*, is in the Piazza del Collegio Romano; and here (No. 1a) is the entrance to the —

*GALLERIA DORIA-PAMPHILI, on the 1st floor (adm., see pp. 150, 151; fee ½ fr.; catalogue, 1901, 1 fr.). In winter the galleries and other rooms are very cold, noonday light is the best. — The Doria Gallery resembles the other Roman collections in possessing examples of different schools, but the founders have shown a preference for works of the 17th century. Among the most interesting of the older paintings will be noted the *Madonnas* of *Niccolò Rondinelli*, a little-known follower of *Giov. Bellini*. *Raphael*, the prince of cinquecentists, is represented by the portraits of two Venetian scholars. The *Joanna of Aragon* is a copy only. *Titian's Daughter of Herodias*, and a portrait by *Lor. Lotto* are admirable Venetian works. The colouring of the portrait of *Pope Innocent X.*, by *Velasquez*, the chief boast of the collection, is strikingly rich; the skilful manner in which the three shades of red are blended should be particularly noticed. *Garofalo*, though not a master of the highest rank, has produced an admirable work in his *Nativity of Christ*. The landscape-painters of the 17th cent. are also well represented. In the landscapes of *Annibale Carracci* we observe a conflict between historic and scenic imagination, and the obtrusion of the former at the expense of harmony of effect. The pictures by *Salvator Rosa* are not among his best works, but *Claude Lorrain's* landscapes are justly admired. His 'Mill', and the landscape with the temple of *Apollo*, may be regarded as models of ideal landscape; the effect is produced by the beauty of the lines and the skilful gradations of distance. — The examples of the Netherlands Schools, though fairly numerous, do not possess great distinction.

We ascend the staircase and ring at the top. We first enter — Room I. Venetian paintings of small importance: 19. *Jacopo Bassano*, Sacrifice of Noah. — Room II. 39. *G. Poussin*, Landscape; 42. *Bourguignon* and *Maratta*, Capture of the town of Castro in 1649, one of the chief military exploits of Innocent X.; 43, 45. *Van Bloemen (Orizzonte)*, Landscapes; 60. *Salvator Rosa*, Belli-

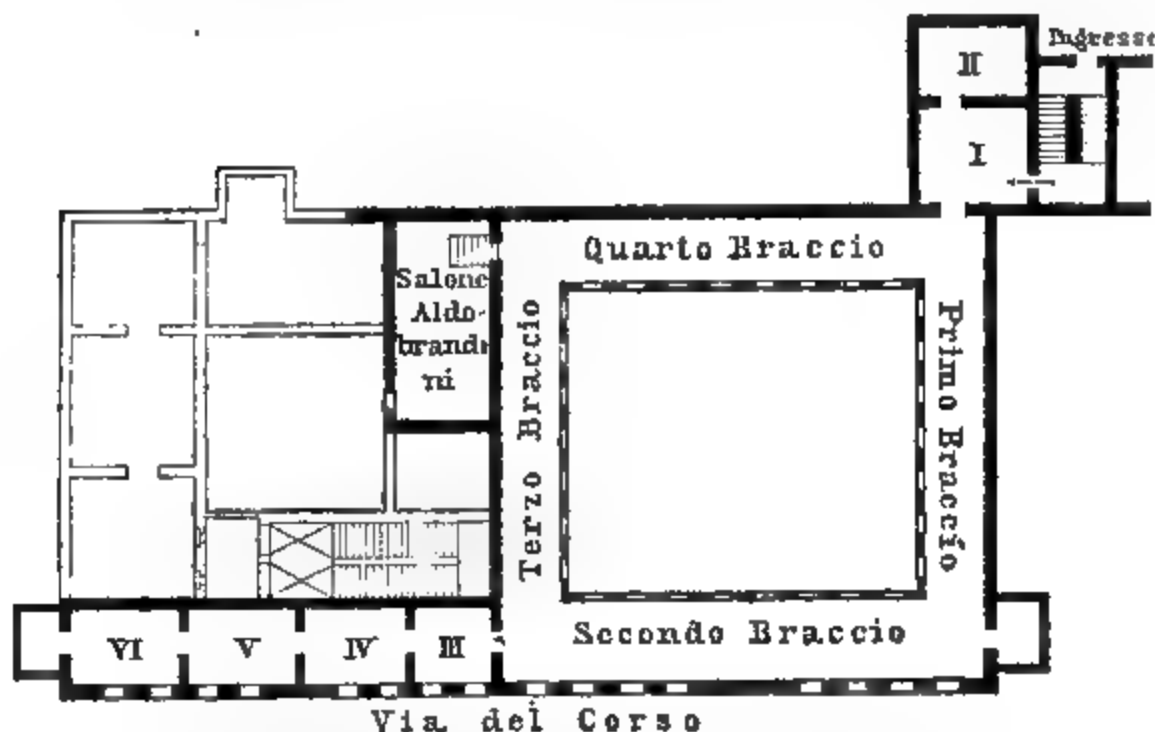

sarius. — We now return through Room I to the principal rooms (Galleria Grande) surrounding the arcaded court (see p. 207).

I. GALLERY (*Primo Braccio*): 70. *Guercino*, John the Baptist; 71, 72. *Claude Lorrain*, Landscapes with mythological figures; 74. *Ann. Carracci*, Nativity; *76. *Claude Lorrain*, Landscape with a temple of Apollo; *Ann. Carracci*, 78. Assumption, 80. Flight into Egypt, 82. Pietà, 84. Adoration of the Magi, 86. Entombment; *Claude Lorrain*, *88. 'The Mill', a masterpiece (see p. 207), 92. Landscape with the Flight into Egypt; 94. *Carlo Maratta*, Madonna; 108. *Jan Both*, Landscape with the Flight into Egypt. — At the end of this gallery, to the left, is a CABINET containing: **118. *Velasquez*, Pope Innocent X.

'The blue-grey eye set in the ugly visage gazes at us; there lies the power — not in the purple vestment nor the glittering gold . . . It is the gaze of a man determined to read the thoughts of all who approach him, to impress their personality for ever on his mind, conscious as he is of the infallibility of his decisions.' *Just.*

The cabinet contains also a bust (17th cent.) of this Pope. — Opposite the exit of the cabinet is the —

II. GALLERY (*Secondo Braccio*), with a few antique sculptures, leading to five smaller rooms. The first of these is Room III. 120. *Masolino*, Massacre of the Innocents; 121. *Boccaccio*, Madonna with saints; 124. *School of Ferrara* (*Mazzolino*), Expulsion of the money-changers; 140. *Parentino*, Temptation of St. Anthony; 137. *Masolino*, Entombment. — Room IV. 143. Copy of *Raphael*, Madonna del Passaggio; 144. *Garofalo*, Holy Family with two Franciscans; 153. Dutch Copy of *Raphael*, Joanna of Aragon; 156. *Fra Paolino da Pistoja*, Holy Family; 158. *School of Michael Angelo*, (Seb. del Piombo?), Holy Family; *159. Nic. Rondinelli, Madonna; 161. *Garofalo*, Visitation (1518); 163. Nic. Rondinelli, Madonna; 164. *Andrea Solario*, Christ bearing the Cross; 165. *Ottolani*, Nativity; 170. *Domenico Dossi* (?), Portrait; 171. Unknown Master, Portrait of Machiavelli. — Room V. 173. *Quentin Massys*, Money-changers quarrelling; 175. *Brueghel*, Holy Family; 180. St. Eustachius, from an engraving by *Dürer*; 189. A. van Dyck, Portrait; 192. *Jan Scorel*, Agatha van Schoenhoven; 196, 208. German School, Portraits (1545); 197, 200, 206, 209. *Brueghel*, The four elements. — Room VI. *Teniers the Younger*, 215. Rural festivity; 218. Tavern-scene; 231. *Rubens*, A Franciscan; 236, 241, 253, 258. *Wemir*, Market-scene. — CABINET. Small Dutch landscapes and three modern busts of members of the Doria family. — We retrace our steps and, turning to the left on quitting R. III, enter the —

III GALLERY (*Tersa Braccio*). *277. *Paul Veronese*, Venus, Mars, and Cupid; 298. *Sassoferrato*, Holy Family; 290. *Lor. Lotto*, St. Jerome; 291. *Jan Lievens* (*Andrea Comodi*?), Abraham's sacrifice; 295. *Guido Reni*, Madonna; *296. *Rembrandt*, The Shepherd (1649, damaged); 299. Nic. Poussin, Copy of the Ald. Brandini nuptials (p. 367); 307. *Luca Giordano*, The Cook; 315. *Bern. Liotino*, Portrait. — A few steps descend to the left to the —

SALON ALDOBRANDINI, also used as the copying-room, to which the finest pictures in the collection are frequently brought. On the walls are landscapes by *Gasp. Poussin* and his followers. — *Antiquities* on the steps to the right, corresponding to those at the entrance, Replica of the so-called Artemis of Oabii in the Louvre; in front of the fireplace, Ulysses escaping from the cave of Polyphemos; in the centre of the wall opposite the entrance, Archaistic statue of the bearded Dionysus; in the centre, Young Centaur (entire front part modern) and a round altar with delicate ornamentation. — We re-ascend the steps and enter the —

IV. GALLERY (*Quarto Braccio*). 373. *Sofonisba d'Anguisciola*, Portrait of a man and woman; 376. *Sassoferrato*, Madonna; 384. *Baraceni*, Repose on the Flight into Egypt; 386. *Titian*, Portrait; 387. Copy of *Correggio*, Triumph of Virtue (ground-colour in tempera, unfinished); *388. *Titian*, Daughter of Herodias (early work); 390. *Jac. Bassano*, Portrait; *403. *Raphael*, Navagero and Beazzano, two Venetian scholars, of the master's Roman period; 406. *Lod.*

Curucci, St. Sebastian; 407. *Venetian School* (Lor. Lotto), Portrait; 410. Old Copy of *Giorgione's* (?) Concert, in the Palazzo Pitti, 411. *Dosso Dossi*, Dido lamenting; 420. *School of Michael Angelo*, Christ on the Mount of Olives.

The Via della Gatta, skirting the W. side of the Palazzo Doria ends to the S. in the Via del Plebiscito (p. 228), opposite the Palazzo Venezia.

Returning to the E. from the Piazza del Collegio Romano, past Santa Maria in Via Lata (p. 201), to the Corso, and thence continuing straight on by the Via Santi Apostoli, we reach the Piazza di Santi Apostoli (Pl. II, 21). The E. side of this oblong space is occupied by the church of the Santi Apostoli and the main façade of the Palazzo Colonna; and the S. end is skirted by the Via Nazionale (p. 174).

The church of the Santi Apostoli was founded by Julius I (357-362) in honour of SS Philip and James, re-erected under Pelagius I. (556-560) and under Clement XI. by France. Pontana in 1702, and restored after a fire in 1871. The vestibule, erected by Giac. di Pisarenzola (?) for Julius II. (while cardinal), the only part of the earlier fabric, contains (left) the monument of the engraver Giov. Volpato by Canova (1807); to the right of the main portal, the remains of the tomb (by Luigi Capponi) of Lor. Colonna, who was executed in 1484; and at the end to the right, an admirable ancient eagle in a garland of oak-leaves, from Trajan's Forum.

Interiors. At the end of the left aisle, to the left, over the entrance to the sacristy, Monument of Clement XIV. by Canova; on the pedestal Charity and Temperance. In the tribune, with altar-piece by Muratori (said to be the largest in Rome), is the monument erected by Sixtus IV. to his nephew, Cardinal Pietro Riario (d. 1474), by *Mino da Pisano* and *Andrea Bregno*. Opposite is the tomb of Girard (d. 1503), husband of the niece of Julius II. On the vaulted ceiling of the tribune, Fall of the Angels, a fresco by *Giov. Odassi*, in the baroque style, but of striking effect. The older church was decorated by *Melozzo da Forlì*, a fine fragment of whose frescoes is now in the Quirinal (p. 178), and others are in the sacristy of St. Peter's (p. 327). — The crypt contains the tomb of Raffaele della Rovere, father of Julius II (1477), a fine early Renaissance work.

The adjacent monastery contains, in a niche in the corrid. next to the church, the tomb of Card. Bessarion (d. 1472) and, nearer the exit, a monument to *Michael Angelo*, who lived and died in the parish of Santi Apostoli.

The Palazzo Colonna (Pl. II, 21), an extensive pile between the Piazza Santi Apostoli and the Via Pilotta, bounded on the S. by the Via Nazionale (p. 174), was built by Martin V. (Colonna) subsequent to about 1417, and much extended and altered in the 17th and 18th centuries. The **GALLERIA COLONNA** on the first floor (adm., see pp. 150, 151, fee of about $\frac{1}{2}$ fr. on leaving, catalogue, 1900, 1 fr.) is entered from No. 17 Via della Pilotta (pp. 162, 177), at the back. The street is spanned by three arches connecting the upper floor of the palace with its garden (p. 212).

In the vestibule is an antique figure of a girl playing with a ball.

I. Room. From right to left: 17. *Tintoretto*, *Narcissus*, in a fine landscape; 22. *Pietro Novelli*, *Marcantonio Colonna*; 23. *Girol. Musiano*, *Vittoria Colonna*, the friend of Michael Angelo; 24. *Lor. Lotto*, *Card. Pompeo Colonna*, much damaged; 25. *Seb. del Piombo*, A member of the Colonna family as a general; 8. *Tintoretto*, *Adoration of the Holy Ghost*, with four half-length portraits beneath; 4. *Ag. Carvaci*, *Pompeo Colonna*; 9. *Dronisno*, *Venus and Cupid*; 8. *Followers of Hieron. Bosch* (not *Ornisch*), *Temptation of St Anthony*; 10. *Van Dyck*, *Lucretia Colonna*; 11. *Bart. di Giovanni*, *Reconciliation between the Romans and Sabines*; *12. *Bonifazio I.* (not *Titian*), *Madonna with saints* (an early work); 13. *Pietro Novelli*, *Isabella Colonna and her infant son Lorenzo Onofrio*; 14. *Bart. di Giovanni*, *Rape of the Sabines*; *15. *Palma Vecchio*, *Madonna with St. Peter and the donor*. — The 16th cent. Renaissance column of red marble (*Columna Bellica*) in the centre of the room, with scenes from a campaign in relief, is the emblem of the Colonna family.

A flight of seven steps, on which a cannon-ball fired into the city during the bombardment of 1849 has fixed itself, descends to the —

II. Gallery (*Gran Sala*), with gorgeous decorations by *Antonio del Grande* and *Girolamo Pontano*, and ceiling-paintings by *Coli* and *Gherardi* (*Battle of Lepanto*, 8th Oct., 1571, which *Marcantonio Colonna* at the head of the papal fleet assisted in gaining). On the walls are mirrors painted with flowers (by *Mario de' Fiori*) and putti (by *C. Maratta*). The antique statues and reliefs here are of no great value and most of them are freely restored. Paintings: right wall, 33. *Scip. Gastano*, *Family group of the Colonnas* (1681); 35. *School of Van Dyck*, *Don Carlo Colonna*, equestrian portrait; 32. *Franc. Albani*, *Pietà*; 49. *Sustermans*, *Fed. Colonna*. Left wall: 30. *Jac. Tintoretto*, *Double portrait*; 31. *N. Poussin*, *Cimone and Efigenia* (*Boccaccio's Decamerone* V, 1); 39. *Niccolò Alunno*, *Madonna rescuing a child from a demon*. Under the fourth window is a beautiful Greek relief of a dead youth.

III. Room. Twelve water-colour *Landscapes by *Gaspard Poussin*, which are among his finest works and the most valuable in this gallery. Some of them are unfavourably hung, but every one of them will repay careful inspection (entrance-wall: 54, 55, 57-59; opposite, 60; on the left wall, 56, 68, on the right wall, 84, 85, 76, 77). The subjects include a mountain-road close to a profound ravine, a bleak plain lashed by a storm, a calm lake enclosed by majestic trees, a riven rocky landscape with waterfall, and various other scenes. Notwithstanding the simplicity and uniformity of the materials used, these works will not fail to interest by the excellence of the composition and drawing. — Left wall: 82. *N. Poussin*, *Metamorphosis of Daphne*. Also, large cabinet with ivory carving by *Frans and Dom. Steinhart* (in the centre, the *Last Judgment*, after Michael Angelo).

IV. Room. Ceiling-painting by *Batoni* and *Luti* (in honour of *Martin V.*). Entrance-wall: Over the door, 92. *Paolo Bordone* (not *Bonifazio*), Madonna and saints; *90. *P. Veronese*, Portrait of a man; 118. *Holbein* (?), *Lov. Colonna*. Right wall: 118. *Paolo Bordone*, Madonna with saints (darkened); 115. *Ann. Carracci*, Lentil-eater; 112. *Spagno*, St. Jerome, noteworthy; 111. *Albani*, Rape of Europa. Exit-wall: 109. *Girolamo da Treviso*, Portrait, described without evidence as *Poggio Bracciolini*; 106. *Bronzino*, Holy Family; 107. *Titian*, Monk (the name *Onuphrius Panvinus* is erroneous); 104. *Giov. Bellini*, St. Bernard. Window-wall: 98. *Guido Reni*, St. Agnes, *Tintoretto*, 94, 95. Two portraits.

V. Room. Throne-room, with handsome old Persian carpet. Above the table on the right is a chart said to have been used by *Marcantonio Colonna* at the battle of *Lépanto* (p. 211); above the table on the left is the diploma of honour sent to him by the Roman senate after the battle. The throne-chair is intended for the Pope's use only and is therefore turned towards the wall.

VI. Room. Entrance-wall: 122. *Permezzanino*, Holy Family; 121. *Innoc. da Imola*, Same subject. 120, 123. *Maube* (? not *Van Eyck*), Two Madonnas surrounded by smaller circular pictures of the joys and sorrows of the Virgin; of miniature-like execution. Right wall: 130. *Stefano da Zevio* (not *Gentile da Fabriano*), Madonna; 132. *Giulio Romano*, Madonna (comp. p. 121); 131. *Catena* (?), Madonna, 133. *Melozzo da Forlì* (more probably Florentine School), St. Rochus; 134. *Jacopo degli Avanzi* of Bologna, Crucifixion; 135. *Giov. Santi* (p. 128), Portrait; 136. *Bugiardini*, Madonna. Exit-wall: 140. *School of S. Botticelli*, 141. *Loughi*, Madonnas.

The *Villa Colonna*, or garden of the palace (comp. p. 210), for which a permesso must be obtained at the palace (*Piazza Apostoli*), is open on Wed. forenoon (entrance at No. 15 *Via del Quirinale*, p. 175; fee to the gardener). It contains several antiquities, fragments of a colossal architrave from the so-called *Frontispiece of Nero*, a building pulled down about 1630, to which the legend now related of the *Torre delle Milizie* (p. 176) formerly attached, and considerable portions of the brick-walls of the *Thermae of Constantine* (?), which formerly extended over the entire *Piazza del Quirinale* (p. 177). The terrace commands a good survey of the city.

e. From the *Piazza di Spagna* to the *Ponte Sant' Angelo*.

The Omnibuses plying between the *Piazza di Spagna* and the Vatican do not traverse the direct route described below, but go through side-streets (comp. Appendix, No. 19).

The chief side-street diverging from the N. portion of the *Corso* is the *Via Condottieri* (Pl. I, 18), which, with its W. continuation the *Via Fontanella di Borghese*, forms the shortest route between the strangers' quarter near the *Piazza di Spagna* and the Vatican quarter (about 18 min. walk to the *Ponte Sant' Angelo*). The street contains nothing of interest beyond its shops. It crosses the *Corso* to the S. of *San Carlo* (p. 198).

On the other side of the *Corso* the street takes the name of *VIA*

FONTANELLA DI BONANNO (Pl. I, 18). Behind us the church of **Santissima Trinità de' Monti** (p. 159) forms a handsome termination to the street. The chief building is the —

Palazzo Borghese (Pl. I, 15, 18), begun by order of Card. Dezza in 1580 by *Mart. Longhi the Elder*, and completed by *Flaminio Ponzio* (d. 1615) by order of Paul V., through whom it came into the possession of the Borghese family. The Court is surrounded by a tasteful colonnade in two stories, with clustered granite columns, and contains three ancient colossal statues. At the end of the colonnade on the right is an important fragment of a marble statue representing an Amazon who has fallen from her horse (copy of a Greek original of the 4th cent. B.C.). Behind the court lies the small garden, containing three baroque fountains by *Carlo Rainaldi*, and some trifling antiquities. The groundfloor, which formerly contained the celebrated picture-gallery, removed to the Villa Borghese in 1801 (p. 192), is now occupied by Sangiorgi, the dealer in antiquities (p. 141). The decoration of the first room, executed by *Carlo Villani* in grisaille and gold, is noteworthy, as is also the seventh room, the walls of which are covered with mirrors, painted in oil with Cupids (by *Ciro Ferri*) and wreaths of flowers (by *Mario de' Fiori*). — The W. side of the Palazzo Borghese faces the little Piazza Borghese. The *Palazzetto Borghese*, on the opposite side of this piazza, is said to be the 'Palazzo Clementi' of 'Mademoiselle Mori' (p. xxviii).

The street skirting the long S.W. side of the Palazzo Borghese leads to the site of the old harbour, *Porto di Ripetta*, whence the *Ponte Cavour* (Pl. I, 15), completed in 1862, crosses the river to the *Prati di Castello* (p. 318). The picturesque ruccca flight of steps built at the harbour by Clement XI. has been sacrificed to the regulation of the Tiber.

To the right in the *Via di Ripetta* is the church of *San Rocco* (Pl. I, 15), built in 1657 by *Giov. Ant. de' Rossi*, a little beyond which is a quaint fountain. — To the left, farther to the N., is a building erected about 1840, with a central part in the shape of a horseshoe (*Il Ferro di Cavallo*), the last wing of which, at No. 215b, contains studios belonging to the *Accademia di Belle Arti*, or *di San Luca* (p. 272). — The N. end of the *Via di Ripetta* debouches in the Piazza del Popolo (p. 166).

Beyond the Piazza Borghese the street assumes the name of *VIA DEI CAMMURRINO* (Pl. I, 15), and intersects the *Via di Ripetta* (see above) and the *Via della Scrofa* (p. 214), which here unite. To the left in the *Via del Clementino* is the new *Palazzo Gattai*, an imitation of the *Pal. Giraud* (p. 317), in front of which is the little Piazza Nicotri. Farther on the street is known as the *Via di Monte Brianzo* (many antiquarian shops). At the end of this, to the left, is the *Albergo dell' Oro*, one of the few remaining medieval private houses of Rome; Montaigne lived here in 1538. From the little piazza farther on, the new *Ponte Umberto Primo* (Pl. I, 15) spans the river to the right, while the *Lungo Tevere Torre di Nona* skirts the Tiber to the Ponte Sant' Angelo (p. 313), reached in about 10 min. from the Palazzo Borghese.

Turning to the S. from the Via del Clementino, we enter the VIA DELLA SCONA (Pl. I, II, 15), which leads direct to San Luigi de' Francesi (p. 220). In the third cross-street to the right (Via Portoghese) is the mediæval Torre della Scimia, usually identified as 'Hilda's Tower', described by Hawthorne in his 'Marble Faun' (p. 246). Taking the next cross-street, we reach the piazza and church of —

Sant' Agostino (Pl. II, 15). The latter was erected by *Giac. da Pietrasanta* in 1479-83 by order of Card. d'Este, the protector of the Augustinians, on the site of an old oratorium. This was the first domed ecclesiastical edifice in Rome. The interior, in the form of a Latin cross, was restored in 1750, and finally in 1880, when it was adorned with frescoes by *Gagliardi*.

INTERIOR. On the entrance wall a Madonna and Child ('Madonna del Parto'), in marble, by *Joe. Sansone* (1521), surrounded by numerous votive offerings. — In the Nave, on the 3rd pillar to the left, *Raphael's* Prophet Isaiah, holding a scroll with the words from Is. XLVI, 2, painted in 1512, but partly retouched by *Don. da Fiesole* and much injured. In the execution of this work the great master has been visibly influenced by *Michael Angelo's* prophets in the Sistine Chapel. In the 2nd Chapel in the RIGHT AISLE, *Puccini's* free copy of the lost Madonna della Rosa of *Raphael*; in the 3th, Christ delivering the keys to Peter, a group by *Giac. Sant. Contini*. — The RIGHT TRANSEPT contains the chapel of St. Augustine with an altarpiece by *Guarino*. St. Augustine between John the Baptist and St. Paul the Hermit.

The HIGH ALTAR was decorated by *Gerard*; the picture of the Madonna is said to have been painted by St. Luke, and brought from the church of St. Sophia at Constantinople. In the chapel on the left of this is the tomb of St. Monica, mother of Augustine, by *Jac. da Pisa*, almost completely destroyed in 1760, altar piece by *Gottardi*.

The small VESTIBULE to the left of the left transept contains a statue of the Madonna and a Pietà by *Giac. Delmonte*. — The 2nd Chapel in the LEFT AISLE contains a fine group in marble (St. Anna, Mary, and Jesus) by *Andrea Sansone* (1512), executed at the expense of Joh. Goritz (Coristius) of Luxembourg and originally placed under *Raphael's* Isaiah, which also was painted for Goritz.

To the right of the church is the entrance to the *Biblioteca Angelica*, founded in 1621 (adm., see p. 146). The former Convent of Sant' Agostino is now the *Ministry of Marine*. In the court are a few Renaissance tombs, including that of Bishop *Jacopo Piccolomini* (d. 1479), of the school of *Mino da Fiesole*.

Proceeding from the Piazza Sant' Agostino straight through the archway, we reach the piazza and old church of Sant' Apollinare (Pl. II, 15), rebuilt in 1552, and finally in 1760 by *Fuga*. — Opposite is the Palazzo Attems, of the 16th cent., completed by the elder *Lunghi*, possessing a handsome double court with arcades and a few antiques. It is now ecclesiastical property.

The VIA DE' CONONARI (Pl. II, 15, 12), running to the W. between the Piazza Sant' Agostino and Piazza Sant' Apollinare and the Piazza Navona (p. 220), ends near the Ponte Sant' Angelo. About half-way is the rear façade of the PALAZZO LANZUOLLOTTI, erected under Sixtus V. by *Francesco da Volterra*, and completed by *C. Maderna*. The portal on the N. main façade is by *Domenichino*. The court contains ancient statues and reliefs. In the private apartments of Prince *Lanzuolli*, shown by special permission only, stands the celebrated

Discus Thrower, found on the Esquiline in 1761, a marble copy of the bronze statue by Myron (p. 350).

Farther on, to the right, is the church of SAN SALVATORE IN LAURO (Pl. II, 12), mentioned in the 13th cent., but rebuilt in 1450 and 1591.

The elegant cloisters, with their double arcades, date from the early Renaissance period. The old refectory (see) contains the monument of Pope Eugenius IV. (d. 1447), brought hither from old St. Peter's. This work, by *Isata di Pisa*, is the earliest example of a mural monument constructed throughout of purely Renaissance elements: on the sarcophagus is a recumbent figure of the deceased, with a Madonna and two angels above, and statues of saints on the pilasters of the surrounding niches. The Renaissance tomb of Maddalena Orsini (15th cent.) is also shown.

At No. 124 Via de' Coronari (to the left) is the so-called *Casa di Raffaele*, the rent of which was devised by Raphael in his will for the maintenance of his tomb in the Pantheon (p. 217). The house in which Raphael lived and died was situated in the Borgo (p. 317).

Side-streets at the end of the Via de' Coronari lead to the right to the *Ponte Sant' Angelo* (p. 318) and to the left to the W. end of the *Corso Vittorio Emanuele* (p. 227).

For the adjacent churches of *Santa Maria dell' Anima* and *Santa Maria della Pace*, see pp. 221, 222; *Piazza Navona*, see p. 220.

d. From the Piazza Colonna past the Pantheon to the Piazza Navona (Circo Agonale) and thence to the Ponte Sant' Angelo.

Piazza Colonna, see p. 200. — The side-streets to the right and left of the colonnade on the W. side of the Piazza Colonna lead to the PIAZZA DI MONTE CITORIO (Pl. II, 18). The rising in this piazza is entirely due to buried ruins, at one time erroneously believed to be those of the amphitheatre of Statilius Taurus, but really those of the *Ustrinum*, or construction used for the solemn cremation of the bodies of the emperors at their apotheosis.

On the N. side of the Monte Citorio stands the spacious *Camera de' Deputati* (Pl. II, 18), begun for the Ludovisi family by *Bernini* (1650), but finished under Innocent XII. by *C. Fontana* for the papal tribunal. The building was fitted up and the court in the interior roofed over in 1871 for the use of the Italian parliament. The sittings usually take place in the afternoon. Entrance to the public seats at the back, No. 10.

The *Obelisk* which has occupied the centre of the piazza since 1789 was, like that in the Piazza del Popolo (p. 156), brought to Rome by Augustus. In antiquity it stood near the site of the present church of San Lorenzo in Lucina (p. 198), and was used as the indicator of a sun-dial. It was originally erected in Egypt in the 7th cent. B.C. by Psammetichus I. Height, including the globe and pedestal, 84 ft.

The usually animated PIAZZA OF THE PANTHEON (*Piazza della Rotonda*; Pl. II, 18) may be reached hence by turning to the S. at the

foot of the Monte Citorio and then to the right (E.), crossing the small PIAZZA CAPRANICA (the street to the right leads hence to Sant' Agostino and the Via de' Coronari, p. 214). Above the large *Fountain* in the Piazza della Rotonda, erected under Gregory XIII. in 1575, was placed the upper end of a broken obelisk from the temple of Isis (p. 208) by order of Clement XI.

On the S. side of the piazza rises the church of *Santa Maria Rotonda*, or the *Pantheon*, the only ancient edifice at Rome which is still in perfect preservation, i.e. the only one the walls and the vaulting of which still stand. The foundation of the building dates from the time of Augustus, whose son-in-law Agrippa erected a temple in 27 B.C. at the N. end of his *Thermae* (p. 218) in the Campus Martius. This building, which may once have had an umbelliform roof supporting the pine-cone mentioned on p. 357, received the name of 'Pantheum' (i.e. 'very sacred', not 'temple of all the gods') and seems to have been dedicated to the gods of the seven planets (Apollo, Diana, Mercury, Venus, Mars, Jupiter, and Saturn). It was struck by lightning in the reign of Trajan and was restored by Hadrian. Only the portico was left substantially unaltered by this restoration, to Hadrian is due the whole of the present circular building, including the beautiful dome. A subsequent restoration took place under Septimius Severus and Caracalla. After the expiry of pagan worship the Pantheon stood unoccupied until Phocas, tyrant of the East, presented it to the pope. Boniface IV. consecrated it as a Christian church on May 13th, 609, dedicating it to all saints under the name of *Sancta Maria ad Martyres*, on which occasion twenty-eight waggon-loads of the bones of martyrs were brought hither from the catacombs. The emperor Constant II. removed the bronze-gilt tiles of the roof to Constantinople in 662. Gregory III. (731-41) covered the dome with lead. Throughout the middle ages the building was regarded as an emblem and chief ornament of the city, and in the 13th cent. every senator was obliged to take an oath to defend and preserve for the pope 'especially St. Peter's, the Leonine city, Trastevere, the Island, the Castello Sant' Angelo, and Santa Maria Rotonda.' Since then the Pantheon has been frequently restored.

The *Portico* (36 yds wide, 14 yds. deep), to which five steps ascended in antiquity (now covered by the raising of the ground all around), is borne by sixteen Corinthian columns of granite, $14\frac{1}{2}$ ft. in circumference, and 41 ft. in height. On the architrave is the inscription of the original erection (*M. Agrippa consul tertium fecit*), renewed in tasteless modern lettering in 1894; the long inscription below refers to the restoration under Severus and Caracalla. The tympanum above formerly contained reliefs. Eight of the columns are in front, the others form three colonnades, originally vaulted over, the outer ones terminating in niches, in which stood the colossal statues of Augustus and his son-in-law M. Agrippa.

In 1682 Pope Urban VIII. (Barberini) removed the brazen tubes on which the roof rested, and caused them to be converted into columns for the canopy of the high-altar of St. Peter's and 110 cannons for the castle of Sant' Angelo. This vandalism gave rise to the epigram of Pasquino, '*Quod non fecerunt barbari, fecerunt Barberini*'. The two campanilli, 'Bernini's ass's ears', as they were derisively termed, erected under the same pope, were removed in 1883. — The entrance is still closed with its ancient massive bronze doors.

The *intrazon* (closed at midday), lighted by a single aperture 30 ft. in diameter in the centre of the dome, produces so beautiful an effect that it was currently believed even in antiquity that the temple derived the name of *Pantheon* from its resemblance to the vault of heaven (comp. p. 171). The height and diameter of the dome are equal, being each 142 ft. The pavement of granite, porphyry, and costly marbles was restored in the pontificate of Pius IX. The surface of the walls is broken by seven large niches, in which stood the statues of the gods (comp. p. 216, Mars and Venus are authenticated). The architrave is borne by fluted columns of giallo antico or pavonazzetto in couples, the shafts being 29 ft. in height. Above the latter, and corresponding with the niches, formerly rose a series of round arches, borne by Caryatides, but they appear to have been removed during the restoration of the edifice in antiquity. The white marble, porphyry, and serpentine decorations of the attic or attic story remained in part till 1747, when they were barbarously replaced by whitewash. The dome, consisting of concrete, is adorned on the inside with five rows of coffers or cassettes, which were perhaps originally painted to imitate the firmament, with gilt stars on a blue ground. The elegant bronze cornice round the inner edge of the opening is the only part of the original decoration now left.

In the second recess to the right of the high-altar is the tomb of *Pieter Hummel II.* (d. Jan 9th, 1878), between it and the altar is that of *Humbert I.* (assassinated July 28th, 1900), both are always covered with wreaths. An annual funeral mass is celebrated in the Pantheon a few days after Jan. 9th, to which the public are admitted by tickets, to be obtained from the consuls or other influential persons. — In the chapel to the left of the high-altar stands the simple monument of *Card. Consalvi* (buried in San Marcello, p. 201), by *Thorvaldsen*.

By the 3rd altar to the left is *Raphael's Tomb* (d. 28th March, 1520; d. 6th April, 1520), with a bronze bust erected in 1828, and the graceful epigram composed by *Card. Bembo* —

*Ille hic est Raphael, timuit quo sospita vincta
Rerum magna parens, et moriente mori.*

Pope, in his 'Epitaph on Sir Godfrey Kneller', translates this as follows: —

*'Living great Nature feared he might outvie
Her works; and, dying, fears herself may die.'*

The Italian translation runs thus: '*Quem à quel Raffaello, cui esse stetit
Mors tanta Natura, e morte estans*'.

The statue of the Madonna on the altar, by *M. Lorenzetti*, was executed in accordance with Raphael's last will. Above the empty niche to the right of the altar is the epitaph of *Marie Bibbiana*, Raphael's betrothed, who died before him.

The Pantheon is also the last resting-place of *Bald. Peruzzi*, *Paris del Vaga*, *Giov. da Udine*, *Ann. Caracci*, *Taddo Zuccaro*, and other

celebrated artists. — The altar and reredos are adorned with paintings and sculptures of the 16th century.

At the back of the Pantheon, but with no connection with it, lay the *Thermae of Agrippa*, considerable remains of which were exhumed in 1881-82; and the rear wall of a hall, with a large recess, was brought to light in the *Via della Palombella* (p. 210). A fluted column and a finely executed frieze (shells and dolphins), both of marble, have been found and placed in position. The ruins known as the *Arco della Ciambella*, in the street of the same name, belonged to another domed hall of the *thermae*.

From the Piazza of the Pantheon we may follow the *Via del Seminario* towards the E., to *Sant' Ignazio* (p. 208).

Behind the Pantheon to the S. E. lies the *PIAZZA DELLA MINERVA* (Pl. II, 18), where the church of *Santa Maria sopra Minerva* stands on the left, and the *Hôtel Minerva* (p. 135) opposite to us. In the centre of the piazza is a marble elephant, on the back of which a small ancient *Obelisk* was placed by Bernini in 1667 (p. 209). On the outside of the church, to the right, are flood-marks which show that in the inundations of 1530, 1567, and 1598 the water rose even higher than in the greatest modern floods (1870 and 1900).

Santa Maria sopra Minerva, erected on the ruins of a temple of *Minerva* founded by Domitian, the only ancient Gothic church at Rome, was probably begun about 1280 by *Fra Sisto* and *Fra Ristoro*, the builders of *Santa Maria Novella* at Florence (p. 1211). It was restored and re-decorated with painting in 1848-55, and contains several valuable works of art.

Interior. By the entrance-wall, on the right, the tomb of the Florentine exile *Diotisalvi* (d. 1487). — **Left Aisle.** On the left, the tomb of the Florentine *Fra Franc. Tornabuoni* (d. 1480), by *Mino da Fiesole*; above it the monument of *Card. Giac. Tebaldi* (d. 1488), from the studio of *Andrea Bregno* and *Giov. Delavante*. To the right of the altar is the 3rd Chapel, *St. Sebastian*, an admirable work by *Michelangelo*. In the 5th Chapel is (?) the monument of *Princess Lante*, by *Fenestrà*. — **Right Aisle.** In the *Camera Mortuaria* (locked), between the 3rd and 4th chapels, is the tomb of *Joh. Alberini* (d. ca. 1490), with an ancient Greek sarcophagus (*Hercules throttling the lion*). In the 4th Chapel, the *Annunciation*, a picture on a golden ground, by *Antonazzo Rommo*; in the foreground *Card. Juan de Torquemada* (*Johannes a Torquemada*) recommending three poor girls to the Virgin, painted to commemorate the foundation of the charitable fraternity of the *Santissima Annunziata* in 1460; on the left the tomb of *Urban VII* (d. 1583), by *Ambr. Buonvicino*. The 5th Chapel (*Aldobrandini*) contains paintings by *Cherub. Alberti*, over the altar the *Last Supper* by *Savoreto*, monuments of the parents of *Clement VIII* by *Giac. della Porta*. In the 6th chapel is the tomb of the Venetian patrician *Benedictus*, Archbishop of *Nicosia* (d. 1485); opposite, the tomb of the Spanish bishop, *Joh. Didacus de Coca* (15th cent.), above the sarcophagus a fresco by *Melozzo da Forlì* (?). — **Right TRANSYV.** A small chapel on the right is first observed, containing a wooden crucifix attributed to *Statto*, then the *Caraffa Chapel*, with a handsome balustrade, painted by *Aliprandino Lippi* with frescoes in 1487 (restored): on the right *Thomas Aquinas*, surrounded by allegorical figures, defending the Catholic religion against heretics; in the lunette, *St. Thomas* and the *Miracle of the Cross*; on the wall at the back, the *Assumption of the Virgin*; altar-wall, the *Annunciation*, with a portrait of the donor *Card. Caraffa*; sibyls on the vault, by *Raffaellino del Garbo*; on the left the monument of *Paul IV* (d. 1560),

designed by *Piero Ligorio*, executed by *Giac. and Tom. Cassino*. — By the wall to the left of the *Caraffa* chapel, "Tomb of Bishop *Guilielm. Durandus* (d. 1200), with a *Madonna* in mosaic by *Johannes Cosmas*, one of the best works of that school. The next chapel contains an altar-piece by *C. Maratta*. In the following *Cappella del Rosario*, to the right of the choir, is the tomb of *Card. Capranica* (about 1470). — The Choir contains the large monuments of the two *Medici*, (l.) *Leo X* (d. 1521), and (r.) *Clement VII* (d. 1534), designed by *Ant. da Sangallo*; the figures of *Virtues* are by *Baccio Bandinelli*, the statue of *Leo* by *Raffaello da Montatupo*, and that of *Clement* by *Nanni di Sances Bigio*. On the pavement the tombstone of the celebrated scholar *Pietro Rambo* (d. 1547). — The high-altar contains the relief of *St. Catharine of Siena* (p. 85).

In front of the high-altar, to the left, is "*Michael Angelo's Christ with the Cross*, which was ordered by *Metello Vari* and *P. Castellari* in 1514, and erected in 1521. *Pietro Urbano*, an assistant of the great master, was entrusted with the final touching up of the work after its erection, but as he acquitted himself badly, the finishing strokes were given to it by *Roderigo Friesi*. The nudity of the figure is justified by the master's intention to portray the Risen Christ, but it is now marred by a bronze drapery; the right foot also is protected against the kisses of the devout by a bronze shoe (comp. p. lxvii).

From the chapel on the left of the choir is a passage to the *Via Sant' Ignazio*; on the wall, to the left, the tombstone of *Fra Giovanni Angelico da Fiesole*, who died in the neighbouring monastery in 1485, with his portrait and the inscription: *Hic jacet Venerabilis pater Frater Joannes de Florentia Ordinis predicatorum 28 LV*. — In the *LART TREASURY* is the Chapel of *San Domenico*, with 8 black columns, and the monument of *Benedict XIII.* (d. 1730) by *P. Bracci*. Adjacent, to the right, is the entrance to the cemetery, behind which is shown the Chamber in which *St. Catharine of Siena* died (see above), removed hither in 1737. The frescoes are very badly lighted.

The adjoining *MONASTERY*, formerly the residence of the chief of the Dominican order and the seat of the Inquisition, was the scene of *Galileo's trial* in 1633 (comp. p. 158). It now contains the offices of the *Minister of Education* (*Ministero dell' Istruzione Pubblica*) and the *Biblioteca Casanatense* (p. 148, entrance *Via di Sant' Ignazio 52*). The convent-court (no admission) contains the tombs of *Ferriaci* (d. 1478), with a relief of the *Madonna* from the studio of *Mino da Fiesole*, and of *Astorgio Agnonesi* (d. 1451). In the passage which used to lead to the library is the tomb of *Andrea Bregno*, with a bust of the master (1506).

A little to the E. are the church of *Sant' Ignazio* (p. 208) and the *Collegio Romano*; to the S. are the *Gest* (p. 223) and the beginning of the *Corso Vittorio Emanuele* (p. 223).

We return towards the Pantheon and, following the *Via della Palombella* (p. 218), which skirts it on the S., reach the *PIAZZA SANT' EUSTACHIO* (Pl. II, 15). At the W. end of this piazza lies the —

Università della Sapienza (Pl. II, 15; entrance, *Via della Sapienza 71*), founded in 1303 by *Boniface VIII.*, and after a rapid decline re-established by *Eugene IV.* It attained its greatest prosperity under and owing to *Leo X.* It possesses four faculties (law, medicine, physical science, and philology) and is connected with institutes for the study of economics, pharmacy, and archaeology. It contains several natural history collections and the *Biblioteca Alce-*

sandrina (p. 146). The present building was designed by *Giac. della Porta*. The church (*Sant' Ivo*), with its grotesque spiral tower, was designed by *Borromini* in the form of a bee, in honour of Urban VIII. (*Barberini*), in whose armorial bearings that insect figures. The colonnaded court, in two stories, is among the most imposing in Rome. — Side-streets lead hence to the S. to the *Corso Vittorio Emanuele* (p. 223), while the *Via degli Staderari* leads to the N.W. to the main façade of the *Palazzo Madama*.

The *Palazzo Madama* (Pl. II, 15), originally built at the close of the 15th cent., derives its name from Margaret of Parma, natural daughter of Charles V. and afterwards Regent of the Netherlands, who occupied it during the pontificate of Paul III. Previously and subsequently it belonged to the Medici, afterwards grand-dukes of Tuscany, by whose orders *Giov. Stef. Marucelli* of Florence altered it to its present form in 1642. Benedict XIV. purchased the palace in 1740; and since 1871 it has been the meeting-place of the Italian Senate (*Palazzo del Senato*). It has two façades, the E. one in the *Piazza San Luigi*, the W. and more important in the *Piazza Madama*. The vestibule, court, and staircase contain antique statues, sarcophagi, reliefs, and busts. The royal reception-room was adorned by *Maccari* in 1888 with noteworthy frescoes representing *Appianus Claudius Cæus*, *Regulus*, and *Cicero* and *Catiline*.

Opposite the N. side of the *Pal. Madama* rises —

San Luigi de' Francesi (Pl. II, 15), the national church of the French, consecrated in 1588. Façade by *Giac. della Porta*. The chapels are very badly lighted. Best light about midday.

RIGHT AISLE. On the pillar opposite the 1st chapel is a monument to French soldiers who fell at the siege of Rome in 1849. 2nd Chapel: *Frescoes from the life of St. Cecilia, one of the most admirable works of *Domenichino* (p. lxxiv); on the right the saint distributes clothing to the poor; above, she and her betrothed are crowned by an angel; on the left the saint suffers martyrdom with the blessing of the Pope; above, she is urged to participate in a heathen sacrifice, on the ceiling, admission of the saint into heaven; altar-piece, a copy of *Raphael's St. Cecilia* (in Bologna) by *Guido Reni*. — Over the high-altar Assumption, a fine work by *Franc. Sassano*. — **LEFT AISLE.** By the first pillar on the right the monument of *Claude Lorrain*, erected in 1838.

On the S.E. side of the *Piazza San Luigi* rises the *Palazzo Giustiniani*, occupied by the Prussian Historical Institute. To the *Via della Scrofa* and *Sant' Agostino*, lying to the N., see p. 214. — To the W., a street between the church and the *Pal. Madama* leads via the above-mentioned little *Piazza Madama* to the —

**Piazza Navona* (Pl. II, 15), now officially named *Circo Agonale*, which occupies, as its form still indicates, the *Circus* or *Stadium of Domitian*. The name 'Navona', which was used in the middle ages and down to 1875, is said to be derived from the *agones*, or contests which took place in the circus.

It is embellished with three *Fountains*. That at the N. end, *Leon. della Bitta* and *Greg. Zappalà* (1878), represents *Neptune*

in conflict with a sea-monster; round the central group are Nereids and sea-horses. — Not far from it, in the centre of a large basin of Pentelic marble, rises a fountain erected by Bernini under Innocent X.; at the corners of the rock, the different parts of which represent the four quarters of the globe, are placed the gods of the rivers Danube, Ganges, Nile, and Rio de la Plata, executed by pupils of Bernini. The whole is surmounted by an obelisk, which was originally erected in honour of Domitian in the Circus of Maxentius (p. 396). — The third fountain, at the S. end of the piazza, is adorned with masks and Tritons, including one known as 'Il Moro', by Bernini.

On the W. side of the Piazza Navona stands the church of **Sant' Agnese**; the fine interior, in the form of a Greek cross, is by C. Rainaldi, while the campanili and façade are by Borromini. The Romans used to maintain that the Nile on the great fountain veiled his head in order to avoid seeing this façade.

Over the principal door is the monument of Innocent X by *Martini*; to the left, in the chapel of the transept, is a statue of St. Sebastian, adapted by *Martini* from an antique statue. Beneath the dome are 8 columns of 'cortinello'. The old church was in the side vaults of the Circus where St. Agnes suffered martyrdom. Two subterranean chapels with ancient vaulting still remain, one of them containing a good relief of the Martyrdom of St. Agnes by *Algarotti* (descent by flight of steps).

To the left of the church is the *Palazzo Pamphili*, also erected by Rainaldi, now the property of *Prince Doria*. — Opposite to it is the church of *San Giacomo degli Spagnuoli*, erected in 1450, and recently restored. In the tympanum above the portal are two angels by *Mino da Fiesole* (on the right) and *Paolo Romano* (on the left). The interior contains a chapel (on the right) by *Ant. da Sangallo* and (on the left) an early-Renaissance organ-loft. — At the S. end of the piazza is the *Pal. Braschi* (p. 226).

The Via Sant' Agnese, to the right of the church, leads to the Via dell' Anima on the right, where on the left side is situated —

***Santa Maria dell' Anima** (Pl II, 15; open till 8.30 a.m., on holidays till noon, when closed, visitors go round the church and ring at the door of the Hospice, opposite Santa Maria della Pace), erected in 1500-1514. The handsome façade has been erroneously attributed to Giuliano da Sangallo. The name is explained by the small marble group in the tympanum of the portal: a Madonna invoked by two souls in purgatory. This is the church of Roman Catholics of German nationality, amongst whom the Netherlands were formerly included.

The interior, designed by a northern architect, has lately been thoroughly restored. The modern frescoes of busts of saints on the ceiling are by L. Sella (1875-82), by whom also the stained-glass window over the chief portal was designed. On the entrance-wall, tomb of Cardinal Wilh. Rucherort (d. 1534). — Right Aisle 1st (high) St. Benno receiving from a Saxon monk the keys of the cathedral at Meissen (Saxony), which had been recovered from the stomach of a fish, altar-piece by *Carlo Saraceni* (pupil of Caravaggio). 2nd Chapel Holy Family, altar-piece by *Guiseppi*; left, monument and bust of Card. Stosius. On the 3rd pillar, Tomb of Hadrian Vreyberg of Alkmaar, with pleasing figures of children by the Dutch sculptor *Frans Duquesnoy* (d. 1644 at Rome). 4th Chapel altered copy of *Michael Angelo's*

Fifth in St. Peter's, by *Font di Basso Stile*. — *LAST ALTAR*. 1st Chapel: Martyrdom of St. Lambert, by C. *Barocci*. 3rd Chapel. Frescoes from the life of St. Barbara, by *Mich. Carolo*. 4th (Brandenburg) Chapel: altar-piece (Entombment) and frescoes by *Frans. Salviati*.

CHOR. Over the high-altar, Holy Family with saints, by *Stefano Annese*, damaged by inundations; on the right, the fine monument of Hadrian VI. of Utrecht (preceptor of Charles V., d. 1523), with figures of Justice, prudence, strength, and temperance, designed by *Soldanesco Peruzzi*, executed by *Matteo Annese* and *Niccolò Tribolo*; opposite to it, that of a Duke of Cleve-Jülich-Berg (d. 1575) by *Egidius of Riviere* and *Nicolas of Arras*. A relief in the ante-chamber of the sacristy (at the end of the N. aisle) represents the investiture of this prince by Gregory XIII. in the church, at the entrance to the sacristy, is the tomb of the learned Lucas Holste of Hamburg, librarian of the Vatican (d. 1681). — Excellent new organ from Germany. This church is noted for its music.

Opposite the *German Hospice* connected with the church rises —

**Santa Maria della Pace* (Pl. II, 15), erected by Sixtus IV. (1484) and Innocent VIII., restored by Alexander VII., and provided by *Pietro da Cortona* with the fine façade and semicircular portico. The church consists of a domed octagon, with a short nave. When closed, apply to the sacristan at No. 5, *Vicolo dell' Arco della Pace* (comp. below).

Over the 1st Chapel on the right are ***Raphael's Sibyls* recording the divine revelations which they receive from angels: to the left the Sibyl of Cumæ, against the arch above, the Persian; then, on the other side of the arch, the Phrygian, and the aged Sibyl of Tibur. They were painted in 1514 by order of Agostino Chigi (p. 369), who erected the chapel, and were skilfully freed from 'restorations' by *Palmarotti* in 1816 (usually covered, sacristan 26-30 c.; best light, 10-11 a.m.; see also p. lxxii).

'With perfect mastery of the art of utilizing the space at his command, a talent admirably illustrated in the Stence, Raphael has here adapted his composition to the curve of the arch so simply and naturally that the consummate skill of the grouping is apt to be overlooked. Equally characteristic of Raphael are the rhythm of the composition, the display of spirited contrasts, and the delicate gradations and judicious demonstration of passionate emotions; while the gracefulness of the female forms and the sprightly beauty of the angel-boys are specially Raphaelian. Michael Angelo's Sibyls are justly extolled as evocations of a sublime imagination, striking the spectator with their supernatural majesty; but these female figures of Raphael are pre-eminently human and lovable'.

In the lunette above the Sibyls are Prophets by *Timoteo Viti* (p. 128): right, Jonah and Hosea, left, Daniel and David.

At the sides of the 1st Chapel on the left are two fine monuments of the Ponzetti family, of 1505 and 1509. Admirable *Altar-piece in fresco by *Beid. Peruzzi*, who here rivals Raphael and Michael Angelo. Madonna between St. Brigitta and St. Catharine, in front the donor Card. Ponzetti kneeling (1516). The vaulting above contains scenes from the Old and New Testament, in three rows, also by *Peruzzi*. — The 2nd Chapel on the right (Cap. Caeli), with its heavy decorations (about 1560), offers an instructive contrast. — To the left, under the dome, is the entrance to the sacristy and court (see above). Over the first altar on the left, Adoration of the

Shepherds, by *Sermoneta*, over the niche, the Death of Mary, by *Morandi*. The second altar, with handsome marble-work, partly gilded, attributed to *Pasquale da Caravaggio*, is of 1490. The high-altar is adorned with an ancient and highly revered Madonna; on the vaulting are pleasing 'putti' by *Franc. Albani*. Over the adjacent altar to the right, Baptism of Christ, by *Sermoneta*. Over the niche, Mary's first visit to the Temple, by *Bald. Peruzzi* (retouched). — Newly-married couples usually attend their first mass in this church.

The *CLOISTERS, constructed by *Beamanzi* (p. lxvi) by order of Card. Caraffa in 1504, are interesting. On the ground-floor are arcades, above which, between the pillars and thus over the arches, is a series of columns. By the right wall, the tomb of Bishop *Bocclacio* (d. 1497) of Modena. Entrance through the church, or by the *Vicolo dell' Arco della Pace* 5.

The *Via de' Coronari* (p. 214), which passes a little to the N. of these two churches, is the shortest route (6-8 min.) from the *Piazza Navona* to the *Ponte Sant' Angelo* (p. 313).

From the portal of *Santa Maria della Pace* the *Via della Pace* and the *Via del Portone* lead straight to the *Via del Governo Vecchio* (p. 226).

c. From the Piazza Venezia to the Ponte Sant' Angelo. Corso Vittorio Emanuele.

The wide CORSO VITTORIO EMANUELE (Pl. II, 17, 14, 12), constructed since 1876 through the most closely built quarters of medieval Rome, is a continuation of the *Via Nazionale*, described at pp. 174-177, and facilitates communication between the centre of the city and the Vatican quarter. The street is always crowded and busy, but, especially towards the end, still presents an unfinished appearance. — *Tramway*, see Appx. Nos. 6 and 8.

The first, or E., portion of the street is named *VIA DEL PLEBISCITO* (Pl. II, 17). Beginning at the *Piazza Venezia* (p. 201), we see first on the left the main façade of the *Palazzo Venezia* (p. 202), and on the right the S. façade (built by P. Amati) of the *Palazzo Doria* (p. 207), the *Palazzo Grassioli*, and the extensive *Pal. Altieri*, erected in 1870. The court of this last-named palace, and the staircase adorned with antiques, deserve note. — Immediately beyond it the *Via del Gesù* diverges on the right to the church of *Santa Maria sopra Minerva* (p. 218).

On the left is the N. side of the *Gesù (Pl. II, 17), the principal church of the Jesuits, one of the richest and most gorgeous in Rome. It was built by *Vignola* and *Giac. della Porta* by order of Card. Alessandro Farnese, in 1568-75. Comp. p. lxxiii. The main front is in the *Piazza del Gesù*.

In the Nave is a ceiling-painting (Triumph of the Name of Jesus) by *Beccio*, by whom the dome and tribune were also painted, one of the best and most lifelike of the baroque works of the kind. The walls were covered with valuable marble at the cost of the Principe Aless. Torlonia in 1860. The high-altar has four columns of *giallo antico*; on the left the monument of Card. Bellarmine (p. 42) with figures of Religion and Faith, in relief; on the

right the monument of Padre Fignatelli, with Love and Hope. — In the Last Transversal Altar of St. Ignatius with a picture by *Padre Pazzi*, below which is a silver-gilt group in high relief, representing St. Ignatius surrounded by angels. The original silver statue of the saint, by *Leyras*, is said to have been removed on the suppression of the order in the eighteenth century. The columns are of lapis lazuli and gilded bronze, on the architrave above are two statues: God the Father, by *B. Ludovisi*, and Christ, by *L. Ottavi*, behind which, encircled by a halo of rays, is the emblematic Dove. Between them the globe of the earth, consisting of a single block of lapis lazuli (said to be the largest in existence). Beneath the altar, in a sarcophagus of gilded bronze, repose the remains of the saint. On the right and left are groups in marble; on the right Religion, at the sight of which heretics shrink, by *Leyras*; on the left Faith with the Cup and Host, which a heathen king is in the act of adoring, by *Tadema*. Opposite, in the right transept, the altar of St. Francis Xavier.

The church presents a most imposing sight on 31st Dec., on the festival of St. Ignatius (31st July), and during the Quarant'ore (p. 181; the two last days of the Carnival), on which occasions it is brilliantly illuminated in the evening. During Advent and Lent (Frid. excepted), and at various other seasons also, sermons are preached here about 11 a.m., often by preachers of great ability.

Adjoining the church on the S. is the former *Casa Profana* of the Jesuits, now used for military purposes, adjacent to which, No. 1a in the Via di Araceli (p. 203) leading to the Capitol, is the entrance to the rooms of St. Ignatius (Mon., Wed., Frid., 9-11). Opposite is the *Palazzo Bolognetti*, which bounds the Piazza del Gesù on the S.

The dome in front of us in the Corso Vittorio Emanuele belongs to the church of Sant' Andrea della Valle (see below). A few hundred paces to the W. of the Piazza del Gesù the Corso is crossed by the Via di Tor Argentina (p. 230).

Farther on, to the left, is the rear of the Palazzo Vidoni (Pl. II, 14), formerly belonging to the *Caffarelli*, and now the property of Prince Giustiniani-Bandini. The chief façades are in the small Piazza della Valle and the Via del Sudario, which leads to the S. The building (partly restored) was designed by *Raphael* and erected by *Lorenzetto*. On the staircase is the so-called *Abbate Luigi*, a Roman figure in a toga, formerly placed at the N. angle of the palace, and used as the bearer of lampoons and pasquinades (comp. p. 203).

Opposite the Palazzo Vidoni is the *Cappella del Sudario*. In the Piazza della Valle a statue of the *Abbe Nic. Spedalieri* (1740-181), by Marco Rastelli, was erected in 1903. The Via del Monte di Farina leads hence to *San Carlo of Cottarelli* (p. 281).

The domed church of Sant' Andrea della Valle (Pl. II, 14), begun by *P. Olivieri* in 1581 on the site of several earlier churches, and completed by *C. Maderna*, has a florid façade added in 1665 from designs by *Carlo Ramaldi*. The interior is well proportioned, but part of it has been whitewashed. See p. lxxiii.

On the right the 2nd Chapel (Braconzi) contains copies in bronze of the Piety (p. 324) and the Rachel and Leah (p. 189) of *Michael Angelo*, whose influence is apparent in the design of this chapel itself. — On the left the 1st Chapel (Biancamano) is adorned with several marble statues of the school of Bernini. — Above the last arches in the Nave are the monuments of the two popes of the Piccolomini family, brought here from the old church of St. Peter; on the left that of Pius II. (d. 1458; p. 48), by *Pasquino da Montepulciano* (?); on the right that of Pius III. (d. 1503), by

Frane. di Giovanni and Battista di Frane. Ferrucci. — In the Dome: Glory of Paradise, by *Lufrancesco*; below, on the pendentives, the 'Evangelists' by *Domenichino*, one of his sweet works. By the same master, 'Frescoes on the vaulting of the apse. In front, between the transverse ribs, a rectangular painting of John the Baptist pointing out Christ to St. John and St. Andrew (John, I. 36); in the vaulting itself, on the left, the Scourging of St. Andrew; in the centre, the Vocation of St. Peter and Andrew by Christ; on the right, St. Andrew beholds and reveres the cross to which he is about to be affixed; below are six female figures representing the virtues (p. lxxiv). The large lower fresco by *Calabrese* (martyrdom of St. Andrew) are of no great value.

The Via del Teatro Valle, on the other side of the Corso, opposite the church, leads to the N. to the small Piazza della Valle and the *Palazzo Capranici* (Pl. II, 15), and thence to the right to the University and the *Pal. Madama* (p. 220).

No. 141 in the Corso Vitt. Emanuele, to the right, is the —

Palazzo Massimo alle Colonne (Pl. II, 14, 15), a fine structure by *Bald. Peruzzi*, who, however, died in 1536 before its completion. The arc-shaped façade was skilfully adapted to the curve of the originally narrow street, but has lost its effect by the construction of the wide Corso. The glimpse obtained of the double court is, however, still strikingly picturesque. On the second floor is the Chapel of *San Filippo Neri* (p. 227; open to visitors on 16th March), who is said to have here resuscitated a child of the Massimo family.

In 1467, within the buildings connected with this palace, the Germans *Pannartz and Schönerheim*, who during the two previous years had found an asylum in the monastery of Subiaco (p. 428), established the first printing-office in Rome, from which they issued Cicero's Epistles and other works, furnished with the name of the printers and the words '*In arduis Patri de Martino*' — The Massimo family claims descent from the ancient *Fabii Massimo*, and their armorial bearings have the motto '*Constante restitui*'.

On the left, at the point where the *Via de' Baullici* diverges to the *Palazzo Farnese* (p. 229), is the little *Palazzo Linotte* (*Pal. Regis*; Pl. II, 14), built about 1523 for the French prelate *Thomas le Roy*, of Rennes, whose armorial lilies, repeated several times in the frieze, have procured the erroneous title of *Palazzo della Farnesina* for the palace. It is probably a work of *Ant. da Sangallo the Younger*, and has a tasteful court and staircase. The restoration, begun in 1896, under *Enrico Guy*, is now complete, the building being intended for a municipal museum of modern art.

To the right opens the Piazza di San Pantaleo (Pl. II, 15), containing the small church of *San Pantaleo*, with a façade erected by *Giuseppe Valadier* in 1806. In the centre is a statue, by *Gangeri*, of the Italian statesman *Marco Minghetti* (1818-86).

From the Piazza San Pantaleo the Via San Pantaleo runs towards the N.W. No. 9 in this street, on the right, is the spacious *Palazzo Braccio* (Pl. II, 15), erected by *Morelli* in 1780 and now occupied by the Minister of the Interior. It contains a fine marble staircase and a few ancient statues. The N. side of the building looks towards the Piazza Navona (p. 220). — At the obtuse N.W. angle of the palace stands the so-called *Pasquino*, an admirable, but now sadly mutilated.

lated relief of an antique group of statuary representing Menelaus with the body of Patroclus, looking around for succour in the tumult of battle. Duplicates of the group are in the Loggia de' Lanzi and the Palazzo Pitti at Florence, and there are fragments in the Vatican (p. 354).

Cardinal Caraffa caused the group to be erected here in 1501. It became the custom of the professors and students of the Roman Archigymnasium on St. Mark's day (April 25th) to write Latin and Italian epigrams to the statues (at first without any satirical aim). The name was derived from a schoolmaster living opposite, but when the 'pasquines' began to assume a bitter satirical character about the middle of the 16th cent. (chiefly as the result of the Reformation), the title came to be connected with a tailor named Pasquino who was notorious for his lampooning propensities. The answers to the satires of Pasquino used to be attached to the Marforio (pp. 23, 244). Compositions of this kind have been much in vogue at Rome ever since that period, sometimes vying with the best satires of antiquity.

The *Via del Governo Vecchio* (Pl. II, 13, 12), running from the small piazza named after Pasquino, formed the chief communication with the *Ponte Sant' Angelo* before the construction of the *Corso Vittorio Emanuele*. On the right in this street is the sadly neglected *Pal. del Governo Vecchio* (1476), once the brilliant residence of Cardinal Stefano Nardai, and occupied later by the law and police courts. No. 124, opposite is an elegant little house in Bramante's style, built in 1500 for the papal secretary J. P. Turcius. We next pass the back of the former *Philippine Monastery* (p. 277) and cross the *Piazza dell' Orologio* (Pl. II, 12), whence the *Via Monte Giordano* leads to the right to the *Palazzo Gabrielli*, with a pretty fountain in its court. Thence the *Via di Pasio* leads to the *Ponte Sant' Angelo*.

Farther on the *Corso Vittorio Emanuele* discloses a view of the dome of St. Peter's.

To the left lies the narrow *PIAZZA DELLA CANCELLERIA* with the palace of that name and the church of San Lorenzo in Damaso.

The **Palazzo della Cancelleria* (Pl. II, 13, 14), an edifice of majestic simplicity, designed in strict conformity with the ancient orders of architecture, is one of the noblest Renaissance monuments in Rome (p. 12vi). It was built in 1486-95 for Card. Raffaele Riario by a Tuscan architect, but not by Bramante, who did not come to Rome until 1499. The elegant façade is constructed of blocks of travertine from the Colosseum. The beautiful balcony at the S.E. corner should be noticed. The chief portal of the palace, in an in-harmonious baroque style, was added by *Domenico Fontana*. It leads into the **Court*, surrounded by arcades on the two lowest stories. The columns are antique and were formerly used in the ancient basilica of San Lorenzo (see below). The graceful capitals are decorated with roses, a flower which appears in the armorial bearings of Card. Riario. Under the arcade to the left is a bust of *Padre Secchi*, the astronomer (p. 207). To the right is a door leading to the church of San Lorenzo (see below). This is the only palace in the interior of the city which government still permits to be in the hands of the pope.

The handsome portal by *Vignola*, nearest the *Corso*, admits to the church of *San Lorenzo in Damaso*. The ancient basilica of this

name was originally founded by Damasus I. (ca. 370) near the Theatre of Pompey (p. 228), but it was taken down at the instance of Card. Riario and rebuilt in connection with the palace. The internal decoration is quite modern, dating from the time of Pius VII (1820) and Pius IX (1873). At the E. end of the right aisle is the tomb of the papal minister Count Rossi, who was assassinated on the staircase of the Cancelleria in 1848 (bust by Tenerani), the left aisle contains the tomb of Card. Scarampi, by Paolo Romanelli.

From the Cancelleria to the Piazza Campo di Fiori, see p. 228. — Visitors to Rome will be interested in the characteristic *Reg Fetr* held every Tuesday morning in and around the piazza in front of the Cancelleria, at which antiquities, old textile fabrics and embroideries, books, etc., are offered for sale (bargaining essential).

We continue to follow the Corso Vitt. Emanuele. At the corner of the second street to the right is the Palazzo Sora, built in 1603-1609 for Card. Fieschi by an architect (perhaps Giuliano Lons'), who has used (with some unhappy modifications) Bramante's design for the exterior façade of St. Peter's. It has been altered for the Liceo-Ginnasio Terenzio Mamiani. — To the right stands the —

Chiesa Nuova (Pl. II, 12), or Santa Maria in Vallicella, erected by San Filippo Neri about 1550 for the order of Oratorians founded by him, and finished in 1605. Architecture by Giov. Matteo da Città di Castello, interior by Mart. Longhi the Elder, façade by Bughesi.

The interior, which is dark and unfavourable for pictures, is richly decorated. The admirable stucco work is by Cos. Puccinotti and Brizio Ferrata. The ceiling of the Nave, the dome, and the tribune are painted by Pietro da Cortona. In the Left Aisle, adjoining the tribune, is the small and sumptuous Chapel of San Filippo Neri, beneath the altar of which his remains repose. Above is the portrait of the saint in mosaic, after the original of Guido Rendi preserved in the adjoining monastery. — Over the High Altar, with its four columns of porphyry, is a Madonna by Andrea; on the left "SS. Gregory, Maurus, and Pappas, on the right "SS. Domitilla, Verena, and Achilles, also by Andrea, who painted these pictures during his second stay in Rome in 1608 for this church, which was then the most fashionable in the city.

On 24th May, the festival of the saint, and after Ave Maria every Sunday from 1st Nov. to Palm Sunday, concerts of sacred music, to which men only are admitted, are given in the adjoining Oratory, which derives its name from the oratories fitted up by San Filippo Neri. The saint was fond of music and advocated a cheerful form of divine service.

The adjoining PHILIPPINE MONASTERY, erected by Borromini, is of irregular shape, but remarkably massive in its construction. It contains a room once occupied by the saint, with various relics. The Corte d'Appello, the Tribunale Civile e Criminale, and the Tribunale di Commercio are now established here. — The Biblioteca Vallicelliana (adm., see p. 148) is also preserved here.

Farther on, to the left, lies the small Piazza Sforza, with the Palazzo Sforza-Oscurini, the Bohemian Hospice, restored in 1876, and a monument (by Bonini, 1892) to the poet and statesman Count Terenzio Mamiani (1799-1886). Beyond the piazza the Via del Banco di Santo Spirito diverges to the right to the Ponte Sant' Angelo (p. 313). Nos. 44-46 in this street once belonged to the banker

Agostino Chigi (p. 369), the 'gran mercante della cristianità', whose office (in the wing, Arco dei Banchi 9) is now a stable.

To the left is the Museo Barracco (Pl. II, 12), or *Museo di Scultura Antica*, a new building, to be opened in 1904, for the reception of the antiquities presented to the city by Senator Barracco. Farther along the Tiber is San Giovanni de' Fiorentini (Pl. II, 12), the handsome national church of the Florentines. The building was begun, prior to 1521, by desire of Leo X., from a design by Jac. Sansovino (which was preferred to competing plans of Raphael, Ant. da Sangallo the Younger, and Peruzzi); and the difficult task of completing the substructures on the river was executed by Sangallo, Michael Angelo, and on his death, Giac. della Porta and Carlo Maderno were afterwards engaged in the work. The façade was added by Aless. Galilei in 1734. In the right transept is a picture by Salv. Rosa (SS. Cosmas and Damianus at the stake). — Near the church the Ponte ai Fiorentini, a suspension-bridge constructed in 1868, crosses the river (toll 5 c.; p. 368).

To the S.E. from San Giovanni runs the *Via Giulia*, see p. 230.

f. Quarter to the S. of the Corso Vittorio Emanuele as far as the Piazza Montanara. Isola Tiberina.

To the S. of the Pal. della Cancelleria (p. 226) lies the busy **PIAZZA CAMPO DI FIORE** (Pl. II, 14; vegetable-market every morning). Heretics and criminals used to be put to death here. Among the former was the philosopher *Giordano Bruno*, whose death in this square on Feb. 17th, 1600, is commemorated by a bronze *Statue (designed by *Ettore Ferrari*), erected in 1889 on the site of the stake.

Giordano Bruno, born at Nola near Naples in 1583, entered the Dominican order. In 1589 he fled to Geneva, and after a career of wandering, during which he visited France, England, and Germany, he was seized and imprisoned at Venice by the Inquisition in 1592. — The *Reliefs* on the base of the monument represent, on the right, Bruno teaching; behind, his trial, on the left, his execution at the stake. The *Medallions* are portraits of the champions of religious freedom: Paolo Sarpi of Venice (1562-1623), Tommaso Campanella of Calabria (1568-1639), Petrus Ramus of France (1515-1572), Lucilio Vanini of Naples (about 1586-1619), Acontius Palearius of Rome (1560-1570), Michael Servetus of Spain (1511-1553), John Wiclif of England (1324-1384), and John Huss of Bohemia (1369-1415).

To the E. of the Campo di Fiore once lay the *Theatre of Pompey* (Pl. II, 14). In the court of the *Palazzo Pio* or *Righetti* (entrance, *Via Bisclione* 95), a bronze statue of Hercules (p. 362) and substructures of the theatre were discovered. Fragments of the ancient walls are incorporated in the modern building. The semicircular bend of the street by *Santa Maria di Grottopinta* distinctly shows the form of the ancient auditorium; the stage approximately occupied the site of the present *Via de' Chiavari*. Behind the latter extended the large *Porticus Pompeiana*, with its colonnades and halls, in one of which Julius Caesar was murdered on March 15th, 44 B.C. — The *Via de' Giubbbonari* leads hence to *San Carlo ai Catinari* (p. 231).

From the Campo di Fiori three parallel streets lead to the S.W. to the PIAZZA FARNESA, with two fountains. Here stands the —

Palazzo Farnese (Pl. II, 14), one of the finest palaces at Rome, begun by Card. Alex. Farnese, afterwards Pope Paul III (1534-49), from designs by *Ant. da Sangallo the Younger* (p. 1211), continued after his death (1548) under the direction of *Michael Angelo*, and completed by the construction of the loggia at the back, towards the Tiber, by *Giac. della Porta* in 1580. *Michael Angelo's* plans had included a second court (behind the present court), to be decorated with the Farnese antiquities now at Naples, and a bridge connecting the palazzo with the Villa Farnesina on the other side of the Tiber. The building materials were taken partly from the Colosseum and partly from the Theatre of Marcellus. This palace was inherited by the kings of Naples, and in 1903 an offer to purchase it was made by the French government, whose embassy to the Italian government has been established here since 1874. On the second floor is the French archaeological institution. The triple colonnade of the entrance and the two arcades of the court were designed by *Sangallo*, the arcades being in imitation of the Theatre of Marcellus, the upper story (originally open) and the beautiful cornices are by *Michael Angelo*. The court contains two ancient sarcophagi (that to the right said to be from the tomb of *Cecilia Metella*, p. 306). The Galleria, or hall, on the first floor contains admirable frescoes of mythological scenes by *Agostino* and *Annibale Carracci* and their pupils, but is not accessible.

In the Via Giulia, behind the Palazzo Farnese, is situated the round church of *Santa Maria della Morte* (Pl. II, 11; closed), founded by the fraternity of the *Fratelloni della Buona Morte*. On the 2nd floor figures referring to death are exhibited in the chambers below the church.

From the Piazza Farnese a line of streets, called the *Via di Monserrato* and *Via de' Bianchi Vecchi*, leads to the N.W. to the Ponte Sant'Angelo (p. 313). On the right in the first of these is *San Tommaso di Canterbury* (Pl. II, 11), or degli Inglesi (p. 148), the church of the English College, rebuilt in 1585 on the site of a church said to have been founded by a king of Wessex in the 8th century. It contains among others the simple but noble tomb of Cardinal Balabridge, Archbishop of York (d. 1814). The adjoining college contains portraits of English cardinals from *Wolsey* to *Vaughan*. — On the left side of the street, farther on, stands *Santa Maria di Monserrato* (Pl. II, 11; open in the morning only), the national Spanish church, with a hospice. It was erected in 1496 by *Ant. da Sangallo the Elder*, and afterwards restored. The first chapel on the right contains the remains of *Calixtus III.* and *Alexander VI.*, the two popes of the Borgia family; the altar-piece is by *Ann. Carracci*. On the right pillar of the first chapel on the left is a ciborium by *Luigi Capponi*; in the third chapel on the left a statue of *St. James* by *Jac. Sansovino*. The convent-court (entrance *Via Giulia* 151) contains several fine Renaissance tombs. At Nos. 23-24 in the *Via de' Bianchi Vecchi* is the former house of the goldsmith *Giampietro Orsini*, erected about 1510, with florid decorations in stucco.

To the S.E. of the Piazza Farnese the *Vicolo de' Venti* leads to the Piazza di Capo di Ferro. Here, on the right, rises the —

Palazzo Spada alle Regole (Pl. II, 14), erected in the pontificate

of Paul III. about 1540 by Card. Capodiferro, in imitation of a house built by *Raphael* for Giambattista Branconi dell' Aquila in the Borgo Nuovo (p. 317; now destroyed). Since 1640 the palace has belonged to the Spada family. The first floor is leased to the *Consiglio di Stato*.

The sessions-hall, the ceiling of which is a splendid example of Renaissance high art, contains a nude colossal statue of *Pompey*(?), erroneously described as that before which Julius Caesar was slain. In the adjoining corridor are eight *Reliefs* of scenes from Greek mythology and legend. The porter (fee 1/2 fr.) admits visitors to the library on the ground-floor to the left, whence a portico is seen in delusive perspective. The other antiquities and paintings (over 200, mostly by Bolognese masters of the 16-17th cent.) are not accessible.

Pursuing the same direction beyond the Piazza Capo di Ferro, we next reach the small PIAZZA DE' PELLEGRINI. On the left is the back of the *Monte di Pietà* (Pl. II, 14), the seat since 1604 of the pawn-office, founded in 1639. On the right is the church of *Santissima Trinità de' Pellegrini*, erected in 1641; the high-altar is adorned with a Trinity, by *Guido Reni*. Adjoining is a hospital for convalescents and pilgrims.

The VIA DE' PETTINARI (Pl. II, 14) leads from the Piazza de' Pellegrini to the *Ponte Sisto* (p. 373).

From the Ponte Sisto towards the N.W., parallel with the river, runs the *Lungo Tevere Tibaldi*, affording a pretty view of the Villa Farnesina and the Janiculum. Parallel with this street, on the right, is the VIA GIULIA (Pl. II, 14, 11, 12), most of which was built by Julius II., leading in 12 min. to the Ponte Sant' Angelo. To the left is a fountain known as the *Mascherone dei Farnesi*, and farther on, also on the left, beyond an arch spanning the street, is the *Pal. Falconieri*, built by Borromini, with herms on the façade in a baroque style, terminating in colossal falcons' heads. In the Via di Sant' Eligio, the next cross-street to the left, is the church of *Sant' Eligio degli Orefici* (Pl. II, 11), a graceful but dilapidated little circular structure, built in 1609 from a design by *Raphael* and renewed in 1801 (closed; visitors knock at Via dell' Armata 118). Farther on in the Via Giulia, on the left, are the *Carceri Nuove*, a prison founded by Innocent X. (closed in 1897), the little church of *San Biagio della Pagnotta*, and, No. 66, the *Pal. Sacchetti* (Pl. II, 12), erected in 1543 by Antonio da Sangallo the Younger as his private residence. The courses of rough rustica masonry in the lower stories of the houses on the left side of the street, formed the beginning of a large court of justice, projected by Julius II. and designed by Bramante, but never carried out. — To the left, at the end of the Via Giulia, is *San Giovanni de' Fiorentini* (p. 228).

The most important side-street diverging from the Corso Vittorio Emanuele is the VIA DI TOM ARCAUTINA (Pl. II, 15-18, 14), mentioned at p. 224, which begins at the Pantheon (p. 216) on the N., and is continued to the S. by the Via Arenula to the *Ponte Geri*-*di* (Pl. II, 13; p. 373).

To the S. of the Corso Vitt. Emanuele, the Via di Tor Argentina leads to the Piazza **BENEDETTO CAIROLI** (Pl. II, 14), passing the Teatro Argentina (p. 147) and a monument to *Pietro Costa* (1834-81), the dramatist. Thence the *Via de' Grubbonavi* runs to the right to the Campo di Fiore (p. 228), and the *Via del Piano* (p. 232) to the left to the Porticus of Octavia and the Theatre of Marcellus (p. 232).

On the N. side of the Piazza Benedetto Cairoli rises the church of **San Carlo ai Catinari** (Pl. II, 14), built by Rosati in 1612 in honour of San Carlo Borromeo, in the form of a Greek cross, with a dome. In the pendentives below the dome are the four cardinal virtues, by *Domenichino*. Over the high-altar, Card. Borromeo in the procession of the plague at Milan, by *Pietro da Cortona*.

The narrow *Via de' Falegnami* runs from the N.E. angle of the Piazza Benedetto Cairoli to the small Piazza **MATTEI**, or **TARTARUGA** (Pl. II, 17), named after the graceful **Fontana delle Tartarughe* (tortoises), a bold and skilfully composed bronze group with figures of four youths and dolphins and tortoises (restored in 1803). This is the most charming fountain in Rome; the design, which was formerly attributed to Raphael and to Giacomo della Porta, is by a Florentine sculptor of the school of *Giov. da Bologna*.

To the left is the **Palazzo Mattei** (Pl. II, 17), originally an aggregate of separate buildings which occupied the rectangle between Santa Caterina de' Funari and the Via Paganica. The handsomest portion (principal entrance, *Via de' Funari* 31, side-entrance, No. 32), is one of the finest productions of *Carlo Maderno* (1616).

In the passages of the entrance and in the Court, a great number of ancient reliefs are built into the walls. In the court are (r) Mars with *Ehea Silvia*, and Apollo with the Muses, and (l) the Calydonian Hunt and Rape of Proserpine; in the portico, Sacrifice to Mithras, Apollo with the Muses, and a Bacchanalian procession, all from sarcophagi. The statues in the court and niches on the staircase, some of them freely restored, are of no great value. The stucco decorations of the ceiling over the staircase are well executed.

Farther on we observe on the left, on the site of the ancient *Circus Flaminius*, the church of **Santa Caterina de' Funari** (Pl. II, 17), erected in 1563 by *Giac. della Porta*, with a good façade and a baroque tower. The name of the church is derived from the rope-makers who in the middle ages plied their trade within the circus.

Straight in front is the **Palazzo Ascarelli** (Pl. II, 17), whence the *Via Dellini* leads to the left to the *Via Aracelli* (p. 203), the street to the right to the Piazza **CAMPITELLI**. Here, on the right, is —

Santa Maria in Campitelli (Pl. II, 17), erected by *C. Rainaldi* under Alexander VII in 1665 on the site of an earlier church, to provide a more worthy shelter for the miraculous image of the Virgin, to which the cessation of the plague in 1666 was ascribed.

Interion. The site of this church tapers to a point at the back, but this irregularity has been most skilfully masked by the architect, who has so designed a kind of 'preliminary' transept as to produce the impression that, beyond the handsome projecting columns, there is another and more spacious transept. — Beneath the canopy over the high-altar is placed

the miraculous Madonna. In the 2nd Chapel on the right, the Gift of Tongues, by *Luca Giordano*; in the 1st Chapel on the left, two monuments of the *Alinari* family (17th cent.) resting on lions of rosso antico, that on the right marked 'umbra', that on the left 'nihil'. In the S. transept is the tomb of Card. Faccia by *Patrici*.

From the S.E. end of the Piazza Campitelli the *Via di Tor de' Specchi*, skirting the foot of the Capitol, leads to the left to the Piazza Araceli (p. 235), while the *Via Montanara* runs to the right to the Piazza Montanara (p. 233).

From the S.E. angle of the Piazza Benedetto Cairoli (p. 231) the *Via del Pianto*, continued by the *Via del Portico d'Ottavia* (Pl. II, 14, 17), skirts the N. side of the former *Ghetto*, or Jewish quarter, which was pulled down in 1887. A new *Synagogue*, from designs by Costa and Armanni, was built here in 1903. In antiquity and during the middle ages the Jews resided in Trastevere; but in 1556 Paul IV. assigned this quarter to them, and until the end of the papal rule they were forbidden to settle elsewhere.

The third street on the left leads from the *Via del Pianto* to the Piazza Tartaruga (p. 231), and the first street on the right to the *Palazzo Cenci-Bolognetti* (Pl. II, 14), the home of the ill-fated Beatrice Cenci (comp. pp. 184 and 316), who was executed in 1599 for the murder, in conspiracy with her brothers, of her father Francesco Cenci, a man of execrable character.

At the end of the *Via del Portico d'Ottavia*, on the left, is the **Porticus of Octavia* (Pl. II, 17), erected by Augustus on the site of a similar structure of Metellus (B. C. 149), and dedicated to his sister. It was destroyed by a fire, but restored by Sept. Severus and Caracalla in 203, as the inscription records. The principal entrance consisted of a double colonnade with eight Corinthian columns, of which three in the inner, and two in the outer row are still standing. To the right and left of this were double rows of 14 columns each, while there were at least 40 columns in a row at the sides. The entire colonnade, with its 300 columns, enclosed a rectangular space, within which stood temples of Jupiter and Juno. It was adorned with many admirable works of art which formed part of the Macedonian booty. In 770 the church of *Sant' Angelo in Pescheria* (frequently restored) was built on the ruins by Stephen III., and here the Jews were compelled to attend Christian sermons on their Sabbath from 1584 down to the pontificate of Pius IX. Rienzi went in procession from this church to the Capitol at Whitsuntide, 1347 (p. xxxviii).

Farther to the S.E., on the right in the *Via del Teatro di Marcello*, are the remains of the **Theatre of Marcellus* (Pl. II, 16), which was begun by Caesar and completed in B.C. 13 by Augustus, who named it after his nephew, the son of Octavia. Twelve arches of the outer wall of the auditorium are now occupied by workshops. The lower story, partly sunk in the earth, is in the Doric, the second in the *to style*, above which, as in the Colosseum, a third probably

rose in the Corinthian order. It is said to have accommodated 3-4000 spectators. The stage lay towards the Tiber.

In the interior (entr., Via della Cattedra 14, adm. 80 c.), on a mound of débris, rises the *Palazzo Orsini*, where Niebuhr, the historian, lived in 1818-23 as Prussian ambassador in Rome. Since 1903 it has belonged to the Savings Bank (p. 201). Considerable remains of the vestibules of both stories, and of the substructures of the rows of seats are still visible. On the first floor is a room containing architectural fragments, inscriptions, and plaster-casts from the theatre. On the second floor is a garden-room with mosaics of the 16th century.

The Via del Teatro di Marcello ends in the small but busy Piazza MONTANARA (Pl. II, 16), much frequented by the country-people, especially on Sundays. Omnibus to the Piazza Venezia, etc., see No. 20 in the Appendix.

At the beginning of the VIA BOCCA DELLA VERITÀ, which runs hence to the S., in a small piazza to the right, is the church of *San Nicola in Carcere* (Pl. II, 16), restored in 1880, containing, on the outer walls and in the interior, ancient columns obtained from three temples which adjoined each other in the *Forum Holitorium* on this site. Two of the temples seem to have been those of *Spes* and *Juno Sospita*. Visitors may examine the foundations of these (sacristan with light $1\frac{1}{2}$ fr.).

Hence to the *Piazza Bocca della Verità* and *Santa Maria in Cosmedin*, see p. 283.

The *Ponte Fabricio* (Pl. II, 16), to the S.W. of the Theatre of Marcellus, also called the *Ponte de' Quattro Capi* from the four-headed herms on the balustrades, is the oldest bridge now in Rome, having been built in B.C. 62 by *L. Fabricius*, as the inscription records.

This bridge crosses to the *Isola Tiberina* (Pl. II, 16), on which is a small piazza and the church of *San Bartolomeo*.

In antiquity the whole island was surrounded by a bulwark of travertine which gave it the appearance of a ship, the mast being represented by an obelisk. A part of this bulwark is still preserved at the S. end of the island, with a bust of *Æsculapius* and a serpent in relief. The last is a reminiscence of the story that the Romans, when sorely afflicted by the plague, sent for *Æsculapius* from Epidaurus in B.C. 293, and that a snake, a reptile sacred to the god, concealed itself in the vessel, and on reaching the harbour escaped to this island, which was dedicated to *Æsculapius* in consequence.

SAN BARTOLOMEO, erected, perhaps on the site of an ancient temple of *Æsculapius*, about the year 1000 by the Emp. Otto III. in honour of St. Adalbert of Gnesen, was erroneously named St. Bartholomew. The emperor had desired the Beneventans to send him the relics of this saint, but received those of St. Paulinus of Nola in their stead. The present church, the campanile excepted, is modernised and uninteresting; façade by *Martino Lunghi the Younger*, 1625. The interior contains fourteen ancient columns; in the choir, remains of an early mosaic. In the centre of the steps leading to the presbyterium is the mouth of a well of the 12th cent., with sculptures.

The island was connected with Trastevere by the ancient *Pons Cestius* (*Gratiant*; Pl. II, 18), which was erected soon after the *Pons Fabricius*, restored by the Emperors Valentinian and Gratian, and in 1887-90 entirely rebuilt with the old stones and lengthened by an arch at each end. It is now called *Ponte San Bartolomeo*. — A few paces along the right bank of the Tiber bring us to the *Via della Lungarina* (p. 374).

III. The Southern Quarters (Ancient Rome).

This part of our description of Rome embraces the southern portion of the city, beginning with the Capitol, and extending eastwards as far as the Lateran: i. e. the hills of the Capitol, Palatine, Aventine, Caelius, and the S. slope of the Esquiline. This was the most important quarter of the Republican and Imperial city, but lay waste and deserted from the early part of the middle ages down to our own times. Recently it has lost much of its characteristic aspect owing to the construction of new quarters, consisting largely of tenement houses of the most Philistine appearance. A number of ancient churches, as well as the imposing collections of the Capitol and Lateran, are situated in this district.

a. The Capitol.


The Capitol, the smallest but historically the most important of the hills of Rome, consists of three distinct parts: the N. summit with the church of *Araceli* (164 ft.); the depression in the middle with the piazza of the Capitol (98 ft.), and the S.W. point with the *Pal. Caffarelli* (156 ft.). It was on this piazza, the *Area Capitolina*, that Romulus is said to have founded his asylum; it was here that popular assemblies were afterwards held; and it was here, in the year B.C. 133, on the occasion of the suppression of the revolt of Tiberius Gracchus, that the blood of the citizens flowed for the first time in civil warfare. The N. peak was occupied by the *Ara*, or citadel, with the *Temple of Juno Moneta* ('the warner'), beside which, from 269 B.C. onwards, stood the mint of the Senate (comp. Plan, p. 272). The S.W. peak was the site of the great *Temple of Jupiter* (comp. Plan, p. 250), built by Tarquinius Superbus, the last of the kings, and consecrated in B.C. 509, the first year of the Republic. This temple was 800 ft. in circumference, and possessed a triple colonnade on the front and sides and three cellæ, that of Jupiter being in the middle, and one for Juno and Minerva on each side. In the year B.C. 83, during the civil war between Sulla and Marius, the temple was burned down, and the same fate overtook it in A.D. 69, on the occasion of the struggle between Vespasian and Vitellius. Magnificently restored by Domitian, this temple continued to be the most sacred shrine of the Roman world until the 6th century.

W
US
U
T
A
G

.

.

.

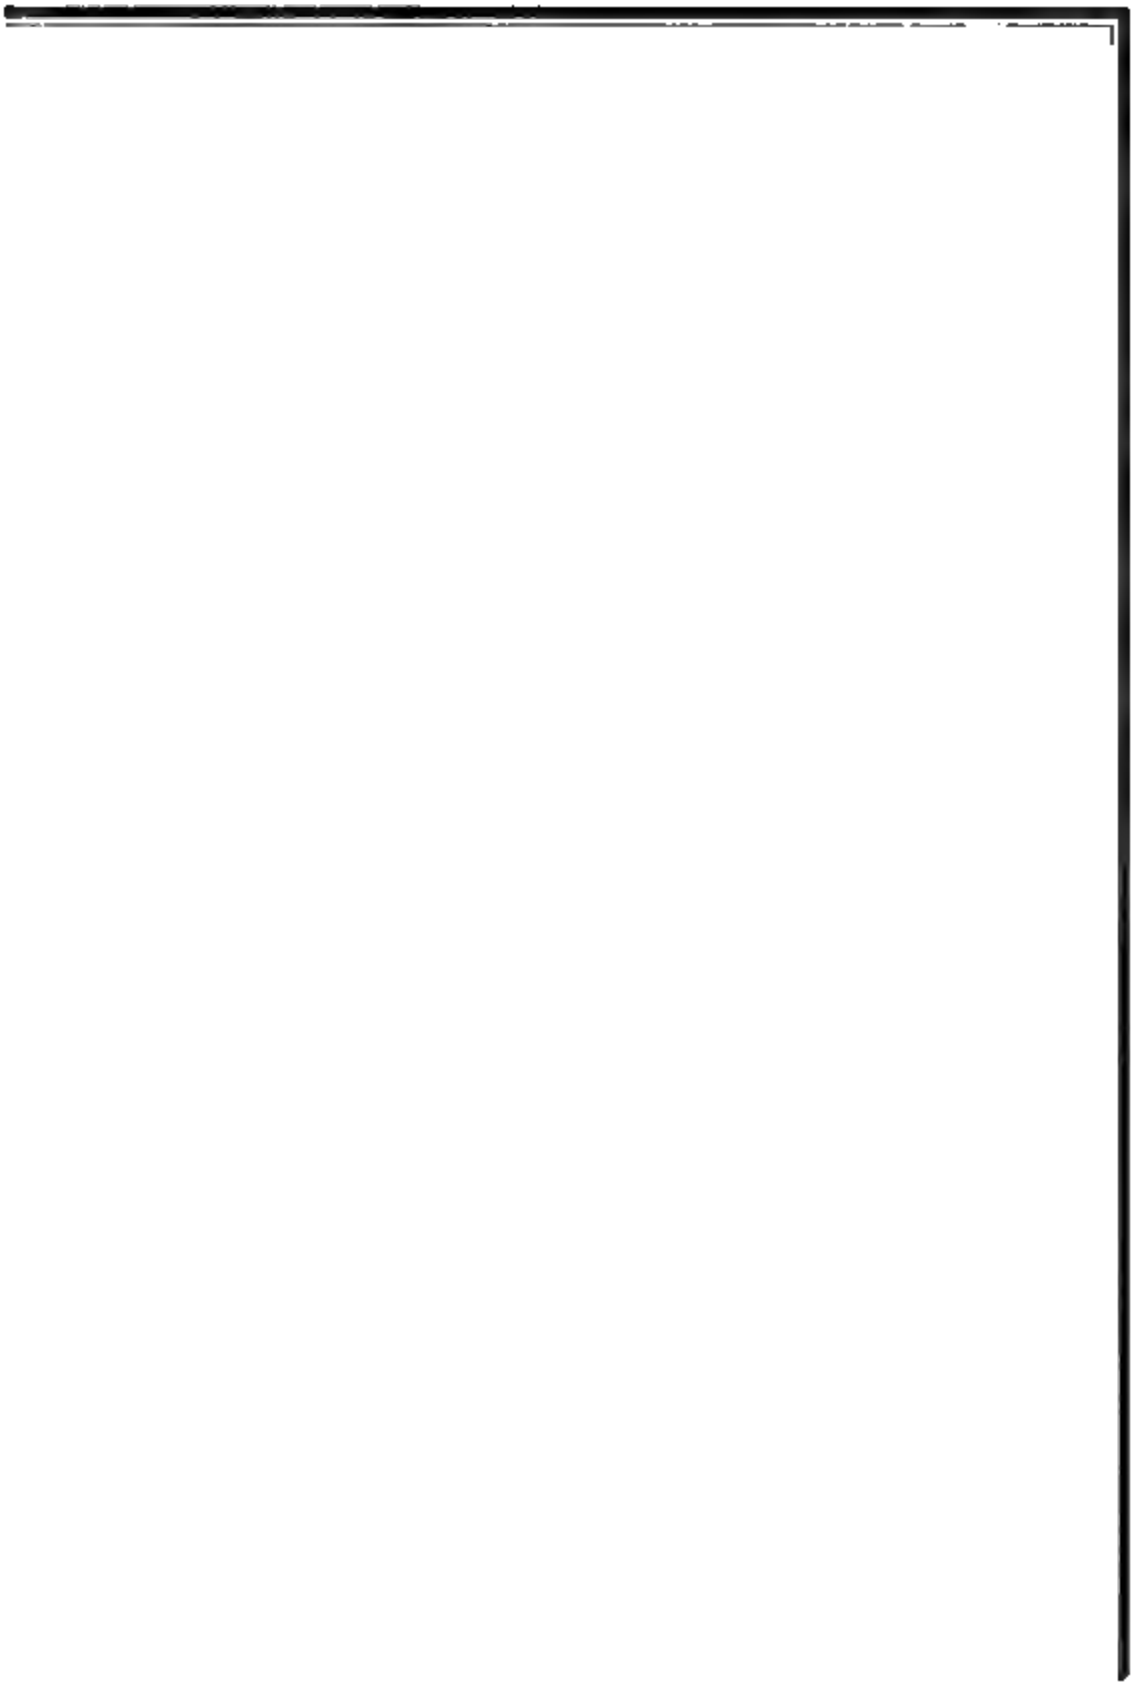

During the early middle ages the hill was in the possession of the monastery of Santa Maria de Capitolio (Araceli). The name of *Monte Caprino*, or hill of goats, applied to the S. E. height, testifies to its desertion. The glorious traditions, however, which attached to this spot, gave rise to a renewal of its importance on the revival of a spirit of municipal independence at Rome. In 1143 it again became the centre of the civic administration; and the 'Novum Palatium' for the meetings of the municipal *Senatus* (p. 238) is first mentioned in 1150. In 1348 the first approach from the new quarter of the city in the Campus Martius was made by the construction of the flight of steps of Araceli, leading to the piazza of the Capitol, which was at that time the market-place. The *Palace of the Conservatori* (p. 238) dates from the 16th cent., the general arrangement of the piazza of the Capitol from the 16th and 17th centuries.

From the PIAZZA ARACELI (Pl. II, 17), which is reached from the Piazza Venezia by skirting the W. side of the substructure of the Victor Emmanuel Monument (p. 237) and from the Corso Vittorio Emanuele by the Via Araceli (p. 203), three approaches lead to the Capitoline Hill, that in the centre being the principal ascent for pedestrians (p. 237). — On the left a lofty FLIGHT OF STAIRS (124), the only public work executed at Rome during the exile of the papal court at Avignon, ascends to the principal entrance (generally closed) of the church of Santa Maria in Araceli (see below). — On the right the VIA DELLE TRE PILE, converted in 1873 into a convenient drive (on which occasion remains of the ancient Servian wall, enclosing the hill in the direction of the Campus Martius, and now seen behind the railings to the left, were brought to light; see p. xxx), leads past the entrance of the *Pal. Caffarelli*, which was erected about 1580, and is now the German embassy. The throne-room of this palazzo (adm., pp. 150, 151) is embellished with scenes from Northern mythology by *Hermann Prell* (1896), representing spring, summer, and winter. — The principal approach and the Via delle Tre Pile lead to the Piazza del Campidoglio, see p. 237.

**Santa Maria in Araceli* (Pl. II, 20), a very ancient church, is mentioned in the 8th cent. as *Sancta Maria de Capitolio*. It occupies the site of the Capitoline temple of Juno (p. 234). The present name ('Church of the Altar of Heaven'), dating from the 14th cent., is derived from an ancient legend according to which this is the 'Camera Octaviani' (a name suggested by the inscription on the column mentioned below), in which the Sibyl of Tibur appeared to the emperor, whom the senate proposed to elevate to the rank of a god, and disclosed to him the new Revelation. The church, of which the Roman senate formerly enjoyed the patronage, has given title to a cardinal since the time of Leo X. The façade is unfinished. — It was in this church that Gibbon first conceived the idea of writing his history of the Decline and Fall of the Roman Empire.

Visitors generally approach the church from the Piazza of the Capitol by the staircase to the E. of the Capitoline Museum, turning to the left at the top of the first flight of steps. Over the door is a mosaic of the Madonna between two angels (late 13th cent.).

The *INTERIOR* is much disfigured by modern additions. The nave is borne by 22 ancient columns, varying greatly in style, thickness, and height. The third on the left bears the ancient inscription '*A cubiculo Augustorum*'. The rich ceiling was executed to commemorate the victory of Lepanto (p. 211) in 1571.

By the wall of the principal *EXTRAMURUM*, to the right, is the tomb of the astronomer Lodovico Grato (1531), with a figure of Christ by *Andrea Sansovino* (?); on the left the fine monument of Oard Librettus (de Alibrettis, a member of the celebrated d'Albret family of S. France), by *Andrea Bregno* (1465), with partly preserved painting, and the tomb-relief (much worn) of Archdeacon Giov. Crivelli (d. 1492), by *Donatello*. — *RIGHT AISLE*, 1st Chapel (Bufalini): *Frescoes from the life of San Bernardino of Siena, painted about 1484 by *Pinturicchio*, restored by *Cavaliere*. The decoration of the ceiling also deserves notice. — *LEFT AISLE*. In the 2nd Chapel a manger (*presèpe*) is fitted up at Christmas. This consists of a gorgeous and brilliantly illuminated representation of the Nativity in life-size, with the richly decorated image of *Il Santo Bambino*, or Holy Child. Between Christmas Day and Jan. 6th, from 3 or 4 o'clock daily, children from 5 to 10 years of age here recite little poems, etc., in honour of the Bambino, a carefully studied performance, but usually accomplished with great naturalness of gesture and manner. — Between the 2nd and 3rd chapel on the left is a colossal statue of Paul III., and opposite, in the right aisle, Gregory XIII. — 3rd Chapel (left) Renaissance tomb of Ant. Albertini (d. 1509) and a fresco (St. Anthony) by *Benozzo Gozzoli* (covered). — 5th Chapel (l.): fine Renaissance tomb of the physician Fil. della Valle (d. 1494), by *Michele Martini* (?).

TRANSAPT. On the right and left, by the pillars of the nave, are two *Ambones from the old choir, by *Laurentius* and *Jacobus Cosmas* (ca. 1200). The chapel on the right contains handsome monuments of the *Savelli* family, of the 13th and 14th cent.: to the right that of Pope Honorius IV; to the left those of his father and other relatives (incorporating an antique sarcophagus). — The left transept contains a canopy, borne by 8 columns of brocatellone marble, called the *CAPPPELLA SANTA*, or *DI SANT' ELENA*. Beneath the altar, destroyed during the French Revolution but restored in 1833, the remains of St. Helena are said to repose in an ancient sarcophagus of porphyry. The present altar encloses an ancient altar, bearing the inscription *Ara Primogeniti Dei*, which is said to have been erected by Augustus. At the end of the N. transept is the monument of *Matthæus of Acquasparta* (d. 1302), the general of the Franciscans, mentioned by Dante (*Paradiso*, xii. 124). To the left

is a colossal statue of Leo X., by *Atene da Veirano*, near which a slab marks the tomb of *Polio de' Frodi*, who discovered the *Lacoon* group (p. 355) in his vineyard in 1506.

CHURCH. To the left, the handsome tomb of *Giov. Batt. Savelli* (d. 1498), from the studio of *Andrea Bregno*. From 1512 to 1566 the high-altar was adorned with the *Madonna of Foligno* by *Raphael* (p. 344). The donor, *Sigismondo Conti de Foligno*, is interred here. The present altar-piece is an ancient *Madonna*, ascribed to *St. Luke*.

The *Franciscan* monastery belonging to the church was pulled down in 1888 to make room for the vast *Monument of Victor Emmanuel II.*, designed by *Count Gius. Sacconi*. The work, which is being erected on the N. end of the Capitol, has already swallowed up about 10½ million francs as the cost of the site (p. 202), sub-structures, preliminary operations, etc. The entire cost is estimated at 24½ million francs. When finished, it will be over 200 ft. in height, and will include an equestrian statue of the king, rising in the centre of a platform, surrounded by colonnades and approached by massive flights of steps. The colonnades, with columns 50 ft. in height, are being richly decorated with mosaics and paintings, and the apartments in the basement are to be fitted up as a *Museo del Risorgimento Italiano*. A glimpse of the operations may be obtained from the *Via della Pedacchia* or the *Via del Marforio*.

The **CENTRAL APPROACH**, ascending in shallow steps paved with asphalt ('*la cordonata*'), leads direct to the *Piazza del Campidoglio*. At the foot of the steps are copies of the Egyptian *Lions* mentioned at p. 245, and at the top a group of the horse-taming *Dioscuri* (found near the theatre of *Balbus*?). In the gardens to the left is a *Bronze Statue of Cola di Rienzo*, by *Masini*. The pedestal, formed of ancient architectural and inscribed fragments, is intended to suggest *Rienzi's* antiquarian studies. He was slain at the foot of the *Araceli* steps. Higher up are cages containing a she-wolf and two eagles.

The design of the present **Piazza del Campidoglio*, or *Square of the Capitol* (Pl. II, 20), is due to *Michael Angelo*, and its execution though begun soon after 1538 was not completed until the 17th century. *Michael Angelo* superintended in person only the erection of the statue of *Marcus Aurelius* and the construction of the *staircase-approach* and of the flight of steps in front of the palace of the *Senators*, the rest was executed from his plans, with various modifications of detail, by his successors. The slanting position of the palaces at the sides, which causes the piazza to seem larger than it is, is due to the situation of the earlier palace of the *Conservatori*. — On the balustrade in front, adjoining the *Dioscuri*, are the so-called *Trophies of Marius*, admirably executed works probably dating from the reign of *Domitian* (brought hither from the water-tower of the *Aqua Julia*, p. 183), and the statues of the *Emp. Constantine* and his son *Constans* from the *Thermae of Constantine*.

(p. 177). On the right is the first milestone of a Roman road, and on the left the seventh of the ancient Via Appia.

In the centre of the piazza rises the admirable **Equestrian Statue of Marcus Aurelius* (161-180), in bronze, once gilded, which stood near the Lateran in the middle ages, and was, as the inscription records, transferred hither in 1538. Its original position is unknown. It owes its excellent preservation to the popular belief that it was a statue of Constantine, the first Christian emperor (see pp. xxiv, liv). The height of the pedestal, which is said to have been designed by *Michael Angelo*, is skilfully calculated so as to permit spectators to inspect even the head of the statue.

Behind this monument rises the *Palazzo del Senatore* (Pl. II, 20), first mentioned as the 'Novum Palatium' (p. 235) in 1150. In 1300 it was restored and provided with a vestibule (lobium or loggia) in two stories; and after being injured by a fire in 1354, it was again restored by Boniface IX. in 1389. Two of the four corner towers of Boniface's edifice are still recognizable; one at the S.E. corner next the Forum and one at the N.W. corner in the Via del Campidoglio. The handsome flight of steps is by *Michael Angelo* (p. 239). The façade, slightly altered from *Michael Angelo's* design, was constructed by *Girol. Rainaldi* (1592). The river-gods which adorn it are the Tiber (right) and Nile (left); in the centre is a fountain, above which is a sitting statue of Rome from Cort (comp. p. 443), much too small for its position. *Michael Angelo* had designed to erect here a colossal figure of Jupiter. Petrarch was crowned as a poet in 1341 in the great hall on the lower story (now dark and used as a store for antiquities). On the upper floor is another spacious hall, now used for the meetings of the civic council. The senators' coats-of-arms (14-15th cent.) here were discovered in 1889 and 1895. The palace contains also the offices of the civic administration, dwellings, and an observatory. The *Campanile*, by *Martino Longhi* the Elder, was erected in 1579, to replace an older one. The roof, which is adorned with a standing figure of Roma, commands an extensive view (ascent, see p. 250).

The *Via del Campidoglio* to the right of this palazzo, and the *Via dell' Arco di Settimio Severo* (p. 271) to the left, descend to the Forum.

The two palaces at the sides now contain the Capitoline Collections. The PALACE OF THE CONSERVATORS, or town-council, on the right, originally erected about 1450 under Nicholas V., was rebuilt in 1564-68 after *Michael Angelo's* plans by *Prospero Boccapaduli* and *Tommaso de' Cavalieri*. The CAPITOLINE MUSEUM (p. 244), on the left, was erected in 1644-55 under Innocent X. by *Girol. Rainaldi*. — The flights of steps and triple-arched colonnades on the E. side of these palaces were erected by *Vignola* (1550-65); that to the left behind the Capitoline Museum leads to the church of Santa Maria in Araceli (p. 235); that to the right, on the opposite side, to the Monte Citorio (now Via di Monte Tarpeo; p. 249).

[illegible][illegible]

A. *Palace of the Conservatori.

Admission, see pp. 150, 151.

The principal door leads from the Piazza del Campidoglio into the Court (*Cortile*). By the right wall of the court are the hands, arm, and feet of a colossal figure in marble; and the cube containing the cinerary urn of *Agrippina*, wife of Germanicus, which in the middle ages was employed as a measure for corn. By the left wall are high-reliefs of Roman provinces, separated by barbaric trophies and weapons, which were found in the Piazza di Pietra (p. 200); also a colossal head of Constantine the Great (perhaps from his basilica, p. 284). — In the centre of the colonnade opposite the entrance, a statue of Roma; at the sides, statues of barbarians in grey marble. To the left, in the corner, a colossal bronze head.

In the ENTRANCE HALL: opposite the staircase, 30. Modern *Columna rostrata*, with the antique fragment of an inscription in honour of C. Duilius, the victor at Mylae, B.C. 260 (the original was probably replaced at the beginning of the imperial period by the extant marble copy). Below the window is a statue of Charles of Anjou, King of Sicily, who was senator of Rome in 1263-66, 1268-78, and 1281-84. Until 1870 this statue stood in the large Hall of the Capitol.

Built into the walls on the first landing of the staircase are four noteworthy reliefs, three of them from a monument of M. Aurelius, found near Santa Martina in the Forum: on the right, 44. Sacrifice in front of the Capitoline temple; on the long wall, 43. Entry of the emperor; 42. Pardon of conquered enemies. The fourth relief (41. Reception of an emperor, perhaps Hadrian, by Roma at a triumphal arch) was found in the Piazza Sciarra. — On the second landing: Relief from the triumphal arch mentioned on p. 199, representing an emperor making an oration. Another relief from the same arch may be seen on the next landing (p. 243). On the left are the staircase leading to the picture-gallery (p. 244), and the entrance to the —

*New Capitoline Collection, which contains chiefly bronzes and the antiques found during the construction of the new streets of the E. quarter of the city, which became municipal property (p. 168). Comp. *Hebbig*, Antiquities in Rome, vol. I, pp. 400-464.

We first traverse two rooms with modern lists of Roman magistrates (*Fasti Moderni*). In the first, on the left, 100. Excellent Roman portrait-head of the Republican period; then Greek portrait-heads (206. Bust of *Anacreon*, found outside the Porta Portese in the Gardens of Omsar), on the right, Roman portrait-heads. — In the second room, more Roman portrait-heads; by the window, 241. Head of Serapis, god of the lower world. — A third room contains

further Roman portrait-heads. By the end-wall, to the left, so-called Head of Amalasuntha, Queen of the Goths (p. 95), to the right, a replica of the head of the 'Thorn Extractor' (p. 242) and the head of a youthful charioteer.

We now pass through a *Corridor* (*Corridolo*): on the left, statuette of Latona flying from the dragon, with her children Apollo and Diana; foot of a colossal statue, the sandal of which is decorated with bas-reliefs.

Hence we enter (to the right) the —

SALA DEGLI ORTI LAMIANI, containing the marble antiquities found on the Esquiline. On the right, *81. Head of a Centaur (Pergamenean school); 32. Copy (restored throughout, head modern) of Praxiteles' Satyr pouring wine; no number (between 121 and 42), Bust of Hercules, after Scopas; 40. Figure of a genius, with a cornucopia and ægis, 50, 49 Statues of girls; by the end-wall, 36, 37. Tritons, found together with the following *36. *Half-figure of the Emperor Commodus*, with the attributes of Hercules, the marble still displays its original polish; the pedestal is masked by the kneeling forms of two Amazons (personifying provinces) bearing a shield enclosed by cornucopia, below which is a celestial globe. On the window-wall, 285. Large marble vase richly ornamented with acanthus leaves; 58, 62. Well-preserved youthful portrait-heads (found together), 143. Old woman carrying a lamb; 141. Old fisherman, 150. Statuette of a boy at play, aiming a nut at a pyramid of nuts on the ground; 133. Graceful figure of a young girl, seated, 8. Tombstone of *Q. Sulpicius Maximus*, a boy of 11½ years, who, according to the Latin inscription, worked himself to death after having distinguished himself in a competition (agon) in extemporising in Greek verses, instituted by Domitian in 94 A.D.; the verses are inscribed on each side of the statuette of the youthful poet. In the middle, *65. So-called *Esquiline Venus*, a young girl in the act of fastening her hair; the *Ureus*-serpent indicates that she was dedicated to the worship of Isis (eclectic work of the Augustine epoch; the upper part of the body is archaic, the lower realistic).

We now return to the above-mentioned —

CORRIDOR. On the wall nearest the court: 61. Fragmentary statue of a youth with sword-belt, opposite, 158. Apollo in the robe of a citharædus (head missing); 60, 68. Two statues of a post-Constantine period, each holding aloft a cloth in the right hand as the signal for starting in the chariot-race.

The corridor and the Sala degli Orti Lamiani open on a —

GARDEN (*Giardino*), with two fountains, one with a figure of Silenus, bearing a wine-skin on his shoulders, the other with a horse being torn by a lion (head and legs of the horse badly restored). The latter group was much admired by Michael Angelo. On the N.W. wall is the partial reconstruction of a *Plan of Rome* (Forma

Urbis), executed under Septimius Severus about 205 A.D. The fragments, discovered for the most part in the 16th cent., have been pieced together by Hülsen and Lanciani and let into the wall as nearly as possible in the manner in which the ancient plan was displayed on the wall of the so-called *Templum Sacrae Urbis* (p. 264). As is customary in antique plans, the top represents the S.; the scale is about 1 : 250. — One side of the garden abuts on the Pal. Caffarelli (p. 235). A portion of a gigantic column of Pentelic marble built into the base of the wall here is the sole visible trace of the Temple of Jupiter (p. 234).

To the S. of the above-mentioned corridor is the Room of the ANCIENT SCULPTURES (*Sculture Arcaiche*). The large slabs in the floor of this room belong to the *Girdle Wall of the Temple of Jupiter*, and are thus still in their ancient position (comp. Plan, p. 239). The two granite columns and the massive granite architrave were incorporated in a mediæval edifice, but doubtless originally belonged to some ancient building in the neighbourhood. — In this room may also be noticed: a replica of the so-called statuette of Penelope (p. 261); fragment of a Greek tombstone with a female figure at the top; 176. Victory descending from heaven; Greek funeral stele on which is represented a girl with a dove; torso of an Amazon stretching her bow. Fragment of an Attic funeral stele (the deceased with her servant), on each side is a female torso. Tomb with a large vase in terracotta; leaden vases and cinerary urn in alabaster. Top of a well in terracotta, with an old Latin inscription (3rd cent. B.C. ?); female head with a diadem; 272. Youth mounting a chariot. — In the passage: Bas-relief of an Athlete washing his hands. Frieze in terracotta representing a procession of chariots; opposite, fragments of ancient wall-paintings. — Adjacent is the so-called —

PROTOROMEA, a collection of busts of celebrated Italians (especially in the domains of science and art), the nucleus of which was formed by the busts removed from the Pantheon in 1820 by order of Pius VII. The bust of Pius VII. is by Canova. Several eminent foreigners also have been admitted: e.g. Winckelmann, Angelica Kauffmann, Raphael Mengs, and Poussin. At the end of the corridor is a monument to Canova by L. Fabris.

We again return to the Corridor: 84, 92. Athletes; 21. Large sarcophagus from Vicovaro (p. 425), representing the Calydonian Hunt (the faces of the deceased and his wife are unfinished). — Adjacent on the left is a room containing the objects found in the gardens of Mæcenas (*MONUMENTI DEGLI ORTI MÆCENASIANI*; see p. 182). To the right, 154. So-called head of Mæcenas. Statue of a young woman wrongly restored as Urania with a globe and a stylus; more probably it was a Hygieia with a serpent and patera. — Statue of *Marsyas*, in red marble, from Pergamum; this formed part of a group which included also a figure resembling the Grinder

in the Tribuna of the Uffizi (Florence). Opposite, **Head of a Wounded Amazon*; statue of *Hercules fighting*; **Relief of a dancing Maenad*, with a knife and the hind-quarter of a goat, an admirable Greek work. In the middle, a cornucopia (garden-ornament).

ROOM OF THE BRONZES. At the entrance, **Roman Priest's Boy* (Camillus), on a revolving pedestal; *Ephesian Diana*, on a triliteral altar. — Below the window: Fragments of a group representing the combat of the gods (here replaced by satyrs) and the giants, a copy of a group from the votive offering of King Attalus on the Acropolis at Athens (see p. III). In the corner: colossal head in bronze. Farther on, *Vase*, found near Anzio, presented by King Mithridates to a gymnasium (foot and handles modern); expressive **Bronze Head*, erroneously said to be that of *L. Junius Brutus*, who expelled the kings and became the first consul; eyes inserted. Fragment of a *Bull* and (opposite) a **Horse*, sadly mutilated, but of excellent workmanship, found at Trastevere together with the *Apoxyomenos* (p. 380). In the centre, the so-called **Capitoline Wolf*, a work of the 6th cent. B.C.; the twins, *Romulus* and *Remus*, are modern. The she-wolf was probably represented alone, as is shown by ancient Roman coins. This is the wolf that stood in the Capitoline temple and was injured in B.C. 85 by lightning, of which traces are evident on the hind legs. In the middle ages (before the 10th cent.) this work, with other bronzes, was erected near the Lateran, and was perhaps subjected at the same time to the pernicious restoration by soldering and filing which has seriously injured it. Opposite the window: **Thorn Extractor* (on a revolving stand), boy removing a thorn from his foot (p. xlvii).

ROOM OF THE VASES (*Vasi* on the Plan), the so-called *Museo Italico*, a collection of vases, terracottas (including two sarcophagi with figures on the lids), bronzes, and various anticaglias from Etruria and Latium. Under glass: Silver ornaments of a cista with archaic figures of animals, found at Palestrina. 'Tensa', i.e. chariot mounted with bronze, the fittings only being antique; bed with ornaments in bronze and inlaid with silver and copper (the portions in wood and tortoise-shell are modern), litter (modern) with fragments of ancient metal fittings.


From the Room of the Vases, we return to the staircase-landing and enter (left) the —

Salò dei Conservatori (i.e. of the town-councillors), with frescoes and other works of art, chiefly of the end of the 16th century.

We pass through a **CORRIDOR** (Pl. IX) containing a collection of porcelain presented by *Cente Cini*, and the old **CHAPEL** (Pl. VIII) containing a fresco (*Madonna*) in the style of *Francesco di Lorenzo*. We then reach the VII. Room, the walls of which are frescoed by *Jacopo Ripanda* (?) of Bologna with scenes from the Punic Wars (retouched throughout). — II. Room (to the right) Frescoes from the history of Rome under the Kings by *Laureti*; statues of the generals *Marcantonio Colonna*, *Alexander Farnese*, *Hospignoli*, *Aldobrandini*, and *Barberini*. — Two finely carved doors lead hence

to the **LARGE SALOON** (Pl. I) with frescoes by the *Cassellere d'Arpino*, representing the Combat of the Horatii and the Curiatii, and other scenes from the period of the Kings; it also contains a bronze statue of Innocent X. by *Algará*, and a marble statue of Urban VIII. by *Bernini*. — We now return through R. II into the III. Room. Scenes from the Cimbrian war on the frieze; bust of Lewis I. of Bavaria; A. Upper part of an antique statue of Apollo. — IV. Room Fragments of the *Fasti Consulares*, or lists of Roman consuls and (on the side-pillars) of all triumphs from Romulus to the time of Augustus, found in 1548 (and smaller fragments in 1818 and 1872), between the temples of Castor and Faustina. They were originally exhibited in the Regia (p. 252). The busts of *B. Borghesi* (by A. Tadolini) and *W. Henzen* (by J. Kops), two scholars who explained the Fasti, were placed here in 1868; and one of *G. B. de Rossi* (p. 402), the archaeologist (by G. Galvani), in 1896. — V. Room Several antiques: bronze jug in the form of a female head; two ducks, head of Medusa, by *Bernini*. Bust of Michael Angelo, not by himself. — VI. Room, a small room, with relics of Garibaldi: weapons, garlands, banners, letters, etc. — VII. Room, formerly the assembly-hall of the Senate. The frieze, representing scenes from the life of Scipio Africanus, is attributed to *Ann. Carracci*. On the walls is tapestry woven at San Michele (p. 376).

We return once more to the landing and ascend the stairs.

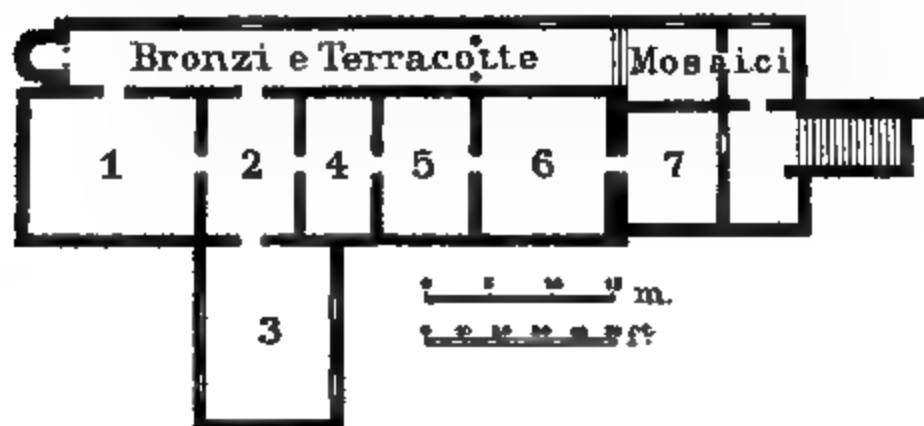

Second Floor. On the upper landing of the staircase, a statue of Persephone, with a fine head of Athena (belonging to another work, restored as Roma). Inserted in the wall, a bas-relief representing the apotheosis of an empress. The heads of the chief figures are restorations with the exception of the chin of the emperor, which indicates him as Hadrian (not Marcus Aurelius or Antoninus Pius). The empress, therefore, must be either the adoptive mother or the wife of Hadrian (i.e. either Plotina or Sabina). This relief belonged to the same arch as that on the second landing (see p. 239). Here also are two marble mosaics (*opus sectile*, resembling the modern Florentine work) from the walls of the Basilica of Junius Bassus on the Esquiline (4th cent. A.D.), representing cattle torn by wild beasts.

The two adjoining rooms (comp. Plan, p. 239) contain fragments of *Mosaics*, several of which are excellent: the Evil Eye (*malocchio*), pierced and surrounded with animals to annihilate its magic power; the Rape of Proserpine, with the heads of the seasons in the corners. — In the **COMMON** to the right, figures and utensils

in bronze Roman seals; statues of a household god (*lar*) and the three-bodied *Hecla*. Then, objects found in the ancient Necropolis on the Esquiline: cinerary urns, some of them in the shape of huts. On the other side: vases, lamps, bas-reliefs used for interior decoration, figures in terracotta, including an archaic *antefixa* in the shape of a woman's head, perhaps belonging to the first temple of Jupiter. On the left and right, two masks of Silenus, also *antefixa*, the first archaic, the second of a later period. In the same cabinet, on the right, archaic fragment of a Warrior wounded on the left breast, whence the blood drops. — In the following cabinet, below, in the middle, head in vitreous paste of various colours. Farther on, cabinet with fragments of a large group in terracotta belonging to a pediment. Finally, glasses and utensils in bone and, at the end of the corridor, a statue of *Hercules* in gilded bronze, a somewhat clumsy work. — We now enter the —

Picture Gallery founded by Benedict XIV. Good catalogue by A. Venturi (11⁴ fr., not sold in the museum).

I. Room. On the entrance-wall above 1-30. *Apelle and the Muses*, fresco by *Le Spagno*. — Below, from right to left: 240, 240, 310. *Pinocchio*, *Passion* and *Baptism of Christ*, 30 *Dono Dono Holy Family*. Narrow wall on the left: 44 *Copy of Perseus, Virgin and saints*. Opposite the entrance: 54 *Antoni, Romulus and Remus* (ca 1610), 62 *Copy of P. Perseus, Triumph of Flora* (original in the Louvre). (On this and the following narrow wall, above 57-60 *Corvus Francesco* from the story of *Cupid and Psyche*. — II Room 102-110. Views of Rome in the first half of the 16th cent., by *Fanshull* and *Costant*. — III Room (to the right of the preceding). On the right: 127 *Corvus, Fortune teller*; above: *Copy of Corvus, Virgin and saints* (original at Parma). Narrow wall: 121 *Guarino*, St. Petronilla raised from the tomb and shown to her bridegroom, a large canvas painted for St. Peter's where it is replaced by a copy in mosaic. — On the left: 17 *Guido Reni, Blessed soul* (undressed). Returning to R. II, we now enter (to the right) the IV Room. On the right: 141 *F. Ann, Baptism of Christ* (ca 1610); 240 *Corvus, St. Sebastian*; 240 *Guido Reni, same subject*; 128 *Volpquist Portrait of himself* (1610); 127 *A. van Dyck, Portraits of the painters Lucas and Cornelius de Wae*; 125 *Marcello Farnesi (?) Portrait of Michael Angelo*; 125 *F. van Dyck, Portrait of the poet Thomas Blighew and of Henry Carew*; 204 *Plato da Carona, Alexander and Darius*; 121 *Marcello, Portraits*. — V Room. 61 *Guido Reni, Magdalen*; 50 *Domestic, the Cumaean Sibyl*; 117 *School of Paolo Veronese, Virgin and St. Anne*; 61 *School of Guercino the Perugian Sibyl*; 197 *P. Veronese, Rape of Europa*; 61 *Pinocchio, Magdalen*. — VI Room. On the right: 240 *Corvus, Virgin*; 166 *Guido Reni (?) So-called portrait of Perseus*; 141 *Style of Baccio (not Giov. Bellini), Portrait*; 24 *Cola dell' Amatrice Death of the Virgin*; 60 *School of Bellini, Virgin and saints*; 15 *School of Fr. Prudent, Virgin and saints* (1610); 142 *Braccio Grandi (?) not Giov. Bellini), Portrait of a woman*; 147 *Annunziata, Portrait of himself*.

The valuable *Collection of Coins* and the collection of *Gold Ornaments and Curved Orms* have also been transferred to the second floor and are not accessible to the public.

B. *Capitolino Museum.*

This museum was founded by Clement XII. and extended by Pius VI., Clement XIII., and Pius VI. The works carried off

by the French were restored with few exceptions to Pius VII. The collection is much smaller than that of the Vatican, but is rich in admirable works. Admission, see pp. 150, 151. Catalogue (1888), 3 fr. Comp. *Helbig*, *Antiquities in Rome*, vol. 1, pp. 293-399.

Ground Floor. — In the centre of the Court (Cortile): in front, above the fountain, is the so-called **Marforio*, a colossal river-god, erected in the middle ages in the Via di Marforio opposite the Carcer Mamertinus, where it was employed as a vehicle for the sarcastic answers to the interrogatories of Pasquino (see p. 226). By the wall, to the right and left of the Marforio: Figures of Pan, two architectonic supporting-figures found in the Piazza del Sacri, on the site of the orchestra of Pompey's Theatre (p. 228). Among the other sculptures here, most of which are unimportant, are two *Egyptian Lions* of basalt (formerly at the foot of the steps of the Capitol), two *Granite Columns* with reliefs, and (44, 51) two *Cynocephali* (dog-faced baboons) in basalt, all from the Temple of Isis near Sant' Ignazio (p. 203).

Corridor (Pl. 4) on the ground-floor. To the left of the entrance: 4. Colossal statue of Athena (period of Phidias); Sarcophagus with Bacchanalian representations, purposely mutilated. At the end of this corridor, to the right: 21. Lower part of a statue of a barbarian in pavonazzetto, originally on the attica of the Arch of Constantine (p. 270).

The three rooms on this side (Pl. 1-3) which contained ancient sculptures, mosaics, sarcophagi, etc. are closed at present, their contents are to be transferred to the Palazzo dei Conservatori. A collection of Christian inscriptions will probably be installed here.

We return to the Corridor (Pl. 4). To the right of the principal entrance: 35. Polyphemus the Cyclops with one of his victims; (right) 40. Colossal Mars, a copy of the image in the temple mentioned at p. 273 (legs, arms, and cloak modern); by the window, 38. Hercules, wrongly restored by Algardi (Hercules originally knelt on the hind). The Hydra (No. 89) and leg, exhibited beside this work, belonged to a different group though found at the same place. — Adjacent, to the right, is the entrance to three rooms containing inscriptions and several interesting sarcophagi.

I. Room (Pl. 5). In the centre: Ara, which stood in the market-place of Albano till 1743, with archaic representation of the labours of Hercules. — **II. Room (Pl. 6)** to the right: 5. *Sarcophagus* with battle between the Romans and Gauls (betraying the influence of figures from the votive monument of Attalus I at Athens; p. 115); (left) 11. Cippus of T. Statilius Aper, an architect ('*mensor aedificiorum*'), with a wild boar (aper) at his feet and a measuring-rod and other instruments on the sides. — **III. Room (Pl. 7).** Large *Sarcophagus* (formerly supposed to be that of Alex. Severus and his mother Mamaea), with scenes from the life of Achilles: Achilles

discovered among the daughters of Lycomedes, (left) farewell of Deidamia, (right) arming of Achilles, at the back, Priam begging for the body of Hector (found at the close of the 16th cent. with the Portland Vase of the British Museum in the Monte del Grano, near the Porta Furba, p. 392). On the rear wall, 3 Relief of an Archigallus (Priest of Cybele). — We now return to the corridor, and ascend the staircase to the first floor.

First Floor. — Straight in front: I. ROOM OF THE DYING GLADIATOR. In the centre: *1. So-called *Dying Gladiator*, found at Rome in the 16th cent. and originally preserved in the Villa Ludovisi. The trifling restorations (right arm, toes, and part of the base) are said to have been made by Michael Angelo. The dying warrior, recognized as a Gaul by his twisted collar, short hair, and moustache, is sitting on his shield, while the blood pours from his wounded breast; he has evidently inflicted the fatal blow himself, having previously broken the curved horn which lies on his shield. He exhibits the same dignity of character as the Barbarian in the group now in the Museo Boncompagni (p. 173), which was probably found at the same time (comp. p. lii). The visitor will readily recall the lines by Byron: *Childe Harold*, Canto iv, 140. — Right wall: 6. *Head of Dionysus*, once erroneously taken for a woman's (Ariadne's). 4. Amazon, in the style of that from the Villa Mattei (p. 363); the head is antique but belonged originally to some other statue; 3. Alexander the Great; 2. Pergamenian statue of a goddess. Opposite the entrance: 16. So-called M. Junius Brutus, the 'et tu Brute' of Cæsar (now said to be a portrait of Virgil); 14. Statue of a girl from the Villa of Hadrian, restored as Flora. — Left wall: *12. Portrait statue of a youth, from Hadrian's Villa, sometimes erroneously described as Antinous; *10. *Resting Satyr of Praxiteles*, one of the best of the extant copies (p. xlix).

This is the figure that suggested the title of Nathaniel Hawthorne's romance, *The Marble Faun* (see p. xxvii), in the opening pages of which occurs a fine description of the statue.

9. Girl protecting a dove. Entrance-wall: *8. Portrait statue, so-called *Zeno*.

II. STANZA DEL FAUNO. On the entrance-wall, the *Lex Regia* of Vespasian (black tablet of bronze), whence Cola di Rienzi (p. xxxviii) once demonstrated to the people the might and liberty of ancient Rome. In the centre, 1. *Satyr (Fauno)* in rosso antico, raising a bunch of grapes to his mouth, from Hadrian's Villa, on a remarkable altar, dedicated to Jupiter Sol Serapis. Window-wall: 26. Circular ara with a rostrum, and the inscription *Ara Tranquillitatis*, found along with the adjoining *Ara Ventorum* and *Ara Neptuni* at the harbour of Anzio (p. 439), where they were employed by sailors for offering sacrifices on their embarkation or return. — Wall of egress: 3. Sarcophagus with relief of Diana and Endymion; upon it, 6. Ideal head; 8. Boy with mask of Silenus. Back-wall,

61. Silenus. — Entrance wall: 16. Boy struggling with a goose, copy of a statue by Boethos; 18. Sarcophagus with battle of Amazons; upon it, 21. Ariadne.

III. LARON SALOON. In the centre: 2, 4. Two Centaurs in dark-grey marble, by Ariston and Papias, found in Hadrian's Villa (p. 420) in 1738. Originally each centaur bore a Cupid on his back, but while the younger obeys the will of love with joy, the older regards his tormentor with mingled wrath and pain. 3. Colossal basaltic statue of the youthful Hercules, found on the Aventine; it stands on an altar of Jupiter, embellished with representations of his birth, education, etc. — Window-wall to the left of the entrance: 30. Archaic Apollo; 31. Apollo (very soft in treatment); 33. Wounded Amazon, the name of the sculptor, according to the inscription on the trunk, was Sosikles (copy of a work by Kresilas, a contemporary of Phidias), 36. Athena. — Wall of egress: 7. Colossal statue of Apollo; 8. Athena; 9. Colossal bust of Trajan with civic crown. — Right wall: 19. Hadrian as Mars. A doorway in the centre leads to Corridor VI (p. 248). 20. Archaic Apollo; *24. Ceres. — Entrance-wall: 27. Hunter with a hare; 28. Harpocrates, god of silence, from Hadrian's Villa (p. 420).

IV. ROOM OF THE PHILOSOPHERS. On the walls, beautifully executed **Reliefs*, six from the frieze of a temple of Neptune, with sacrificial implements and parts of ships (Nos 99, 100, 102, 104, 105, 107). — In the centre: *98. Sitting Statue, erroneously called Marcus Claudius Marcellus, the robes are Greek, not Roman. Also ninety-three **Busts of Celebrated Characters of Antiquity*, to some of which arbitrary names are affixed: 1. So-called Virgil (really an Eleusinian deity); 4, 5, 6. Socrates; 8. Carneades; 9. Aristides the sophist (?); 10. Hellenistic poet (perhaps Callimachus or Philotas), usually but groundlessly described as Seneca; 21. Diogenes the Cynic; 22. Sophocles; 25. Theon; 31. Demosthenes; 33, 34. Sophocles; 35. Alcibiades (?); 38. Chrysippus (?), 41-43. Euripides. Opposite, in the lower row. 44, 45, *46. Homer, 48. Cn. Domitius Corbulo, general under Claudius and Nero; *49. Scipio Africanus(?); 58. Plato, *59. Young Barbarian, sometimes identified as Arminius the Cheruscan though the facial type is scarcely Germanic, 63. Epicurus and Metrodorus, a double hermes; 64. Epicurus. *62. Aeschylus (?). The names of the busts by the window-wall are unknown.

V. ROOM OF THE BUSTS OF THE EMPERORS. Reliefs on the entrance-wall: *92. Endymion asleep, beside him the watchful dog; *89. Perseus liberating Andromeda (these two are similar in style to the reliefs in the Pal. Spada, p. 230). In the centre: *84. Sitting female statue, long believed to be the Elder Agrippina, wife of Germanicus, an identification that is now disputed (comp. the bust No. 10, below). — The collection of the **Emperors*

Busts is one of the most complete in existence; the names are for the most part verified by coins (comp. p. liv).

The numbering of the busts commences in the upper row, to the left of the entrance-door: 1. Julius Cæsar; 2. Augustus; 3. Marcellus, nephew of the latter (?); 4. Tiberius; 5. Germanicus; 6. Drusus the elder, brother of Tiberius; 7. Antonia, wife of the elder Drusus, mother of Germanicus and Claudius; 8. Germanicus; 9. Agrippina, his wife, daughter of M. Agrippa and mother of Caligula; 10. Caligula, in basalt; 11. Claudius; 12. Messalina, 3rd wife of Claudius; 13. Agrippina the younger, daughter of Germanicus, mother of Nero and last wife of Claudius; 14. Nero; 15. Nero (freely restored); 16. Poppæa, Nero's second wife; 17. Galba (modern); 18. Otho; 19. Vitellius; 20. Vespasian; 21. Titus; 22. Julia, his daughter; 23. Domitian; 24. Domitia, wife of Domitian; 25. Nerva (modern ?); 26. Trajan; 27. Plotina, his wife; 28. Marciana, his sister; 29. Matidia, her daughter; 30. Hadrian; 31. Sabina, his wife; 32. Marcus Cæsar, his adopted son; 33. Antoninus Pius; 34. Faustina the elder, his wife; 35. Marcus Aurelius as a boy; 36. M. Aurelius more advanced in life; 37. Faustina the younger, daughter of Antoninus, wife of Aurelius; 38. Lucius Verus; 39. Commodus; 40. Pertinax; 41. Maximus; 42. Unknown, executed, according to the inscription, by Seneca of Aphrodisias; 43. Septimius Severus; 44. Caracalla; 45. Hellogabalus; 46. Alex. Severus; 47. Maximin; 48. Maximus, son of Maximin; 49. Gordian Africanus; 50. Gordian; 51. Pupienus; 52. Philippus Cæsar; 53. Gallienus; 54. Julian the Apostate (? the inscription on this bust is medieval).

VI. *Corridor*. At the end to the left: no number, Beautiful marble vase on an archæistic *Puteal or circular wall-head, with a procession of 12 gods: Jupiter, Juno, Minerva, Hercules, Apollo, Diana, Mars, Venus, Vesta, Mercury, Neptune, and Vulcan. By the window to the left: 33. *Bust of Caligula*. Then, the back of the visitor being turned to the window: (l.) 30. *Trajan*, (l.) *29. *Palas*, found at Velletri, a replica of the *Minerva Giustiniani* (No 114; p. 380), without the eagle; (l.) 25. *Jupiter*, on a cippus with relief of *Claudia Quinta*, the Vestal Virgin, drawing a boat containing the image of the *Magna Mater* up the Tiber; (r.) 38. *Bacchus*; (r.) 42. *Female draped statue*. (The door opposite leads to the *Venus room*, see p. 249). Left, 20. *Psyche*, tormented by Cupid; (r.) *Stercorarius* with representation of the birth and education of *Bacchus*. In the following compartments of the window-wall and rear wall are inscriptions from the columbarium of the freedmen of Livia (near the church of *Domine Quo Vedis* p. 399; now destroyed). Right: 48. *Son of Niobe falling on his knee*; (l.) 15. *Colossal head of Venus*; (r.) *49. *Colossal female head* (the eyes, of vitreous paste, were inserted), an original work by *Damophon of Maseone* (2nd cent. B. C.); 51. *Colossal head of Aphrodite*; 52. *Draped statue of Aphrodite*, restored as a *Muse*; (l.) 10. *Octagonal cinerary urn with Cupids*; B. *Old woman intoxicated*. Here is the entrance to the *Room of the Doves*. Then, (l.) 5. *Cupid bending his Bow*; (r.) 60. *Flute-playing satyr*; 60. *Copy of the Discobolus of Myron* (p. 215), incorrectly restored as a falling warrior.

VII. *Room of the Doves*, so called from the *Mosaic on the right wall: *Doves on a Fountain Basin*, found in *Hadrian's Villa* near *Tivoli* (p. 420), copy of a celebrated work by *Seneca of Perga-*

mum, mentioned by Pliny (Nat. Hist. 36, 184). Below it, a sarcophagus: 13. Prometheus forming man, whom Minerva inspires with life, in a style showing the transition to the Christian style of art. On the right wall, Mosaic with masks. Under the mosaic: 37. Sarcophagus with Selene and Endymion. On the end-wall are several fine Roman portrait-busts. On the left wall, in the 2nd window, 83. *Iliac Tablet* (*Tabula Iliaca*), a small relief in pelombino, a soft kind of marble, with the destruction of Troy and flight of Aeneas in the centre, and many other incidents from the legends of the Trojan war, explained by Greek inscriptions, found near Bovillae. 83a. Fragment of a representation of the shield of Achilles, inscribed on the back as the work of Theodoros. On the margin of the shield were 124 lines from Homer's description of the shield in Book XVIII of the *Iliad*, but only 76 are now left. 83b. Fragment of another representation of the same subject.

VIII. Room of Venus. Opening off the corridor is the Venus Room, which contains (on a revolving pedestal) the ^{**}Capitoline Venus, unquestionably the workmanship of a Greek chisel, and the most admirable of all the existing later developments of the idea of the Cnidian Aphrodite of *Praxiteles* (p. xlix), which is known to us from coins. The statue is to be regarded as the perfect type of feminine grace, not as intended as a temple figure. It was found near San Vitale on the Quirinal (p. 174). — Left, *Leda*; right, ^{*}*Cupid and Psyche*, found on the Aventine.

On the S. height of the Capitol, called the *Monte Caprino* (to which a flight of steps ascends on the E. side of the Palace of the Conservatori, comp. p. 230), stand the so-called *Casa Tarpeia* with the Protestant hospital, and the *German Archaeological Institute*, erected in 1874-76 by Laspeyres, at the cost of the German government. In the garden (custodian, Via di Monte Tarpeo 25) is shown the *Rupe Tarpeia*, or Tarpeian Rock, whence persons condemned to death were hurled down. Ancient substructures of solid stone, which were discovered in the garden of the Palazzo Caffarelli (p. 236) in 1866, belonged to the temple of the Capitoline Jupiter (p. 234).

The imposing ruins on which the Senatorial Palace has been erected (entrance by the first iron gate to the left in the Via del Campidoglio, as we come from the Piazza del Campidoglio; then enter the door to the right with the superscription 'Tabulario e Torre Capitolina'; admission daily 10-4, 50 c., closed on Sun.) belonged to the ^{*}Tabularium, erected in B.C. 78 by the consul Q. Lutatius Catulus for the reception of the public archives. Grouped round the square court were large vaults; an open colonnaded court with half-columns in the Doric style, still visible, faced towards the Forum. The vaults were used in the middle ages as a public salt-magazine,

and the blocks of peperino have been much corroded by the action of the salt. The rooms contain architectural and sculptural fragments from the neighbouring temples, such as (at the end, to the left) the splendid main cornice of the Temple of Concordia (p. 253), a restored east of the cornice of the Temple of Veasarian, etc. — From the middle of the colonnade we may ascend a flight of steps to the left marked 'Torre Capitolina'. We first reach a room with the inscription from a monument raised by the Emperor Frederick II. after his victory over the Milanese at Cortenuova in 1237, in Rome (whither he sent the captured 'carroccio' or banner-chariot); and then traverse a short corridor with mediæval and modern inscriptions (standard measures, etc.), to the top (259 steps in all) of the Campanile of the Palazzo del Senatore (p. 258). The highest gallery commands one of the most beautiful ^{**}Views of Rome, especially to the S.

Bühlmann and Wagner's panorama of ancient Rome (p. xxviii) is taken from this point; visitors are recommended to bring a copy of it with them.

b. *The Forum Romanum and the Colosseum.*

In the most ancient times the Capitol and Palatine were separated by a deep and marshy valley about 38 ft. above the level of the sea, and 22 ft. above the level of the Tiber. The inhabitants of the city on the Palatine must have begun at a very early period to drain and cultivate this valley, at the same time regulating, embanking, and covering the channel of the streamlet which flowed out of it to the Tiber. In this manner was gradually formed the *Cloaca Maxima* (pp. 258, 283). — Tradition makes the depression on the slope of the Palatine the scene of the conflict of the Romans under Romulus against the Sabines under Titus Tatius after the rape of the Sabine women. After the hostile tribes made peace on the Comitium, the highest lying portion at the foot of the Capitol, they chose the valley to be the Forum, or central point, of the new community. The Forum and the Comitium adjoined each other, somewhat as the Piazza and Piazzetta at Venice adjoin each other to-day, but they served different purposes. In the Comitium, the smaller but more dignified square, which extended from near the Arch of Severus to the Via Cremona, the popular assemblies and courts of justice were held. On it lay the *Curia Hostilia*, or council-hall, which is said to have been erected by King Tullus Hostilius, and the *Carcer Mamertinus* (p. 271). The Forum, on the other hand, was originally used for trading-purposes, as a market-place, etc.; and along its sides were ranged the *Tabernæ Veteres* and *Novæ*, or shops, which were at first occupied by butchers and other craftsmen. In the course of time a number of temples, public buildings, and monuments were erected in and around both squares. The Temple of Vesta and Shrine of Juturna are among the earliest sanctuaries of which the ruins still remain. The Temples of Saturn

on

8-

de

4.

6.

10

2.

4.

6.

..

.. .. _____

1

2

3

4

(B.C. 497) and of *Castor and Pollux* (484) date from the Republican period. The *Temple of Concord* (366) commemorates the termination of the protracted struggle between the Patricians and the Plebeians. With the extension of Rome's supremacy, especially after the Samnite War, the development of public life required more and more space. The popular assemblies were transferred from the Comitium to the Forum, and the small dealers were banished from the latter to the 'Macellum', or flesh-market, and the 'Forum Piscatorium', or fish-market, which were now erected on the N. side, while the shops thus vacated were occupied by money-changers and goldsmiths (*tabernæ argentariæ*). The Forum was used also for the celebration of the funerals of the nobility, for the gladiatorial combats introduced about the year 264, and on other public occasions. The first expedient for gaining space, resorted to after the second Punic War, was the erection of basilicas, or quadrangular courts surrounded by colonnades, adjoining the Forum, with a view to draw off a portion of the traffic. In 184 Cato the Elder erected the *Basilica Porcia* on the N. side; in 179 followed the *Basilica Æmilia*, and in 169 the *Basilica Sempronia*. The task was prosecuted with the utmost energy by Cæsar, who extended the Forum by the addition of the *Forum Julium* (p. 273), and appears to have projected a cutting through the hill which connected the Capitol with the Quirinal in order to facilitate communication with the new quarter, then rapidly springing up in the Campus Martius. He also built the *Curia Julia* (p. 258) which occupied the main portion of the old Comitium, and he erected the spacious *Basilica Julia* on the S. side of the Forum. Augustus proceeded to carry out the plans of his uncle, and to that emperor is chiefly due the arrangement of the Forum which the present excavations are bringing to light. All the edifices of the Republic were restored by him and his successors, whose building operations extended without intermission over the first four centuries of the Christian era. External magnificence of public life, it would appear, was intended to compensate for the irrevocable loss of liberty and power. Five new fora, constructed between the time of Cæsar and that of Trajan, adjoined each other on the N. side of the old Forum, thus connecting the central point of the original city with the palatial buildings of the Campus Martius. By these new fora the Forum of the Republic would have been wellnigh eclipsed, but for the glorious traditions connected with it, to commemorate which it was profusely adorned with gilded bronzes and rare marbles, with columns, triumphal arches, statues, and other works of art.

The Forum was seriously injured by a fire in the reign of Carinus (283-84); but Diocletian and his successors restored many monuments. The ancient buildings were restored for the last time in the reign of Theodoric the Goth, in the first half of the 6th century. The last monument erected in the Forum was the Column of

Phocas (see p. 256), but the rudeness of the architecture distinctly betrays the decline of the period. As early indeed as the latter half of the 8th cent. had begun the war of extermination waged by the middle ages against paganism. Ancient public buildings were transformed into churches, such as those of *Santi Martina e Luca*, *Sant' Adriano*, *Santi Cosma e Damiano*, and *Sancta Maria Antiqua*, and, from the 8th cent. onwards ancient temples also met with the same fate, as in the case of *Sancta Maria Nova*, *San Lorenzo*, and others that have now disappeared. Interspersed with these churches were the towers and castles of the Roman nobility, called into existence by the destructive mediæval feuds. Throughout a thousand years the edifices of ancient Rome were employed as quarries, from which churches and secular buildings alike derived their columns, their blocks of solid stone, and, owing to a still more destructive proceeding, their supplies of lime from the burning of marble. It need hardly be observed that the bronzes of antiquity were still more eagerly appropriated in an age when metal of every kind was scarce.

The systematic destruction of the Forum was followed by its systematic burial in rubbish-heaps, so that the ancient pavement is at places 40 ft. below the present level of the ground. As early as the 12th cent. the middle of the Forum seems to have been impassable, to judge from the ancient directions for processions; and the accumulation of rubbish was probably accelerated by the demolition of the towers of the *Frangipani* and other noble families (1221, 1267). In the 15th cent. the Forum was largely occupied by gardens and cane-brakes; its desolate area was covered with the teams of buffaloes and oxen of the peasantry, and mechanics established their workshops around it, while a few isolated columns alone protruded from the rubbish. The very name of Forum was forgotten, and down to our own day the famous site was popularly known as the *Campo Vaccino*. As early as 1519 *Raphael* had formed a plan for restoring the ancient city, and especially the Forum; and subsequently, particularly in 1546-47, several excavations were begun in the neighbourhood of the Arch of *Severus* and the temples of *Castor* and *Faustina*. The object in view, however, being merely the discovery of works of art and inscriptions or of hewn stones for building purposes, the excavations were soon filled up again. It was not until the 19th cent. that this, the most historical site in ancient Rome, was systematically explored. The arch of *Severus*, the column of *Phocas*, and the *Clivus Capitolinus* (p. 256) with its temples, were disinterred under the superintendence of *Carlo Fea* in 1803-19, while in 1835 and 1848 part of the *Basilica Julia* was excavated by *Comina*. The Italian government resumed these works on a large scale, at first under the care of *P. Rosa* (1871-75), and then under the care of *Rod. Lanciani* (1882-84). The latest operations, carried on since 1898 under *Comandatore C. Boni*, have nearly doubled the excavated area of the

10
 11
 12
 13
 14
 15
 16
 17
 18
 19
 20
 21
 22
 23
 24
 25
 26
 27
 28
 29
 30
 31
 32
 33
 34
 35
 36
 37
 38
 39
 40
 41
 42
 43
 44
 45
 46
 47
 48
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65
 66
 67
 68
 69
 70
 71
 72
 73
 74
 75
 76
 77
 78
 79
 80
 81
 82
 83
 84
 85
 86
 87
 88
 89
 90
 91
 92
 93
 94
 95
 96
 97
 98
 99
 100
 101
 102
 103
 104
 105
 106
 107
 108
 109
 110
 111
 112
 113
 114
 115
 116
 117
 118
 119
 120
 121
 122
 123
 124
 125
 126
 127
 128
 129
 130
 131
 132
 133
 134
 135
 136
 137
 138
 139
 140
 141
 142
 143
 144
 145
 146
 147
 148
 149
 150
 151
 152
 153
 154
 155
 156
 157
 158
 159
 160
 161
 162
 163
 164
 165
 166
 167
 168
 169
 170
 171
 172
 173
 174
 175
 176
 177
 178
 179
 180
 181
 182
 183
 184
 185
 186
 187
 188
 189
 190
 191
 192
 193
 194
 195
 196
 197
 198
 199
 200
 201
 202
 203
 204
 205
 206
 207
 208
 209
 210
 211
 212
 213
 214
 215
 216
 217
 218
 219
 220
 221
 222
 223
 224
 225
 226
 227
 228
 229
 230
 231
 232
 233
 234
 235
 236
 237
 238
 239
 240
 241
 242
 243
 244
 245
 246
 247
 248
 249
 250
 251
 252
 253
 254
 255
 256
 257
 258
 259
 260
 261
 262
 263
 264
 265
 266
 267
 268
 269
 270
 271
 272
 273
 274
 275
 276
 277
 278
 279
 280
 281
 282
 283
 284
 285
 286
 287
 288
 289
 290
 291
 292
 293
 294
 295
 296
 297
 298
 299
 300
 301
 302
 303
 304
 305
 306
 307
 308
 309
 310
 311
 312
 313
 314
 315
 316
 317
 318
 319
 320
 321
 322
 323
 324
 325
 326
 327
 328
 329
 330
 331
 332
 333
 334
 335
 336
 337
 338
 339
 340
 341
 342
 343
 344
 345
 346
 347
 348
 349
 350
 351
 352
 353
 354
 355
 356
 357
 358
 359
 360
 361
 362
 363
 364
 365
 366
 367
 368
 369
 370
 371
 372
 373
 374
 375
 376
 377
 378
 379
 380
 381
 382
 383
 384
 385
 386
 387
 388
 389
 390
 391
 392
 393
 394
 395
 396
 397
 398
 399
 400
 401
 402
 403
 404
 405
 406
 407
 408
 409
 410
 411
 412
 413
 414
 415
 416
 417
 418
 419
 420
 421
 422
 423
 424
 425
 426
 427
 428
 429
 430
 431
 432
 433
 434
 435
 436
 437
 438
 439
 440
 441
 442
 443
 444
 445
 446
 447
 448
 449
 450
 451
 452
 453
 454
 455
 456
 457
 458
 459
 460
 461
 462
 463
 464
 465
 466
 467
 468
 469
 470
 471
 472
 473
 474
 475
 476
 477
 478
 479
 480
 481
 482
 483
 484
 485
 486
 487
 488
 489
 490
 491
 492
 493
 494
 495
 496
 497
 498
 499
 500
 501
 502
 503
 504
 505
 506
 507
 508
 509
 510
 511
 512
 513
 514
 515
 516
 517
 518
 519
 520
 521
 522
 523
 524
 525
 526
 527
 528
 529
 530
 531
 532

FORO ROMANO

Scala 1:1000



1
1

LATO SETTENTRIONALE

Tabulario Capitolino

RICOSTRUZIONE

STATO ATTUALE

Forum, and have yielded results of the highest value. The most ancient days of Rome have been brought back to us by the archaic necropolis adjoining the Temple of Faustina (p. 263; discovered in 1902) and by the inscribed stone found under the 'lapis alger' (p. 258) in 1899, while the most brilliant epochs of the imperial period are recalled by the Basilica Aemilia (p. 258), the Temple of Augustus with its associated buildings, and the Shrine of Juturna (1899-1900). A unique monument of the Byzantine period in Rome is preserved in the church of Santa Maria Antiqua, with its rich fresco decoration (p. 280), discovered and restored in 1900-1902.

The ENTRANCE to the excavations (open from 9 a.m.; comp. pp. 180, 181) is at the corner of the Via delle Greche and the Via delle Condottiere. The part of the Forum next the Capitol, containing the Colonnade of the Twelve Gods and the temples of Vespasian and Concordia, is now enclosed by a railing and is best viewed from above — See the subjoined VIEWS OF THE S. AND W. SIDES OF THE FORUM. At the top are reconstructions of the ancient appearance of the Forum, and below its present appearance. The longer axis of the Forum lies almost exactly from N.W. to S.E. For the sake of simplicity, however, we describe the side between Santi Adriano and San Lorenzo as the N. side, and that between the Basilica Julia and the Temple of Castor as the S. side. — Regulations for photographing, sketching, etc., see p. xxi.

Descending from the piazza of the Capitol through the Via del Campidoglio to the right, past the Senatorial Palace (comp. p. 236), we enjoy a good *SURVEY OF THE FORUM*. To the left, below us, lie the temple of Saturn, to which the eight unfluted columns belong, the three columns of the temple of Vespasian, and the arch of Septimius Severus. Behind, partly hidden by the columns of the temple of Saturn, is the column of Phocas, farther on is the temple of Faustina, with well-preserved octostyle portico, and, opposite, the three columns of the temple of Castor. The *Sacra Via*, ascending from the temple of Faustina, passes (on the left) the circular temple of Romulus with the church of Santi Cosma e Damiano, then the huge arches of the basilica of Constantine, while on the right are the remains of numerous brick-built shops and houses. In the background appear the church of Santa Francesca Romana, on the site of the temple of Venus and Roma, the Colosseum, the arch of Titus, and to the right the ruins and gardens on the Palatine.

The building immediately below the Tabularium (p. 249), in the angle formed with it by the street, is the Colonnade of the Twelve Gods (*decem consentium*), whose images were erected here in A.D. 367 by Vettius Agorius Prætextatus, the prefectus urbis, and one of the principal champions of expiring paganism. In 1868 the ruin was freely restored.

To the right of the Colonnade of the Twelve Gods and close to the Tabularium, rise three columns, belonging to the *Temple of Vespasian*, erected under Domitian and restored by Septimius Severus. The inscription ran thus: '*Disco Vespasiano Augusto Senatus populusque Romanus; imperatores Caesaris Severus et Antoninus Pii Felices Augusti restituerunt*.' A part of the last word only is

254 III. Southern Quarters. ROME. b. The Forum Romanum:

preserved. The columns and entablature display excellent workmanship (restored east in the Tabularium, see p. 250). In front the temple had a portico of six columns. An apse from the Tabularium (p. 249) was evidently built up by the back-wall of the cella.

Farther on, to the right, and with its back adjoining the Tabularium, is the Temple of Concordia (p. 251), founded in B.C. 368 by M. Furius Camillus, to commemorate the reconciliation between the Plebs and the Patricians, and rebuilt on a magnificent scale by Tiberius in B.C. 7. Its remarkable arrangement would appear to date from this later restoration. The *Cella* or inner space of this temple differs from the usual type in having its longer axis (130 ft.) at right angles to the longer axis of the temple; it is 82 ft. wide. The N. part of the cella is concealed by the ascent to Araceli. A broad flight of steps ascended to the Pronaos, which lay 20 ft. above the level of the street and was 88 ft. long and 48 ft. wide. The interior of the temple was frequently used in early times for meetings of the Senate, and after the restoration by Tiberius it seems to have served chiefly for the exhibition of works of art.

In order to continue our examination of the Forum we now proceed to the entrance in the Via delle Grazie (p. 253) and visit first the Basilica Julia.

The Basilica Julia was founded by Caesar with a view to enlarge the Forum, and was inaugurated in B.C. 46, after the battle of Thapsus, though still unfinished. Augustus extended it, but before he could witness its completion it was burnt down. The building was again twice injured by fire towards the end of the 3rd century. It was restored several times, finally in A.D. 416. After several partial excavations, it was almost all extricated in 1871-83.

The *Ground Plan* of the basilica is a rectangle, about 110 yds. long and 58 yds. wide. On the four sides were double aisles which enclosed a *CENTRAL SPACE*, about 80 yds. by 17 yds., paved with variegated African and Phrygian marble, the costly nature of which indicates that the space was roofed over. The greater part of the pavement has been badly restored, a few fragments of the original only having been preserved. The sittings of the tribunal of the Centumviri, in four different sections, took place here. The *Aistae* were paved with white marble, on which are still seen a number of circles, and occasionally writing, scratched on the surface by visitors. These were used in playing a game resembling draughts; for the ancient Romans were as fond of pastimes as the modern. Of the *Pinnæ* nothing but the bases remain; the blocks of which they consisted were used in building the Pal. Giraud in the Borgo (p. 317). The brick pillars have been reconstructed, in a manner indicated by some lingering remains and partly with the original materials. On the N.W. side the remains are somewhat more important, owing to the fact that a mediæval church (*Santa Maria in Cosmedin*) was built in this part of the basilica. Here, on the side next the *Vicus Jugurinus*, still stand marble pillars adorned with Doric pilasters, while at the back, facing the *Consolations*, are lofty walls of tuffaceous and travertine. Staircases ascended here to the upper story.

The main façade of the Basilica Julia is skirted by the *Via Sacra*, on the right side of which, opposite the Basilica, are eight

large brick pedestals, once coated with marble. The hasty construction of these and the brick-stamps refer them to the period of Diocletian. The first two pedestals now support colossal columns (granite and pavonazzetto), which were found in fragments at their foot in 1873 and were re-erected in 1898-99. The bases of the columns were rustered on the model of that of the Phœœas column.

A little to the right from the Sacra Via, almost opposite the last of the brick pedestals, are the foundations of the *Triumphal Arch of Tiberius*, discovered in 1901. The arch was erected by Tiberius in A.D. 18 to commemorate the victories of Drusus over the Germanic tribes and the recovery of the Roman insignia lost at the battle of the Teutoburgian Forest. A few marble blocks and fragments of cornices belonging to the arch lie near the last brick pedestals. The street begins to ascend beyond the arch, forming the *Clivus Capitolinus*, which led up in several curves from the Forum to the Temple of Jupiter (p. 234). An ancient retaining-wall, recently discovered here, has been wrongly identified with the *Rostra Vetera* or *Rostra Caesaris* (comp. below). — Upon the Clivus, immediately to the left, was situated the Temple of Saturn.

The *Temple of Saturn*, of which eight columns are still standing on a high basement, was consecrated by the consuls Sempronius and Minucius, B. C. 497, and restored by Munatius Plancus (about B.C. 44). The inscription, *Senatus populusque Romanus incendio consumptum restituit*, refers to a later restoration, undertaken hastily and without taste. From the earliest times it was the depository of the *Aerarium Publicum*, or public treasury. Of the lofty flight of steps by which the portico was approached there are now but scanty traces.

On the Clivus Capitolinus, near the Arch of Severus, are the conical brick remains of the *Umbilicus Urbis Romæ*, or ideal centre of the city. Behind it, under a wooden roof, are some very ancient structures of tuff, which are supposed to be the *Velocum*, an altar and sanctuary of Vulcan. On the road in front of the Temple of Saturn traces have been found of the *Miliarum Æreum*, a column giving the names and distances of the chief towns on the roads radiating from Rome, erected by the Emp. Augustus in B.C. 28.

To the right of the Arch of Tiberius, in the centre of the W. side of the Forum, we see the massive stone remains of the *Rostra*, or orators' tribune, erected by Augustus. This tribune consisted of an extensive raised platform, adorned with statues and tablets, and giving the orator room to walk up and down during his speech. It has been aptly compared to the preaching stages in some of the Roman and Neapolitan churches. The front was thoroughly restored in 1903.

The original tribune derived the name of *Rostra* from the iron prows of the war-ships of Antium with which it was adorned after the capture of that town in B. C. 338. Its position cannot now be definitely fixed, but was certainly nearer the Curia (Sant' Adriano). Cæsar transferred it to the end of the Forum in the course of his extensive building operations.

of the excavations here was the Curia, or meeting-place of the Roman Senate, which was built by Cæsar (*Curia Julia*) and restored about 301 A.D. by Diocletian. About 625 A.D. Pope Honorius I. converted it into the church of the martyr Hadrian (*Sans Adriano*), but retained the brick façade of Diocletian's building. The tombs hollowed out in the brick wall date from the middle ages; they, like the different layers in the walling-up of the ancient entrance, show the gradual raising of the level of the ground between the 7th and 17th centuries. — Besides the large council-chamber, the senate-house contained various smaller rooms, chapels, colonnaded courts, and the like. The church of Santi Martina e Luca, mentioned on p. 272, is built into the *Secretarium Senatus*, or hall for secret meetings.

To the right of the Curia lies the imposing but sadly dilapidated *Basilica Æmilia*, the front of which occupied the whole of the N. side of the Forum as far as the Temple of Faustina. It was originally built in 179 B.C. by the Censors M. Æmilius Lepidus and M. Fulvius Nobilior, and was frequently restored by members of the Gens Æmilia down to the times of Augustus and Tiberius. This building of the early imperial epoch showed on the side towards the Forum a two-storied colonnade, with arches and Doric architrave. The remains of a pillar still occupy their original position at the S.E. corner, and adjacent to them are fragments of the architrave with triglyphs and bucrania. Beyond the colonnade lay a series of quadrangular rooms (*tabernæ*), with walls built of large blocks of tufa, which were used as offices, committee-rooms, and the like. They were adjoined by the large main hall, 200 ft. long and 72 ft. wide, which has not yet been fully excavated. At the sides of this hall were galleries supported by unfluted columns of variegated marble (*Africano*). The innumerable fragments of iron and bronze, heads of nails, and small coins, which are stuck fast in the magnificent flooring of large marble slabs, furnish a proof that the building was destroyed by fire, perhaps on the capture of Rome by Alaric the Visigoth in 410 A.D. Subsequently the colonnade towards the Forum was hastily and tastelessly restored, the white marble pillars being replaced by smaller columns of red granite on rude cubical bases. Three of these have been re-erected in modern times. Finally, in the 7th or 8th cent., a fortress-like house of large grey blocks of tufa was added to the ancient structure. Its flooring consists of a mosaic of small tesserae of marble, porphyry, and serpentine. This building also seems to have been deserted and gradually covered up with rubbish after the year 1000.

A round marble basin in front of the *Basilica Æmilia* marks the site of the small sanctuary (*Sacellum*) of the *Venus Cloacina*, which stood near the point where the *Cloaca Maxima* entered the Forum. This large drain was, according to tradition, constructed by the Tarquins to carry off the water of the marshy valley in which the Forum lay (see p. 250), and was renewed by Augustus and Agrippa.

The open area of the Forum proper, which was paved with slabs of white limestone and measured about 400 ft. in length by 166 ft. in width, was used for popular assemblies and so forth. Most of it is now covered with columns, bits of the architrave, and other architectural fragments of the Basilica Emilia and other buildings. Below the pavement a network of narrow vaulted passages about 6 ft. high was discovered in 1904, but the use of these has not yet been explained.

A large basement in rubble-work, about 3 ft. below the pavement, near the centre of the area, is supposed (without sufficient reason) to have supported the colossal equestrian statue of Domitian.

On the E. side of the Forum, and facing the Capitol, is situated the Temple of Cæsar, of which nothing remains but the concrete core of the substructures. Cæsar had erected here a new oratorical tribune, and it was from this place, at the funeral of the murdered dictator on 19th or 20th March, B.C. 44, that Mark Antony pronounced the celebrated oration which wrought so powerfully on the passions of the excited populace. A funeral pyre was improvised, and the illustrious deceased was accorded the unparalleled honour of being burned in view of the most sacred shrines of the city. His ashes were interred in the family tomb of the gens Julia in the Campus Martius, while a column with the inscription 'parenti patriæ' was erected here to commemorate the event. Augustus afterwards erected a temple in honour of 'Divus Julius', his deified uncle and adoptive father, and dedicated it to him on 18th Aug. B.C. 29, two years after the battle of Actium. At the same time he adorned the tribune with the prows of the captured Egyptian vessels.

The temple was of the Ionic order, with six columns in front. In front of the temple there are the remains of a platform, still partly paved with slabs of stone, which is believed to have been the above-mentioned tribune or *Rostra ad Divi Julii*. In the front wall of the Rostra is a semicircular recess, which was hastily walled up at a late period with grey tufa. Within this recess, at the close of 1893, were discovered the foundations of a round altar or large pedestal, which in all probability was placed here to commemorate the great Dictator.

Separated from the temple of Cæsar by the Sacra Via, which was spanned by a *Triumphal Arch of Augustus*, with three gateways, was the —

*Temple of Castor and Pollux, generally called the *Temple of Castor* (*Ædes Castoris* or *Castorum*), which was dedicated to the twin gods out of gratitude for the aid which enabled the Romans to defeat the Latins at the battle of Lake Regillus in B.C. 496. According to the story the Dioscuri appeared in person at the Lacus Juturnæ (p. 280), where they watered their horses, to announce the victory. Twelve years later, in B.C. 484, the temple was consecrated. The remains consist of the basement and a piece of the stylobate on the E. side, with three splendid columns of Parian

marble. These columns (height $47\frac{1}{2}$ ft., diameter 5 ft.) probably date from a restoration of the temple in the reign of Trajan or of Hadrian. The temple had eight columns in front and probably thirteen on each side.

To the left of the temple of Castor lies the sacred *District of Juturna*, the nymph of the health-giving springs which here bubble up at the foot of the Palatine. We first notice the *Lacus Juturnae* a quadrangular water-basin with a pillar in the middle upon which stood a marble altar with figures in relief of Jupiter, Leda with the Swan, the Dioscuri, and Juturna holding a large torch. Beside and beyond the basin are various rooms and chambers which probably served for religious uses, and were adorned with numerous statues of the gods connected with healing. Among others were *Æsculapius* with an acolyte holding a cock; the Dioscuri with their horses, archaic works, probably from S. Italy (5th cent. B.C.); the head of Serapis; headless archaic statue of Apollo. In the 4th cent. A.D. these chambers were handed over to the municipal water board (*statio aquarum*). — Farther on is a small chapel (*Ædicula*) for an image of Juturna, whose name is still preserved on the architrave. In front of this is a fine *Puteal* of white marble, restored, according to the inscription, by M. Barbatius Pollio, a curule edile (probably in the reign of Augustus).

The back of the *Ædicula* adjoins a rectangular room in good brick-work (entr. on the W. side), which in the Christian period was converted into an *Oratory of the Forty Martyrs*, on its walls are remains of frescoes of the 8-9th centuries.

In front of us opens the approach to the basilica of *Sancta Maria Antiqua*, which was erected in the 7th cent. and incorporates the remains of an ancient monumental building, probably the library connected with the temple of Augustus (*Bibliotheca Templi Divi Augusti*). The large and square uncovered court became the narthex of the church, the central chamber of the library, an atrium with pillars and columns, was converted into the nave and aisles; while three other rooms beyond became the choir (presbytery) and side-chapels.

The Court contains a large and deep basin (*impluvium*), which belonged to an older building (perhaps the Palace of Caligula), destroyed in the course of a restoration of the library in the reign of Domitian. — The aisles, choir, and chapels of the basilica are richly adorned with *Frescoes*, executed by Byzantine artists of the 7-8th cent., who were probably denizens of the convent belonging to the basilica, which was granted to Greek monks who had fled from the E. Roman Empire at the time of the iconoclastic riots. On the side-wall of the left aisle is a figure of Christ enthroned, with eleven Latin saints on his right and nine Greek saints on his left; above are scenes from the story of Joseph and other Old Testament subjects. The best-preserved paintings are in the chapel at the end of the left aisle. Below a representation of the Crucifixion appears the Madonna enthroned, accompanied by St. Peter, St. Paul, St. Quiricus, and his mother St. Julitta. On the left is Pope Zacharias (741-752), in whose pontificate the chapel was decorated by a high official named

Theodotus, who is represented on the right, holding a model of the church. On the side-walls are the martyrdom of St. Quiricus and Julitta and other subjects. — The frescoes in the choir are in poor preservation. Three layers are generally discernible, one above the other. The earliest (Virgin enthroned, to the right of the apse) dates perhaps from the commencement of the 7th cent.; the Fathers of the Church with long Greek handscrolls (to the left of the apse, below) are of the time of Martin I. (649-54); thirdly, the similar figures of Church Fathers, above the Madonna, may be assigned to the time of John VII (see below); and finally, the figure of Christ enthroned, surrounded by seraphim, saints, and Fathers of the Church, in the apse, date from the time of Pope Paul I. (757-57). In the lunette above the apse is Christ on the Cross adored by angels and saints in white robes; below are long Greek inscriptions on a red ground (Messianic prophecies from the Old Testament). The screens of the presbytery bear figures of David and Goliath, the sick king Hæzekiah, and the prophet Isaiah. The pulpit (ambo), which once stood here, is now represented merely by an octagonal marble slab inscribed 'Johannes servus servorum dei' (i.e. Pope John VII., 705-707). — Beneath the flooring of the basilica were found numerous Christian graves, and also several fine sarcophagi, one decorated with scenes from the story of Jonah.

From the court, to which we now return, a door on the right (E.) side admits to a corridor that ascended in four windings to the Palace of Tiberius upon the Palatine (p. 277). We, however, pass through a low archway to the left and enter a massive brick structure. This is the cells of the *Temple of Augustus* (*Templum Divi Augusti*), which was built by Tiberius and sumptuously restored by Domitian after the Neronian conflagration. Its front faced the *Vicus Tuscanus*, a busy street which led from the Temple of Castor to the Forum Boarium (p. 289) on the Tiber; the niches were filled with colossal statues of Augustus and other deified emperors.

We now return to the *Lacus Juturnus*, turn to the right, and continue to follow the *Sacra Via*. Immediately to the right a circular concrete erection surrounded with blocks of tufa marks the site of the celebrated *Temple of Vesta* (*Atræ Vestæ*), in which the sacred fire was kept alight by the Vestal Virgins. Numerous fragments of its marble entablature, columns, and cassetted roof strew the ground. The workmanship of these is somewhat careless, dating apparently from the restoration of the temple after a fire at the beginning of the 3rd century of our era. — Opposite the Temple of Vesta, on the other side of the *Sacra Via*, are some fragmentary marble walls, belonging to the Regia, which was not completely exhumed until 1899.

The Regia, traditionally at first the dwelling of King Numa Pompilius, the founder of the national religion, afterwards became the official residence of the Pontifex Maximus. As such it contained the sacred chambers (*sacra*) of Mars and the ancient goddess Ops, in which the sacred spears of the god, the sacrificial implements of the priests, and the archives of the Pontifices were preserved. When the Pontifex Cn. Domitius Calvinus rebuilt the Regia of marble after the fire of B.C. 86, he caused a list of consuls and

triumphs to be inscribed on the marble blocks of the E. and W. walls, these are the so-called *Fasti Consulares* (p. 243). — The beautiful fragments of entablatures and capitals which lie in a heap between the Temples of Castor and Vesta belonged to this marble structure of Calvinus. The rude pieces of a cornice lying on the E. side of the building, where the wall with the *Fasti* stood, date from a restoration under Septimius Severus. Of the tufa building of the republican Regia, which extended farther towards the E., there remain a round basement about 6 ft. in diameter (top course modern), groundlessly named the *Sacrum Martis*, and a room with a mediæval cistern called, also without ground, the *Sacrum of Ops*.

Beyond the temple of Vesta (to the left) is a small *Ædicula*, or shrine for the image of a god, erected according to the inscription by the Senate and People of Rome. This was restored (not very successfully) in 1898, the clumsy brick pillar on the right should have been replaced by a column.

Adjoining the *Ædicula* are a few steps and a side-entrance leading to the *Ætrium Vestæ*, or Palace of the Vestal Virgins. The extant ruins are carefully constructed of brickwork, which has almost entirely lost its marble facing. They date from the 1st and 2nd cent. of our era. The whole building falls into three divisions: a rectangular colonnaded court, corresponding to the *Ætrium* in private houses; the official rooms (?) of the Vestals, grouped round a lofty square apartment, resembling the ordinary *Tablinum*; and the kitchen and offices to the right (W.), behind the *Ætrium*. The dwelling-rooms were situated on the upper floor.

The Court is the most extensive part of the building. It was surrounded by a two-storied arcade, with columns of veined green cipollino marble below and red breccia corallina above, and adorned with statues of Head Vestals (*Virgines Vestales Maxime*), of which eleven are still preserved in whole or in part (see p. 189). The intervention of the Vestal Virgins was often very effective in procuring appointments to official and even military posts, and the inscriptions on the bases of some of the statues show that they were erected by grateful relatives and other recipients of such favours. The names (*Nummia Maximilla*, *Torentia Flavola*, *Flavia Publicia*, *Conia Claudiana*, *Tarentia Rustilla*) belong to the 3rd and 4th cent. (201-364 A. D.). In the centre of the court are three marble-lined cisterns for the reception of rain-water, as a venerable precept of their cult forbade the priestesses to use either river-water or water conveyed through artificial channels.

The second division of the palace consists of the Official Rooms (?). In the middle is a lofty square room approached by steps. On each side of it are three doors giving access to three cells, each of which is supposed to have belonged to one of the six priestesses. — The beautiful mosaic marble flooring is still preserved in two rooms of the E. wing, below the *Nova Via* and the *Palatina*. A mill of later date has been erected within the last rooms in the S.E. corner. In the W. wing are the Domestic Offices, including a kitchen with its fire-place, a store-room with numerous broken bits of pottery, a large leaden water-tank, etc.

The Upper Floor (the keeper of the Forum has the key) comprised several apartments, including bath-rooms, some of which have been preserved. A wooden staircase ascends from one of the apartments on the E. side. The upper story commands a good survey of the whole building well as a view towards the Basilica of Constantine.

Farther on in the *Sacra Via*, opposite the temple of *Vesta* and the *Regia*, on a base 16 ft. above the street and formerly reached by a flight of steps, is the —

***Temple of Faustina**, of which the portico, with its ten beautiful columns of Euboean marble (cipollino), and part of the cella, decorated on the W. side with a marble frieze (griffins and candelabra), are still standing. It was dedicated by Antoninus in A.D. 141 to his wife, the elder Faustina, and re-dedicated to that emperor also after his death. The first line of the inscription, *Divo Antonino et | divae Faustinae ex S.C.*, was then added. In the interior of the temple is the church of *San Lorenzo in Miranda* (Pl. II, 19).

The year of the foundation of the church is unknown, and the earliest record of it dates from the 12th century. The façade was erected in 1802. Its name probably refers to that of its foundress, some rich Roman lady named *Miranda* (comp. *San Lorenzo in Damaso* and *San Lorenzo in Lucina*). The entrance is at present in the *Via in Miranda*, on the S.E. side.

In 1902 a very ancient *Necropolis* was discovered at the E. angle of the temple, lying at a great depth below the surface, and including both ordinary graves and recesses for cinerary urns. Some of the urns found here, including one in the shape of a hut, like those from the neighbourhood of *Albano* (p. 361), may possibly, date back to the 8th cent. B.C., while the latest cannot be more recent than the 6th cent., for burial on this site must naturally have ceased when the Forum became the market-place. The objects found in this necropolis are exhibited in the Forum Museum (p. 266).

A hill, named the *Vallis* in ancient times, connects the *Palatine* and *Esquiline*, its highest point being marked by the Arch of *Titus* (95 ft.; p. 265). The *Sacra Via* gradually ascends the *Vallis* towards the S.E., and soon reaches —

Santi Cosma e Damiano (Pl. II, 19; entrance in the *Via in Miranda*), built by *Felix IV.* (526-30), having been incorporated with an ancient circular temple erected by the Emp. *Maxentius* to his son *Romulus*, and sometimes erroneously called a temple of the *Penates*. On account of the dampness of the soil *Urban VIII.* raised the level of the pavement so much in 1633, that an upper and a lower church were formed.

The **Lower Church** retains its old bronze doors with their antique lock. **UPPER CHURCH.** On the arch of the choir and in the tribune are **Mosaics* of the 6th cent., the period of the founder, perhaps the most beautiful of their kind at Rome (see p. 121), but freely restored about 1680 (best light in the afternoon). Those on the arch, which has been shortened during a restoration, represent the Lamb with the Book with seven seals according to *Revelation v.*; adjoining these the seven candelsticks, four angels, and two of the symbols (angel and eagle) of the *Evangelists*. The arms with wreaths, below, belonged to two prophets. In the tribune: *Christ*, to whom the saints *Cosmas* and *Damianus* are conducted by *Peter* and *Paul*; on the left side *St. Felix* (modern) with the church, on the right *St. Theodorus*. Beneath, *Christ* as the Lamb, towards whom the twelve lambs (*Apostles*) turn.

At the back of the church were found the remains of an ancient plan of Rome (see p. 241). The ancient wall to which the plan was affixed belonged to a building which adjoined the Forum Pacis, and is supposed to have been erected by Vespasian and restored by Septimius Severus as a repository for the archives of the censor, municipal plans, registration lists, etc. It is usually named *Templum Sacras Urbis*.

We next reach, on the left, the three colossal arches of the *Basilica of Constantine* (Pl. II, 19, 22), erected by Maxentius, but afterwards altered by his conqueror Constantine, whose name it bears. The entrance originally faced the Colosseum, but afterwards the *Sacra Via*. It was a basilica of three halls, with vaulting of vast span, which has served as a model to modern architects, as in the case of St. Peter's, where the nave-vaulting is of the same width. The ground-plan is rectangular in form, over 100 yds. long and 87 yds. wide. The principal apse, opposite the entrance from the Colosseum, has lately been extricated from rubbish, but is only partly preserved. After the opening of the second entrance on the side next the Palatine, a second apse was added. The barrel vaulting of the S. aisle has been preserved; width 87 ft., depth 57 ft., height 80 ft. The span of the nave was about 82 ft., its height 114 ft., and its width 86 ft. In front of the central pillars stood eight huge Corinthian columns of white marble; the only one now existing stands in front of Santa Maria Maggiore (p. 180). The original apse at the W. end may possibly have contained the colossal statue of Constantine to which the head mentioned at p. 239 belonged. The entrance facing the *Sacra Via* was formerly adorned with columns of red porphyry, some of the shafts of which have been re-erected. The gilded bronze tiles were removed to St. Peter's by Pope Honorius I. about 626.

Between the Basilica of Constantine and the Palatine some remains of *Private Houses* have recently been discovered on the *Sacra Via*. This street was one of the most elegant in Rome and contained many shops of goldsmiths, bronze-workers, and the like. The walls which have been laid bare date from various periods, both before and after the time of Hadrian; their details are still somewhat doubtful.

Adjoining the basilica of Constantine, and partly occupying the site of the temple of Venus and Roma (p. 265), is the church of —

Santa Francesca Romana (Pl. II, 22), originally named *Sancta Maria Nova*. The church, which was restored in 1216 by Honorius III. after a fire and at several other periods, contains the tomb of *Francesca de' Ponsiani* (d. 1440), foundress of an order of Oblate nuns, who was canonised in 1608 and has given the church its present name. The façade is by *Carlo Maderna* (1612).

Interior. In the vestibule, with a side-entrance between the 1st and 2nd chapels on the right: (r.) Monument of Card. Vulcani (d. 1384) and (l.) of the papal commandant and general Antonio Rido (d. 1467). 2nd

Chapel: Miracles of St. Benedict, altar-piece by *Subleyras*. In the TRISOMI mosaic of the 12th cent. (restored in 1891) in the centre Madonna, (l.) SS. John and James, (r.) SS. Peter and Andrew. Over the high-altar an ancient Madonna, traditionally attributed to St. Luke, which is said alone to have escaped destruction in the conflagration. To the right of the apse: monument of Gregory XI (d. 1378), who transferred the papal residence from Avignon to Rome, with a relief by *Oliveri* (1866). Here on the right, built into the wall, are two stones on which SS. Peter and Paul are said to have knelt when they prayed for the punishment of Simon Magus. In the Confessio a group of Santa Francesca with an angel, by *Meli*. In the crypt (stairs in left transept) is the tomb of the saint with a marble relief by *Bernini*.

In the adjoining CONVENT, with its tasteful cloisters of the time of Alexander VI., a *Museum* is being fitted up for the reception of the antiquities found in the Forum. The ground-floor is to be devoted to architectural fragments and sculptures, while other objects will be exhibited on the upper floor.

On the summit of the *Velia* (p. 263), at the foot of the Palatine, rises the *Triumphal Arch of Titus, commemorating the defeat of the Jews (A.D. 70), and dedicated to him under his successor Domitian in 81, as the inscription on the side next the Colosseum records: *Senatus populusque Romanus divo Tito divi Vespasiani filio Vespasiano Augusto*. The single arch is embellished with fine reliefs (p. liv). On the outside, below the inscription, is a sacrificial procession on the frieze. Inside: Titus crowned by Victory in a quadriga driven by Roma; opposite, the triumphal procession with the captive Jews, table with the show-bread, and candlestick with seven branches. In the centre of the vaulting, the consecrated emperor borne to heaven by an eagle.

In the middle ages the arch was used as a fortress by the Frangipani, and strengthened with battlements and new walls. When these were removed in 1822, the arch lost its support, and had to be reconstructed, as stated by the inscription on the other side. The central part, in marble, is therefore alone ancient; the restored parts are of travertine.

The Via San Bonaventura (Pl. II, 19) ascends to the S. from the Arch of Titus, passing the church of *San Sebastiano alla Polveriera*, on the site of a temple of Apollo built by Augustus (fine view of the Colosseum from the adjoining vigna), and leads to the monastery (partly pulled down in 1902) of *San Bonaventura*, the garden of which, open to gentlemen, contains a fine palm and commands a beautiful view.

From the Arch of Titus the Via Sacra descends to the Colosseum, passing the remains of private houses, sometimes groundlessly named 'Thermae of Maxentius' (which never existed). On the left is the double apse of the Temple of Venus and Roma (Pl. II, 22), erected by Hadrian from a plan by himself in A.D. 135, and restored after a fire by Maxentius in 307. This was one of the most magnificent temples in Rome.

There were evidently two temples under the same roof, entered from the sides next the Colosseum and next the Capitol. The apses were back to back, so that there was a niche on each side of the dividing wall for the image of a god. The apse towards the Colosseum is open. The temple was peripteral, with ten columns at the ends, and twenty at the sides

(length 120 yds.). It was surrounded by a colonnade of about 150 columns, 120 yds. long, and 110 yds. wide, projecting as far as the street, where it was supported by massive substructures. To this colonnade belonged the granite shafts scattered about here. The ceiling were constructed with the rarest marbles.

Descending hence towards the Colosseum, we reach the so-called *Mais Sudans*, the partly restored brick core of a magnificent fountain erected here by Domitian. To the right we see the Arch of Constantine (p. 270). To the left (N.) we observe the remains of an extensive square *Basis* of masonry. Here from the reign of Hadrian stood the gilded bronze *Colossal Statue of Nero*, as god of the sun, crowned with rays, and about 118 ft. in height, executed by Zenodorus by order of the emperor himself, to grace the 'Golden House' which he erected with lavish splendour after the burning of Rome in A.D. 64. The palace fell to decay soon after Nero's death in 68 (p. xxlii). In the space occupied by an artificial lake in the gardens of Nero, Vespasian founded the —

*Colosseum (Pl. II, 22), originally called the *Amphitheatrum Flavium*, the largest theatre, and one of the most imposing structures in the world, completed by Titus in A.D. 80. It was inaugurated by gladiatorial combats, continued during 100 days, in which 5000 wild animals were killed, and naval contests were exhibited. It was struck by lightning under Macrinus (217), and the resulting fire burned for three days, necessitating restorations that were not completed until the reign of Alexander Severus. In 248 the Emp. Philip here celebrated the 1000th anniversary of the foundation of Rome with magnificent games. In 406 gladiatorial combats were abolished by Honorius as inconsistent with the precepts of Christianity, which had prevailed since Constantine, but wild-beast fights were continued till after the time of Theodoric the Great. In 442 the Colosseum was damaged by a great earthquake and it seems to have been restored in 445 by Theodosius II. and Valentinian III. The building has been known since the 8th cent. under its present name, derived probably from the colossal statue of Nero.

The Colosseum must have been reduced to approximately its present limits between the 8th and the 14th cent., probably by convulsions of nature, such as the earthquakes of 1281 and 1256. The exterior colonnades were in as ruinous a condition about 1281 as they are now, as is proved by the arms of the Hospital *Sancta Sanctorum* (the head of Christ between *mandelab's*) which appear above the arches in the originally third inner wall. The N.W. quarter alone, which was used by the Roman barons, especially the *Fraugipani*, as a fortress, is in better preservation. In 1312 the *Annibaldi* were obliged to surrender it to Emp. Henry VII., who presented it to the Roman senate and people. During the 16th, 16th, and 17th cent. the stupendous pile afforded building materials for many new churches and palaces, although probably only the portions already lying in ruins on the ground were removed for this purpose. In the 16th cent. Paul II. here procured materials for the construction of the *Pal. di Venezia*, and *Card. Riario* for the *Cancellaria*, in the 16th cent. Paul III. for the *Palazzo Farnese*, and in 1705 Clement XI. for the Harbour of the *Ripetta*. *Benvenuto XIV.* (1760-65) was the first to protect the edifice from further dam-

ENANVM SYMMVM
IN LIGNEIS

IAENIANVM
SECUNDVM

IAENIANVM
PRIMUM

PODIVM

tion by consecrating the interior to the Passion of Christ, referring to the frequency with which the blood of martyrs had flowed there. Pius VII., Leo XII., and Gregory XVI. averted the imminent danger of the fall of the ruins by the erection of huge buttresses; but as new fissures began to make their appearance, a vaulted hall in two stories was erected in 1892 in the middle of the inner fourth story by Canina, who endeavoured to follow the traces of the ancient structure. The best view of the building as a whole is commanded from the top of this hall (comp. p. 269). — The excavation of the arena with its interesting substructures was begun in 1871. A good view of the best preserved portion of the exterior is obtained on the E. side, where the original level of the ground has been laid bare (p. 270).

The Colosseum is almost wholly constructed of blocks of travertine, originally held together by iron cramps; tufa and bricks have been used only in the interior. The numerous holes were bored in the middle ages for the purpose of extracting the then very valuable iron. According to the most trustworthy statistics the external circumference of the elliptical structure measures 573 yds., or nearly one-third of a mile, the long diameter 205 yds., the shorter 170 yds., and the height 157 ft. The still preserved N.E. portion, on the side next the Esquiline, consists of four stories, the three first being formed by arcades, the pillars of which are adorned with half-columns of the Doric, Ionic, and Corinthian order in the 1st, 2nd, and 3rd stories respectively. A wall with windows between Corinthian pilasters forms the 4th story. Statues were placed in the arcades of the 2nd and 3rd stories, as appears from representations on ancient coins. At the ends of the diameters are the four triple **PRINCIPAL ENTRANCES**, those next to the Esquiline and Caelius (on the smaller axis) being destined for the emperor, the others for the solemn procession before the beginning of the games, and for the introduction of the animals and machinery. On the side next the Esquiline are seen traces of the stucco-decorations, which were used as models by Giovanni da Udine, the pupil of Raphael. The arcades of the lowest story served as entrances for the spectators, and were furnished with numbers up to lxxvi (Nos. xxiii-liv still exist), in order to indicate the staircases to the different seats.

The **IMMUNIO** had seats for 40-50,000 spectators (the common estimate of 87,000 is an exaggeration). The tiers of seats are supported on the outside by two rows of arcades, and on the inside partly by a solid substructure. Every fourth arch contains a staircase, while the tiers of seats are intersected by passages. The foremost row of seats, called the *Podium*, was destined for the emperor, the senators, and the Vestal Virgins. The emperor occupied a raised seat, called the *Pulvinar*, and the others had seats of honour. Above the *Podium* rose two other divisions of marble seats, beyond which was a girdle-wall pierced with doors and windows. This wall supported a colonnade in which were wooden seats, while the humbler spectators ('*pullati*', i.e. those who were without togas)

sat on the roof of the colonnade. Quite at the top of the wall,

inside, are a series of consoles which originally supported a narrow gallery, on which were stationed sailors of the imperial fleet for the purpose of stretching awnings over the spectators to exclude the glare of sun. Apertures are still seen in the external coping, with corbels below them, for the support of the masts to which the necessary ropes were attached.

The arena is 83 yds. long by 68 yds. wide. Beneath it and adjacent to the foundations of the inner wall, were chambers and dens for the wild beasts. More towards the centre were found a number of walls, pillars, and arches, partly required for the support of the arena, and partly connected with the apparatus for hoisting up from below the scenery, properties, etc., required in the combats with beasts and other performances. The numerous fragments with very large letters, on the edge of the arena, belonged to the dedicatory inscriptions set up by Theodosius II. and Valentinian III. in 445 (p. 266).

Although two-thirds of the gigantic structure have disappeared, the ruins are still stupendously impressive. An architect of last century estimated the value of the materials still existing at 1½ million scudi, which according to the present value of money would be equivalent to at least half a million pounds sterling. The Colosseum has ever been a symbol of the greatness of Rome, and gave rise in the 5th cent. to a prophetic saying of the pilgrims:—

'While stands the Colosseum, Rome shall stand,
When falls the Colosseum, Rome shall fall,
And when Rome falls, with it shall fall the World.'

The Urban Forum should be visited by those who desire to obtain a distinct idea of the character of the structure (entrance in the second arch to the left of the entrance opposite the temple of Venus and Roma; (M.C.). Of the three arcades on the first story we follow the innermost, which affords a survey of the interior. Three arches (closed) at the N. end of the shorter axis are now used as stores for inscriptions, including a series from the edge of the podium, giving the names of the proprietors of the seats, among whom figure many illustrious Romans of the 6th and 8th cent. A.D. In the third of these arches is a model of the Colosseum (scale 1/100), constructed by Leongalli (d. 1812), a Roman mechanic. — Over the entrance next the Palatine a modern staircase of 65 steps ascends to the 2nd, and then to the left to a projection in the 3rd story. The View from the hall on the fourth floor mentioned on p. 268, to which 65 more steps ascend, is still more extensive. It embraces the Coline with San Stefano Rotondo and Santi Giovanni e Paolo; farther off, the Aventine with Santa Balbina, in the background San Paolo Fuori, nearer, to the right, the Pyramid of Cestius; to the right the Palatine, with the arches of the Aqua Claudia.

The Colosseum is profoundly impressive by moonlight, or when illuminated (e.g. by Bengal lights, comp. p. 148), which permits the general mass to produce its effect unimpaired by the ruin of the details. The traveller should avail himself of a fine moonlight night for the purpose. Visitors may enter the arena at any hour of the night, but a special permission of the Ministry is necessary for access to the tiers of seats.

To the N. of the Colosseum the Via del Serpenti leads to San Pietro in Vincelli (pp. 189, 193). To the S.W., between the Coline and Palatine, spanning the Via Triumphalis which here joined the Sacra Via, stands the —

*Triumphal Arch of Constantine (Pl. II, 23), the best-preserved structure of the kind in Rome, erected after the victory over Maxentius at *Bata Rubra*, near the *Ponte Mole* (p. 188), in 312, where Constantine declared himself in favour of Christianity. The inscription runs thus: *Imp. Cae. Fl. Constantino Maximo pio felici Augusto Senatus Populusque Romanus, quod instructis divitiarum omnium magnitudine cum exercitu suo tam de tyranno quam de omni ejus factione uno tempore justis cum publicum ultus est armis arcum triumphis insignem donavit*. The arch, which was converted into a castle in the 10th cent., and afterwards belonged to the Frangipani, was laid bare in 1804. It has three passages.

The great or part of the ornamentation and the admirable sculptures were brought from a building of Trajan (not, however, as usually supposed, his triumphal arch which stood at the entrance to Trajan's Forum, contrasting strongly with the rude additions of the time of Constantine. From the period of Trajan above, *Statue of Captive Darius* in pediment, seven of these are ancient, but the eighth and the heads and hands of the others, are modern (fragment, see p. 245). The large *Reliefs* now inserted to the right and left of the main passage and on the ends of the attic, originally belonged to a continuous frieze, at least 10 ft. long, which was ruthlessly taken to pieces under Constantine. The original order of them is as follows: 1 (to the left of the main passage), Trajan's triumphal entry into Rome, Praetorians fighting with Dacians; 2 (left end of attic), Continuation of the battle; 3 (to the right in the passage), Prisoners beseeching the emperor for mercy; 4 (right end of attic), Conquered Dacians, with their hole in the background. To the same period also belong the eight *Medallions* of hunting and sacrificial scenes, which have been placed with the same disregard to their connection. Start for the hunt (W. side, to the left) and sacrifice to Apollo (E. side, to the left), Boar hunt (E. side, to the left) and sacrifice to Diana (W. side, to the right), Boar hunt (W. side, to the right) and sacrifice to Artemis (W. side, to the left), Lion hunt (E. side, to the right) and sacrifice to Hercules (E. side, to the right). — The eight *Reliefs* on the sides of the attic, beside the inscription, have been quite erroneously ascribed to the age of Trajan, the heads of the emperor in them were arbitrarily restored with the features of Trajan in the 17th cent., at which period the most characteristic details were also added. These scenes (sacrifices, harangues before the people and the soldiers, triumphal entry, etc.) probably refer to Marcus Aurelius and belong to the same series as the reliefs in the palace of the Constantinians mentioned on p. 238.

From the period of Constantine are the smaller *Reliefs* inserted below the medallions, representing the achievements of Constantine in war and peace, and the *Statue of Victoria* and *Captive* on the pedestals of the columns.

On the S.E. side of the Colosseum the original pavement was laid bare in 1805. This consists of slabs of travertine, bordered at a distance of about 60 ft. from the building by large boundary-stones of the same material, in the backs of which are holes, probably for the insertion of railings or cords to regulate the crowds of spectators entering by the various doors. Round this open space ran a street paved with lava. The remains of a brick portions that are seen to the E. of the modern street perhaps belonged to the *Thermae of Titus*, which, like the Colosseum, were built on part of the site of Nero's 'Golden House' (p. 208). These baths occupied the slope of Oppian, as far as the modern *Via del Serpenti*, but are now

completely ruined. They were adjoined by the much larger *Thermae of Trajan*, which extended almost to San Pietro in Vincoli and San Martino ai Monti (p. 188). The remains of the latter, which were wrongly identified with the *Thermae of Titus*, were still partly standing down to 1786. What is now shown as the 'Terme di Tito' belongs almost wholly to the earlier buildings (perhaps Nero's), which Trajan incorporated in the foundations of his construction.

The ENTRANCE (Pl. II, 26; on Sun. 10-4.30, other days 8-4.30; from June 1st to Sept. 20th, 7-12 and 8 till dusk) is in the Via Labicana, to the left, near the beginning of the street. Visitors should be careful not to enter these ruins in a heated condition. We first enter the substructure of a large semicircular *Exedra*, which formed the centre of the rear-wall of Trajan's edifice. Farther on are Nero's buildings, which form an angle of 45° with the axis of the *Thermae*. Here we first enter a suite of seven rooms opening off each other; to the left, in front of the central room, are remains of a fountain. The special purpose of these rooms cannot be definitely settled. Their chief interest lies in the beautiful mural paintings (much injured and badly lighted), which served as models for Giovanni da Udine and Raphael in the decoration of the loggia of the Vatican. A recess is pointed out by the guides (quite erroneously) as the spot where the *Laocoon* (p. 206) was found.

c. *Fora of the Emperors.*

In the plain to the N.E. of the Forum of the Republic lay the *Fora of the Emperors*, which were erected not only as monuments to their founders and ornaments to the city but also for practical purposes. They were mainly used for judicial proceedings, and their chief edifice was always a temple. The Forum Julium, the first of the kind, was begun by Caesar and completed by Augustus; the second was built by Augustus. A third, around the *Templum Pacis*, was constructed by Vespasian. Between this forum and the first two lay the Forum Transitorium, begun by Domitian and completed by Nerva. The series ended on the N. with the magnificent Forum of Trajan.

We begin our inspection at the N. corner of the Forum Romanum, where the *Via dell' Arco di Settimio Severo* (p. 238), descending from the Capitol, unites with the *Via di Marforio* (p. 202).

Here, in the *Via di Marforio*, lies the small church of *San Giuseppe dei Falegnami* (Pl. II, 20), which is built over the *Carcer Mamertinus*, one of the most ancient structures in Rome (entr. below the outside steps; light supplied by the sacristan, 20-30 c.). This was perhaps originally a well-house (Lat. '*tullianum*'), traditionally attributed to Servius Tullius, and it was afterwards used as a prison. A theory has recently been advanced that the building was an archaic domed tomb (like those of Mycenæ).

The building consists of two chambers, one below the other. The upper is an irregular quadrilateral, which was probably once adjoined by other similar chambers. An inscription on the front records a restoration in 22 A.D. (?). The lower chamber, which was originally accessible only through a hole in the ceiling, is 19 ft. long, 10 ft. wide, and 6½ ft. high. The original vaulting was probably conical, formed by the gradual pro-

1. The first part of the document is a list of names and addresses.

2. The second part of the document is a list of names and addresses.

3. The third part of the document is a list of names and addresses.

junction of the side-walls until they met, but the present roof is a flat arch of jointed blocks of tufa. In this dungeon perished Jugurtha, Vercingetorix, and other conquered enemies. Sallust, in recording the execution of Catiline's confederates, describes the prison almost exactly as it now exists. — 'In the prison is a chamber named the *Tullianum*, about 12 ft. below the surface of the ground. This is surrounded by walls and covered by a vaulted stone roof, but its appearance is repulsive and terrible on account of the neglect, darkness, and smallness. — It contains a spring, which, according to the legend, St. Peter, who was imprisoned here under Nero, miraculously caused to flow in order to baptise his jailors. The building has therefore been named *San Pietro in Carcere* since the 15th century.

A little to the E. the *Via Bonella* reaches the Forum. At the end of it, to the right and left, are the churches of *Santi Martina e Luca* and *Sant' Adriano* (p. 268). *Santi Martina e Luca* (Pl. II, 20) consists of a lower and an upper church, the former of very ancient origin, and the latter constructed in the 17th cent. by *Pietro da Cortona*.

No. 44, *Via Bonella*, is the *Accademia di San Luca* (Pl. II, 20), a school of art founded in 1577 and re-organised in 1874. The first director was *Federigo Zuccaro*. The picture-gallery of the Academy is a second-rate collection, but may be visited if time permit. Admission, see pp. 150, 151.

We ascend the staircase, into the walls of which are built a few casts from Trajan's Column (disfigured with whitewash). On the first landing is the entrance to the collection of the competitive works of the pupils (closed, apply to custodian upstairs). *Kassios*, Discus-thrower reclining, in plaster; *Christ on the Mt. of Olives*, drawing by *Leandro Betti*; reliefs by *Thersidides* and *Canova*, *Caryatids* watering the eagle, by *Thersidides*, and several casts from the antique.

We ascend another staircase, and enter a small Antechamber, whence a door to the right leads to the *Biblioteca Sassi*, containing 15,000 vols., chiefly relating to art (adm., see p. 146). In the antechamber we ring at the entrance to the —


Picture Gallery 1 **SALOON**. Entrance-wall: 1. *Early Flemish School*, Descent from the Cross. 2. *Carlo Maratta*, Madonna; on the back of this picture there is an interesting copy, by Marcantonio, of the first design of Raphael's Transfiguration; 3. *Antoni*, Venus crowned by the Graces; 7, 11 *Orissens*, Landscapes; 10. *Van Dyck*, Madonna. — West wall: 21, 24 *Jos. Verelst*, Sea-piece. — Wall facing the entrance 38 *Mysons*, Admiral Kortenaar (1838); 39. *School of P. Veronesi*, Toilet of Venus; 106. *Giulio Romano*, Copy of Raphael's Galatea in the Farnesina (p. 370); 43 *Guido Reni*, Cupid; 49 *Claude Lorrain*, Sea-piece; 51 *Hayes* (d. 1802), Victorious athlete. — Short wall 52. *J. Verelst*, Sea-piece. — The saloon is adjoined on the right by a Room, containing modern works, most of them painted in competition for academical prizes. Also, 108 *After Van Dyck*, Portrait of a child (pastel, a late copy 'taken from the group of children of Charles I.'). — Another small Room contains portraits of artists, including (to the left of the entrance) those of *Virgilio Lebrun* (176) and *Angelica Kauffmann* (214).

II **SALOON** 57. *Gerard David*, Madonna and saints (copy of a picture by Memling in the Louvre); 59 *School of Titian*, Vanitas; 61. Copy of *Titian*, St. Jerome (original in the Brera); 72. *Raphael*, St. Luke painting the Madonna (study-piece); 73. Copy of *Titian*, Tribute-money (original in Dresden); 77. *Guercino*, Cupid and Venus (fresco); 78. *Raphael*, Boy as garland-bearer, a relic of a fresco from the Vatican, spun out of the wall, and freely retouched (copy of the boy is the fresco of *Isiah* in *Sant' Agostino*, p. 214); 79. Copy of *Titian*, Discovery of the guilt of *Callisto* (original in *Bridgewater House*, in London); 81. *Spagnoletto*, St. Jerome disposing the schism.

1

.

1

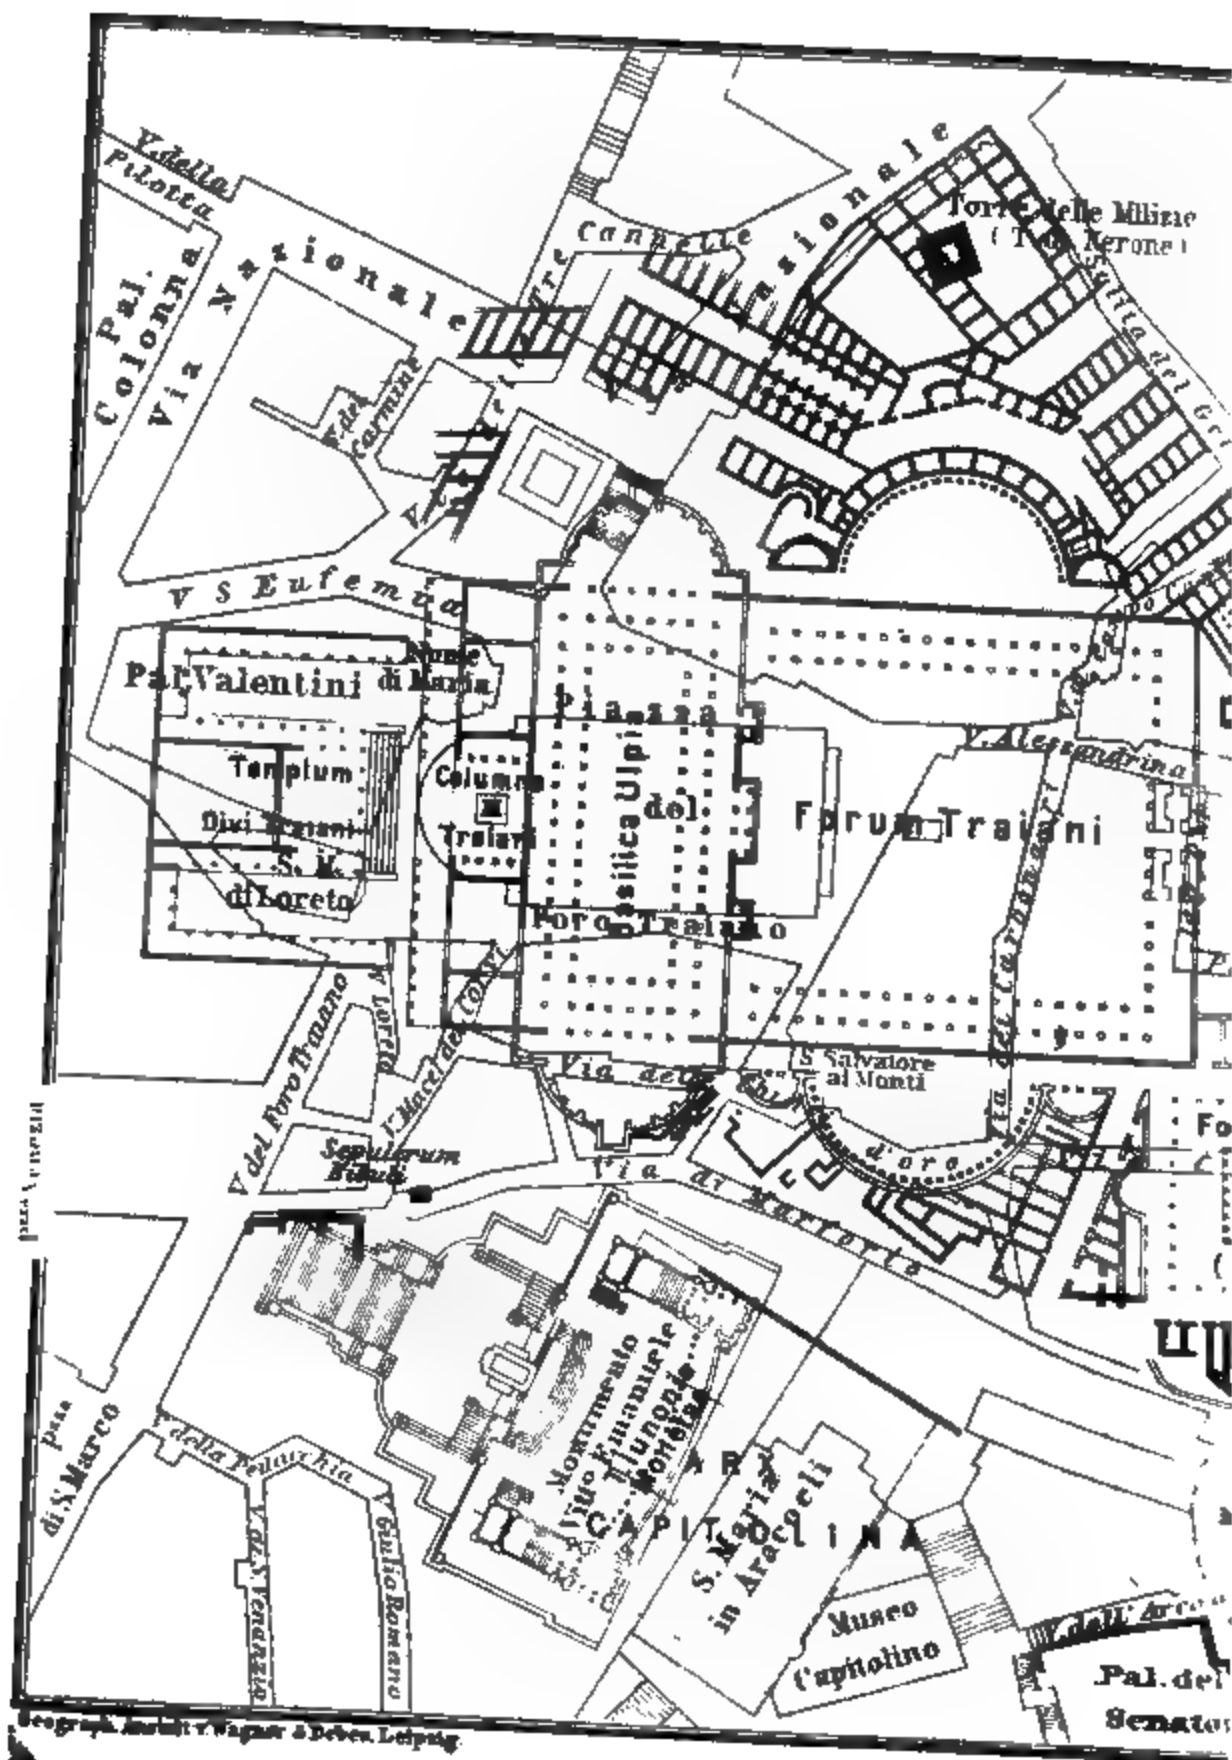

III. SALOON. On the wall to the right: 103. *Guido Caponci*, Lactia, an able work of this master, a painter of no great note belonging to the school of Guido Reni; 107. *Paolo Veronese* (?), Susanna; 108. *Dom. Pollaiuolo*, Hebe; 109. *Paolo Veronese* (?), Susanna. — End-wall, 110. *Guido Reni*, Theseus and Ariadne. — Wall to the left: 122. *Albani*, Madonna; 131. *Assereto*, Madonna; 133. *Guido Reni*, Fortuna; 147. *G. H. Harlow*, Wolsey receiving the cardinal's hat.

To the N.W. of Santi Martino e Luca and the Academy lay the Forum of CRASSUS or Forum Julium, the centre of which was occupied by a Temple of Venus Genetrix. Some remains of the massive enclosing wall, of tufa and travertine, may be seen in the court of No. 29, Via delle Marmorelle.

The Via Bonella, which intersects the Via Alessandrina (p. 274), leads to the ruins of the Forum of Augustus (Pl. II, 20), which were excavated chiefly in 1888-89.

Augustus had vowed a temple to *Mars Ultor* (Mars the Avenger) during the battle of Philippi, and afterwards resolved to combine with its erection the formation of an extensive forum. The acquisition of the necessary area was costly; densely populated streets had to be pulled down, and individual proprietors placed difficulties in the way of Augustus, who was unwilling to resort to forcible expropriation. His architect was therefore compelled to accommodate his plans to an exceedingly irregular site, the difficulties presented by which were, however, most skilfully evaded chiefly by the construction of the large *exedra* in the sides of the bounding-wall. During the middle ages the low-lying forum was reduced to a swamp (whence the name of the district 'Pantano'), Pius V. and Gregory XIII. caused the level of the ground to be much raised for their new streets.

The back of the TEMPLE OF MARS ULTOR, dedicated on the 12th May, 2 B.C., adjoined the E. enclosing wall of the forum. The three beautiful Corinthian columns of Luna marble and the pier with the entablature belonged to the colonnade on the right side. The temple was richly adorned with works of art, and contained the Roman eagles captured from Crassus by the Parthians at the battle of Carrhae and restored to Augustus in B.C. 20. Victorious generals deposited here the insignia of their triumphs; and the imperial treasure (*aerarium militare*) was preserved in the cellars of the lofty substructure. The massive wall of peperino blocks which enclosed both the temple and forum is still in good preservation on the E. side. The large *exedra* or circular recess in the S. bounding-wall has several rows of smaller niches, the lowest of which were occupied by bronze statues of generals who had enjoyed triumphs, while inscriptions (*elogia*), placed by the emperor's decree, announced their deeds. The costly pavement of the now neglected and dirty forum lies 20 ft. below the present level of the ground.

The *Arco del Pantano* ('pantano', swamp), an ancient gateway of peperino with travertine vousoirs, beside the three columns of the temple, leads to the Via di Tor de' Conti, which skirts the E. side of the massive enclosing wall and runs to the right to the Via Cavour (p. 188). This street is so named from the fortified Tor de' Conti erected in the pontificate of Innocent III., who was a member of the Roman family of Conti. The greater part of the tower was

pulled down at the beginning of the 17th century. — Before reaching the tower we turn to the right into the *Via della Croce Bianca*, which crosses the site of the Forum of Nerva, sometimes called the *Forum Transitorium* from having been intersected by an important street. Here stood a temple of Minerva, the marble of which was used by Paul V. for the decoration of the *Acqua Paola* (p. 379), and a small temple of Janus Quadrifrons. Remains of the external walls exist in the so-called *Colonnacce, two half-buried Corinthian columns, with entablature projecting over them in the debased Roman style. The entablature is enriched with reliefs representing Minerva as patroness of the arts, weaving, etc., and as a companion of the Muses. This fragment, situated at the intersection of the *Via Alessandrina* and *Via della Croce Bianca*, is well calculated to afford an idea of the former grandeur of the structure.

The busy *Via Alessandrina* leads hence, crossing the *Via Bonella* and the site of the Forum of Augustus (see p. 273), to the *PIAZZA DEL FORO TRAJANO* (Pl. II, 20)

The *Forum of Trajan was an aggregation of magnificent edifices, and is said to have been designed by Apollodorus of Damascus (111-114). By means of a huge cutting between the Capitol and the Quirinal, Trajan effected a convenient communication between the Fora of the ancient city and the Campus Martius (pp. 261, xxii). His forum measured about 220 yds. in width, and was of still greater length, and it was considered the finest of the many magnificent constructions in Rome. In 1812-14 the French government partly excavated the central portion.

Ammianus (16, 10) thus describes it on the occasion of the visit of the Emp. Constantius in 356. — 'But when he reached the Forum of Trajan, a work which, we suppose, is entirely unique and which even the gods cannot help admiring, he stood still as if thunderstruck, permitting his eyes to wander over the gigantic edifices, the description of which transcends the powers of speech and the like of which can never again be attempted by mortals.' — According to a legend of the 7th cent., Gregory the Great, while admiring the ancient splendour of the forum one day, and saddened by the thought that so just and benignant a monarch as its founder should be condemned to everlasting perdition, succeeded by his prayers in obtaining the release of Trajan's soul from purgatory.

The general ground-plan embraced four parts, reckoned from S. to N.: the Forum proper, the Basilica, the Libraries (with Trajan's Column in the court), and the Temple. Hitherto only the second and third, and these but partially, have been excavated. The forum adjoined that of Augustus; the principal entrance, dignified by a triumphal arch, lay near the modern *Via del Priorato*. Part of the wall of the great hemicycle which bounded it on the E., the so-called *Bagni di Paolo Emilio*, may be seen in the court of No. 6, *Via di Campo Carlo* (key kept by the custodian of Trajan's Forum); it consists of two stories, with a tasteful brick façade.

In the excavated part (about 120 by 60 yds.) are seen the foundations of four rows of columns, belonging to the double-aisled

Basilica Ulpia, which lay with its sides towards the ends of the present piazza. The central hall was 27 yds., and the whole building 61 yds. in width (these dimensions are about the same as those of *San Paolo Fuori*, p. 397). The pavement consisted of slabs of rare marble. The granite columns which have been erected on the bases discovered here perhaps belonged to the colonnade running round the forum. The basilica originally had fluted columns of yellow marble.

On the N. side of the basilica rises *Trajan's Column*, constructed entirely of marble, the shaft of which (constructed of 18 monolithic drums averaging 5 ft. in height) is 87 ft. high, and the whole, including the pedestal and statue, 147 ft.; diameter 11 ft. below, and 10 ft. at the top. The height of the column indicates the depth of earth removed between the Quirinal and Capitoline in order to make room for the buildings: 'ad declarandum quantum altitudinis mons et locus tantis operibus sit egestus', as the inscription, dating from A.D. 114, records. Including the base, the height is 100 ancient Roman feet (97 Engl. ft.). Around the column runs a spiral band, 3-4 ft. wide and 660 ft. long, of admirable *bas-reliefs* from Trajan's war with the Dacians, comprising, besides animals, machines, etc., upwards of 2500 human figures, 2-2½ ft. high at the foot (comp. p. 11v). Beneath this monument Trajan was interred, and on the summit stood his statue, replaced in 1587 by that of St. Peter. In the interior a staircase of 184 steps ascends to the top (for the ascent a permesso from the Ministero dell' Istruzione Pubblica, p. 219, is necessary). The column was surrounded on three sides by a two-storied gallery, from which the upper reliefs could be conveniently viewed. The foundations of this may still be traced. Adjacent, to the right and left of the column, were a Greek and a Latin library. More to the N., between the two churches, lay the temple of Trajan, built by Hadrian as a completion to the work of his adoptive father.

On the N. side of the piazza are two churches. That on the right, *del Nome di Maria*, was erected in 1738. That on the left, *SANTA MARIA DI LORETO*, begun by *Antonio da Sangallo the Younger* in 1507 (?), has a picturesque octagonal interior and a rich coffered cupola. The baroque lantern on the crown of the dome was added in 1680 by *Gion. del Duca*. In the choir, over the 2nd door on the left, is a statue of St. Susanna by *Duquesnoy*.

4. The Palatine.

The *Palatine Hill*, situated on the S. side of the Forum, rises in the form of an irregular quadrangle, about 1960 yds. in circuit. Like the Capitoline Hill it consisted originally of two summits of almost equal height (*San Bonaventura* to the S., 168 ft.; *Farnese Gardens* to the N., 165 ft.) separated by a saddle; building operations have, however, materially altered its appearance. Tradition

places on this hill the dwellings of its heroes before the foundation of the city, *Evander* and *Faustulus*; and their memory was preserved down to a very late period by a number of ancient temples and shrines. The Palatine was the nucleus and the centre of the mistress of the world, the site of the *Roma Quadrata*, various fragments of whose walls have been brought to light. In the republican period it was occupied by private dwellings, the orator *Hortensius*, *Catiline*, *Cicero*, and his bitter enemy the tribune *Clodius* possessed houses here. *Augustus* was born on the Palatine, and after the battle of *Actium* he transferred his residence to this seat of the ancient kings. His buildings cover a considerable portion of the S. hill. They include besides the palace proper (*Domus Augustana*) also a large temple of *Apollo* and the rich Greek and Latin library. *Tiberius* built another palace on the N. side of the hill, perhaps near his ancestral house (see p. 277). *Caligula* enlarged the palace by an addition at the N.E. angle, by which the Temple of *Castor* was converted into a vestibule of the imperial residence; but his buildings soon disappeared (comp. p. 277). The Palatine did not afford scope enough for the senseless extravagance of *Nero*, who built himself the Golden House, extending from the Palatine to the *Esquiline* (p. 268). The emperors of the *Flavian* dynasty once more transferred the imperial residence to the Palatine, enlarging and adorning the buildings of *Augustus*. *Septimius Severus* extended the imperial abode to the S. beyond the limits of the hill. Part of the *Septisontium*, a colonnaded edifice of many stories, erected by him to improve the view from the *Via Appia*, which ends here, was still standing in the 16th cent., but it was at length removed by *Sixtus V.* The *Palatium* participated in the general decline of the city. It was inhabited by *Odoacer* and *Theodoric*, but from the 10th cent. onwards the hill was occupied by monasteries, fortified towers, and gardens.

The first excavations took place in the course of the laying out of the *Orti Farnesiani*, or *Farnese Gardens*, in the pontificate of *Paul III. Farnese* (1534-50). In 1721-30 the central part of the Palatine was laid bare. Most of the works of art then found were carried away from Rome (to *Naples* and *Parma*). A systematic excavation, under the superintendence of the architect *Comm. Pietro Rosa*, was begun in 1861, when *Napoleon III.* bought the *Farnese Gardens*, and has been continued by the Italian government, which acquired the gardens in 1870.

The excavations are open to the public daily (guide desirable; see pp. 150, 181). The following account of them refers mainly to the best preserved remains, which may be visited in about 2-3 hrs.; but many other interesting points may be added. The imposing character of the ruins, coupled with the beautiful and varied views commanded by the Palatine, renders them well worthy of repeated visits. — Permission to sketch, photograph, or take measurements, see p. xxiii.

The *ENTRANCE* (which may shortly be removed, comp. p. 281) is in the *Via San Teodoro* (Pl. II, 19, in the Appx.) We ascend to the left by the *Clivus Victorius*, an ancient street skirting the N.

7

4

4

4

4 4 4 4

4



angle of the hill and passing behind the Library of the Temple of Augustus (p. 260), of which it commands a good bird's-eye view. Under the emperors, when sites for new buildings in Rome became scarce, this street was vaulted over with massive brick arches. This portion of the buildings is wrongly called the *Domus Caligulae*; it really dates from the period of the Antonines or of Septimius Severus.

Under one of the arches on the right (Pl. 7), now closed by a railing, is a rough graffito upon white stucco, described as a drawing of the Crucifixion, but more probably representing rope-dancers. Above are some erotic Latin verses. This graffito must not be confounded with the better known Caricature Crucifix (p. 208).

At the top of the street we reach the *Omaio* of the former *Parmentes Gardens*. Thence we mount the steps to the right to the remains of the Palace of Tiberius, the site of which is covered with gardens. A balcony-like projection on the N. side commands an excellent view of the Forum and the Basilica of Constantine. From the brow of the N. spur, where there is now a small grove of evergreen oaks, the mad Caligula caused a bridge to be thrown over the Forum to the Capitol, in order to facilitate his intercourse with the Capitoline Jupiter, whose representative on earth he pretended to be. Farther on a fine view is obtained of the Capitol, the valley of the *Vela-brum*, and the *Vicus Tuscanus*. — The small staircase at the end descends to the —

House of Livia (*Domus Liviae*), recognizable by its modern zinc roof. This house, the only one of the kind in the midst of the palaces of the emperors, is believed to have been the house of Tiberius Claudius Nero, the father of Tiberius, to which his mother Livia also retired after the death of Augustus, to marry whom she had divorced her first husband. The entrance is at the E. corner.

A flight of six steps descends to the mosaic pavement of the vaulted *Peristylum*, whence we enter a quadrangular *Cour*, originally partly covered, opening off which are three chambers opposite the entrance. The admirable *Mural Paintings* here will bear comparison with any of the kind known. The principal pictures in the *Central Room* represent large windows whence a view of mythological scenes is obtained; on the right is Io guarded by Argus, while Mercury approaches to release her; on the wall opposite the entrance are Polyphemus and Galatea (much damaged). The admirable perspective in the picture of Galatea is best seen from the entrance of the *Atrium*. The two smaller sacrificial scenes in the corners, above, are painted to imitate ancient easel-pictures, which like the mediæval altar triptychs could be closed by two folding shutters or wings. On the left wall are leaden water-pipes (found under the floor) with inscriptions from which the ownership of this house has been gathered. The walls of the *Room on the Right* are adorned with magnificent garlands of flowers and fruits, from which masks and other *Bacchanalian* objects depend between columns; the walls of the *Room on the Left* are divided into brown panels edged with red and green, above which are light arabesques between winged figures on a white ground. Adjoining the right side of the court is the oblong rectangular *Traicinium*, or dining room, recognizable by the modern inscription, with walls painted bright red. The two large central paintings represent landscapes. On the entrance wall, above, are two glass vases with fruits. On the wall opposite the entrance visitors should notice the flange-like insert between the stucco facing and the external wall to preserve the paintings from damp. The other rooms of

the houses, on the upper floor, were connected with the court by a narrow staircase (closed). They may be entered from the outside (to the right).

The lofty square substructure on the W. peak of the hill, overgrown with live oaks, belonged to a *Temple of the Magna Mater (Cybele)*, founded here in 191 B.C., when in consequence of a sibylline oracle the sacred stone of Cybele was brought from Phrygia to Rome. Though more than once injured by fire, this temple retained its highly primitive form throughout the entire imperial period. Fragments of the shafts, capitals, and bases of peperino columns once covered with white stucco are scattered about. On the right side of the temple is a (headless) statue of Cybele, of good Roman workmanship. — A flight of steps (*Scalae Caeli*?) hewn in the rock and defended by a wall and gate, descends hence towards the Circus Maximus (p. 286). Adjoining are the ruins of private houses of several stories, with baths and mosaic pavements. — Between the steps and the Temple of the Magna Mater, on the brow of the hill, remains of very ancient masonry, of uncertain purpose, have been discovered. A round cistern (discovered in 1897), vaulted over, like the Carcer Mamertinus, by the gradual projection of the upper courses of stones and intersected by later constructions of massive blocks, is probably the oldest building on the Palatine and one of the oldest in all Rome.

To the right as we quit the House of Livia is a covered passage (*Cryptoporticus*), with stucco ornamentation (partly incrustated by the water of a fish-pond or *pisces* above). This is supposed to have been the scene of the murder of Caligula by the conspirators in 41 A.D. At the end of the passage, to the right, is the *ANNA PALATINA*, the open space in front of the imperial palace, to which a street, diverging at the Arch of Titus, led up from the *Sacra Via*. A mass of foundations here, really of mediæval origin, has been groundlessly identified as the Temple of Jupiter Stator. On the E. side of this are the remains of a subterranean canal (?), with an early Latin inscription.

The *Domus Augustiana*, or imperial palace, whose N. front was turned towards the Forum and the *Sacra Via*, is now frequently called *Domus Flavia*, because the greater part of the excavated portion probably dates from a later addition, built by Domitian. Before the front was an elevated vestibule of cipollino columns, with three projections resembling balconies, approached by flights of steps at each end. The accessible remains of the palace belonged entirely to the reception and state apartments and include no part of the private rooms, which lie buried beneath the former Villa Mills (see p. 279 and comp. the plan). The arrangement of the rooms, therefore, shows little resemblance to that of an ordinary Roman dwelling-house, such as those of Pompeii, while the size of the apartments is unusually great.

From the vestibule open three spacious rooms. The one in the middle, known as the *Tablinum*, was the *Aula Regia*, or throne-

room, in which the emperor granted audiences. This extensive hall, 39 yds. by 49 yds. (i.e. 10 yds. wider than the nave of St. Peter's), with its large semicircular apse which was occupied by the throne, and its six niches, alternately round and square, containing the now empty pedestals, was originally entirely covered; but an adequate idea of its magnificence can hardly now be formed, as it has been deprived of its decorated ceiling, while the walls have lost their marble covering, the niches their columns, and the pedestals their colossal figures. Two colossal statues of Hercules and Bacchus, found here in 1724, are now in the museum at Parma.

The room adjoining the Tablinum on the S.E. was found in 1720 to contain a large altar with steps at the sides, which caused the room to be named the *Lararium*, or chapel of the Laræ or household gods. This altar has since been destroyed and the small marble altar at present to be seen has been brought from elsewhere. On the front of the latter appears a Roman offering sacrifice with covered head; on the sides are Laræ, with boots, a short 'chiton', a 'rhyton' or drinking-horn in the raised hand, and a 'situla' or pitcher in the other. Behind are the remains of a staircase ascending to an upper floor.

To the N.W. of the Tablinum lies the *Basilica*, where the emperor administered justice. The semicircular tribune was separated from the space for litigants by a marble screen, a fragment of which still stands. This space was flanked on each side by a narrow colonnade. The unfluted columns were adorned with bronze ornaments, the holes for fastening which are still visible.

To the S.W. of the Tablinum is the *Peristylum*, two-thirds of which only have been excavated (one-third on the S.E. side being covered by the former Villa Mills), a square garden, 58 yds. wide, originally surrounded by a colonnade. Its imposing dimensions and a few traces of its marble covering now alone witness to its ancient magnificence. The open space in the centre was doubtless occupied by fountains, trees, and flowers.

At the S.W. corner steps descend to two subterranean chambers containing traces of stucco decorations and painting in the style of the reign of Augustus. Several adjoining rooms were destroyed in 1721 immediately after their discovery. These perhaps all belonged to the earlier Domus Augustiana, over which the palace of Domitian was erected.

Beyond the peristyle, and opening along its entire width, is the *Triclinium*, or large dining-hall (*Jovis Coenatio*), whence the diners could enjoy a view of the fountains and the trees in the peristyle. In the semicircular apse on the W. wall most of the marble and porphyry covering of the pavement still exists (poor and irregular, dating from a late restoration). The remains of the pavement and covering of the wall on the N.W. side are more scanty. — Adjacent to the latter is the *Nymphæum*, or dining-room for the hot season, containing an elliptical fountain-basin, covered with partly-preserved marble slabs.

Behind the Triclinium is a *Colonnade*, with six cipolline columns (two entire, the others in fragments). A view is obtained, through the broken pavement, of the original level over which the emperors built. Farther on are two other rooms, with semicircular terminations:

and niches in the walls, which are erroneously termed the *Academia* and *Bibliotheca*. Fine view of the valley of the Circus Maximus and of the Aventine.

To the W. of the imperial palace, between the Nymphæum and the House of Livia, lies a ruined temple, of which only the sub-structures and steps remain. This is apparently the *Temple of Jupiter Victor*, erected in consequence of a vow made by Fabius Maximus at the Battle of Sentinum, B.C. 295. The nearly square podium is approached by 28 steps in five flights. A round pedestal with an inscription, on the fourth landing, was the lower part of a votive offering of Domitius Calvinus, who triumphed over Spain in B.C. 38.

We now follow the path descending amongst shrubs opposite the front of this temple, and take the first turning to the left, to reach the ruined palaces on the S.E. side of the hill. To the left are the remains of the S. façade of the palace of Augustus, including a large *Atrium* in the form of a flat arch. Into this is built the gardener's house below the former Villa Mills, the beautiful cypresses of which peep down from above. Beyond the house we pass through an ancient gateway on the left, and enter the so-called —

Stadium, an oblong space (175 yds. long by 52 yds. wide), usually regarded as an arena for races and athletic contests, but more probably a garden. Most of it was excavated in 1881, the remainder in 1893. It was originally enclosed merely by lofty walls, and had a large apse covered with a semi-dome on the S.E. side and a balcony on the N.E. side (next the convent of San Bonaventura; p. 266). Subsequently, probably under Septimius Severus, a colonnade of piers adorned with half-columns was built in front of the walls at the sides. The N.E. corner is in best preservation. Here we may note how the brick-faced core of the columns was covered with white marble at the bases and fluted red marble (*porta santa*) on the shafts. At each end of the central space is a large semicircular fountain basin; a considerable number of fragments of the decorations, cornices, etc., of the E. fountain have been found. The wide channel of white marble that runs round the entire central space afforded a convenient water-supply for the garden. At the farther ends of the colonnades are semicircular recesses, in one of which (that to the left) is placed a statue of one of the *Muses* found here in 1899. Other sculptures found in the Stadium are now in the Museo delle Terme (p. 171). — Beneath the large apse on the S.E. side (groundlessly called 'the imperial box') are three chambers with faded remains of frescoing. The elliptical structure in the S.W. half dates perhaps from the time of Theodoric, whose name occurs on brick-stamps found here.

An opening in the left wall (Pl. E) leads to the central portions of the *Domus Augustiana*, which were also restored by Domitian and contained the imperial private apartments. Here is a large square court with oval rooms to the N. of it, one of which has a square, and two others

octagonal roof of interesting construction. Of the second story important fragments remain in the cellars of the Villa Mills (not accessible).

A staircase between the great apse and the N.E. corner of the Stadium ascends to the level of the upper passage round the Stadium. On a platform here, immediately to the left, are the remains of several rooms and some large cisterns, which served as cellars in the demolished part of the convent of San Bonaventura (p. 265). This point commands a fine view of the Stadium and of the Mons Caelius and the Alban Hills to the S.E. We next pass the back of the apse, the lofty proportions and coffered vaulting of which should be observed, and reach the remains of the *Palace of Septimius Severus*. We distinguish rooms with heating-apparatus and baths, but the general plan is not clear. The floors of concrete, 20 ft. or more in breadth, supported only at the edges, should be noticed. — We then cross a paved bridge to a *Belvedere* supported by three lower stories, and commanding a magnificent view.

Towards the N.E. tower the ruins of the Colosseum, nearer are five arches of the *Aqua Claudia* (p. 185), which supplied the Palatine with water. (Beneath the aqueduct passes a new road, on which an additional (8.) entrance to the Palatine, in the *Via dell' Arco di Costantino*, may perhaps be opened.) Here to the right (8.) are the churches of *Santi Giovanni e Paolo*, the *Lateran*, in the foreground *San Gregorio*, and above it *San Stefano Rotondo* and the casino of the *Villa Calimontana*. Still farther to the right appear the ruins of the *Thermae of Caracalla* (the two towers beyond, to the left, belong to the *Porta San Sebastiano*, beyond which is the *Tomb of Aurelia Metella*), and *Santa Balbina* with its lofty tower; farther off, *San Saba*, with its two-storied vestibule, and still more distant the *Pyramid of Cestius*, and in the *Campagna San Paolo fuori le Mura*; then the *Aventine* with its three churches; on the slope the white tombstones of the Jewish burial-ground; and lastly, to the W. and N.W., the *Jaculum* and the *domus* of *St. Peter's*.

We recross the bridge, turn slightly to the right, and passing the remains of a black and white mosaic pavement, reach after about 100 paces a modern staircase. This we descend to the S. edge of the hill and thence return under the arches to the entrance of the Stadium (p. 280). We now descend to the left to a series of chambers on the S.W. slope of the Palatine, below the verandah of the former *Villa Mills*. These perhaps belonged to the —

Paedagogium, or school for the imperial slaves, who, like those of all the wealthier Romans, received a careful education. A portico of granite columns, one of which still remains, with a marble entablature now supported by pillars of brick, stood in front of these apartments. The walls are covered with all kinds of sketches (*graffiti*, done with the *stilus*), drawings, and sentences, the most numerous and the best-preserved of which are in the small dark room to the left of the circular recess. The phrase '*exit de paedagogio*' occurs frequently and gives the clue to the ancient name of this building. The caricature of the *Crucifixion*, mentioned at p. 206, was found here.

About 3 min. farther on is a modern house, on the front of which is a bust of *Francesco Bianchini* (d. 1729), distinguished for his excavations on the Palatine. Here, in its ancient position

stands an altar (*Ara*) of travertine, with an ancient inscription ('*sei deo sei deoas sacrum*', etc.), 'dedicated to an unknown God', and probably re-erected in 100 B. C. by the prætor Sextius Calvinus. Then to the right, on the W. slope of the hill, is a fragment of an ancient wall, constructed of blocks of tufa placed alternately lengthwise and endwise, without mortar. This is usually described as part of the original wall of *Roma Quadrata* (p. 276), but more probably dates from some substructions of a later period of the Republic. Behind it is a grotto, quite erroneously supposed to be the *Lupercal*, revered in antiquity as the refuge sought by the she-wolf when driven from the twins by the shepherds.

Hence we proceed, past the church of San Teodoro, to the exit.

e. Velabrum and Forum Boarium.

The modern VIA SAN TEODORO (Pl. II, 19), leading to the S. along the W. side of the Palatine, approximately follows the line of the ancient *Vicus Tuscus* (p. 281), which was the principal artery of traffic between the Forum and the Tiber. To the left is the low-lying round church of San Teodoro (Pl. II, 19; open on Frid. till 9 a.m.; see also p. 145). It is first mentioned in the time of Gregory the Great, and was erected on the substructures of an antique building. In the interior is a Christian mosaic of the 7th century.

Farther on the *Via di San Giorgio in Velabro* diverges to the right. Its name recalls the ancient VELABRUM, a quarter stretching between the *Vicus Tuscus* and the Forum Boarium.


To the right is San Giorgio in Velabro (Pl. II, 19; generally closed; visitors knock at the adjoining door to the left), founded in the 4th cent., re-erected by Leo II. in 682 and dedicated to SS. George and Sebastian, and subsequently often restored. The portico, according to the metrical inscription, dates from one of these restorations. (In the middle ages the word Velabrum was altered to '*velum aureum*'.) The interior, a basilica with aisles, 16 antique columns, and an old canopy (p. lxii), is under restoration. The frescoes of Giotto(?) in the tribune have been painted over.

Adjacent to the church is the small *Arch of the Money Changers* (*Arcus Argentariorum*; Pl. II, 19), which, according to the inscription, was erected by the money-changers and merchants of the Forum Boarium in honour of Septimius Severus and his wife and sons. The sadly damaged sculptures represent victims and sacrificial utensils. A portrait of Geta here was defaced by command of Caracalla (comp. p. 257). — Farther on is the **Janus Quadrifrons* (*Arco di Giano*; Pl. II, 19), an arched passage with four façades, of the later imperial age, supposed to have been erected in honour of Constantine the Great. Above it once rose a second story. — From this point to the Tiber stretched in antiquity an extensive square known as the *Forum Boarium*, or cattle-market.

Proceeding through the low brick archways opposite the *Arcus Argentariorum*, and passing a mill, we reach the *Cloaca Maxima* (Pl. II, 16), an ancient channel constructed for the drainage of the Forum and the adjacent low ground (p. 250), and still discharging this useful function. A basin was formed here, into which springs were conducted to produce a current through the *Cloaca*. In the mill (20-30 c.) is seen the continuation of the *Cloaca* towards the Forum, and from the *Ponte Palatino* (p. 285) its influx into the Tiber. The *Cloaca* is constructed of tufa with occasional layers of travertine, and at the mouth of peperino entirely.

Following the street beyond the Arch of Janus, and passing the N.W. end of the *Piazza dei Cerchi* (*Via dei Cerchi*, p. 286), we reach the *PIAZZA BOCCA DELLA VERITÀ*, which forms part of the Forum Boarium. In the centre is a baroque fountain erected in 1715 after *Bissaccheri's* design (group of Tritons by *Moratti*). The *Via Bocca della Verità* runs hence to the N. to the *Piazza Montanara* (p. 233). — To the left, at the foot of the *Aventine*, is the church of —

**Santa Maria in Coemeterio* (Pl. II, 16), sometimes called *Bocca della Verità* (p. 284). Founded as early as the 5th cent. and many

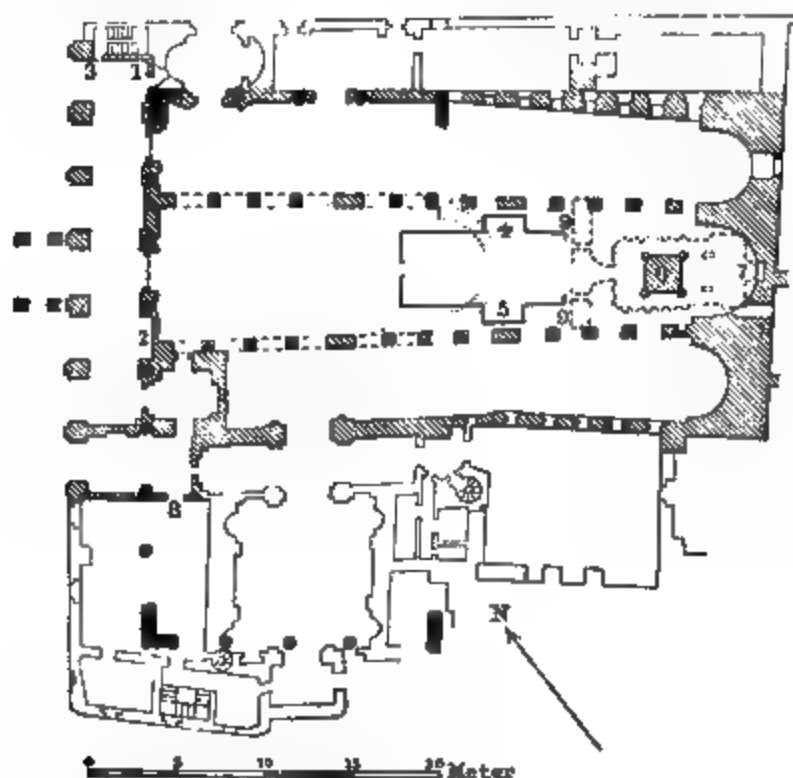

times rebuilt and altered, the building was admirably restored in 1894-99 by G. B. Giovenale and is of the highest interest to the student of Roman mediæval architecture. The campanile, of the early 12th cent., is one of the finest in Rome (comp. p. xiii).

The present basilica, consisting of nave, aisles, a large apse, and two smaller apses, stands on the foundations of two ancient Roman buildings. The first of these was a Temple of Hercules (*Templum Herulis Pompeianum*) probably dating from the republican period, some blocks of travertine belonging to which were discovered under the large apse; the other (shaded black on the ground plan) was a hall for the distribution of grain to the Plebs (*Porta Aemilia*), dating from the 4th cent. A.D. The original basilica (indicated on the plan by dotted lines) consisted simply of a nave, and may have been built as early as the 3rd cent. in the nave-hall which had by that time fallen out of use. Pope Hadrian I. (772-786) nearly doubled this building by the addition of two aisles and three new apses (shown on the plan by diagonal lines), and in doing so tore down the ruins of the Temple of Hercules and used its stone as building material. The title "in Cosmedin" is the name of the church, derived from a square in Constantinople; refers to the fact that it belonged to the Greek colony in Rome (*Stade Græcorum*); this fact is also the explanation of the galleries for women (*ambones*) above the aisles, and of the niches in the wall of the apse, for the sacred vessels and books (*peristyles*). At the beginning of the 17th cent. the level of the flooring was raised by about 8 ft., the women's galleries were removed, and the nave and aisles covered with flat wooden ceilings of which the present are reproductions. The vestibule and the campanile (p. 281) also received their present form at this time. These changes were probably due to Cardinal Giovanni Gastaldi, who was bishop of the church from 1670 to 1710, and afterwards became Pope Clement XI. (1700-1721). His successor Calixtus II. completed the decoration of the interior with the aid of his chamberlain Alfano. The disgusting alterations of the 16th and 17th cent. have been removed.

Vestibule. The column antique marble size with the mask of a Triton (No. 1 on the plan) probably served originally as the cover of a man hole, or horizontal entrance to a drain. It is known as the *Summa Porta* from the popular superstition that the ancients on going on earth used to insert their hand in the mouth of the mask, which stood on the hand of those who perjured themselves. The principal portal, executed according to the inscription by a certain Johannes de Vercelli about the 11th cent., exhibits a rude imitation of antique motives, on each side are long records of donations of the 9th century. To the right is the tomb of Alfano (Pl. 2, see above). A door (Pl. 3) adjoining the mask, leads to the organ loft, which contains a small museum of objects found in the earlier churches (now kept by the museum). The noticeable stone decorations on the vaulting of the arches opening upon the nave date from the 3rd-4th cent. A.D.

Entrance. By the entrance-wall are three marble columns from the Statio Aemilia (see above), other specimens of which may be seen in the wall of the left aisle and in the sacristy. They stand upon a plinth about 8 ft. in height. The nave is supported by 20 ancient columns brought from various buildings; an inscription above the 6th to the left indicates the extent of the oldest building and of that of Pope Hadrian. In the sacristy are remains of frescoes, perhaps dating from the 13th century. The screens enclosing the most and choir (*tabula cantorum*), the ambones (Pl. 4-5), the Easter candlestick (all restored and replaced in their original sites), the episcopal throne (Pl. 7) in the apse and the beautiful marble "Pavement" (*opus Alexandrinum*) rank amongst the most beautiful decorations of the 13th cent. in Rome. — The high-aisle (Pl. 6) is formed by an ancient hall of red granite. The marble mosaic (*opus sectile*) below it dates from the 9th century. The ciborium, presented by Cardinal Francesco Gastaldi, the nephew of Sixtus VIII. is a work of Alessandro Cambrini (ca. 1500). On the wall to the left of the apse are some remains of frescoes of the 11th (?) cent. with Greek graffiti. The frescoes of the apse and the framework of the blind window behind the bishop's throne are modern. — The Crypt (see entrance, at Pl. 9), below the presbytery, consists of nave and aisles and is entirely hollowed out of the foundation of the ancient temple; in the side-walls are niches for reliquaries. — In the

Securitas (entrance to the right, in front; Pl. 8) is a mosaic on a gold ground, representing the Adoration of the Magi, a fragment from the Lady Chapel erected by Pope John VII. in 706, in the old church of St. Peter.

The *Via della Salara* (see p. 286) runs hence to the S., towards the Porta San Paolo.

Opposite, towards the Tiber, stands a small and picturesque *Round Temple*, with twenty Corinthian columns, the ancient name of which is uncertain (*Fortunus*?). The ancient entablature and roof and one column have disappeared. With the exception of the circular podium, the whole edifice is built of solid marble instead of the much more usual concrete core veneered with marble slabs. Beneath the present poor wooden roof lies the little church of *Santa Maria del Sole*, also called *Santo Stefano delle Carrozze*.

The *Ponte Palatino* (Pl. II, 16), a new iron bridge, called also *Ponte Emilio* or *Nuovo Ponte Rotto* (comp. below), connects the Piazza Bocca della Verità with Trastevere (Lungarina, p. 374). Adjacent, upstream, is the solitary remaining arch of the ancient *Pons Æmilius*, built in 181 B.C., the position of which exposed it to frequent injury from inundations. The two arches next the left bank were carried away by the great flood of 1598, after which it was called *Ponte Rotto*. Below the new bridge is the mouth of the *Cloaca Maxima* (p. 283), the arch of which, preserved below an arch in the new quay, may be seen from the bridge when the river is not too high.

To the right of the bridge is a second small and well-preserved *Temple* (converted in 880 into the church of *Santa Maria Egiziaca*; Pl. II, 16), dating, as its style seems to indicate, from the close of the Republic. It is an Ionic pseudoperipteros, with 4 columns at each end, and 7 on each side; but those of the portico, which is now built up, were alone detached, the others being merely decorative half-columns. The edifice is built of tufa, with the projecting and sculptured parts of travertine, the whole overlaid with stucco. There is no authority for assigning it (as is commonly done) to *Fortuna Virilis*; it is perhaps more probably the temple of the *Mater Matuta*. The interior is uninteresting.

Directly opposite the entrance to this church is the picturesque *House of Crassentius* (Pl. II, 16), commonly called *Casa di Rionzi*, or *di Pilato*, constructed of brick with a singular admixture of antique fragments. On the E. side, *Via del Ricovero*, a long metrical Latin inscription records that 'this lofty house was erected by Nicholas, son of Crescens, foremost and descended from the foremost, not from motives of ambition, but to revive the ancient glory of Rome'. The Crassentii were the most powerful noble family in Rome at the close of the 10th cent., but no action of the name of Nicholas can be traced, and the house, the oldest existing specimen of mediæval domestic architecture in Rome, is perhaps not earlier than the 11th or 12th cent. (comp. p. lxii). The building was originally much larger, and was intended to command the bridge over

the Tiber. It has nothing to do with Cola di Rienzo, 'the last of the tribunes', who was born in the Rione Regola.

To the N., following the bank of the Tiber or taking the *Via Bocca della Verità* (p. 283) to the *Piazza Montanara* (p. 283), we may reach the *Theatre of Marcellus* (p. 232).

Between the S.W. slope of the Palatine, along which now runs the *VIA DE' CERCHI* (Pl. III, 19), and the Aventine, was situated the *Circus Maximus*, which was originally instituted by the kings, afterwards extended by Omsar and furnished with stone seats, and lastly more highly decorated by the emperors. In the time of Pliny it was capable of containing over 100,000 spectators, and after subsequent extensions the number of places was increased to 200,000. The last race which took place here was under the auspices of Totila the Ostrogoth in 549, when the city was to a great extent in ruins. In the centre ran a *spina*, or longitudinal wall which connected the *metae*, or goals, and bounded the course. With a few trifling exceptions, the walls of the circus have disappeared; but its form is distinctly traceable from a higher point, such as the Palatine.

The *Jewish Cemetery* lies within the Circus, at the base of the Aventine (entrance from the *Via dell' Orto degli Ebrei*, the first turning to the left from the *Via di Santa Sabina*). A pretty view of the Palatine and the S. quarters of the city is enjoyed hence.

f. The Aventine. Monte Testaccio. Pyramid of Cestius.

ELECTRIC TRAMWAY from the *Piazza Venezia* via the Forum to the *Piazza Bocca della Verità* and thence by the *Via della Salara* and the *Porta San Paolo* to *San Paolo Fuori*, see No. 4 in the Appendix.

The Aventine (150 ft.), anciently the principal seat of the Roman Plebs, and also afterwards densely peopled, is now occupied by monasteries and vineyards only, and is as yet little disturbed by the modern building activity.

At the base of the hill is the *VIA DELLA SALARA* (Pl. III, 16), beginning at the *Piazza Bocca della Verità* (p. 283), and continued by the *Via della Marmorata* (p. 288). Immediately beyond *Santa Maria in Cosmedin* (p. 283) and 2 min. farther, at the small Chapel of *St. Anna*, streets diverge to the left from the *Via Salara*, both ascending to the top of the Aventine.

The second of these, the steep *Vicolo di Santa Sabina*, reaches the top of the Aventine in 5 minutes. The extensive remains of tufa walls, which bound the vigna to the right at the corner of the street, date from a *Castle*, whence in the 13th cent. the Savelli commanded the river and the road on its banks. On the top, in the *Via di Santa Sabina*, are the three churches on the Aventine (*Santa Sabina*, *Sant' Alessio*, *Santa Maria Aventina*), situated close together.

**Santa Sabina* (Pl. III, 16), which probably occupies the site of a temple of *Juno Regina*, was erected in 425, in the pontificate of Coelestine I., by Petrus, an Illyrian priest, and restored in the 13th,

15th, and 16th centuries. Honorius III. presented the church, along with the old papal palace adjoining it, to St. Dominic, who made it the headquarters of his order. It is usually entered by a side-door, if closed, visitors ring at the door to the left, and proceed through the old portico, now built up, and the principal portal. The cypress-wood doors are adorned with carvings of scriptural scenes, mostly of the 5th cent. (the upper relief on the left is perhaps the oldest representation of the Crucifixion) Comp p lxi.

The *trianon*, with its open roof and twenty four ancient Corinthian columns of Hymettian marble, has retained the character of an early Christian basilica almost unimpaired. — *ENTRANCE WALL*. Over the door, an admirable *Mosaic* (450 A.D.) inscription with the name of the founder, on the left a figure emblematical of the *Ecclesia ex Circumcisione* (Jewish Christians), on the right that of the *Ecclesia ex Gentibus* (Gentile Christians). — *FURN*. On the pavement in the centre, towards the altar, is the tomb of *Muñoz de Sarmiento*, general of the Dominican order (d. 1500), adorned with *mosaic*. — At the end of the *Right Aisle*, is the Chapel of St. Dominic, the *Madonna del Rosario* with St. Dominic and *Cathartes*, an altarpiece by *Sanseverino*, regarded as his masterpiece (stolen in 1801 but subsequently recovered). Adjacent on the right, Renaissance tomb of *Card. Azzurro de Podio* (d. 1600). — Several fragments of the ancient choir-screen, with ornaments of the 9th cent., have been built into the wall of the *Left Aisle*.

The small garden of the former Dominican Monastery contains an old orange-tree said to have been planted by St. Dominic. It is visible from the small window opposite the wooden door. The handsome cloisters (p. lxi), with 108 small columns, and the large garden now belong to a Fever Hospital and are quite inaccessible.

Sant' Alessio (Pl. III, 16) is an ancient church with an entrance court. The date of its foundation is unknown, but it was re-consecrated by Honorius III. after the recovery of the relics of the saint in 1217. In 1426 it came into the possession of the Order of St. Jerome. In the neighbouring monastery a blind asylum (*Istituto dei Ciechi*) has been established. We enter the court, and, if the church is closed, ring at the door at the end of the right cloister ($\frac{1}{2}$ fr.).

The *trianon* was modernized in 1700, and again recently. The N. aisle contains a well and a wooden staircase belonging to the house of the parents of the saint, which formerly stood on this site. In the choir are a bishop's throne and two small columns adorned with *mosaic*, according to the inscription the remains of a work of 18 columns by *Josephus Canopus* (p. lxii).

The *Via di Santa Sabina* next reaches a small piazza embellished with obelisks and trophies in stucco. The brown door No. 40, to the right in this piazza, with the arms of the Grand Master of the Knights of Malta above it, contains a brass-bound aperture above the keyhole, through which is obtained a celebrated *View of the dome of St. Peter's at the end of the principal avenue of the garden. (Adm. to the garden on Wed. and Sat. from 9 a.m. till dusk; ring at the door.)

Santa Maria Aventina (Pl. III, 17), also called *del Priorato*, belong to the Maltese Order, which celebrates its periodical festivals here. This church, founded perhaps as early as the 10th cent., was restored under *Plus V.*, and remodelled by the Grand Prior *Card. Grev. Batt. Razzone* from plans by *Piranesi* in 1765.

To the right of the entrance is an ancient sarcophagus, on which the deceased (head unfinished), surrounded by Minerva and the Muses, is represented; the remains of a Bishop Spinelli were afterwards placed in it. Also a statue of Piranesi (d. 1778), and the monuments of several members of the Maltese Order: Grand Master Ric. Caracciolo (d. 1806); Gio. Diedo, Grand Prior of Venice and nephew of Pope Eugene III.; the 'belli' Bart. Carafa, by the Magister Paulus (beside the altar, to the right), and Sergio Seripando (first recess to the left of the entrance), of the 15th century. The third recess to the left contains a remarkable marble reliquary of the 13th cent., roughly wrought after the pattern of an antique funeral urn.

The garden contains one of the finest palm-trees in Rome, injured by a cannon-ball during the siege of 1849. This garden, and the upper floor of the *VILLA MAGISTRALIS* of the Maltese Order (adm. pp. 150, 151), which adjoins the church, command a picturesque view of Rome, the Campagna, and the mountains, now, like many similar views, gradually being built up. The second floor contains a large saloon with portraits of all the grand-masters (74) from Frater Gerhardus (1113) down to the present Grand Master Coschi, among them that of the Emp. Paul I. of Russia (1798-1801, after the taking of Malta by Bonaparte).

On the W. brow of the Aventine rises the huge international Benedictine seminary of *Sant' Anselmo* (Pl. III, 17), consecrated in 1900. The rough and dirty road passing to the left of it descends in 10 min. to the *Via della Marmorata* (see below).

The *VIA DELLA MARMORATA* (Pl. III, 16, 17) reaches the Tiber in 6 min. from the Piazza Bocca della Verità, and skirts the river for about 2 min., affording to the right a pleasing retrospect of the Ponte Palatino and the Capitol. On the river-bank was the *Marmorata*, the landing-place and depôt of the unwrought Carrara marble. Opposite lies the harbour of *Ripa Grande*, in front of the large Ospizio di San Michele (p. 376).

The street now leaves the river and leads S.E. towards the Porta San Paolo. The former *Prati del Popolo Romano*, between the street and the river, are now occupied by a new quarter of ugly tenement houses. This was the quarter of the ancient *Horrea* or warehouses for goods landed from the shipping in the Tiber.

At No. 84 *Via della Marmorata* is the University Museo del Gessi (Pl. III, 15), containing casts from antiques that are not in Rome. This collection, useful for purposes of study, is open on Wed. & Frid. 2-5, Sun. 10-12.30 (closed July 1st-Nov. 15th).

After 6 min. the road from the churches on the Aventine descends from the left (see above). Just beyond this the street is crossed by the broad *VIA GALVANI*, leading on the left to San Saba, Santa Prisca (p. 290), and the Circus Maximus (p. 288), and on the right to the river, Mte. Testaccio, and the extensive new *Slaughter Houses* (*Mattatoio*).

The *Monte Testaccio* (Pl. III, 16) is an isolated mound, 115 ft. in height and about 1000 paces in circumference, rising above the Tiber, and consisting, as the name indicates, entirely of broken pottery. It is formed of the large earthenware jars (*dolia*),

chiefly from Spain and Africa, which were unpacked at the neighbouring *Emporium*. The hill is now honeycombed with cellars, in some of which wine is sold. — The summit, marked by a wooden cross, commands a once celebrated panorama, now much injured by the new buildings of the neighbourhood.

To the N., the city, beyond it the mountains near *Baccano* and the isolated *Soracte*. To the E. the *Sabine Mts.*, in the background the imposing *Leonessa*, in the nearer chain *Mte. Gennaro*, at its base *Monticelli*, farther to the right *Tivoli*. Beyond this chain the summits of *Monte Velino* above the *Lago Fucine* are visible. To the S. of *Tivoli* appears *Palatrana*. After a depression, above which some of the *Volturn Mts.* rise, follow the *Alban Mts.* on the buttrass farthest E. is *Colonna*, beyond it *Prascati*, higher up *Rocca di Papa*, *Mte. Cave* with its monastery, below it *Marino*, finally to the right *Castel Gandolfo*. In the broad *Campagna* are the long lines of arches of the *Aqua Claudia* and the *Acqua Felice* towards the S.E., and the tombs of the *Via Appia* and that of *Onelia Metella*.

The *Porta San Paolo* lies about 5 min. beyond the *Via Galvani*. Just before the gate is reached, a short side-street on the left leads to the Protestant Cemetery.

The Protestant Cemetery (Pl. III, 18) is open from 7 a.m. till dusk (ring, custodian, who has the key of the older cemetery also, 20-30 a.). The older burying-ground, adjoining the Pyramid of Cestius, is now disused. In 1825 the present burial-ground was set apart for this purpose. It is a retired spot, rising gently towards the city-wall, affording pleasing views, and shaded by lofty cypresses, where numerous English, American, German, Russian, and other visitors to Rome are interred. The new Chapel, in the Romanesque style by A. Holzinger, was erected at the W. end in 1898-99.

Of the Old Cemetery Shelley wrote that 'it might make one in love with death, to think that one should be buried in so sweet a place'. Close to the entrance and seen from the outer edge of the moat surrounding the cemetery, is the tomb of *John Keats* (d. 1821), bearing the melancholy inscription 'Here lies one whose name was writ in water'. Beside the grave of Keats is that of his friend *Joseph Spence* (d. 1879). Beside rests *John Bell* (d. 1820), writer on surgery and anatomy. *J. A. Carstens* (d. 1798), the painter, is also buried here.

Amongst many illustrious names in the New Cemetery the eye will fall with interest upon that of the poet *Shelley* (d. 1822), 'cor cordium', whose ashes were buried here (near the upper, or eastern, wall), the present new tomb, by *Onslow Ford*, was erected in 1891. Shelley's remains were burned in the bay of *Spezia*, where they were washed ashore; his heart, the only part not consumed by the flames, is now at *Boscombe* in England. Adjoining Shelley is the grave of *Frederick* (d. 1861). On the opposite side of the walk lies *J. A. Symonds* (d. 1893), and below in the next walk, *Constantin Frederick Woodson* (d. 1894). The graves of *R. M. Ballantyne* (d. 1894), the author, of *William and Mary Howitt* (d. 1879 and 1885), and of *John Gibson* (d. 1896), the sculptor, and several other artists may also be recognised. *August Gauthier* (d. 1890), son of the poet, is also interred here.

The 'Pyramid of Cestius' (Pl. III, 18), originally on the *Via Ostiensis*, but enclosed by Aurelian within the city-wall, is the tomb of *Caius Cestius Epulo*, who died before B.C. 12. The Egyptian pyramidal form was not unfrequently adopted by the Romans in their tombs. That of Cestius is formed of concrete and covered with marble slabs, height 116 ft., length of each side at the base 98 ft.

According to the principal inscription on the E. and W. sides ('C. Cestius L. f. Pob. Epulo. pr. tr. pl. VII vir epuloem'), the deceased, son of Lucius, a member of the Tribus Pobilia, was praetor, tribune of the people, and member of the college of Septemviri Epulones, or priests who superintended the solemn sacrificial banquets. The inscription on the E. side below records that the monument was erected in 530 days under the supervision of L. Pontius Nela and the freedman Pothus — In the middle ages the pyramid passed for the tomb of Remus. Alexander VII. caused the deeply imbedded monument to be extricated in 1690, and ordered the formation of the present entrance to the vault (19 ft. long, 13 ft. wide, and 16 ft. high), which was originally accessible by ladders only.

The *Porta San Paolo* (Pl. III, 18), immediately to the E. of the Pyramid of Cestius, is the ancient *Porta Ostiensis*. — Hence to *San Paolo Fuori*, see p. 397; electric tramway, No. 4 in the Appendix.

The *VIA DI PORTA SAN PAOLO*, diverging to the N.E. from the *Via della Marmorata* just inside the gate, reaches in 5 min. (left) a fragment of the old *Servian Wall* (Pl. III, 20, p. xxx), about 30 ft. high and 100 ft. long, consisting of large blocks of tufa, laid alternately as headers and stretchers (comp. p. 271). The arch in it is of much more recent date. The remains show that the wall was quite out of use and built over in the later days of the Republic.

A little farther on the *Via di San Saba* (right) and the *Via di Santa Prisca* (left) diverge to the churches of those names.

San Saba (Pl. III, 21), dedicated to the Cappadocian abbot Sabas (d. ca. 431 A.D.), is a church of great antiquity, but was almost entirely rebuilt in 1466. It belongs to the Collegium Germanicum. To the left in the portico is an ancient sarcophagus with a representation of a wedding and Juno Pronuba. The interior contains 17 columns, some of granite, others of marble, with mutilated capitals; the walls of the central apse and of the left aisle show traces of paintings. In the left aisle are five ancient sarcophagi, and other Roman remains may be seen in the convent garden. The loggia above the entrance commands a fine view.

In the course of the extensive restorations (now temporarily suspended) numerous antique fragments and sarcophagi were brought to light, as well as the remains of an earlier church (about 13 ft. beneath the present floor), with traces of paintings of the 7th and 12th centuries.

Santa Prisca (Pl. III, 20; usually closed), another very ancient church, but modernised in the 18th cent., is traditionally stated to cover the site of the house of Aquila and Priscilla. Adjacent is the 'Castello di Costantino' (p. 138), an osteria commanding a beautiful view of the Palatine and other deserted S. quarters of the ancient city. — About 5 min. farther on the *Via Santa Prisca* unites with the *Via di Santa Sabina* (p. 286).

g. The *Via Appia* within the City.


From the Arch of Constantine (Pl. II, 22; p. 270) by the *Via di San Gregorio* to the church of *San Gregorio Magno*, see pp. 294, 295. Just beyond the church the *Via de' Cerchi* (p. 289) diverges to the right.

Near the point where the *Via San Gregorio* unites with the *VIA DI PORTA SAN SEBASTIANO* (Pl. III, 22, 23, 27) was anciently situated the *Porta Capena*, whence the *Via Appia* issued. We follow the *Via di Porta San Sebastiano* to the left.

After 5 min., at the end of the avenue which runs parallel with the street on the right, a road ascends on the right to the church of *Santa Balbina* (Pl. III, 23), situated on the slope of the *Aventine*, and consecrated by Gregory the Great. The roof is still open, but the church is modernized and destitute of ornament. It contains a relief (Crucifixion) by *Mino da Fiesole* and the handsome tomb of Card. Stefano Surdi, by *Johannes Cosmas*. (Visitors ring at the gate on the right of the church.) The adjacent building is a Reformatory for young criminals.

After following the *Via di Porta San Sebastiano* for a short distance we obtain a view to the left of the *Villa Celimontana* (p. 298). After 10 min. the road crosses the turbid streamlet *Marrana*. On the left is a nursery-garden (*Semencolo Comunale*). On the right, at No. 29, just before reaching the church of *Santi Nereo ed Achilleo*, is the entrance ($\frac{3}{4}$ M. from the Arch of Constantine) to the ruins of the —

**Thermæ of Caracalla*, or *Thermæ Antoninianæ* (Pl. III, 23; adm., pp. 150, 151). These baths were begun in A. D. 212 by *Caracalla*,

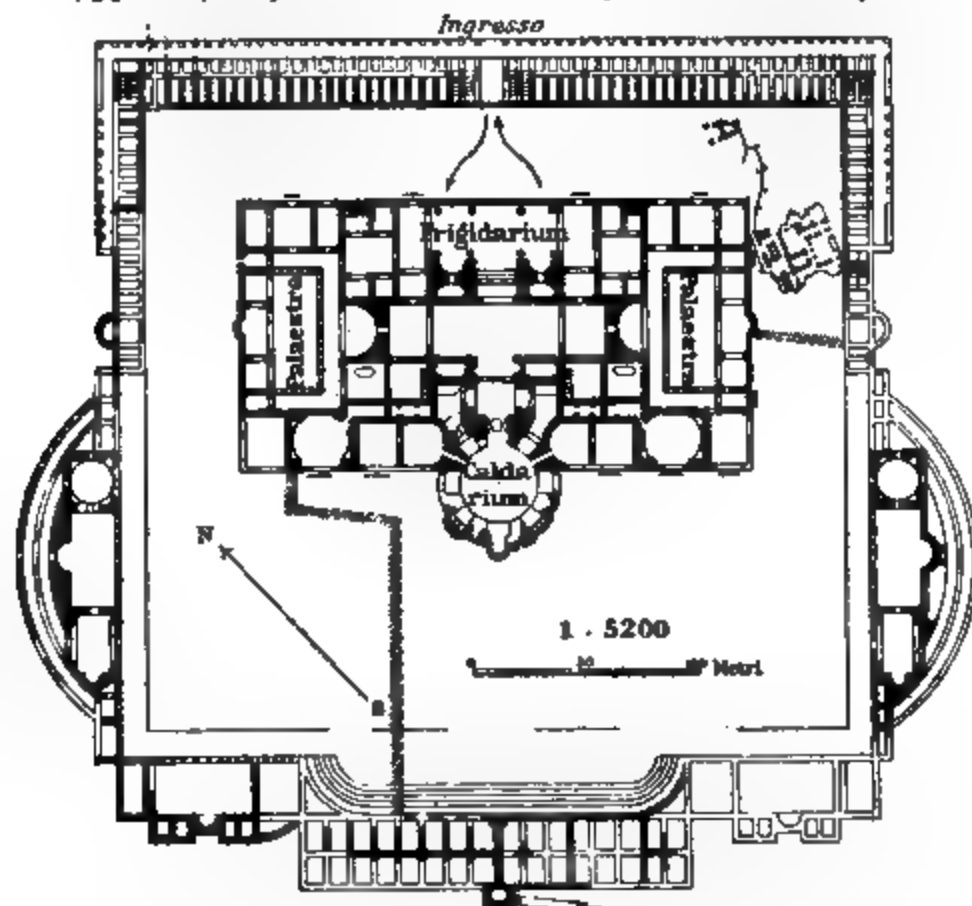

calla, extended by *Heliogabalus*, and completed by *Alexander Severus*. They contained 1600 marble baths, but could accommodate a much

larger number of bathers at once. Their magnificence was unparalleled. Numerous statues, including the Farnese Bull, Hercules, and Flora at Naples, mosaics, etc., have been found here, while the massive walls, notwithstanding the destruction of the roof, still bear testimony to the technical perfection of the structure. The bathing establishment proper, surrounded by a wall with porticoes, a race-course, etc., forming a square, was 240 yds. in length and 124 yds. in breadth, while the entire enclosure was 300 yds. long and as many broad. In the time of the Emperors the act of taking a bath had become a highly luxurious and elaborate process, the chief steps in which were as follows: first, a hot-air bath of moderate temperature in the so-called *Tepidarium*, with anointing and gentle massage, second, a hot-water bath in the *Caldarium*, next, a cold plunge in the *Frigidarium* or *Placina*, and finally, the 'rubbing down' or 'shampooing', with a second anointing. Some of the principal rooms have been identified, but the names given to the others are somewhat arbitrary. The latter were used for gymnastic exercises, conversation, and repose, and included also libraries and gardens.

We first enter the *Frigidarium*, a large unroofed room, with a swimming basin, then pass through a small room to the right to the *Palæstra*, a square hall once surrounded by columns, and containing scanty remains of mosaic pavement. In the middle of the long wall, where the well is now, projected a semicircular *Exedra* (where part of the *Homie* of the *Gladiators*, now in the *Laterna*, was found; comp. pp. 304, 310). We then enter the central hall, erroneously called the *Tepidarium*, a large room formerly covered with a slightly vaulted roof; in the corners are four basins for tepid baths. — To the right, beyond a small ante-chamber (*cella media*) in ruins, is the *Caldarium*, a circular chamber with very thick walls, the vaulting of which has fallen in. The heating arrangements and hot air pipes have been discovered here. By ascending a small flight of steps within the first pier on the right we obtain a good survey of the ground plan. — The smaller rooms are arranged symmetrically on both sides of the three principal chambers. In the second (B) *Palæstra* (corresponding to the one mentioned above), where most of the above-mentioned mosaic was discovered, are exhibited architectural and sculptural fragments, and the remains of a mosaic pavement with sea monsters (from the upper floor). — On the S. side of the outer boundary wall a domed octagonal room has been preserved, beside a large swimming-bath. Opposite the *Caldarium*, outside the W. wall, are distinct traces of a *Stadium* for foot races. Other remains of the *Therma* are scattered throughout the neighbouring vineyards. — The exit is on the right of the *Frigidarium*, to which we now return.

Continuing to follow the *Via di Porta San Sebastiano*, we next reach, on the right, the ancient church of *Santi Nerves ed Achilleo* (Pl. III, 23, 26; custodian at No. 8a), rebuilt by Leo III. about 800, and again by Card. Baronius at the close of the 16th century.

The *Interno* exhibits the characteristics of an early basilica. The handsome floor is of *Opus Alexandrinum*. At the end of the nave is an ambo on the left, brought from San Silvestro in Capite; on each side of the altar is a marble *sandalebrum* (beginning of the 10th cent.). Above the arch of the tribune are fragments of a mosaic of the time of Leo III. Transfiguration, with Moses and Elias, in front the kneeling *Agostino*, on the right the *Annunciation*, on the left the *Madonna enthroned* (comp. p. 121).

The opposite church of *San Sisto*, restored by Benedict XIII., is

uninteresting. The monastery was assigned to St. Dominic by Honorius III. — The *Via della Ferratella* then diverges to the left to the Lateran (p. 302).

On the right, a little farther on, is San Ondrea (Pl. III, 27; open on Sun. and festival mornings), a small but curious church, mentioned by Gregory the Great, and finally restored by Clement VIII.

INTERIOR. In the centre of the anterior portion of the church are two altars, of the close of the 16th cent.; at the farther end, to the left, the old pulpit with sculptures: Christ as the Lamb, the symbols of the Apostles, and sphinxes, opposite, a modern candelabrum with ancient base. The inlaid screen of the *Presbyterium*, and the decorations of the *Altar* are Cosmates work (p. lxii); as also is the ancient episcopal throne in the tribune.

The piazza in front of the church is adorned with an antique column.

The ancient *Via Latina*, which diverges here to the left, quitted the limits of the Atrian city by the *Porta Latina* (Pl. III, 30; closed in 1609; p. 301), 5 min. from San Cesareo. Near the gate, to the left, beyond the old monastery, is the church of San Giovanni a Porta Latina (Pl. III, 30), which was founded in the 8th cent., rebuilt by Constantine III. in 1180, and modernized by restorations in 1606, in 1635, and chiefly by Card. Rasponi in 1696. It contains little of interest, beyond four antique columns in the portico and two in the interior. To the right, nearer the gate, is an octagonal chapel of 1609 (perhaps designed by Bramante), named San Giovanni in Oleo from the legend that St. John was thrown into a cauldron of boiling oil at this spot, but having come out unharmed was then set at liberty (festival on May 8th).

Farther on in the *Via di Porta San Sebastiano*, on the left by the cypress, in the *Vigna No. 12*, is the Tomb of the Scipios (Pl. III, 27; open 10-5, uninteresting, candles required, 25 c.), discovered in 1780. The tomb was originally above the surface of the earth, with a lofty threshold; the interior was supported by walls hewn in the solid tufa-rock. It was probably injured, or at least altered, during the imperial age, when freedmen were interred here, and various modern alterations have increased the difficulty of realising its original arrangement. The ancient sarcophagus (p. 357) and inscriptions are now represented by copies merely (adm. 10-5, by candle-light, 25 c.).

This sarcophagus once contained the remains of *L. Cornelius Scipio Barbatus*, Consul in B.C. 298, the earliest member of the family buried here. The bones of the hero were interred at Padua by Quirini, a Venetian. Here, too, were interred the son of Scipio Barbatus, Consul in 209, many of the younger Scipios, the poet *Statius*, and several members of other families and freedmen.

In the same *vigna*, to the E., is the *Columbarium* of Pomponius Hylas, or of the Freedmen of Octavia, wife of Nero, in which a staircase (25 c.) descends to a subterranean chamber, with niches in the walls for the funeral urns. Structures of this kind were common in imperial times and were generally constructed by several families in common, or as a matter of speculation, and each recess could be purchased, given away, or inherited. Their name is derived from the resemblance of the niches to pigeon-holes (*columbarie*). The names of the deceased, painted on plaster or carved on marble

tablets are placed above or beneath the niches (*loculi*), which run in uninterrupted rows round the chamber, even below the low stone benches (*podia*). The mode of acquisition of the spot was frequently added. Let into the wall under each niche were 2, or more rarely, 1, 3, or 4 *ossae*, or cinerary urns. The nature of the decorations depended of course on the means of the family. The columbarium of Hylas is distinguished by its decorations in stucco and colours. Directly opposite the staircase is a niche decorated with stucco, beneath which is a cinerary urn with shells and mosaic; to the right is an apse with painted vine-tendrils and Victories.

In the adjacent *Vigna Codini*, No. 19, are three other Columbaria (ring; fee $1\frac{1}{2}$ fr.).

Two of these structures are almost square. The vaulting of the larger building, in which there are more than 800 urns, is borne by a massive central pier. The smaller building, according to the inscriptions, was built in A. D. 10 for the *Slaves and Freedmen of Marcia*, niece of Augustus. — The third columbarium, discovered in 1863, consists of three vaulted passages in the shape of a horseshoe, the walls of which contain rectangular niches of various sizes, some of them formerly adorned with rare marbles and stucco.

A few min. farther on, just inside the *Porta San Sebastiano* ($1\frac{1}{4}$ M. from the Arch of Constantine), is the so-called Arch of *Drusus* (Pl. III, 30), constructed of travertine blocks, partly covered with marble, and still possessing two marble columns on the side towards the gate. It originally had a lateral opening on each side. The name and date (B. C. 8) commonly ascribed to this monument are erroneous; the arch is more probably of the reign of Trajan. It terminated in a pediment, until Caracalla, for the supply of his baths (p. 291), conducted an aqueduct over it, the brick remains of which seriously mar the effect.

The marble blocks of the *Porta San Sebastiano* (Pl. III, 30), the ancient *Porta Appia*, seem to have been taken from antique buildings. The gate is surmounted by mediæval battlements.

With regard to the *Via Appia* without the city, see p. 393; the *Catacombs of Calixtus*, $1\frac{1}{4}$ M. from the gate, see p. 404.

B. *The Caelius.*

This once densely-peopled hill (165 ft.) is now deserted, like the Palatine and Aventine.

Starting from the Arch of Constantine (Pl. II, 22; p. 270), we follow the *VIA DI SAN GREGORIO* (Pl. III, 23) towards the S., leading between the Palatine and Caelius. On the right we observe the handsome palm of the convent of San Bonaventura (p. 285), and the arches of the *Aqua Claudia* (p. 281). Above the street, on the left, is the *Botanic Garden*, and farther on, at No. 1, the entrance to the municipal —

Antiquarium (Pl. II, III, 22), formerly the *Magazzino Archeologico*, containing the antiquities most recently discovered in the city. Adm., see pp. 150, 151.

In the *Gallerie* are various fragmentary sculptures and inscriptions and the remains of a tombstone with carvings of four-horse chariots, found beside the *Porta del Popolo*.

Room I. In the cabinets on the right are broken specimens in stucco, pottery, and encaustic work; inlaid marble decoration and painting (pigments). On the east-wall, to the right, is a collection of specimens of the most precious marbles. To the left, *British stamps*, pipes from *terracine*, iron-mounted door from a tomb. — **Room II.** The cases contain fragments of sculpture, some of them of great beauty. End-wall (right): Fragmentary statue of a youth in the act of fighting. On the back-wall (I) opposite is an excellent replica of the *Venus Giustiniani* (p. 273), and in the centre is a good copy of the *Fallus of Volturni* (original in the Louvre). — **Room III.** Objects from the cemetery on the *Esquilina*. To the right, *paperine* fragments from the tomb of a member of the guild of *sub-players* (*subitones*), who performed at public sacrifices in Rome. To the left, lamps, contents of single graves. In the centre are the remains of a water-conduit. — **Room IV.** The cabinets contain votive reliefs and figures in terracotta. To the right are objects found in excavating the *Quirinal tunnel* (p. 176): Head of a strategist or general, statue of a boy, after an *aschale* original. To the left are sepulchral sculptures and inscriptions of the republicans, one in *paperine* (grey) and *travertine* (yellow). — **Room V.** On the end-wall to the right, below: Head of an Egyptian princess (the eyes were inserted), head of a muse or poetess with cap and garland, above to the left of the small head under glass, head of a goddess with a cap, head of a youth, after *Polycletus*, head of *Perseus* with the winged cap. To the right of the entrance, on the middle shelf, are heads of *Hephaestus* with a cap and of a youth, both retaining traces of painting and gilding; to the right, head of a girl, expressing strong feeling, above, head of *Apollo* and head of *Diomedes*. To the left of the exit, group of a satyr and nymph, showing traces of colouring. Opposite, statuette of a girl. In the centre, to the left, two *Muses* and a *Diademene* (see *Polycletus*). Seasonal ornaments. — **Room VI.** Lead and bronze pipes, basins, *quintarnes*, and other objects from Roman waterworks, conduits, and baths. To the left is a long inscription in honour of *Calus Dullian*, from the *Forum of Augustus* (p. 273).

We continue to skirt the *Via San Gregorio* and finally pass through an iron gate to the church of —

San Gregorio Magno (Pl. III, 22), originally built by Pope Gregory the Great in 575 on the site of his father's house, and dedicated by that pope to St. Andrew, and afterwards by Gregory II. to his first namesake. In 1633 it was restored under Card. Borghese, by *Giov. Batt. Sorio*, who designed the steps, colonnade, atrium, and façade. The interior was modernized in 1725-34. — It was from this church that St. Augustine, a member of the adjoining Benedictine monastery, set out in 596 with forty monks to preach Christianity in England. — Cardinal Vaughan was titular of this church, as was Cardinal Manning before him.

Entrance Court. Under the colonnade in front of the entrance, left, monument of the *Guidicione* of 1642, but with sculptures of the 16th cent.; right, two monuments of the two brothers *Rossi*, by *Luigi Opponi* (ca. 1400). Here also is the monument of *Sir Edward Curzon* (d. 1861), English ambassador to Rome under Henry VIII. — Interior, with sixteen ancient columns. At the end of the *Right Atrium* Chapel of St. Gregory with small marble reliefs by *Luigi Opponi*, in front of the altar. The *stir-pipes* is by *A. Sordani* (?), the *predella* represent the Archangel Michael with the apostles and other saints, probably by a pupil of *Annibale*. Here to the right is a small *Chancel* preserved from the house of St. Gregory, containing a handsome ancient chair of marble, a *seats* in which Greg

ory is said to have slept, and a collection of small relics of saints. Opposite, from the left aisle, the Cav. Salvatori is entered. Over the altar on the right, an ancient and highly revered Madonna, which is said to have addressed St. Gregory; left, an altar from the studio of Andrea Bregno (1480), disfigured by regilding.

The sacristan (1½ fr.) now shows three "Chapels detached from the church, and connected by a colonnade. A fragment of a wall of the Imperial epoch (erroneously said to be earlier than that of Serrus), partly covered with remains of other walls, is observed here. To the right, Chapel of St. Silvia, mother of Gregory, with her statue by Cordieri. In the apse, a fresco (Angelical concert) by Guido Reni, greatly damaged (1808). — In the centre, Chapel of St. Andrew. Over the altar Madonna with SS. Andrew and Gregory, painted on the wall in oils by Rossetti. On the right, Martyrdom of St. Andrew, *Domenichino*; on the left, St. Andrew, on the way to execution, beholding the cross, *Guido Reni*; two pictures once extravagantly admired. In the left lower corner of each is the portrait of the artist. — To the left, the Chapel of St. Barbara, with a sitting statue of St. Gregory in marble, said to have been begun by *Michael Angelo*, completed by Cordieri. In the centre a marble table with antique supports, at which St. Gregory is said to have entertained twelve poor persons daily. According to the legend, an angel one day appeared and turned a thirteenth.

We now ascend the *Via di Santi Giovanni e Paolo*, which leads to the N., passing under several brick arches and skirting (on the left) the antique brick façade, which is now the wall of the lower church of Santi Giovanni e Paolo. In a few minutes we reach —

"Santi Giovanni e Paolo (Pl. III, 22), a small church in the form of a Greek cross, founded about 400 by the senator Pammachius on the site of the house of SS. John and Paul, two exalted court-officials, who, according to the legend, suffered martyrdom in the reign of Julian the Apostate. When Rome was plundered by Robert Guiscard in 1084, this building was severely injured, but it was restored in the 12th cent., from which period date the atrium (attributed to the English Pope Hadrian IV.), the mosaic-pavement in the interior, and the architecture of the outside of the apse, with its elegant columns. In 1718 Cardinal Paolucci disfigured the interior by altering it in the baroque style. The conspicuous dome over the chapel of St. John in the left aisle was added in the pontificate of Pius IX., when the whole church was restored by Cardinal Howard, the titular.

The modernized upper church is comparatively uninteresting, but below it are the interesting remains of several earlier structures, for, as at San Clemente (p. 299), several strata of buildings have been found here one above another. These include two *Private Houses*, one with pagan frescoes, the other with Christian frescoes (unique in Rome), an *Early Christian Oratory*, and a *Medieval Chapel*. All these were buried in the course of the destruction of 1084 and the subsequent restorations, and remained concealed for seven hundred years. They have been excavated since 1887 under the direction of the Passionist Padre Germano. Festivals on June 26th (see p. 145) and Feb. 14th.

The entrance is at the end of the S. aisle (sacristan with light, 50 c.). We first enter a Vestibule, in which stand several amphoræ, one bearing a monogram of Christ. To the left we enter a hall, known as the Tab-

Mosaic, painted in imitation of marble. On the vaulted ceiling are marine deities, flowers, and masks, and also three Christian subjects: Moses on Horeb, Moses receiving the Tablets of the Law, and a praying woman. These paintings may date from the 4th or 5th century. An adjoining Room contains older frescoes of garli (nearly life-size) with festoons of fruit on a white background (2nd-3rd cent.). Farther on is an Oratory ascribed to the building of Pammachius, adorned with frescoes, including one of the beheading of three martyrs (the earliest known representation of a martyrdom). At a lower level is a Bath Room, belonging to the earliest construction on this site. Finally, behind the Tablinum, next the Via di Santi Giovanni e Paolo, is a Chapel with frescoes of the 9th and 11th cent. (Christ with the Archangels and SS. John and Paul; interesting representation of the Crucifixion).

Beside the church is a tasteful campanile. — The adjoining monastery belongs to the Passionists. The garden (ladies not admitted) commands a fine view of the Colosseum, to the N., and of the Lateran, to the S E.

We continue to ascend the street flanked by walls, and reach the Arch of the *Consens Dolabella and Silvanus* (Pl. III, 25), constructed of travertine in A. D. 10, to carry the Aqua Marcia over an ancient street. — Near this, on the right, No. 8, is the portal of a hospital which belonged to the former small church of *San Tommaso in Formis* (Pl. III, 22), situated behind it. The mosaic-medallion above the door, representing Christ between a black and a white slave (indicated as Christians by a cross), was executed, according to the inscription, by two masters of the Cosmas family (ca. 1218), and is an allusion to the order of Trinitarians founded in 1198 for the purpose of ransoming Christian slaves.

To the left, the Via Claudia descends to the Colosseum (p. 266).

On the right lies the oblong PIAZZA DELLA NAVICELLA (Pl. III, 26) with a double row of trees, and the church of Santa Maria in Domnica. In this vicinity, to the S. of the Aqua Marcia, in the direction of the Villa Celimontana, lay in antiquity the *Castra Peregrina*, or barracks of the centurions ('*frumentarii*') of legions on foreign stations, sent to Rome on service somewhat resembling that of an officer of the intelligence department. The barracks included several small temples (of Isis, Jupiter Redux, etc.). St. Paul on his arrival in Rome was consigned to the *Castra Peregrina*, until he was permitted to remove to his own hired house (Acts, xxviii, 16, 30). The small *Marble Boat* ('*Navicella*') which stands in the piazza recalls the thank-offerings dedicated in the temples by the centurions after dangerous journeys, a small marble boat being an appropriate gift after a voyage. An antique vessel of this kind formerly stood in the vestibule of the church, and having been injured, was replaced by a copy by order of Leo X. Remains of similar marble boats have been found in the Villa Celimontana.

The church of Santa Maria in Domnica, or *della Navicella*, one of the oldest deaneries of Rome, was rebuilt by Paschalis I. in 817, to which era the columns of the nave and tribune belong; the portico, erected by Leo X., is said to have been designed by Raphael.

Interior. — The NAVE runs on eighteen fine columns of granite; the arch of the TRISUM on two columns of porphyry. On the wall above the nave is a fresco by Giulio Romano (retouched). The MOSAICS (817-824) were freely restored under Clement XI.; above the arch, Christ between two angels and the apostles, below, two saints, in the vaulting, the Madonna and Child imparting blessings, Paschalis I. kissing her feet, on each side angels; beneath all the figures spring forth flowers. — The church is open on the second Sunday of Lent only; on other days visitors ring at the door adjoining the church on the right.

Adjoining the church is the entrance to the *Villa Calimontana* (Pl. III, 25, adm., see p. 149; see 25-30 c.), or *Villa Mattei*, founded in 1582, now the property of M. von Hoffmann. Among the few antiquities in the garden may be mentioned an obelisk, which in antiquity stood probably in the temple of Isis Capitolina and in the middle ages near the Araceli until 1682, when it was presented by the Roman Senate to Ciriaco Mattei. The beautiful grounds command a striking view of the ruins of Rome and the Alban Mts.

Opposite Santa Maria in Domnica, but not accessible from the Piazza della Navicella, rises Santo Stefano Rotondo. We follow the VIA DI SANTO STEFANO to the left, pass through the first green door on the right, and ring the bell placed on the fourth column.

Santo Stefano Rotondo (Pl. III, 25) is very interesting on account of its construction, and, though greatly diminished in extent, is the largest circular church in existence. It stands on the foundations of the central structure of a large market (*Macellum Magnum*) of the late imperial epoch, but was consecrated as a church in 468 by Pope Simplicius, and in the following centuries gorgeously decorated with marble and mosaics. It then fell to utter decay, but was restored by Nicholas V. In the original edifice, the diameter of which was 70 yds., the present external wall formed the central ring of columns, while another lower wall, decorated with pilasters, 11 yds. distant, and still traceable round the church, formed the circumference. The edifice thus consisted of three concentric rings, intersected by four transepts. Nicholas V. left the external wall as it was, and filled up the spaces between the columns of the central ring with masonry, with the exception of the projecting chapels. The roof is rudely constructed of wood. The old entrance was on the E. side.; the present vestibule was built by Nicholas V.

INTERIOR. To the left is the ancient episcopal throne, an antique chair, from which Gregory the Great delivered one of his homilies, then an altar-niche with mosaic (842-849), farther up (1), a fine monument of the beginning of the 16th century. Most of the fifty-six columns are of granite, a few of marble. Fearful scenes of martyrdom are painted on the walls, by Tempesta and Pannofanti (freely retouched). In the centre is a wooden tabernacle. The roof is borne by two lofty columns of granite and two pillars.

Beyond the church the Via di Santo Stefano (Pl. III, 25, 28) leads, past a large *Military Hospital* (to the left) and the arches (*Arcus Neroniani Aquae Claudiae*) of the continuation of the Aqua Claudia built by Nero for his Golden House, to (5 min.) the vicinity of the Lateran (p. 302).

1. San Clemente. The Lateran.

TRAMWAYS from the *Piazza Venezia* to *Piazza San Giovanni*, and from *Piazza San Silvestro* to *Piazza di Porta San Giovanni*, see Nos. 8 and 11 of the Appz. — Omnibus from the *Piazza Santa Ponsa* via *Piazza Venezia* to *Piazza San Giovanni*, see No. 18 of the Appendix.

From the Colosseum (p. 286; Pl. II, 22) several streets run towards the S.E.: to the left the *Via Labicana* towards the so-called *Therma of Titus* (p. 270), to the right the *Via de' Santi Quattro* to *Santi Quattro Coronati* (p. 301), joining the following street near the Lateran; and lastly, between these, the *VIA DI SAN GIOVANNI IN LATRANEO*, running direct to ($\frac{1}{2}$ M.) the Lateran. The last street leads in 5 min. to a small piazza, where on the left rises the church of —

**San Clemente* (Pl. II, 25; one of the side-entrances from the street generally open; if not, visitors ring at the principal door under the portico; closed during mid-day), one of the best-preserved basilicas of Rome. Excavations begun in 1858 and continued from 1861 by Prior Mullooly (d. 1880) have laid bare the early-Christian lower church and two different strata of Roman masonry below. The Christian basilica (now the lower church) is mentioned by St. Jerome as early as 392, and in 417 was the scene of a council of the church. It was almost entirely destroyed in 1084 on the entry of Robert Guiscard into Rome, and in 1106 Paschalis II. erected on its ruins the present upper church, with which he incorporated several ornaments of the lower, such as the choir and the ambones. The upper church was also frequently restored, finally with considerable taste by Clement XI., who, however, added the unsuitable ceiling of the nave. — St. Clement (91-100), according to Roman tradition, was the third successor of St. Peter, and suffered martyrdom in the Black Sea. This church, which stands on the traditional site of his house, gives a title to a cardinal, and belongs to Irish Dominicans.

From the principal gate in the *Via di San Clemente*, we first enter the *Atrium*, surrounded by a colonnade and paved with fragments of marble (giallo and verde antico), and beyond it the **URNA CRUCEM*, consisting of nave and aisles, but, like most early-Christian basilicas, without a transept. Comp. p. lx.

Interior. — The Nave with its flat ceiling is separated from the aisles by sixteen antique columns, and contains the **Screen* of the choir and the *Ambone* from the lower church, with the monogram of Pope John VIII. (key kept by the sacristan). The *Canopy* with four columns of pavonazetto dates from the time of Paschalis II. (p. lx). — In the *TRICLINUM* is an ancient episcopal throne, restored in 1108. *Mosaics* (p. lxiii) of the tribune of the 12th century. On the rood-arch in the centre. East of Christ with the Symbols of the Four Evangelists, (l.) SS Paul and Lawrence, below them Isaiah, lower down the city of Bethlehem, (r.) SS Peter and Clement, below them Jeremiah, lower down the city of Jerusalem. On the vaulting: Christ on the Cross, with John and Mary surrounded by luxuriant wreaths, below which are the thirteen lambs. On the wall of the apse, Christ and the apostles, restored by means of painting only. — On the wall to the right of the tribune are the monuments of Card. Roverella (d. 1478), by Giovanni Dalmata and Andrea Bregno, and of Archbp.

Brunelli, by Luigi Cignoni (1485). — The chapel to the right of the Canopy is elaborately adorned with frescoes of scenes from the lives of SS. Cyril and Methodius, executed by *S. Nobili* in 1598 at the expense of Abp. Siroc-mayr. In the adjoining chapel in the apse, at the end of the BENT AISLE, is a statue of John the Baptist by *Simone di Giovanni Ghini*. — To the left of the principal entrance, the CAPPILLA DELLA PASSIONE with frescoes (retouched), probably painted by *Massaccio* at a late period of his life at the instance of Card. Branda Castiglione (d. 1443). On the arch over the entrance, the Annunciation. To the left, outside the entrance, St. Christopher. On the wall behind the altar, a Crucifixion. On the left wall, scenes from the life of St. Catharine: above, she refuses to worship a heathen idol; teaches the king's daughters in prison; below, she disputes before Maximian with the doctors (best of the series); an angel destroys the wheels on which she was to be broken; her execution. The paintings on the window-wall, greatly damaged, illustrate the story of St. Ambrose.

As above mentioned, and as the accompanying plan and sections show, there exist below the present church several older strata of masonry. Lowest of all, and forming a right angle, are two massive walls, constructed of blocks of tufa quarried on the *Colinus* itself and probably dating from the republican epoch (No. I in the ground-plan and in the section). Above these are remains of work-manship of the Imperial era, executed in the 2nd cent. after Christ (No. II. in the ground-plan and in the section, see also p. 301). Upon these artificial foundations in the 4th cent. was erected the Christian basilica which now forms the *Lower Church*, the altar of which stood at the point marked *a* in the section. This was a much grander edifice than the church afterwards superimposed, its nave having been as broad as that of the upper church and one of its aisles put together, and the lower apse was accordingly considerably wider than the upper. During the construction of the upper church the lower was entirely covered up, and until the present day the two churches were never in use at the same time. — The lower church (adm. $1\frac{1}{2}$ fr.) is shown daily 10-12 and 2-4, except Sun. and holidays, by the sacristan, who provides a light. In order, however, to obtain a distinct idea of the original structure, which has been considerably marred by alterations, the visitor should visit it on 23rd Nov., 1st Feb., or on the second Monday in Lent, on which days the lower church is illuminated after 3 p. m.; even on these days, however, the visitor should carry his own candle for the inspection of details. The entrance is from the sacristy of the upper church (in the right aisle), on the walls of which are hung copies of the frescoes in the lower church, and plans comparing the upper with the lower part of the edifice.

A broad marble staircase, with inscriptions on the walls from the time of Pope Damasus, descends to the vestibule in which the nave and aisles of the lower church terminate. The walls between the columns of the right aisle were built on the occasion of the construction of the upper church. The buttresses constructed during the recent excavations for the support of the upper church are recognisable by their whitewash.

The *Frescoes* date from different periods, extending over seven centuries. Some of them are in excellent preservation. We begin with the — *VIRGINAL*. Immediately by the staircase is a female head with a halo (a cent.). — Farther to the left, under the first arch, Christ blessing in the

S.CLEMENTE.

Greek mode, with feet, middle, and little finger extended, between the archangels Michael and Gabriel and SS. Andrew (1) and Clement (2). Before him stand St. Cyril and Methodius (9th or 10th cent.). The figures to this, as well as in the following scenes have their names attached. — Opposite (on the right), a Mother feeds at the altar of St. Clement her child who had been swallowed up by the sea and thrown on shore a year later. Under it the family of the donor grouped round the medallion portrait of St. Clement. To the right is the dedication: *Ego Domus de Baptista pro amore dei et beati Clementis pignora sum* (9th cent.). — On the right farther on the Transference of the remains of St. Cyril from the Vatican to San Clemente in the reign of Pope Nicholas with the dedication: *Ego Maro Bonifacio pro amore Dei et remedio anime mee hanc pignora sum*. — At the end of the vestibule on the right is the entrance to the —

Lower Atrium. Over the door of the latter are three badly preserved frescoes, of which that in the centre represents the resuscitation of a child. Two only of the frescoes at the end of this atrium are distinguishable: on the posterior wall in the left corner St. Cyril before the Emp. Michael, on the lateral wall a Youth baptised by St. Methodius (10th cent.).

The Atrium is now entered through the arch in the right wall. Here, immediately to the left, is a fresco in three sections: one above the other. Half of the uppermost, the Resurrection of St. Clement, is destroyed. That in the centre represents St. Clement celebrating mass, on the right Theodore converted to Christianity and her husband Sisinus struck with blindness: the smaller figures on the left are those of the donor Bezo and his wife. Below it is also the dedicatory inscription: *Ego Bezo de Baptista cum Maro uxore mea etc.* The lowest represents Sisinus causing a column to be bound instead of St. Clement (9th cent.). The lateral surfaces of this pier, the view of which is obscured by the proximity of the walls (best seen from the left aisle) are also adorned with frescoes representing St. Martin, and Daniel in the lions den. — Farther on towards the vestibule on the same wall is another and larger fresco in three sections. The highest, now half obliterated, represents Christ between Michael and St. Clement (1), and Gabriel and St. Nicholas (2). In the centre are three scenes from the life of St. Alexius placed side by side as in the case with scenes on Roman sarcophagi: a Alexius returns unrecognized to Rome as a hermit, a Pope Innocent I. blesses the dying man, c The betrothal of St. Alexius recognizes his corpse. The lowest of the three frescoes is of a decorative character with flowers and birds. — At the end of this wall are three scenes from the life of Christ. Next to them, on the wall of the vestibule on the right, the Crucifixion on the left the Death of the Virgin. Over the latter Christ borne by four angels at the corners St. Vitus (3) and L. 14 (1) with the inscription *S. Dom. Leo IV P P Ro.* and the square niches with which living persons were usually represented (9th cent.).

The frescoes of the external wall of the lower Atrium are almost obliterated. A niche here contains a group of Mary with Jesus. On the arch above Christ (benediction) with figures of angels and saints on each side.

Below the apse are the remains of *Cellarum* or *van Iuvencius* Atrium (No. 11 marked black in the plan) built of brick. The first of the three adjoining chambers is enriched with mosaic. The next is an antechamber to a Chapel of *Stithus* in which, rather singularly, a statue of the Good Shepherd was found. These chambers are damp and partly filled with water. A staircase descends to them at the end of the right aisle.

A transverse street opposite to San Clemente leads to the *Via de' Santi Quattro Coronati* which then ascends to the left to the church of —

Santi Quattro Coronati (Pl. II. 25, entrance by the gate of the Ospizio di Urfano), dedicated to SS. Severus, Severianus, Carpophorus, and Victorinus, who suffered martyrdom under Diocletian. Five sculptors who met with a similar fate for refusing to make images of heathen gods, are also revered here (the 'scarpellini', or stone-masons, therefore possess one of the chapels). The date of

the foundation is very remote, and probably some ancient structure was originally incorporated in the church. After its destruction by Robert Guiscard, it was rebuilt by Paschalis II. in 1111, restored under Martin V. by Card. Alfonso Carillo, and afterwards partly modernized. Key in the entrance-court to the right ($1\frac{1}{2}$ ft.).

The church now has two ENTRANCE COURTS, a peculiarity owing to the diminution of its size on one of the restorations, probably by Paschalis II. It originally extended over the whole of the second court, and its former breadth is indicated by the ancient columns in the walls of this court. The disproportionate size of the tribune in the interior can hardly be otherwise accounted for. — On the right, under the colonnade in front of the entrance to the second court, is the *Cappella di San Silvestro* (belonging to the stone-masons), consecrated under Innocent IV. in 1246, with valuable, though unattractive ancient paintings from the life of Constantine, somewhat after the Byzantine style. — The LITURGICAL consists of nave and aisles with galleries. The tribune is decorated with baroque frescoes by Giovanni da San Giovanni and contains a ciborium from the studio of Andrea Bregno, presented by Innocent VIII.

To the right, farther on in the Via di San Giovanni (p. 290), is a large hospital for women, with the obstetric clinical department of the University. The Via di San Giovanni ends at the PIAZZA DI SAN GIOVANNI IN LATERANO (Pl. III, 28), the buildings in which were erected by Sixtus V., except the new houses to the left, at the S. end of the Via Merulana (p. 182). In the S.W. corner is the old baptistery, in the S.E. angle the transept-façade of *San Giovanni in Laterano* (p. 303), and on the E. the *Lateran Palace* (p. 305).

In the centre rises an Obelisk of red granite, originally erected by King Tutmes III. (B.C. 1436-1427) in front of the temple of Ammon at Thebes, and brought by Constantine to the Circus Maximus in 357. In 1587 it was discovered there in three pieces, and in 1588 was erected by Sixtus V. on its present site. This is the largest obelisk in existence, being 105 ft. in height, or with the pedestal 154 ft., and over 440 tons in weight.

We first visit the octagonal *Baptistery, *Il BattistERO*, or *San Giovanni in Fonte*, which was long the only baptistery at Rome, and afforded a model for all later buildings of the kind. Here, according to a Roman tradition, Constantine the Great was baptised by Pope Sylvester I. in 324 (his baptism, in fact, took place in 337, shortly before his death). Sixtus III. (d. 440) is regarded as the true founder. In 461 Pope Hilarius added to the baptistery the *Oratories of St. John the Evangelist and St. John the Baptist* on the E. and W. sides respectively, and about the year 640 John IV. added the *Oratory of San Venerando*, adjoining the former. Leo X. roofed the baptistery with lead, and his successors decorated and modernized it.

From the piazza we at once enter the precincts of the BAPTISTERY itself (Pl. a). It is divided into a central space and surrounding passage by eight large columns of porphyry with antique marble entablature, which are said to have been presented by Constantine. In the centre is the font, an ancient bath in green basalt. The frescoes are by A. Sacchi, Maratta, and others. — Adjacent, to the right, is the ORATORY OF ST. JOHN THE BAPTIST (Pl. b), containing a statue of the saint in bronze by L. Valadier, executed

—

in 1772 (after Donatello), between two columns of serpentine. The bronze doors were presented by Hilarius. — On the left, opposite this oratory, is the ORATORY OF ST. JOHN THE EVANGELIST (Pl. c), with bronze doors of 1198, and adorned with fine *Mosaicæ* representing birds and flowers on a golden ground. The relief of St. John with the kneeling figure of Leo I. is by *Luigi Cyrenet*. The statue of the saint, between two alabaster columns, is by *Landini* (d. 1504). — A third door admits to the square ORATORY OF SAN VINCENZO (Pl. d), with elaborate mosaics (840-843). — The fourth door, opposite to the entrance from the piazza, opens on the PORTICO OF SAN VINCENZO (Pl. e), formerly the vestibule of the Baptistery, when the chief entrance was on this side. In 1154 the portico was converted into two chapels. The apse to the left is enriched with admirable *Mosaicæ* of the 5th cent., consisting of gold arabesques on a blue ground. Over the door to the Baptistery is a Crucifixion, a relief in marble, from an altar presented by G. de Ferraris in 1422. — The outer door of the portico is adorned with two ancient columns of porphyry with their architrave. It leads to the Court, which was restored in 1876-85.

The basilica of *San Giovanni in Laterano* (Pl. III, 28), 'omnium urbis et orbis ecclesiarum mater et caput', was the principal church of Rome after the time of Constantine the Great (p. xxxiii). The emperor presented Pope Sylvester I. with a large palace, which had hitherto belonged to the wealthy family of the Laterani, and fitted up a church within it. It was called the *Basilica Constantiniana* after its founder, and sometimes *Basilica Sancti Salvatoris*, or *Aula Dei*, as being a second Zion, and gradually became privileged to grant the most ample indulgences. It was overthrown by an earthquake in 896, but was re-erected by Sergius III (904-911), and dedicated to John the Baptist. In 1308 it was burned down, but it was restored by Clement V., and decorated with paintings by Giotto. A second fire destroyed the church in 1360, after which it was rebuilt by Urban V. and Gregory XI. It was again altered by Martin V (1430), Eugene IV., and Alexander VI., and modernized by Pius IV. (1560), by the alterations of F. Borromini (1650), and by the façade of A. Galilei (1734). In 1876-86 the church was enlarged by moving back the tribuna and choir.

The PRINCIPAL FAÇADE, by Galilei, is turned to the E., abutting on the Piazza di Porta San Giovanni (p. 811). With its portico (38 ft. deep and 196 ft. long) and the open loggia above it, it is one of the best of this description in Rome. From the loggia the Pope used to pronounce his benediction on Ascension Day. Of the two entrances the *Porta Santa* is walled up and is opened only in the year of jubilee. The central entrance has two antique bronze doors adorned with garlands, etc. To the extreme left is an ancient statue of Constantine the Great, found in his *Therma* (p. 177).

The FAÇADE OF THE S. TRANSEPT, looking on the Piazza di San Giovanni in Laterano (p. 803), is also adorned with a portico, built by Sixtus V. in 1586. The caps of the small campanili, standing far apart, were added by Pius IV. The vestibule below, to the right, contains a bronze statue of Henri IV of France, by N. Cordieri (Pl. 12). — Five important Councils have been held in this church, viz. those of 1123, 1199, 1179, 1215, and 1512.

INTRA-MUR. The Nave (426 ft. in length), flanked by double aisles, is borne by twelve pillars, the work of *Borromini*, partly enclosing the ancient columns. In the niches are the Twelve Apostles, of the school of *Bernini*; reliefs by *Algardi*. Over these are the figures of twelve prophets. The gorgeous ceiling, said to have been designed by *Michael Angelo*, is more probably by *Giacomo della Porta*. The richly inlaid pavement was a gift of Martin V. (Colonna). On the right and left at the end of the nave are the only two ancient granite columns now visible. Below, in front of the *Confessio*, is the handsome monument of Pope Martin V. (d. 1431), in bronze, by *Simone di Giov. Ghini*. — In the centre of the *TRANSSEPT*, which is raised by four steps, is the **Canopy*, a beautiful Gothic work by *Giov. di Stefano* (1369, restored in 1851), with paintings by *Bernas da Siena* (d. 1387), but freely restored. It contains numerous relics, including, it is said, the heads of SS. Peter and Paul. Below it is the high-altar (*altare papale*), at which the pope or a substitute named by him alone reads mass, containing a wooden table from the catacombs which is said to have been used as an altar by St. Peter. The transept was restored under Clement VIII. by *Giac. della Porta* (1603) and adorned with frescoes. Here to the right are two fine columns of *giallo antico*, and above is the richly decorated *Organ*. To the left is the large *Altar of the Sacrament*, with four ancient columns of gilded bronze, which belonged to the original basilica. — The chapel to the left of the choir (Pl. 8) contains a portrait of Martin V. by *Scip. Gaetano*, and an altar-piece by the *Cro. d'Arpino*. Carved choir-stalls by *Giov. Baimaldi*. To the right of the choir is the tomb of Innocent III., by *Lucchetti*, the tomb of Leo XIII., by the same artist, is to be erected opposite, to the left of the choir. — In the chapel farther to the right, on the left side, is the monument of the philologist *Laurentius Valla* (d. 1466), a canon of this church.

The walls and floor of the Choir, which was enlarged in 1884, are covered with slabs of polished marble. To the right and left are three balconies with gilded railings. The ancient *Apse*, moved back at the extension of the choir, contains precious **Mosaics* by *Jacobus Torriti* (p. lxiii, 1290; or perhaps older works restored by him), representing the Saviour enveloped in clouds, below, at the sides of a cross, (l.) the Virgin, at whose feet *Nicholas IV.* kneels, SS. Francis, Peter, and Paul, and (r.) John the Baptist and SS. John, Andrew, and Anthony. — In the *AMBULATORY* are two mosaic tablets, with inscriptions relating to the construction of the church, and statues of Peter and Paul, of the 10th century. — Adjoining the ambulatory is the *SACRISTY*, the inner bronze doors of which date from 1196. It contains the monument of *Fulvius Ursinus* (d. 1600), (1) an *Annunciation* by *Marcello Venusti* after a drawing by *Michael Angelo*.

In the *GUARDAROBIA* (closed) are preserved a statue of John the Baptist in wood by *Donatello*, the cartoon of *Raphael's* *Madonna di Casa d'Alba* (at St. Petersburg), and a small votive picture of *Pedro Inghirami*, who was accidentally killed at the Arch of Titus.

ANALYSIS. At the first pillar on the right (Pl. 10), *Boniface VIII. between two cardinals proclaiming the first jubilee (1300), the injured fragment of a fresco by *Giotto*. On the next pillar is the funeral inscription of Pope Sylvester II. (d. 1003). **ON THE RIGHT:** The 2nd chapel (Pl. 8) belongs to the Torlonia family and is richly decorated with marble and gilding, over the altar, Descent from the Cross, a marble relief by *Tenerani* (a custodian opens this and other chapels, 1/2 fr.). The 3rd chapel (Pl. 9), belonging to the *Massimi*, constructed by *Giac. della Porta*, contains the Crucifixion, an altar-piece by *Sermoneta*. Above the opening looking into the chapel is a relief of St. James, which adorned an altar from the studio of *Andrea Bregno*, presented by G. de Peracina (the other portions of the altar are in the cloister). Farther on, the monument (Pl. 11) of Card. Giuliano (d. 1287; the older portions by the *Cosmati*); that of Card. Rannocio Farnese, by *Vignola* (at the back of the last pier of the nave), and that of the Portuguese cardinal Ant. de Chiaves (d. 1447), by *Florizi*, removed during the alterations of 1650 but afterwards placed together again. — **ON THE LEFT.** The 1st chapel, that of Sant' Andrea Corsini (Pl. 1), designed by *Al. Galilei* in 1734, contains four ancient porphyry columns and a large vessel of porphyry from the portico of the Pantheon, in front of the bronze figure of Clement XII. (Corsini, d. 1740); the walls sumptuously inlaid with precious stones. Below the chapel is the burial-vault of the Corsini, with a **Pietà* by *Antonio Montauti* (or more probably *Bernini*, though not in his usual style).

The sacristan conducts visitors from the last chapel of the S. aisle into the interesting **Clostrum* ('Chiostrò'), constructed in the 13th cent. by *Vassallettus* (comp. p. 399), with numerous small spiral and inlaid columns (p. lxii). Various fragments from the old church are deposited in the passages. The monastery was founded at the end of the 6th cent. by Benedictines from Mte. Cassino.

The N. side of the Piazza di San Giovanni in Laterano is occupied by new buildings. Between the Via Ariosto and the Via Tasso, which begin here, lies the *Casino Massimo* (Pl. II, 28; not visible from the piazza), the only relic of the *Villa Massimo*. Three rooms in this are adorned with *Frescoes* from the three Italian poets Dante, Ariosto, and Tasso, painted for Prince Camillo Massimo in 1821-28 by the German artists Jul. Schnorr, Ph. Veit, A. Koch, Overbeck, and Führich (admission only on special introduction).

On the E. side of the piazza, adjoining the basilica of San Giovanni in Laterano, rises the —

Palazzo del Laterano (Pl. III, 28), to which, together with the Vatican and Castel Gandolfo, the privilege of extraterritoriality was secured by a law of 1871. This was the residence of the popes from the time of Constantine down to the migration to Avignon. The old palace was much larger than the present one, and

included the *Sancta Sanctorum* Chapel (p. 311). After the great fire in 1308 it lay in ruins, but these were removed, and the new palace erected by *Domenico Fontana*, by order of Sixtus V in 1588. As it remained unoccupied, it was converted by Innocent XII. into an orphan-asylum in 1693. In 1843 Gregory XVI. set apart the palace for the heathen and Christian antiquities for which the Vatican and Capitoline museums no longer afforded space, and named it the *"Museum Gregorianum Lateranense"*. The entrance is in the Piazza di Porta San Giovanni (p. 311), on the E. side of the palace. Admission, see pp. 150, 151.

On the ground-floor is the so-called *"Museo Profano"*, or collection of ancient sculptures, including several admirable works. Comp. *Helbig*, *Antiquities in Rome*, vol. i, pp. 465-518. — We cross the entrance-hall and follow the arcades of the court, to the left, to the end of the W. wing, where we begin with Room I. (comp. ground-plan, p. 302).

I. Room. Entrance-wall: 6. Statuette in the style of the *Athena Parthenos* of Phidias; 10. Tomb-relief (warrior's farewell); 11. Education of the young *Æsculapius* (fountain-relief). Left wall: 13. Two pugilists, named *Dares* and *Entellus* (in relief); 15. Bust of *Marcus Aurelius*. 20. Roman emperor accompanied by lictors. The upper part of this relief (now in the *Therma Museum*, p. 172) represents the Temple of *Venus and Roma*, which was founded by *Hadrian* (p. 265), so that the restoration of the emperor's head as *Trajan* is erroneous. — In front of the last, 19. Statuette of a girl (known as *Nemesis*); 26. Nymph giving water out of a drinking-horn to a boy-satyr (fountain-relief). Right wall: Several excellent torsos; 51. Portion of a statue of *Artemis*, with traces of a deer on the left arm. In the centre a mosaic with pugilists, from the *Therma* of *Caracalla* (see 1st floor, p. 310). — II. Room: interesting architectural fragments, especially from the Forum of *Trajan*. 86, 130, 168. Fragments of a frieze, in the centre of the walls of the entrance, the egress, and that on the right. — III. Room: by the entrance-wall. 255. Statue of *Æsculapius*. Right wall: 258. *Antoninus* (p. liv; head modern), found at *Ostia*. — IV. Room. Entrance-wall: 278. Roman female portrait. *278. *Medea with the Peliades* preparing the cauldron for the sacrifice of *Pallas*; the sorceress is the figure on the left (a Greek relief). 291. Statue of *Germanicus*. Right wall: 319. Statue of *Mars*. Wall of egress: 348. Replica of the reposing Satyr of *Praxiteles* (p. xlix). On a cippus: 352. Bust of a Youthful Member of the *Claudian Gens*. In the centre, 382. Beautiful basin of *lumachella* (a kind of shell-marble).

We now cross the passage to the —

V. Room. Rear wall: 394. Roman portrait-bust; *396, 406. *Hermes* of *Pan*; 407. *Cinerary Urn* with the head of *Medusa* and representation of a cock-fight. In the centre: 399. Stag, in basalt, which originally bore a figure of *Artemis*. — VI. Room: collection

of sculptures from Corvotari, the ancient Ocre (p. 438). Entrance wall: 427. Circular altar with Pan and two dancing Hærm; on it, 428 Colossal portrait-head (perhaps Augustus), 433. Statue of an emperor, head modern. Rear wall: 435, 437. Colossal sitting figures of Tiberius and Claudius, between them, 436. The younger Agrippina (y). Wall of egress 439. Statue of an emperor. In front of it 442. Relief with representation of the deities of three Etruscan cities (Tarquinii, Veii, Vetulonia). On the pillar between the windows: 445 Female portrait-statue (perhaps Drusilla). In the centre, 447, 450. Two sleeping Sileni (from a fountain); 448. Altar with representation of sacrifice. — VII. Room. On the right. *462 So-called *Dancing Satyr*, found near Santa Lucia in Seles; more probably *Marsyas* endeavouring to pick up the flutes thrown away by Athens, and recoiling on the appearance of the goddess, from a group by Myron (p. xlvi, the arms and cymbals are erroneously restored). Opposite the entrance: on a revolving pedestal, *476, *Sophocles*, one of the most beautiful ancient portrait-statues in existence, found at Terracina in 1838. 'In the statue of the poet the sculptor has endeavoured to produce a type of perfect manhood, to portray the self-reliance of genius and the unruffled dignity of manly beauty; and he has accomplished his object by the general grandeur of his design, the easy attitude and noble symmetry of the figure, and the expressive attitude of the head; while the broad and lofty forehead, the gentle and imaginative eye, the firm cheek, and the earnest but benevolent mouth complete the picture of a man who has attained the zenith of human excellence and happiness.' To the right: 475 Portrait of a Diadochæ. — VIII. Room. Entrance-wall. left, *487. Relief of a poet, with masks, and a Muse; to the right, above, 496 Small head of a sleeping nymph; 497. Small head of a victorious athlete. Left wall: 515. Fragment of a Roman relief. In the centre: *554. *Statue of Poseidon*, found at Porto. — IX. Room, containing numerous architectural fragments brought to light by the excavations in the Forum and the Via Appia. In the centre: 656 *Triangular Ara* with Bacchantic dances. — X. Room: chiefly sculptures from the tombs of the Haterii, on the Via Labicana near Centocelle. Entrance-wall: 675, 677. Portrait-busts, farther on, 676. Relief of a large tomb, with powerful lifting-machine adjacent. Right wall: 681. Relief of a dead woman lying in state, surrounded by mourners. Wall of egress: 719. Relief with representation of Roman buildings, among which the Arch of Titus and the Colosseum are distinguishable. Above it, 721. Relief with Mercury (broken), Ceres, Pluto, and Proserpina. Between the window and the exit, *686. Triangular pillar, with a candelabrum wreathed with roses on two of the sides. In the centre: 740. Cupid on a dolphin.

We next cross a second passage to the —

XI. Room. The sculptures are chiefly from the tombs on the Via

Latina (p. 391). Entrance-wall: to the right, 761. Sarcophagus with Bacchic relief. Right wall: 766. Sarcophagus with pugilists, 769. Sarcophagus with Adonis (on the lid, the history of *Œdipus*). Wall of egress: 788. Greek votive relief (two men and a stripling conversing); below, 782. Fragment of a Nereid. In the centre: 792. Large sarcophagus with triumphal procession of *Bacchus*. — XII. Room. Entrance-wall: 799. Sarcophagus with the story of *Orestes* (death of *Agamemnon*, etc.), 806. Head of *Augustus*. Wall of egress. 813. Sarcophagus with the destruction of the Children of *Niobe*. In the centre: 831. Circular *Arx* from *Veii*, an imitation of the *Puteal Libonis* in the Roman Forum. — XIII. Room. Entrance-wall: 840. Tomb-relief of *Ulpia Epigone*; 842. Relief of a Titan fighting; 846. Portrait Statue of *C. Cestius Saturninus*. Right wall. Portions of colossal statues in porphyry. Wall of egress. 866. Roman tomb relief; *868. Relief, *Pylades* supporting the exhausted *Orestes*. In the centre. 882. Sarcophagus of *P. Cæcilius Valianus*, with the representation of a funeral-banquet. Upon it, 885. Three-sided *Candelabrum* stand with *Pluto*, *Neptune*, and *Proserpine*. — XIV. Room. Entrance-wall. 887. Fragment of a Greek votive-relief (*Aphrodite*?) Opposite the entrance: 902. Statue of a captive barbarian, unfinished, interesting on account of the 'copy-points' left by the sculptor to guide the workman's chisel. Adjacent, 896. Sarcophagus of *L. Annius Octavius*, with representation of bread making; above is the inscription: *Evast, effugi, Spes et Fortuna valeat! Nil mihi vobiscum est, ludificate altor*. By the right wall, *892. Mosaic with representation of the floor of an unswept dining-room ('*Opus Asarotum*') and masks, by *Heracitus*, found on the *Aventine* in 1833. — Room XV and the following are devoted to the yield of the excavations made in 1861-69 at *Ostia*. In the glass-cabinets under the windows are lamps, terracottas, fragments of glass, ivory articles, etc. On the pillar, mosaic from a niche, with *Silvanus*; on each side fragments of slabs of terracotta. Wall of egress. (r.) 972. Head of *Mithras*; 975. Small Female Head, perhaps of a nymph, 977. Tomb-relief of the Eques *T. Flavius Verus*. — XVI. Room. Lead pipes from ancient aqueducts. 1062-66. Paintings from a tomb, with scenes from the lower regions. In the centre: 1061. Recumbent figure of *Attis*, of interest for the traces of gilding on the hair and the crescent; *1043. Bronze statuette of *Venus*.

The entrance to the CHRISTIAN MUSEUM and the PICTURE GALLERY is below the arcades in the left corner, whence we ascend a staircase (at M. C. on the ground-plan p. 302).

The *Christian Museum was founded in 1864 on the suggestion of the *Fuere Marchi* and was arranged by him and *G. B. de Rossi*. Most of the sarcophagi, dating from *Benedict XIV.*'s earlier collection in the Vatican, are freely restored and retouched.

The great feature of the museum is the "Collection of Ancient Christian Sarcophagi," chiefly of the 4th and 5th centuries (comp. pp. 19, 161, and 162 of seq.). Most of them exhibit the same style of continuous narrative as the works of the late pagan period, uniting several crowded and animated scenes on the same panel. Visitors, even those most versed in the Scriptures, will find considerable difficulty in identifying the various obscurely treated scenes, and the task of recognition is not always lightened by the juxtaposition of archetypes from the Old Testament with the corresponding scenes from the New Testament, as the relation between these is sometimes forced (Burckhardt). The explanation of a few of these series of scenes (e.g. of Nos. 55, 104, 105, 114, 171 given below) will assist the spectator in interpreting most of the others for himself.

Various sculptures and architectural fragments, chiefly from Rome, brought in from 16 Large sarcophagi with two half-length male figures and two rows of relief, above, Raising of Lazarus, Christ foretelling Peter's denial, Moses receiving the tables of the law, Sacrifice of Isaac, Pilate washing his hands, below Moses striking the rock, Daniel in the den of lions, Jesus reading the law, Healing the blind, Miracle of the loaves. On the wall, to the left, 96 Bust of Christ, to the right, 97 Healing the infant Jesus, a mosaic from the chapel of Pope John VII (1003) in the former St. Peter's church (recently restored), 98 Miracle of Christ enthroned, between 99 Paul and Peter a copy executed in the 15th cent. from an original that stood over the tomb of the emperor Otto II in the old church of St. Peter.

We then ascend a few steps to the left. By the end wall, to the right, 100, 101 Statues of the Good Shepherd, 102 Large sarcophagus, found near the tomb of the Apostle in San Paolo fuori le Mura, the damaged interior to it were probably members of a Roman family of rank of the beginning of the 5th century. Reliefs: top row to the left, Adam and Eve, in the centre, Shield with bees; to the right, Turning of the water into wine, Miracle of the loaves, Raising of Lazarus, bottom row Adoration of the Magi, Healing of the blind man, Daniel in the lions, and Peter's denial, Anger of Moses, and Moses striking the rock. — At the window, 111 Sarcophagus, Irenaeus escaping the Red Sea. — On the staircase to the left, 112 History of Jonah above, on a smaller scale, Raising of Lazarus, Water gushing from the rock, Anger of Moses; the sculpture exhibits a strong affinity with antique motives, especially in the subsidiary figures of the fishermen and herdsmen (found at the Vatican), 113, on the front, Adam and Eve, Moses smiting the rock, Healing of the blind man, Resurrection of the dead bones, Peter's denial, Healing of the man with dropsy, Sacrifice of Isaac, Anger of Moses, and Moses striking the rock, on the left side, the Sea in the story furniture, on the right side, Daniel in the den of lions, Noah in the ark. Above, to the right, 114 Christ and the Apostles, to the left, 115 Offerings of Cain and Abel, etc., to the right, 116 Raising of Lazarus, etc. To the left, 117 Scenes from the Old and New Testaments (beside the Sacrifice of Isaac is placed the Raising of the widow's son of Nain), the busts have been restored. To the right, 118 Busts and kneeling graces to the left the Good Shepherd, to the right, Praying figure, interesting from the traces of painting and gilding (most of the latter now blackened by age), of the 3rd or 4th century. To the left, 101 Oval sarcophagus with sculptures showing a strong affinity to antique motives. In the centre 119a Good Shepherd, harvest and vintage, found in the Catacombs of Priscilla (p. 161). To the right, 119b Orpheus from Ostia (Orpheus occurs also in paintings in the Catacombs, comp. p. 162). To the left, 174 On the front, Christ enthroned among the Apostles (St. Peter approaches from the right, St. Paul from the left), to the left, Sacrifice of Isaac, to the right, Pilate washing his hands, on the right end, Moses smiting the rock, Christ healing the woman with an issue of blood, left end, Peter's denial. To the right, 101 Offerings of Cain and Abel, Capture of Peter (cross with the monogram and two soldiers), Execution of Paul, Job and his wife, 4th cent., from the lower church of San Paolo fuori le Mura. — To the left, 171 Bearing of the Cross, Crown of Thorns, Cross with the monogram (below which are two soldiers), Capture

of Christ, Pilate washing his hands (14th cent.; from the Catacombs of Santa Domitilla) — On the staircase leading 199 *Receiving, Adoration of the Magi*; 198 *Assurance of Elijah*. Above, 200 *Sitting figure of St. Hippolytus*, from the catacombs near San Lorenzo fuori le Mura, the only antique portion is the chair, on which is a Greek inscription recording the saint's achievements and an Easter table.

The door on the left leads to the upper arcade, where the door opposite (opened by the custodian on request) leads to the rooms with the copies of the Catacomb paintings (see below). To the right is the entrance to the room with the large mosaic (see below).

The posterior walls of the three open Arcades present a selection of ancient Christian inscriptions systematically arranged by De Rossi, an invaluable aid to the student of Christian archaeology. Immediately to the left of the entrance is the famous inscription of Abaris of Hierapolis in Phrygia, dating from the reign of Heliogabalus (217 A.D.), and containing an account of a pilgrimage from Phrygia to Rome. The Christian origin of this, however, has recently been disputed. — Over the first door on the right is an inscription in honour of Quiricus (Cyreniac), governor of Syria, by whom the census at the period of the birth of Christ was held (Luko i. 3). The other inscriptions are distributed according to arches thus: i. vii. Epitaphs on martyrs, etc., of the age of Damasus I. (366-366); ii. vii. Dated inscriptions (71, 222-227); vii. ix. Inscriptions of doctrinal importance, e. Bishops, presbyters, deacons, etc.; x. Other illustrious personages, xii. Relatives, friends, etc.; xiv. xvi. Symbolic and other records; xvii. et seq. Simple epitaphs from various catacombs. Finally, several Jewish inscriptions (with the seven branched candelstick and other symbols).

Two rooms (see above) contain copies of pictures from the Catacombs of St. Callistus (Chapel of the Sacrament) Catacombs of St. Praxilla (Chapelle Orant), the crypts of Lucina, the Cimiterium (Cimiterium, etc.).

From the first arcade we pass to the right into a room (Pl. A), on the floor of which is a large *Mosaic* with 20 full-length figures and 26 busts of pugilists, found in the Thermen of Caracalla (p. 222) in 1684. This work, dating probably from the end of the 4th cent. and not from the age of Caracalla, bears obvious indications of the decline of the art. The original arrangement of this mosaic, which has been freely restored and supplemented, is shown in the drawings on the walls.

The adjoining Picture Gallery contains a few good pictures of Italian masters, chiefly of the 15th and 16th cent., and a series of modern paintings mostly presented to Leo XIII.

Room I (Pl. A). Disapidated frescoes from Sant Agnese fuori le Mura. Two halls of the 13th cent. from St. Peter's and from Santa Maria Maggiore, small hall of the 8th cent. from Canino near Viterbo.

Room II (Pl. B). In the middle *Mosaic*, found near the Palazzo Rota (p. 22). Entrance wall: C. Crucifix 20 Madonna (1262). St. Madonna with saints (altar piece 1461). R. *Assurance of St. Peter* (1469). In the corner: St. *Assurance of St. Peter*, St. Thomas receiving the girdle from the Virgin, with predella (1460). Rear wall: St. *Pro Filippo Lippi* (coronation of the Virgin, East wall: St. Jerome, by *Donato* the father of Raphael; St. *Cato dell' Annunziata Assumption*, and two smaller paintings (1515); R. *Spain*, Madonna and saints. Window wall: St. *Fresco of the Madonna and saints*, from San Lorenzo fuori.

Room III (Pl. C). Entrance wall: 70 *Mosaic Palmation of Fort* (suppl. of *Belosio*, p. 10), Madonna and saints. 71 *Fresco of the Annunciation*, 72 *Palmation of Madonna and saints*. Rear wall to the right and left, 73, 74 *Pro Bartolomeo*. St. Peter and Paul. East wall: 75 Large copy of *Raphael's Transfiguration* (comp. p. 115). 77 *Cum de deo*, Baptism of Christ. Window wall: 78 *Fresco of the Annunciation*. 79 *Stato Romano*, Smiling of Stephen, cartons for the painting in Genoa.

Room IV (Pl. D). Entrance wall: St. *Cum de deo*, Annunciation. Rear wall: St. *Assurance of St. Peter*, Statue V. East wall: St. *Assurance of St. Peter*, George IV. Great Britain. Window wall: St. *Fresco of the Annunciation*.

Rooms V-VIII (Pl. E, F, G, H). Modern paintings, including: *Stollend*, Martyrdom of St. Gabriel Perboyre; *Aldi*, Judith; *Grandi*, Apotheosis of Leo XIII. — In the last room are some casts from the antiques and views of Rome (fresco) of the time of Sixtus V.

Opposite the N.E. corner of the Lateran is the edifice containing the *Scala Santa*. The two-storied portico was erected by Sixtus V. The *Scala Santa* is a flight of twenty-eight marble steps from the palace of Pilate at Jerusalem, which our Saviour is said to have once ascended. They were brought to Rome in the period of the crusades, and may be ascended only on the knees. They are now protected with wood. The four adjoining flights are for the descent. At the foot of the steps are two insipid marble groups by *Jacomelli*, Christ and Judas, and Christ before Pontius Pilate; also a kneeling statue of Pius IX. At the top of the steps we obtain a glimpse into the *Sancta Sanctorum*, formerly the private chapel of the popes, and the only part of the old Lateran palace now extant. It was erected in 1278 by a member of the Cosmas family for Nicholas III., and contains a Christ in mosaic in the 9th cent. style and another painted on wood, attributed to St. Luke. — In Holy Week (especially on Good Friday) the *Scala Santa* presents an extraordinary spectacle.

To the E. of the *Scala Santa* is a tribuna erected by Benedict XIV., with copies of the ancient *Mosaics from the Triclinium of Leo III.*, or principal dining-room of the ancient Lateran palace. These copies are from originals of the end of the 8th cent., which were destroyed in the pontificate of Clement XII. but were restored in 1743 from ancient drawings. Their subject is the union of spiritual and temporal power effected by Charlemagne. In the centre, Christ sending out his disciples, on the left, Christ enthroned delivers the keys to Pope Sylvester and the banner to the Emp. Constantine; on the right, St. Peter presenting the papal stole to Leo and the banner to Charlemagne (the square blue nimbus was given to living persons).

Opposite the tribuna with the mosaics extends the spacious *PIAZZA DI PORTA SAN GIOVANNI* (Pl. III, 31), partly rebuilt, in which is the entrance to the Lateran Museum (p. 306) and the main façade of San Giovanni in Laterano (p. 303). — A dusty street leads hence to the E. to (5 min.) Santa Croce in Gerusalemme (p. 186); while the *Via Emanuele Filiberto* runs N. to the *Piazza Vittorio Emanuele* (p. 183).

From the *Via Emanuele Filiberto* a street ascends slightly to the right to the entrance of the *Villa Welkensky* (Pl. II, 31), now called *Villa Campanari* and almost wholly enclosed by new buildings, but deserving a visit if time permit, especially in spring, when the roses are in bloom. The *Aqua Claudia* (p. 185) intersects the gardens, where also a few ancient tombs and sculptured fragments are preserved. Admission, see p. 148.

The *Porta San Giovanni* (Pl. III, 31), named after the church, was erected in 1574, taking the place of the ancient *Porta Asinaria*, now built up, which stood a little to the right. Hence to the *Campania*, see p. 391.

The road skirting the town-wall to the left, outside the gate, brings us in 7 min. to the Amphitheatrum Ostracense (Pl. III, 34), the only structure of the kind in Rome with the exception of the Colosseum. The architectural details, including the Corinthian capitals, are of terracotta or of burned brick. The amphitheatre is 57 yds. in length and 41 in breadth. The interior (uninteresting) is entered by the gate near Santa Croce in Gerusalemme (p. 188). — Hence to the Porta Maggiore (p. 186), 12 minutes.

IV. Quarters of the City on the Right Bank.

On the right bank of the Tiber are situated two distinct quarters: towards the N. the *Borgo*, or quarter of the Vatican; and farther S., *Trastevere*. They are connected by means of the long street known as the *Langara*.

a. The Borgo.

ELECTRIC TRAMWAY from the *Piazza della Farnesina* or the *Piazza Venezia*, see Nos. 6 and 8 in the Appx. — OMNIBUS from the *Piazza di Spagna* or the *Piazza del Gesù*, see Nos. 20 and 23 in the Appx.

The district between Monte Mario and the Janiculum was known in antiquity as the *Ager Vaticanus*, perhaps from a vanished Etruscan town *Vaticum* (?). The plain by the river, notorious for its malaria, was never reckoned as part of the city in ancient times, and was not enclosed within Aurelian's wall. It was once covered with the gardens of the emperors, and here *Caligula* constructed a *Circus* and embellished it with a large obelisk. This circus was the scene of the races instituted by *Nero* and of his revolting cruelties to unoffending Christians in the year 65. ('*Pereuntibus addita ludibria, ut ferarum tergis contacti laniatu canum interirent, aut crucibus affixi, aut flammandi, atque ubi defecisset dies, in usum nocturni luminis urerentur*' *Tacitus*, Ann. xv. 44.) On the ruins of the ancient walls thus hallowed by the first great martyrdoms at Rome rose the Church of *St. Peter*, in the immediate neighbourhood of which paganism maintained its footing with greater obstinacy than in any other part of the city. To the N. of the circus were situated highly-revered shrines of the Phrygian *Cybele* (*Mater Deum Magna Idaea*) and of *Mithras*, which flourished well into the Christian period (to the end of the 4th cent.) and were frequently referred to in later antiquity shortly as *Phrygianum* and *Vaticanum* respectively. Another circumstance which tended to shape the future of this part of the city was the erection by *Hadrian* of his gigantic *Tombs* on the bank of the river. This monument was afterwards converted into a *tête-de-pont*, but at what date is uncertain (perhaps by *Honorius* in 406). In 537 it effectually repelled the attacks of the *Ostrogoths*, and since that period the Castle of *Sant' Angelo* (as it was afterwards called) has been the citadel of Rome, on the possession of which the mastery over the city has always depended. Around the Church of *St. Peter* sprang up a number of chapels, churches, monasteries, and hospitals, and in the pontificate of *Symmachus* (498-

614) a papal residence also. Foreign pilgrims soon began to establish settlements here, named *scholas*, or *borghi*, of which in the 8th cent. four are mentioned in history, viz. those of the Saxons (i. e. English), the Frisians, the Longobards, and the Franks, who in time of war formed separate companies of soldiers. In order to protect the whole of this region against the predatory incursions of the Saracens, Leo IV. surrounded it, in 848-52, with a wall 40 ft. in height, and thus became the founder of the *Civitas Leonina* named after him. This wall was repeatedly destroyed during the conflicts of the middle ages, as on the occasion of the retreat of Henry IV. before Robert Guiscard in 1084, and when the Castle of Sant' Angelo was destroyed by the Romans in 1378. A new era in the history of the Borgo began with the return of the popes from Avignon, streets gradually sprang up; and the walls were considerably extended. Eugene IV. and Sixtus IV. were particularly active in developing the Borgo, and it attained the height of its prosperity in the pontificate of Julius II and Leo X. at the beginning of the 16th century. Paul III and Pius IV. renewed the fortifications under apprehension of an attack by Saracenic rovers. Ant. de Sangallo began by the construction of the Porta Santo Spirito on the S. (1545); Michael Angelo raised the imposing Belvedere bastion (1547) and provided the plan for the remaining fortifications which extended the limits of the Borgo mainly on the N. (Porta Angelica; Borgo Angelico) in 1560-70. The papal court, however, was unable permanently to attract the business of the city to its neighbourhood, and a sparse and poor population, engaged in the humbler branches of trade, now lives beneath the shadow of the most famous church and the largest palace in Christendom. Down to the pontificate of Sixtus V. the Borgo belonged to the popes, and lay without the bounds of the municipal jurisdiction; but that pope incorporated it with the city as a '14th Rione', and in the plebiscite of 2nd Oct., 1870, the inhabitants of the Borgo declared their desire not to be separated from the rest of the city. The walls on the N. side, including the Porta Angelica, were pulled down when the Prati di Castello began to be built over soon after 1880.

The principal channel of communication with the Vatican quarter is afforded by the Ponte Sant' Angelo (Pl. I, 12), originally erected by Hadrian to connect his tomb with the city in A.D. 136, and named after him *Pons Ælius*. At the beginning of the bridge, on the site of two old chapels, Clement VII. erected in 1530 statues of St. Peter by Lorenzetto, and St. Paul by Paolo Romano (1464). The ten colossal statues of angels, formerly much admired, were executed from Bernini's designs in 1688, and vary considerably in point of artistic value (p. lxxiv). In 1892-94, during the Tiber regulation operations, the bridge was completely restored. Only the three arches in the middle, are antique, new ones having been added at each end. The temporary Iron Suspension Bridge, erected a little

lower down the river during the alterations, has been allowed to remain, and is at present used by the tramway-cars. A new bridge, the *Ponte Vittorio Emanuele*, is designed to continue the direct line of the Corso of that name, but its construction cannot begin until the E. wing of the Ospedale di Santo Spirito (p. 317) has been pulled down.

The *Castello Sant' Angelo* (Pl. I, 12), which was originally the tomb erected in A.D. 136 by Hadrian for himself and his successors (*Moses Hadrianus*), was completed in 139 by Antoninus Pius. On a substructure, 114 yds. square, rises a cylinder of travertine, 80 yds. in diameter, once encrusted with marble, of which covering no trace now remains. Around the margin of the top stood numerous statues in marble. This cylinder was probably once surmounted by another of smaller dimensions, on which a colossal statue of Hadrian, conjecturally standing on a quadriga, was placed. The head mentioned at p. 354 is supposed to have belonged to this statue. The total height was about 165 ft. From Hadrian to Caracalla (d. 217) all the emperors and their families were interred here. When the Goths under Vitiges besieged Rome in 537, after its capture by Belisarius, the general of the eastern emperors, the tomb was converted into a fortress and the marble statues on the summit were hurled down on the besiegers. The city was at last retaken by Totila, successor of Vitiges, after another terrible siege in 548. On the fall of Totila in 562, the citadel passed into the power of Narses, the successor of Belisarius. In 590 Gregory the Great, while conducting a procession to pray for the cessation of the plague then raging, beheld the Archangel Michael sheathing his sword above the *Castello Sant' Angelo*, in commemoration of which Boniface IV. erected the chapel of *Sanctus Angelus inter Nubes* on the summit. This was afterwards replaced by the marble statue of an angel by Monteleupo (p. 316), and in 1782 by the present bronze statue of the Archangel by *Verschaffelt*. From 923 onwards the edifice was always used by the party in power as a stronghold for the purpose of over-awing the citizens. In 1379 it was almost entirely destroyed by the Romans. From the time of Boniface IX. (for whom it was restored by *Niccolò d'Arezzo*) downwards the castle was held by the popes, who seem to have caused the construction of a covered passage (*passetto*) leading from the Vatican even before the close of the 13th century. This was restored by Alexander VI. The castle was further extended by Julius II. In 1527 Clement VII. sustained a terrible siege here, by the troops of Charles V., on which occasion Benvenuto Cellini asserted he had thence shot the Connétable de Bourbon. The outworks were constructed by Urban VIII. A thorough restoration of the structure, begun in 1901 under the superintendence of *Lieut.-Col. Borgatti*, is in progress. A collection illustrating the history of Italian engineering is to be exhibited in the oriel.



Moles Hadriani.

CASTELLO SANT' ANGELO

Castello Sant' Angelo.

The *Barracche* is opposite the Ponte Sant' Angelo (adm. see pp. 169-171). A guide conducts parties every $\frac{1}{2}$ hr. Illustrated guide by Bergault (see p. 316, 1903) 1 fr.

We first enter a narrow passage leading round the circular portion of the mausoleum on the top of the old square substructure. On the left is a small museum with busts of Hadrian and Antonine Pius, fragments of the marble frieze which encircled the sacred upper building, and a model of the entire monument (after Bergault). The mausoleum itself is entered by means of a modern approach above the ancient main gate. We first enter a square *Chamber*, with a recess for a colossal statue (1 on the section, p. 116), and thence follow a spiral passage (2) which gradually ascends to the *Tomb Chamber* (3) in the centre. This was the last resting place of Hadrian and his family and still contains four niches for the urns. We then ascend a modern staircase and pass a small court (*Cortile d'Onore*) with *Sanfelice de Montepulciano's* marble statue of an eagle (see p. 316). On the left are two rooms (4) with papal coats of arms, inscriptions, and sketches of the Castle. Opposite the staircase is the *Camera of Clement VII.* with a façade designed by Michael Angelo containing a fine relief of the Madonna by *Montepulciano* (?) — We then ascend to the *Loggia of Julius II.* (5) — Here we find the entrance to the former *Archæologium of the Pope*. The first (*Salone del Consiglio*, 6) is embellished with frescoes by *Poma del Fogo* (History of Alexander the Great) and a rich stucco ceiling. The figure of the conqueror to the right of the entrance is wrongly described as that of *Prospero Paratop*, the adviser who defended *Beatrice Cenci* (p. 123). The *Camera del Povero* (on the right) the private apartment of Paul III., is decorated with a fresco frieze by *Poma del Fogo* (Story of Perseus). A fresco by the same artist (Story of Psyche) adorns the *Stanza di Amore e Fede*, a bedchamber with a gorgeous carved and gilded ceiling. From the *Camera del Povero* a small staircase descends to the Pope's bathroom, ornamented with stucco and grotesques. Returning to the *Salone del Consiglio*, we traverse a narrow passage leading to a room (7) with a tasteful stucco ceiling by *On. Simonetti* (marble designs) and remains of frescoes. A narrow staircase ascends hence, round the papal treasure-room (8, with an enormous casket, bound in metal, of Julius II. and carved panel work of Paul III.), to the *Plavium*, which commands a beautiful view of St. Peter's, etc. — Returning to the *Loggia*, we are thence conducted to a number of gloomy dungeons in the E. part of the fortress, where *Beatrice Cenci*, *Benvenuto Cellini*, and others are said to have been incarcerated.

A quay (*Largo Tevere di Castello*) leads to the right from the entrance of the Castle of Sant' Angelo to the new quarter on the *Prati di Castello*, a congeries of long and regular rows of tasteless lofty houses. Facing the end of the *Ponte Umberto* (p. 213) a large Court of Justice (Pl. I, 12-15) is now in process of building, from the plans of G. Caldorini. In front of its N. façade is a *Statue of Cavour*, by Galati, unveiled in 1896, the groups on the pedestal represent Thought (to the right) and Action (to the left). — Farther to the N., in the midst of a new and attractive-looking villa-quarter, is the handsome basilica of *San Girolamo* (Pl. I, 11), founded in 1888 to commemorate the jubilee of Leo XIII.'s ordination as priest, and richly adorned with mosaics, granite columns, and other embellishments. The architect is R. Inghis. — At the N. extremity of the city are three extensive *Barracks*.

Electric Tramway and Omnibuses from the *Prati di Castello*, see Nos. 8 and 9 in the Appendix.

The Castle of Sant' Angelo is adjoined on the W. by the *Plazza* (Pl. I, 12), whence four streets diverge. In the centre, to the

right and left of the fountain, are the streets called the *Borgo Nuovo* (originally constructed in 1499 as the 'Via Alessandrina' by Pope Alexander VI.) and the *Borgo Vecchio*; to the left, by the river, the *Borgo Santo Spirito*; to the right, the *Borgo Sant' Angelo*.

The usual route to the Vatican is by the *Borgo Nuovo*. To the right in this street is the church of *Santa Maria Traspontina* (Pl. I, 9), erected in 1586. Farther on, to the right, in the small *Piazza Scossa Cavalli*, is the *Palazzo Giraud*, now the *Palazzo Torlonia*, erected by Ant. Montecavallo in 1496-1504 for Card. Adriano da Corneto. The façade is a close reproduction of that of the *Cancelleria* (p. 226), and Bramante's share in designing this palace is probably limited to the architecture of the inner court. The poor portal dates from the 18th century. — To the left, in the *Piazza Scossa Cavalli*, is the *Palazzo dei Penitenziari*, built about 1480 by Card. Dom. delle Rovere and decorated by Pinturicchio, but now in a neglected condition. On the first floor are an excellent ceiling-painting of mythological scenes, and a chapel, founded by Card. Alideri, with a Renaissance ceiling. At the S.E. corner of the *Piazza* rises the church of *San Giacomo Scossa Cavalli*. Opposite, on the W. side, the *Palazzo dei Convertendi*, partly built by Bramante for the Caprini family from Viterbo, and purchased in 1517 by Raphael. The architectural style resembled that of the *Pal. Vidoni* (p. 224), but is quite disguised by later alterations. On the first floor is the room where Raphael is supposed to have died.

To the right in the *Borgo Nuovo*, farther on (Nos. 101-106), is the *Pal. Ricciardi*, built for Giac. da Brescia, the physician of Leo X., from a design by Bald. Peruzzi (?). We then proceed straight to the *Piazza Rusticucci* (Pl. I, 19), which forms a kind of entrance-court to the *Piazza di San Pietro*.

The *Borgo Santo Spirito*, issuing from the *Piazza Pia* (p. 316), terminates at the S. colonnade of the piazza of St. Peter. To the left in this street, by the river, is the spacious *Ospedale di Santo Spirito* (Pl. I, II, 9). The building, with its striking octagonal dome, dates from the time of Sixtus IV. and is one of the most important examples of the early Renaissance in Rome. Frescoes of scenes from the life of Sixtus adorn the wards of the hospital. In the chapel are early-Renaissance pictures of the twelve Apostles. The institution was founded by Innocent III and embraces a hospital, a lunatic asylum, a foundling institution (shown 2-4 p.m.; permesso at the office on the first floor, or in the library), a home for girls, a refuge for the aged and infirm, and a valuable medical library (*Biblioteca Leonisiana*; adm., see p. 148). The three departments first mentioned can accommodate 1000, 500, and 3000 inmates respectively.

The 'borgo', or settlement, of the 'Saxons' or English once lay here (comp. p. 318), and its name is preserved in that of the church

of *Santo Spirito in Sassia* (Pl. II, 9), farther on, to the left, built by Antonio da Sangallo the Younger, under Paul III. The façade was added by Mascherino under Sixtus V. This church belongs to the adjoining hospital and contains nothing noteworthy, except a bronze ciborium, ascribed to Palladio, over the altar. The brick campanile, founded by Sixtus IV., with its corner-pilasters, is 'perhaps, in its virile simplicity, the noblest tower of the early Renaissance'.

To the left, at the end of a side-street, rises the *Porta Santo Spirito*, whence the Lungara leads to Trastevere (see p. 368).

Near the colonnades, on the right, is *San Lorenzo in Plesibus* (Pl. I, 9), a church of early origin, rebuilt in 1659, on the left is the small church of *San Michele in Sassia* (Pl. II, 9), formerly the church of the Frisians (p. 313), rebuilt in the 18th cent., with the tomb of the painter Raphael Mengs (d. 1779), the friend of Winckelmann.

The *"Piazza di San Pietro"*, the imposing space in front of St. Peter's, is in the form of an ellipse, adjoined by an irregular quadrilateral on the side next the church. It is enclosed by the huge colonnades erected in 1655-67 by Bernini. The length (including the Piazza Rusticucci) to the portico of the church is 366 yds.; greatest breadth 260 yds. Each of the colonnades contains four series of Doric columns. Three covered passages, the central of which has space for two carriages abreast, are formed by 284 columns and 68 piers. On the balustrades above are placed 162 statues of saints in Bernini's style. The cost of the construction amounted to 850,000 scudi (182,000*l.*), the pavement, laid by Benedict XIII., alone cost 88,000 scudi. The effect is striking, and the piazza forms a fitting approach to the largest church in Christendom.

The great Obelisk in the centre of the piazza, which is destitute of hieroglyphics, was brought from Heliopolis to Rome by Caligula and placed in the Vatican Circus, where it stood upon the 'spina' (comp. p. 312). It is the only monument of the kind at Rome which has never been overthrown.

Under Sixtus V. in 1586 the obelisk was removed on rollers from its original position, and erected on 10th Sept. on its present site under the superintendence of Domenico Fontana, who estimated its weight at about 820 tons. Representations of this extremely difficult undertaking are frequently seen. It is related that Fontana in the construction of his apparatus had omitted to allow for the tension of the ropes produced by the enormous weight, and that at the most critical moment, although silence was imposed on the bystanders under pain of death, one of the 800 workmen, the sailor Brescia of San Remo, shouted '*Acqua alle funi!*' (water on the ropes), thus solving the difficulty. As a reward, his relatives (of Bordighera, near San Remo) were granted the privilege of providing the palm-branches for St. Peter's on Palm Sunday.

On the pavement round the obelisk is placed an indicator of the points of the compass. At the sides are two handsome *Fontaine*, 45 ft. in height, the one next the Vatican erected by Maderna, the other under Innocent XI. On each side, between the obelisk and the fountains, is a round slab of stone indicating the foci of the radii of the colonnades, each series of which appears thence as one.

At the sides of the steps leading to the portico of St. Peter's, formerly stood the statues of SS. Peter and Paul which are now at the entrance to the Sacristy (p. 327), and were replaced under Pius IX. by works of De Fabris and Tadolini.

At the end of the colonnade to the right is the *Portone di Bronzo*, the entrance to the Vatican, where the Swiss guard is stationed (p. 330).

b. *St. Peter's (San Pietro in Vaticano).*

The Church of St. Peter, like San Giovanni in Laterano, San Paolo, Santa Croce, Sant' Agnese, and San Lorenzo, is said to have been founded by the Emp. Constantine at the request of Pope Sylvester I. (p. xxxiv). It was erected in the form of a basilica with nave, double aisles, and transept, on the site of the circus of Nero, where St. Peter is said to have been buried, and it contained the brazen sarcophagus of the apostle. The church was approached by an entrance-court with colonnades and was surrounded with smaller churches, chapels, and monasteries. The interior was sumptuously decorated with gold, mosaics, and marble. At Christmas, in the year 800, Charlemagne received here the Roman imperial crown from the hands of Leo III., and numerous emperors and popes were subsequently crowned here.

In the course of time the edifice had at length become so damaged that Nicholas V. (p. lxiiv) determined on its reconstruction, and in 1452 began the tribune, from the design of the Florentine Bernardo Rossellino. According to this design, the church was to have the form of a Latin cross (i.e., with one arm longer than the others), and the choir was to be rounded internally, and to form half of a hexagon externally. The proportions were so adjusted that the choir and the transept completely enclosed the corresponding parts of the old church. The walls had risen to a height of 4-5 ft. only when the work was interrupted by the death of the pope (1455).


The work was not resumed till 50 years later, when a new impulse was given to the undertaking by the idea of Julius II. to erect a tomb for himself during his own lifetime (p. lxiiv), for which, as there was no sufficient room in the church, it was proposed to add a chapel. For this proposal was next substituted another, that the church itself should be altered, and that the beginning of Rossellino's building should be utilised; but this last suggestion was afterwards abandoned as being likely to interfere with the independence of the work, and it was at length resolved to erect an entirely new edifice. The tradition, that Julius II. had invited a number of architects, including Giuliano da Sangallo, to submit designs, and that Bramante, who came from Lombardy, was the successful competitor, is probably true.† The numbers of sketches and designs

† The original of Bramante's ground-plan is preserved in the collection of architectural drawings in the Uffizi at Florence.

preserved in the collection of drawings in the Uffizi at Florence testify to the enthusiasm and zeal with which the various masters entered the lists, and particularly to the assiduity with which Bramante revised, corrected, and perfected his designs. His aim seems to have been to crown a substructure like the Basilica of Constantine (p. 284) with a superstructure like the Pantheon. He intended the new church to be in the form of a Greek cross covered with a gigantic central dome, with rounded choir and transepts, above which there were to be four smaller domes (comp. Plan). The foundation stone was laid on 18th April, 1506, in the presence of 35 cardinals, under the choir-pillar of St. Veronica (No. 4 on the large plan).

This plan, which had the merit of majestic simplicity, was, it is well known, not adhered to. During the last year of Bramante's (d. 1514) life, *Giuliano da Sangallo* (d. 1516) was entrusted with the superintendence of the work, and was assisted by *Raphael* and *Fra Giocondo da Verona* (d. 1515). The great age of the first and the third, and the early death of Raphael (d. 1520), were unfavourable to the work, and the original plan was much altered, the masters being divided between the Greek and Latin form of cross. The next directors of the work were *Antonio da Sangallo the Younger* (after 1518), *Baldassare Peruzzi* of Siena (after 1520), and *MICHAEL ANGELO* (after 1547). This last distinguished himself by rejecting the innovations of Ant. da Sangallo, and rescuing Bramante's ground-plan. He strengthened the pillars of the dome, simplified the form of the aisles, and planned a porch borne by ten columns, and terminating in a pediment, though this last part of his design was afterwards abandoned. Michael Angelo was most fortunate with his construction of the dome. He completed the drum of the dome, and left behind him drawings and models for the completion of the work up to the lantern. The dome of St. Peter's is thus the completion of the artistic idea which had been conceived 150 years before by Brunelleschi, though in the dome of the cathedral at Florence he practically did little more than demonstrate its technical possibility. The vast dimensions of Michael Angelo's dome render doubly marvellous its airy and symmetrical appearance; and it still remains an unsurpassed model.

After the death of Michael Angelo in 1564 the building of the church was continued by *Vignola* and *Giacomo della Porta*, the latter of whom was charged with the completion of the dome. In 1606 the church was completed with the exception of the façade, when *Paul V.* introduced a momentous alteration. Reverting to the idea of a Latin cross, he caused the nave to be lengthened, and the present weak and unsuitable façade to be erected by *Carlo Maderna*. The effect of the dome, as contemplated by Michael Angelo, is thus entirely lost except from a distance; from the spectator standing in the piazza of St. Peter the drum supporting the dome vanishes behind the façade. *Bernini*, who succeeded Maderna in 1629,

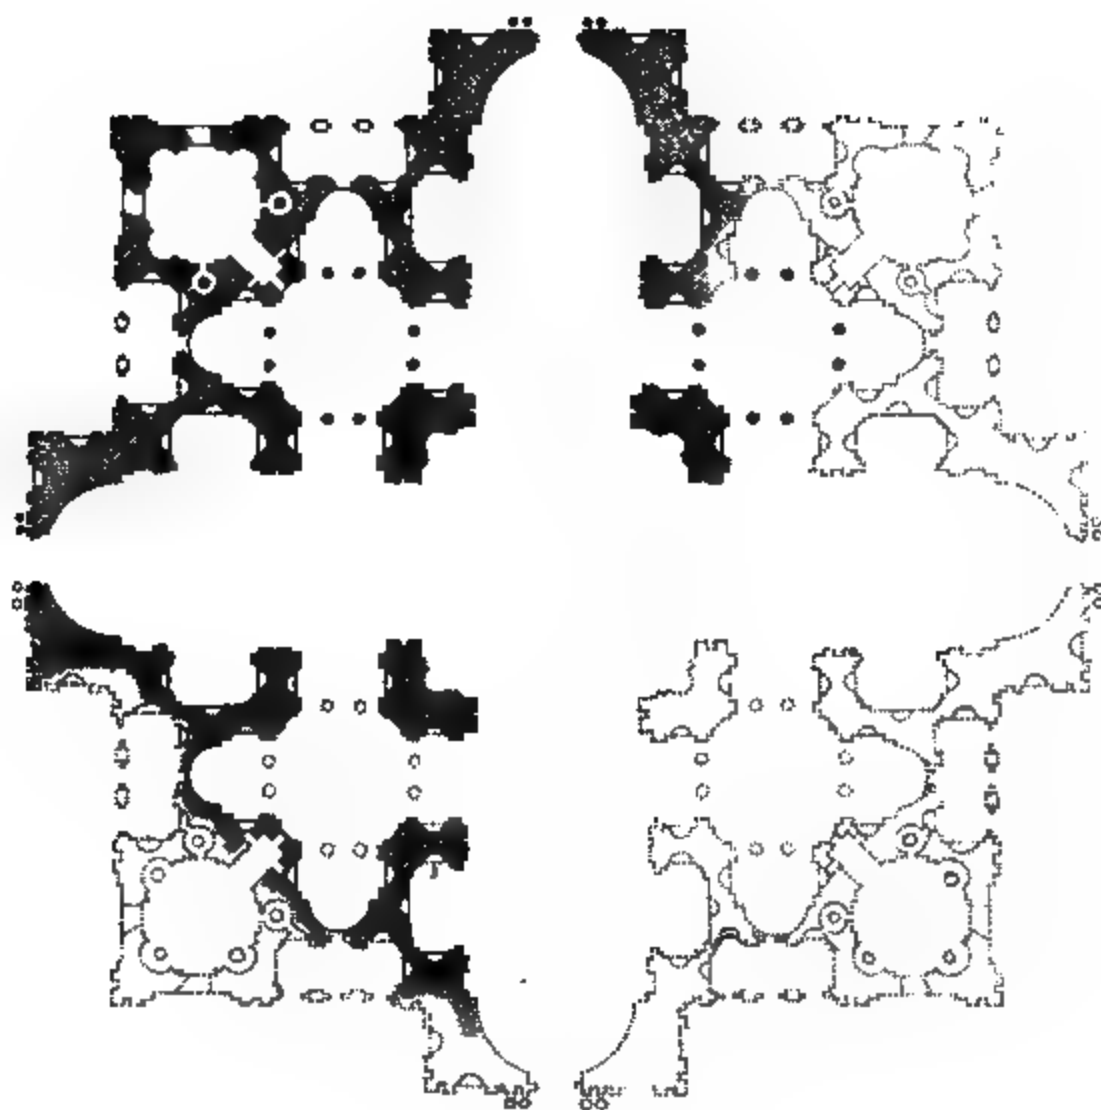


S. Pietro in Vaticano, disegno di Bramante

1:1850

0 10 20 30 40 50 Metri

Spiegazione de' numeri

li. S. Pietro
 li. S. Longino
 li. S. Elena
 li. S. Veronice
 li. S. Andrea
 li. Pio VI.
 di Urbano VIII.
 — Paolo II.
 (S. Pietro,
 del Michelangelo
 no di Leone II.
 — di Maria Cristina di Svezia
 di S. Sebastiano (Domenichino)
 d'Innocenzo III.
 della cattedra Matilde
 del Sacramento
 di Sisto IV.
 di Gregorio XIII
 di Gregorio XIV.
 e di S. Cirillo (Domenichino)
 Gregoriana
 di Gregorio XVI
 del Soccorso
 di Benedetto XIV
 li. S. Bartolomeo (Palladio)
 li. Arcangelo
 li. Valentin
 li. Annunziata
 to di Clemente XIII:
 della Navicella
 di S. Michele Arcangelo
 n. di S. Petronilla (Giovanni)
 di Clemente I
 di Alessandro VII
 guarisce il paralitico
 zini)
 i S. Leone Magno
 della Colonna
 i di Leone II, No. IV
 o di Alessandro VII
 di Simeone Magno (Vanni)
 no (Cassanese)
 di Palestrina
 i Spadarino)
 Un sagrestia
 Clementina
 i S. Gregorio Magno
 di Pio VII
 . Annunziata e Saffra (Ronzani)
 zione di Raffaello (Mantegna)
 di Leone II
 d'Innocenzo II
 del Oro
 d'Innocenzo VIII
 della Presentazione
 to di Maria Clementina
 di
 ella famiglia Stuarda
 del finto battesimo
 i comune
 — del canonico
 episcopale
 i de' benedicti
 alla chiesa

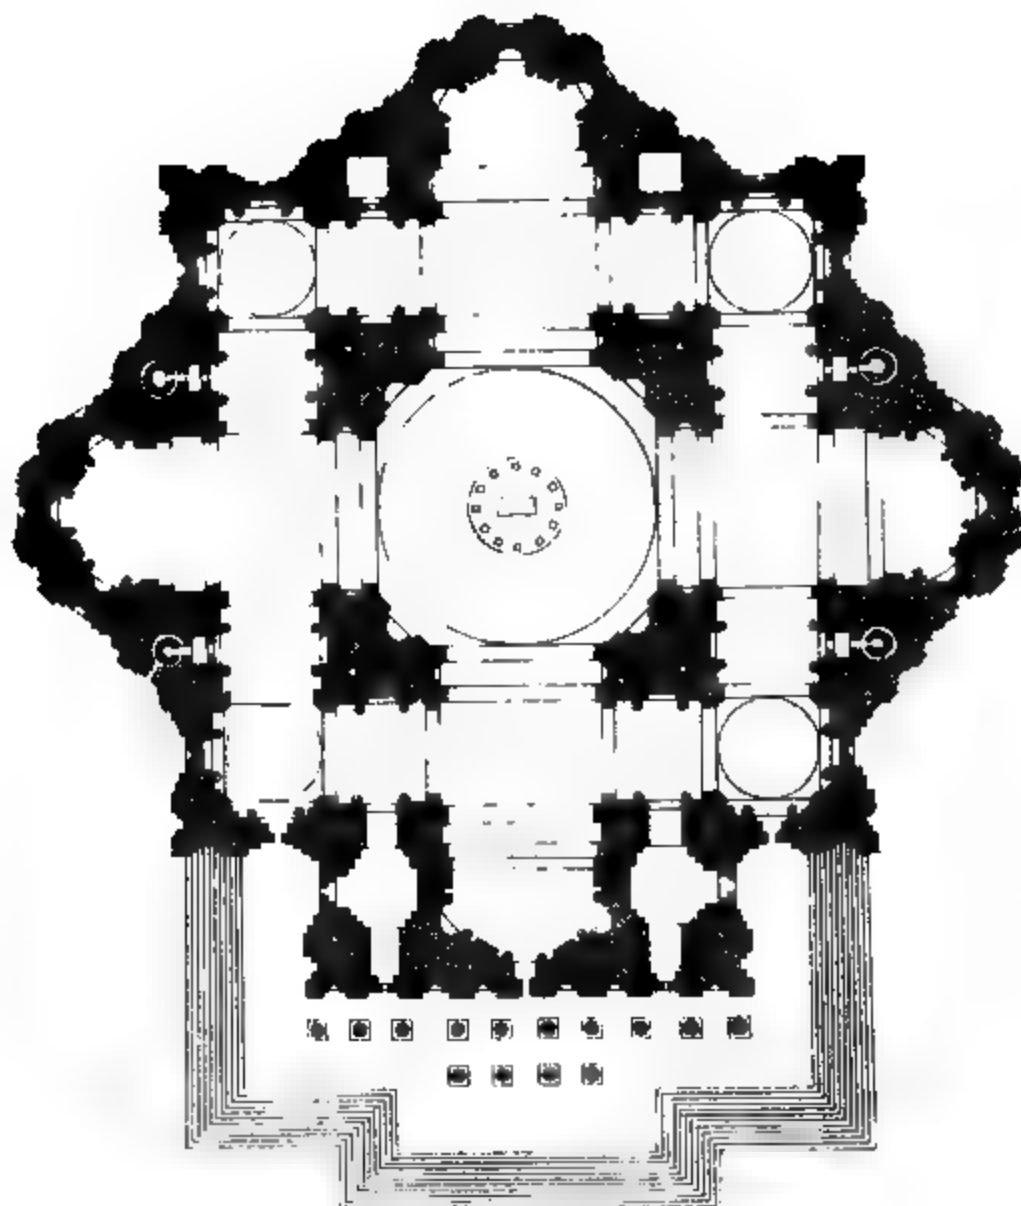

S. Pietro in Vaticano, piano di Michelangelo.

1 : 1850

0 10 20 30 40 50 Metri

finished the building. He designed two campanili to be erected on each side of the church, but the only one which was built had to be removed owing to the insecurity of the foundation.

The new church was consecrated by Pope Urban VIII on 18th Nov., 1626, the 1300th anniversary of the day on which St. Sylvester is said to have consecrated the original edifice. — By the end of the 17th cent. the cost of building St. Peter's had amounted to upwards of 47 million scudi (about 10,000,000*l.*), and the present expense of its maintenance is about 7500*l.* per annum. The new sacristy, erected by Pius VI, cost 900,000 scudi (about 192,000*l.*).

The result of these various vicissitudes is that St. Peter's is the largest and most imposing, if not the most beautiful church in the world, its area is about 18,000 sq. yds., while that of the cathedral at Milan is 12,790, St. Paul's at London 9350, St. Sophia at Constantinople 8150, and Cologne Cathedral 7400 sq. yds.

The dimensions are variously stated. The following measurements are inscribed upon the pavement of the nave in 'palms', here converted into yards for convenience of comparison. Length of the interior 208 yds., or including the walls 212 yds.; length of St. Paul's in London 175 yds.; cathedral at Florence 163 yds.; cathedral at Milan 148 yds.; San Paolo fuori le Mura 139 yds.; St. Sophia at Constantinople 115 yds. — According to the measurements of Carlo Fontana, the total length of St. Peter's, including the portico, is 282 yds., height of nave 154 ft.; breadth of nave in front 20 yds., and at the back, near the tribune 26 yds.; length of transept inside 150 yds. — The dome, from the pavement to the summit of the lantern, is 406 ft. in height, to the summit of the cross 425 ft.; its diameter is 138 ft., or about 5 ft. less than that of the Pantheon. The church contains 26 altars, in addition to the high-altar, and 145 columns.

The Façade, with 8 columns, 4 pilasters, and 6 semi-pilasters of the Corinthian order, is 123 yds. long and 165 ft. high, and is approached by a flight of steps. It is surmounted by a balustrade with statues of the Saviour and apostles, 19 ft. high. The inscription records that it was erected by Paul V. (Borghese) in 1612. Over the central of the five entrances is the Loggia in which the new pope used to be crowned, and whence he imparted his benediction at Easter to the concourse in the piazza (discontinued since 1870).

The Portico, 76 yds. in length, 14½ in width, and 66 ft. in height, is admirably decorated, the magnificent stucco-ornamentation of the ceiling being especially noteworthy. At the entrances are antique columns of pavonazzetto and African marble.

Over the interior of the central external entrance is St. Peter on the sea, termed '*La Navicella*', a mosaic after Giotto (1298), formerly in the entrance-court of the earlier church, unfortunately considerably altered by *Martino Provenzano* and *Francesco Borroni* and entirely modernized. A copy of the original is preserved in Santa Maria della Consolazione in the Piazza Barberini (p. 187). — At the ends of the portico are equestrian statues; on the left, Charlemagne by Cornacchini, on the right, Constantine the Great by *Severini*. The latter is concealed by the side-door which is always kept shut, and can be seen only from the *Scala Regia*, on the other side (p. 230).

Of the five doors of the church that on the extreme right, indented by a cross, is called the *Porta Santa*, and is only opened in

the years of jubilee (every 25 years; the last occasion was in 1900, but the ceremony was omitted in 1860 and 1875). The great **CENTRAL ENTRANCE** is closed by the brazen *Doors which Eugene IV. caused to be executed in 1489-45 by *And. Filarete* (p. lxxv) after the model of those of San Giovanni at Florence. The Christian subjects represented on the main panels contrast strangely with the pagan subjects on the surrounding ornamental borders, such as Phrixus and Helle on the ram, Europa on the bull, Ganymede carried off by the eagle, Leda and the swan, etc.

While the exterior of St. Peter's is open to criticism, the **INTERIOR**, notwithstanding its meretricious enrichments (sculptures by Bernini and his contemporaries, coloured marble incrustation of the walls, and niches formed in the principal pillars by the same master), is strikingly impressive; and the effect is produced not so much by the vastness, as by the harmony and symmetry of its proportions. The finest features, such as the great breadth of the three arms of the cross, the four great dome-pillars, the arcades below the dome, and the diameter of the latter, are all due to Bramante, to whom the coffering of the tunnel-vaulting must also be ascribed.

On the pavement of the NAVE, close to the central door, is a round slab of porphyry on which the emperors were formerly crowned. On the pavement beyond it are inscribed the lengths of several other large churches (see p. 321). On each side, as far as the dome, are four pillars with Corinthian pilasters; above these a rich entablature, which bears the arches extending from pillar to pillar and the gorgeously coffered and gilded tunnel-vaulting of the ceiling. The niches of the pillars here and in the other parts of the church contain baroque statues of the founders of various orders. By the first two pillars of the nave are two holy water basins supported by colossal putti. The pavement, like the walls, consists entirely of coloured marble, inlaid from designs by *Giac. della Porta* and *Bernini*. — By the fourth pillar to the right, on a throne of white marble beneath a canopy, is the sitting **Statue of St. Peter* in bronze (Pl. 1), brought by Paul V. from the destroyed monastery of San Martino al Vaticano, a work of the 5th cent., though now ascribed by some to the 13th cent. (School of Arnolfo di Cambio?). The right foot is worn smooth by the kisses of devotees. In front of the statue are two large candelabra. Above is a mosaic portrait of Pius IX., commemorating the 25th anniversary of his accession to the papal see, 16th June, 1871. Pius IX. is the only pope whose pontificate was longer than that ascribed to St. Peter.

The magnificent and plainly decorated **DOME** rests on four huge piers, 234 ft. in circumference, the niches in the lower parts of which are occupied by statues, 16 ft. in height, of (1.) St. Longinus (2), the soldier who pierced the side of Christ, by *Bernini*, and St. Helena (3) by *Bozzi*, (1.) St. Veronica (4, the finest) by *Mocchi*, and

St. Andrew (5) by *Duquesnoy*; above them are the four logge of *Bernini*, where the most sacred relics are exhibited on high festivals, on which occasions the logge may be entered by none but the canons of St. Peter's. These relics, each preserved in the loggia above the appropriate saint, are the spear that pierced the Saviour, a portion of the Cross, the sudarium of St. Veronica, and the head of St. Andrew. Above the logge are four mosaics of the Evangelists after the *Cav. d'Arpino*, of colossal dimensions. The frieze bears the inscriptions in blue mosaic letters 8 ft. high on a gold ground: *Tu es Petrus et super hanc petram aedificabo ecclesiam meam et tibi dabo claves regni caelorum*. The sixteen ribs of the vaulting of the dome are of gilded stucco; between them are four series of mosaics. In the lowest the Saviour, the Virgin, and the Apostles. On a level with the lantern, God the Father, by *Marcello Frosensale*, after the *Cav. d'Arpino*.

Beneath the dome rises the imposing bronze CANOPY ('*Baldacchino*') borne by four richly gilded spiral columns, constructed in 1633 under Pope Urban VIII, from designs by *Bernini*, of metal taken from the Pantheon (p. 216). It is 95 ft. in height, including the cross, and weighs about 95 tons. Under the canopy is the HIGH ALTAR, consecrated in 1684, where the pope alone reads mass on high festivals. It stands immediately over the Tomb of St. Peter. The CONFRASSIO, constructed by *C. Maderna* under Paul V., is surrounded by 95 ever-burning lamps. The descent to it is by a double flight of marble steps (sacristan 30-40 c.), at the foot of which are two small alabaster columns, bearing statuettes of SS. Peter and Paul. Doors of gilded bronze, dating from the earlier church, close the niche which contains the sarcophagus of the apostle. Between the steps (6) is the beautiful statue of Pius VI. in the attitude of prayer, by *Canova*, 1822.

The nave is continued beyond the dome, and terminates in the TRIVUM, containing the fantastic *Cathedra Petri* of *Bernini*, a bronze throne, supported by the four doctors of the church (*Ambrose*, *Augustine*, *Athanasius*, and *Chrysostom*), and enclosing the ancient wooden episcopal chair of St. Peter. About 109 tons of metal were used in its construction. On the right (7) is the monument of Urban VIII. (d. 1644) by *Bernini*, with a multitude of Barberini 'bees'; on the left (8) that of Paul III. (d. 1549) by *Gugl. della Porta*, probably under the supervision of Michael Angelo. Above is the figure of the pope pronouncing his benediction; beneath on the right Prudence, on the left Justice. The names of the bishops and prelates who in 1854 accepted the dogma of the immaculate conception of the Virgin were engraved on a slab on the right wall by order of Pius IX.

Having traversed the nave and surveyed the stupendous dimensions of the fabric, we proceed to examine the aisles and transepts. St. Peter's contains but few pictures; those formerly here, some of

which are now in Santa Maria degli Angeli (p. 167), others in the Vatican Gallery, are replaced by copies in mosaic.

KNOWT AISLE. Over the 'jubilee-door', St. Peter in mosaic (8), placed here by Clement X. in the year of jubilee 1675. — The (1st) **CAPPPELLA DELLA PIETÀ** (10; seen well only by afternoon-light) contains a celebrated **Pietà* by *Michael Angelo*, an early work, executed in 1498 at the instance of the French Cardinal Jean de Villiers de la Grolais. The Madonna is seated at the foot of the Cross, with her right arm supporting the shoulders of the dead Christ, who lies in her lap with relaxed limbs and head leaning slightly back. Neither the grief of the Mother nor the effect of death on the Son detracts from the ideal beauty imparted to them by the artist. This masterpiece was produced under the direct influence of classic art, and the depth and truth of the conception are mirrored in the exquisite finish of the execution. This chapel also contains, to the left, a large early-Christian sarcophagus, in which, according to the inscription, *Petronius Probus*, prefect of the city (d. 395), was buried. It was discovered in 1596 during the rebuilding of St. Peter's. To the right is a column which tradition affirms to have been brought from the Temple at Jerusalem, and which served Bernini as a model for the twisted pillars of the Baldacchino. — Adjacent, to the right under the arch, is the monument (11) of Leo XII., by *De Fabris*, erected by Gregory XVI.; to the left, cenotaph (12) and bronze relief-portrait of Christina of Sweden, daughter of Gustavus Adolphus, and a convert to the Romish faith (p. 371). Beneath the monument of Leo XII. is the entrance (closed) to the *Cappella del Crocifisso*, which contains the less important relics of St. Peter's. — The 2nd altar (13) is adorned with the Martyrdom of St. Sebastian after *Domenichino* (original, see p. 167). Under the next arch are the monuments of (r.) Innocent XII. by *Fil. Valsa* (14), and (l.) the Countess Matilde of Tuscany (d. 1115) by *Bernini* (15), executed by order of Urban VIII. who had transferred her remains from Mantua hither. The relief on the sarcophagus represents Gregory VII. granting absolution to Emp. Henry IV. at Canossa in 1077. On the right the (3rd) **CHAPEL OF THE HOLY SACRAMENT** (16), closed by an iron gate, contains an altar-piece by *Pietro da Cortona*; right, the finely executed **Monument* (17) of Sixtus IV. (d. 1484) in bronze, by *Ant. Pollajuolo* (1493). Julius II (of the della Rovere family, like Sixtus) is also interred here. Under the next arch right, the monument (18) of Gregory XIII., the rectifier of the calendar (d. 1585), by *Camillo Ruseoni*; left, the plain sarcophagus (19) of Gregory XIV. Opposite, over the altar by the principal pier, is the Communion of St. Jerome (20), after *Domenichino* (original in the Vatican). On the right, the **GENEROUS CHAPEL** (21), erected under Gregory XIII. from the design of *Michael Angelo*, at a cost of over 80,000 scudi; here, to the right, is the monument (22) of Gregory XVI. (d. 1846), by *Amici* (1854);

below it a relief, representing the dissemination of Christianity. Above the altar is the Madonna del Soccorso (23), from the old church of St. Peter, dating from about 1118, under it is the tomb of St. Gregory Nazianzen (d. 390). Under the following arch: right, the tomb (24) of Benedict XIV.; left, altar (25) with the Mass of St. Basilina, after *Sablaynes*.

The RIGHT TRANSEPT was used by the Œcumenical Council for its meetings in 1870. By the tribune, three altars with pictures by *Caroselli* (26), *Valentin* (27), and *Nic. Poussin* (28; Martyrdom of St. Erasmus). The originals of the last two are in the Vatican (pp. 345, 346).

W PROLONGATION OF RIGHT AISLE. Under the arch: right, Monument (29) of Clement XIII. (Bazzonico of Venice, d. 1769), by *Canova*; figure of the pope and the two lions worthy of inspection; left, altar of the Navicella (30) with Christ and St. Peter on the sea, after *Lauffranco*. Right, the CHAPEL OF THE ARCHANGEL MICHAEL (31), the archangel after *Guido Reni*; in a straight direction, St. Petronilla (32), after *Guercino* (p. 244). Under the (left) following arch: right, monument (33) of Clement X (d. 1676); left, Raising of Tabitha by St. Peter, after *Costanzi* (original, see p. 167). — We now pass the principal tribune, and enter the —

W. DIVISION OF LEFT AISLE. Immediately on the right is the monument (34) of Alexander VIII. (Ottoboni of Venice, d. 1691), by *Arrigo di San Martino*; left, Healing of the lame man by St. Peter and John (35), after *Mancini*; farther on, right, the altar (36) of Leo I., with a marble relief by *Algardi* (about 1650), representing the Retreat of Attila. Facing the visitor is the CAPPELLA DELLA COLONNA (37), containing a highly revered Madonna from a pillar of the older church. Beneath the altar an ancient Christian sarcophagus (38), with Christ and the apostles in front, containing the remains of Leo II. (d. 683), Leo III. (d. 816), and Leo IV. (d. 855). Turning hence to the left, we first perceive on the right, over the small door (of egress), the unattractive monument (39) of Alexander VII. (d. 1667) by *Bernini*. Opposite is an altar (40) with an oil-painting (on slate) by *Fv. Vanni*, Punishment of Simon Magus.

The LEFT TRANSEPT, with its tribune and three altars, is next entered. It contains confessionals for ten different languages, as the inscriptions indicate. By the pillar of St. Veronica, below the statue of St. Juliana, is an elevated seat, whence on high festivals the grand-penitentiary dispenses absolution. Over the first altar on the right, St. Thomas (41), by *Canaccioli*; in front of that in the centre, the tomb (42) of the great composer Giovanni Pier Luigi da Palestrina (1526-94, p. 429), altar-piece, Crucifixion of Peter, after *Guido Reni* (original, see p. 345); left, St. Valeria (43), after *Giov. Ant. Spadaro*. The portal of grey marble to the right under the following arch (44) leads to the Sacristy (p. 326), above it the monument of Pius VIII. (d. 1830) by *Tenaroni*. To the left (45), Death

of Ananias and Sapphira, after *Roncalli* (original, see p. 167). From this point is best appreciated the collective effect of the dome, tribune, and transepts. Then the CLEMENTINE CHAPEL (45), erected by Clement VIII. (1592-1606), below the altar (46) on the right reposes Gregory I., the Great (590-604); altar-piece after *Andr. Sacchi* (Mass of Gregory the Great, p. 346); facing us, the monument (47) of Pius VII. (d. 1829), by *Thorvaldsen*, erected by Cardinal Consalvi. — We now turn to the left, and perceive below the arch, on the left, the mosaic copy of Raphael's Transfiguration (49), four times the size of the original (p. 346). — Opposite, to the right, begins the —

LEFT AISLE. Here, under the arch on the right, the monument (50) of Leo XI. (d. 1605) by *Algardi*, with a relief of Henri IV of France abjuring Protestantism; left, monument (51) of Innocent XI. (d. 1689) by *Carlo Maratta*, with relief of the delivery of Vienna by King John Sobieski. The large CHORAL CHAPEL (52), gorgeously decorated by *Giac. della Porta* with stucco and gilding, contains the tombstone of Clement IX. (d. 1721), an altar-piece after *P. Bianchi* (Immaculate Conception; original, see p. 167), and two organs. Ceremonies accompanied by beautiful musical performances frequently take place here on Sundays; ladies admitted only when provided with black dress and veil, gentlemen also in black (evening-dress); others must remain outside the railing. — Beneath the next arch, to the right, over the door, is the tomb in which the most recently deceased pope rests until the completion of his tomb and monument elsewhere. The remains of Leo XIII. were placed here in July, 1903. To the left, the *Monument (53) of Innocent VIII. (d. 1492), by *Aut.* and *Pietro Pollajuolo* (1498). On the right an altar (54) with the Presentation of the Virgin, after *Roncalli* (original, p. 167). The eye of the English traveller will rest with interest upon the monument (55) of Maria Clementine Sobieski (d. 1735 at Rome), wife of James III., the 'Old Pretender', under the arch to the right, over the door which leads to the dome; and upon the tomb (56), to the left, of the last of the Stuarts, by *Canova* (1819), with busts of 'James III.' and his sons Charles Edward (the 'Young Pretender') and Henry (Duke of York and Cardinal of Frascati, better known as Cardinal York). In the last chapel (57) on the right is a font consisting of the cover of a sarcophagus from the mausoleum of Hadrian (p. 314). Over the altar, Baptism of Christ, after *Maratta* (original, p. 167). To the left, St. Peter baptizing his gaoiers in the Mamertine Prison, after *Passeri*; to the right, Baptism of the Centurion, after *Procaccini*.

The SACRISTY (entrance by the grey marble portal mentioned at p. 326, ground-plan 44; visited most conveniently 9-11 a.m.), erected in 1775 by Pius VI. from the designs of *Carlo Marchionni*, consists of three chapels in a corridor adorned with ancient columns and inscriptions.

At the entrance the statues of (s) St. Peter and (1) St. Paul executed in 1661-62 by Paolo Bonanni, and formerly in the Piazza of St. Peter (p. 314). The central octagonal chapel *Sacrestia Cosova* (16) is embellished with eight columns of bigie from the Villa of Hadrian near Tivoli. A chandelier (1/2 fr.) may be found here to show the others. Left, the *Sacrestia dei Canonici* (30), with the *Cap. dei Canonici*, altar-piece by *Francesco Penni* (Madonna with St. Anna, Peter, and Paul) opposite to which is a Madonna and Child by *Giulio Romano*. Adjacent is the —

Stanza Carrozzani (18), containing interesting pictures from the old Confession, by *Giulio*: Christ with Cardinal *Stefaneschi*; Crucifixion of St. Peter: a good example of *Giulio's* dramatic power, Martyrdom of St. Paul; on the back, St. Peter enthroned, St. Andrew John Paul, and James; on the predella (by the window) Madonna and Apostles. This work alone would entitle *Giulio* to be regarded as the founder of a new school of painting (C. & C.). This *Stanza* also contains fragments of the "Frescoes by *Melisso de Perù* from the former dome of *Santi Apostoli* (p. 310): angels with musical instruments and several heads of apostles. On the right, the —

Sacrestia dei Benedettini (61), with a ciborium by *Bonafante* (containing a ruined painting by *Mantegna*) and an altar-piece by *Murino*, the Delivery of the Keys. Contiguous is the *Treasury* (62) of St. Peter's, containing jewels, an altar cross and two candelabra by *Ant. Geronzi* of *Favosa* (1672), exquisite works, executed under the influence of *Michael Angelo*: the crown of the *Emp. Justinus* (6th cent.), the diadems worn by *Charlemagne* at his coronation, etc. Over the treasury are the *Arms* of St. Peter's (shown by special permission only), with ancient 1800, a *Life of St. George*, with admirable miniatures by *Giulio*, also a few classical authors.

The *Sacra Grotta Vaticana* (or crypt), consisting of passages with chapels and altars beneath the pavement of the present church, are visible by special permission only. The crypt is lighted by electricity. Entrance, see ground-plan, a.

The *Grotta Nuova*, situated under the dome, consist of a corridor in the form of a horseshoe, which encloses the Confession. In the four great piers which support the dome, steps descend to so many *Chapels*: a. St. Veronica, b. St. Helena, c. St. Longinus, d. St. Andrew — In the *Chapel of Santa Maria de Porticu* (6), to the right by the entrance, is St. Matthew, on the left, St. John, two statues in relief from the tomb of *Nicholas V* (p. 326), over the altar a Madonna (retouched) by *Simone Memmi*, from the portion of the old church. To the right and left are statues of angels by *Mino da Fiesole* and *Olav Deitman*, from the tomb of *Card. Eruli* (d. 1479). West of *Benedict XII* by *Paolo de Sene*. Statue of St. Peter constructed of antique medieval and Renaissance fragments placed together. On the walls are drawings of the old church of St. Peter. Outside the chapel, on the right, a mosaic: Christ between St. Peter and Paul (the first holding three keys), from the tomb of *Emp. Otto II* (p. 326). — In the *Chapel of Santa Maria Pammartium* (c), at the entrance, the two St. James: relief from the tomb of *Nicholas V* (p. 326), and the Father, Paul before Nero, relief from a ciborium of *Stanza IV*. — The adjoining chamber contains fragments from *John VII's* Lady Chapel (see p. 326) and scenes from the old church of St. Peter — *Coronation*, Martyrdom of St. Peter and Paul: relief from *Stanza IV's* ciborium (see above); statues of the twelve Apostles, some by *Mino da Fiesole*, remains of the canopy of St. Andrew by *Jean de Pise* and *Paolo Romano*; remains of the ciborium of the *Illy Lance*, by *Andrea Bregno*. Reliefs from the tomb of *Paul II* (see p. 326): The Fall, Last Judgment, Faith and Charity (by *Mino da Fiesole*), Hope (signed), Resurrection of Christ (restoration of *Evo* (by *Olav Deitman*)). Statues of St. Peter and Paul in relief from *Card. Eruli's* tomb, also by *Olav Deitman*, Madonna enthroned with *Nicholas III*, and *Card. Gerardo Orsini* (relief, probably from the studio of *Paolo Bonanni*). — Opposite the

entrances to the Confessio. Sarcophagus of the city-prefect *Junius Bassus* (d. 208), one of the most brilliant examples of early-Christian funeral sculpture. The *Cosmetico* (m), or Chapel of St. Peter and Paul, in the centre of the circular passage, is richly decorated with stucco, gold, and jewels. Over the altar, which was consecrated in 1122, are two ancient pictures of St. Peter and St. Paul. The sarcophagus of St. Peter (formerly in the catacombs on the Via Appia, then in the Lateran) has been preserved here since the 15th century.

The *Grotte Vaticane* are about 147 ft. long and 37 ft. wide. The pavement was originally that of the ancient church, and lies 11 ft. below that of the present church. These vaults contain the sepulchral monuments of many popes and princes from the old church. In a. those of Nicholas I. (d. 867), Gregory V. (Bruno, a German; d. 900), and King Otto II. (d. at Rome, 955). At the end of f. that of Alexander VI. (d. 1506; comp. p. 228). In g. those of Adrian IV. (Nicholas Breakspere, the only English pope, d. 1159), an old sarcophagus in granite, Pius II. (*Æneas Sylvius Piccolomini*, d. 1458), an early-Christian sarcophagus (comp. p. 224); Pius III. (d. 1503; comp. p. 224); Boniface VIII. (d. 1303), by *Arnolfo di Cambio* (?); Nicholas V. (Thomas of Sarzana, d. 1455); Paul II. (d. 1471) and Card. Brol (see p. 377), both by *Glen. Dalmata*; Urban VI. (d. 1389); Marcellus II. (d. 1555), in an early-Christian sarcophagus; and Cardinal *Venanzo* (d. 1422).

For the **Ascent of the Dome* (see pp. 150, 151) a permission is required, except on Sat., and may be obtained in the 'Rev. Fabbrica di San Pietro', Via della Sagrestia 8 (first floor). Visitors knock at the door in the left aisle (Pl. 55). An easy spiral inclined plane ascends to the roof. The walls bear memorial-tablets of royal personages who have made the ascent. On the roof a number of domes and other small structures are seen, some of which serve as dwellings for the workmen and custodians. The **View from the roof* ranges over the entire city and the Campagna from the Apennines to the sea.

One of the eight octagonal chambers in the piers which support the dome contains a model of the church by *Michael Angelo* and his predecessor *Ant. da Sangallo the Younger*, for admission to which a separate permission, obtainable by special recommendation only, must be procured.

The Dome rises 308 ft. above the roof, and is 630 ft. in circumference. The visitor will observe the huge hoops of iron by which the dome was strengthened in the 18th cent., when threatening fissures had begun to appear. The gallery within the drum affords a striking view of the interior. An easy staircase ascends between the outer and inner domes to the *Lantern*, which commands a view of the whole church and its environs. A perpendicular iron ladder ascends to the copper ball on the summit, which can contain 16 persons, but affords no view; the ascent is not worth the trouble, and is quite unsuitable for ladies.

Ascending by St. Peter's, to the left beyond the colonnades (way to the Vatican gallery of statues, see p. 349, and Plan, p. 318), we reach, near the sacristy, a slab in the pavement marking the former site of the obelisk mentioned at p. 318. To the left is the *Campo Santo dei Teutonici*, the most ancient Christian burial-ground, instituted by Constantine, and filled with earth from Mt.

Calvary. In 1779 it was granted to the Germans by Pius VI. Adjacent is the church of *Santa Maria della Pietà in Campo Santo*, adjoining which is the German and Flemish refuge for pilgrims.

Near it is situated the *Palazzo del Sant' Offizio*, or Inquisition, now a barrack. The Congregation of the Inquisition was established in 1542 by Paul III. and this edifice was assigned to it by Pius V.

c. The Vatican.

The *Vatican Palace*, the largest in the world, was originally a dwelling-house for the popes, erected by Symmachus (p. 312) near the anterior court of the old church of St. Peter, though throughout the whole of the middle ages the papal residence proper was at the Lateran. Additions were made to the Vatican by Eugene III. (1150), Celestine III., and Innocent III., but it fell into decay during the absence of the papal court at Avignon (1308-77). When the popes returned to Rome, they at last took up their permanent abode at the Vatican, deserting the Lateran, which had been devastated by a great fire in 1308. After the death of Gregory XI. the first conclave was held in the Vatican in 1378, which resulted in the schism. In 1450 Nicholas V. (p. lxiv), with a view to render the Vatican the most imposing palace in the world, determined to unite in it all the government-offices and residences of the cardinals. On his death he left behind him an almost completed palace, including the Library (comp. p. 365), the *Appartamento Borgia*, and the *Stanze*, to which Alexander VI. added the finishing-touch in the shape of the *Torre Borgia*. In 1473-81 the *Sistine Chapel* was erected by Sixtus IV., and in 1486-92 the *Belvedere*, or garden-house, by Innocent VIII. Bramante, under Julius II., united the latter with the palace by means of a great court. The *Logge* round the Cortile di San Damaso were also constructed by Bramante. Paul III. founded the *Pauline Chapel* in 1540, and Sixtus V. built the present Library (which divided Bramante's large court into two parts, the Cortile di Belvedere and the Giardino della Pigna) and the present residence of the popes, which last was completed by Clement VIII. (1592-1605). Urban VIII. began the *Scala Regia* (p. 330) from Bernini's designs; Pius VI. erected the *Sala a Croce Greca*, the *Sala Rotonda*, and the *Sala delle Muse*, Pius VII. the *Braccio Nuovo* for the sculptures, and Pius IX. closed the fourth side of the Cortile di San Damaso by covering and reconstructing the great staircase (*Scala Pia*) which leads from the arcades of the piazza into the court. The palace now covers an area of about 13½ acres, of which about 6 are occupied by the 20 courts, and contains perhaps 1000 halls, chapels, saloons, and private apartments (the common estimate of 11,000 apartments is a mere fable). By far the greater part of the Vatican is occupied by collections and show rooms, a comparatively small part of the building being set apart for the papal court. A law passed

on 13th May, 1871, secures to the Vatican, the Lateran, and the papal villa at Castel Gandolfo the privilege of exterritoriality.

The PRINCIPAL ENTRANCE to the Vatican (*Portone di Bronzo*) is at the end of the right colonnade of the Piazza of St. Peter, where the Swiss guard is posted (no fee). The dicceroni who proffer their services here are to be avoided; their services are useless. Straight in front is the Scala Regia, leading to the picture-gallery, etc., see below. The staircase to the right (*Scala Pia*, see p. 329), leads to the CORTILE DI SAN DAMASO, a court which derives its name from the fountain of St. Damasus erected here by Innocent X., and sometimes called *Cortile delle Logge* from the Logge of Bramante (p. lxvi) by which it is bounded on three sides. On the right is the wing occupied by the Pope. On the left is a door with the inscription *Adito alla Biblioteca ed al Museo* (available for readers in the library only).


A. CAPPPELLA SISTINA. RAPHAEL'S STANZE AND LOGGE. PICTURE GALLERY. RAPHAEL'S TAPESTRIES. APPARTAMENTO BORGHIA.

Admission, see pp. 150, 151. *Permessi* (see below). Sticks and umbrellas must be given up on the second landing of the Scala Regia. Gratuity in the Sistine Chapel, 50 c. Catalogue of the picture-galleries and decorative paintings by the *Conservatore Ercole Massi*, in Ital. 2½ fr., Engl. 2½ and 1½ fr., French 1½ fr., it may, however, be dispensed with.

We proceed from the principal entrance (*Portone di Bronzo*, see above) straight on to the SCALA REGIA, a magnificently decorated staircase, with a skilfully treated perspective effect, by Bernini. From the first landing we have a view, to the right, of Bernini's statue of Constantine (p. 321), on a line with the portico of St. Peter's. At the top of the staircase we obtain our permesso and pass through a door to the Staircase on the Right, which ascends to the Sala Regia, on the first floor (81 steps). Halfway up a notice-board, on the right, marked 'Camere e Stanze di Raffaello', indicates the approach to the second floor with Raphael's Stanze and Logge (p. 335). On the third floor (accessible from the Logge) is the picture-gallery (p. 344).

**SALA REGIA. CAPPPELLA SISTINA. SALA DUCALE.
CAPPPELLA PAOLINA.**

The Sala Regia, an entrance-hall to the Sistine Chapel originally destined for the reception of foreign ambassadors, was begun by *Ant. da Sangallo the Younger* under Paul III. and was completed in 1573. The stucco decorations of the ceiling are by *Perin del Vaga*, and those over the doors by *Daniele da Volterra*. The large frescoes, by *Vasari*, *Salviati*, and the *Zuccari*, illustrate the power of the church: Scenes from the Night of St. Bartholomew (the inscription *Strages Hugonottorum*, etc., which was once under them, has been obliterated); Alliance of the Spanish and Venetians with Paul V.; Battle of Lepanto in 1571; Gregory VII. absolving the

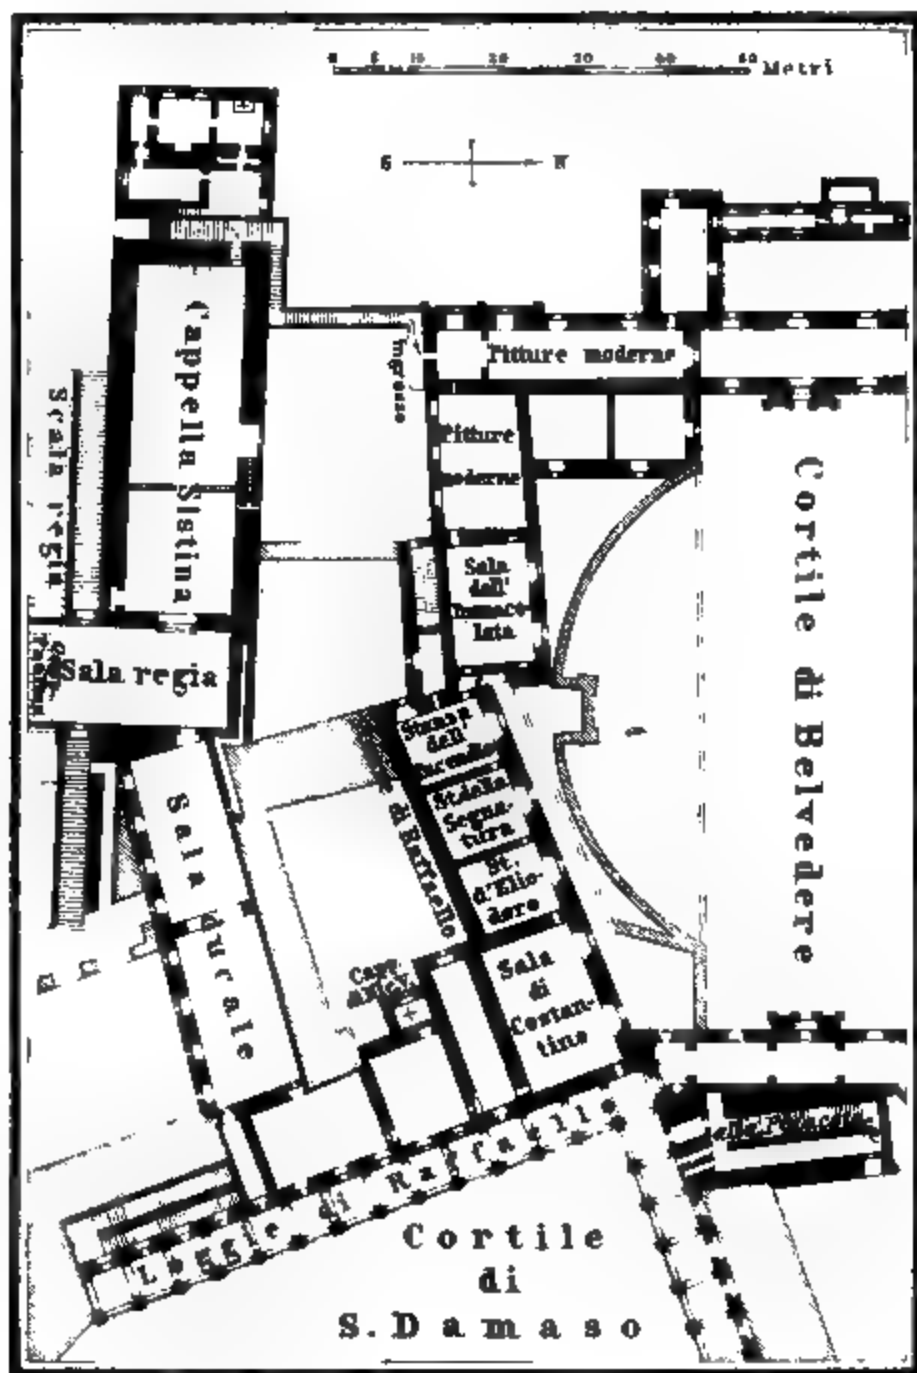

100

.

.

.

1

1

1

Emp. Henry IV., Conquest of Tunis; Gregory XI. returning from Avignon; Alexander III. absolving Fred. Barbarossa. The door in the entrance-wall, to the left, admits to the Sistine Chapel (visitors knock).

The ^{old} Sistine Chapel was erected under Sixtus IV. by *Giov. de' Dolci* in 1479-81, length 133 ft., width 45 ft., six windows on each side above. Beautifully decorated marble screens enclose the space set apart for the clergy; the tribune on the right with the handsome balustrade is occupied by the choir. Both of these are the work of *Mino da Fiesole* and other Florentine masters. The arrangement and decoration of the chapel are modelled on those of the early-Christian basilicas. The lower part of the long walls was formerly hung with Raphael's tapestry (p. 346) at festivals, while the upper part is decorated with beautiful ^{old} *Frescos*, executed about 1481-83 by the most celebrated Florentine and Umbrian masters of the period (p. lxiv) and abounding in contemporary portraits (best light in the morning). These represent incidents from the life of Christ (right) and Moses (left) arranged in the early ecclesiastical manner, in parallel scenes of promise and fulfilment. The two series begin at the altar and meet on the entrance-wall. Left: 1. (by the altar) *Perugino* and *Pinturicchio*, Moses with his wife Zipporah journeying to Egypt, Zipporah circumcises her son; *2. *Sandro Botticelli*, Moses kills the Egyptian, drives the shepherds from the well, kneels before the burning bush; 3. *Piero di Cosimo* and pupils of *Cosimo Rosselli*, Pharaoh's destruction in the Red Sea; 4. *C. Rosselli*, Moses receives the Law on Mt. Sinai, Worship of the golden calf; 5. *S. Botticelli*, Destruction of the company of Korah and of Dathan and Abiram (perhaps a reference to the schism of the Archbishop of Carniola); in the background is the Arch of Constantine. — *6. *Luca Signorelli* and *Bart. della Gatta*, Moses as a law-giver (the nude youth in the centre personifies the tribe of Levi), Investiture of Joshua, Mourning over the body of Moses. — Right: 1. *Perugino* and *Pinturicchio*, Baptism of Christ; 2. *S. Botticelli*, Sacrifices in cleansing a leper (Levit. xiv 2-7) and Christ's Temptation, in the background is the then recently completed Ospedale di Santo Spirito (p. 317); *3. *Dom. Ghirlandajo*, Vocation of Peter and Andrew, in a dignified and severe monumental style; 4. *C. Rosselli*, Sermon on the Mount, Cure of the leper. *5. *Perugino*, Christ giving the keys to Peter, one of the master's finest monumental works in spite of defects in the composition (the figure with the T square on the right is that of the architect *Giov. de' Dolci*, see above), 6. *C. Rosselli*, Last Supper. — The frescoes on the entrance-wall — Resurrection of Christ, originally by *D. Ghirlandajo*, and Contest of the Archangel Michael for the body of Moses, by *Salviati* — were renewed by *Arrigo Flammingo* and *Matteo da Lecce* by order of Gregory XIII. — On the pillars between the windows 24 popes by *Fra Diamante*, *Ghirlandajo*, *Botticelli*, and

C. Rosselli. — The place of honour at the altar, before Michael Angelo painted his Last Judgment (p. 334), was occupied by three frescoes by Perugine: the Finding of Moses, Coronation of the Virgin, and Adoration of the Magi.

The *CEILING* (p. 12 vii, mirrors provided by the custodian; fee) was begun by Michael Angelo on 10th May, 1508, and completed on October 31st, 1512. Whether the ceiling of the Sistine Chapel, or the Stanza of Raphael should be regarded as the culminating effort of modern art, has long been a subject of controversy. The merit of uniformity of thought and compactness of composition must be awarded to the ceiling-painting, and these attributes are the more worthy of admiration as the subjects of the whole series had not been agreed upon from the outset. The pictorial enrichment of the ceiling was at first to be limited to the figures of the Twelve Apostles, but Michael Angelo, perceiving the poverty of the design, prevailed on the pope to allow him to extend it. In order to connect the different scenes, Michael Angelo invented an imaginative structure with columns, pillars, and cornices in bronze and marble, which rises from the walls, and encloses in the middle of the ceiling (which is vaulted, with a flat surface in the middle) nine sections of different sizes. The lifelike figures which step forth from the architectural members, some of them in their natural colour, and others of a bronze tint, impart to the background such animation and significance as to render it an admirable introduction to the large central pictures. It is here that the spectator will become fully aware of the importance to a painter of a thorough acquaintance with architectural designs, and of the extent to which Michael Angelo availed himself of such acquaintance.

A description of the *CENTRAL SCENES* may be given nearly in the words of *Ascanio Condivi*, a pupil of Michael Angelo, who in 1553 wrote the master's life under the eye of the latter. — 'In the *1st Section* of the ceiling (reckoned from the altar), which is one of the smaller ones, you observe in the air God Almighty, who with the motion of his arms separates light from darkness. — In the *2nd Section* he creates the two great lights of the world, his outstretched right hand touching the sun, and the left the moon. Around him are several angels, one of whom (to the left) hides his face, and presses close to the Creator, as if to screen himself from the baneful influence (dazzling light) of the moon. In the same section God is again represented as engaged in creating the herbs and plants on the earth. He is portrayed with such art, that wherever you turn he appears to follow you, showing his whole back down to the soles of his feet, — a very excellent work, proving what can be done by foreshortening. — In the *3rd Section* God the Lord appears in the air surrounded with angels, regarding the waters, and commanding them to bring forth all those kinds of animals which that element nourishes. — In the *4th Section* is

represented (in the grandest and most thoughtful composition of the series) the creation of man: God is seen with outstretched arm and hand, as if prescribing to Adam what to do, and what to abstain from (more correctly, God causing life to stream through Adam's limbs by touching him with his forefinger). With his other arm he encloses a group of angels. — In the *5th Section* God draws from Adam's side the woman, who with folded hands stretched out towards God, bows herself with a sweet expression, so that it seems she is thanking him, and that he is blessing her. — In the *6th Section* the Demon, in female form from the waist upwards, and otherwise a serpent, coils himself round a tree; he converses with Adam and Eve, whom he persuades to disobey their Creator, and hands the forbidden fruit to the woman. In the second part of the section you see the pair, driven out by the angel, fleeing terrified and sad from the face of God. — In the *7th Section* the sacrifice of Abel and Cain (rather Noah's thank-offering) is represented. — In the *8th Section* is seen the Flood, with Noah's Ark on the water at a distance, and a few persons clinging to it in hopes of saving themselves. Nearer is a boat crowded with people, which, owing to its undue load, and to the numbers of violent shocks of waves, is already shipping water and threatening to sink, and it is indeed a strange thing to see the human race perishing so miserably in the waves. Still nearer the eye appears above the water the top of a mountain, where a number of men and women have sought refuge as if on an island; they show different emotions, but they all cower, miserable and terrified, under a tent stretched over a tree, to shelter themselves from the excessive rain. And in this scene the wrath of God is represented with great art, for he sends upon them lightnings, waters, and storms. There is also another mountain-top on the right side with a group of people on it in similar distress, but it would take too long to describe each one of them. — In the *9th Section*, the last, is narrated the story of Noah, who, when lying drunken and naked on the ground, is mocked by his son Ham, but is being covered by Shem and Japheth'.

Michael Angelo reversed the chronological order and painted the last scenes first. Here, at the entrance, we command a view of the central figures, which, being nearer to the spectator, could be executed on a smaller scale than those in the neighbourhood of the altar. The series of Prophets and Sibyls are best seen from the centre of the chapel.

On the lower part of the vaulting are the *PROPHETS AND SIBYLS*, surrounded by angels and genii. To the left of the altar: 1. *Jeremiah*, immersed in sorrowful thought; 2. *Persian Sibyl*, reading; 3. *Ezekiel*, with half-opened scroll; 4. *Erythraean Sibyl*, sitting by an open book; 5. *Joel*, reading a scroll; 6. (over the door) *Zacharias*, turning the leaves of a book; 7. *Delphic Sibyl*, with an open scroll; 8. *Isaiah*, his arm resting on a book, absorbed by divine inspiration; 9. *Cumaean Sibyl*, opening a book; 10. *Daniel*,

writing; 11. *Libyan Sibyl*, grasping an open book; 12. (above the Last Judgment) *Jonah*, who has just escaped from the belly of the whale (the symbol of the resurrection of Christ). 'All these are truly wonderful', says Condivi, 'both owing to the attitudes, and to the ornamentation, and the variety of the drapery. But most wonderful of all is the prophet *Jonah* who sits at the top of the vaulting. His body is foreshortened towards the inside, towards the part nearest the beholder's eye, while the legs project outside, in the more distant part: a marvellous work, for so great is the skill of Michael Angelo in foreshortening and perspective'.

In the pointed arches and lunettes of the vaulting are the ancestors of the Saviour in calm expectation. In the four corner-arches: on the altar-wall, right, the Israelites in the wilderness with the brazen serpent; left, King Ahasuerus, Esther, and Haman. On the entrance-wall, right, David and Goliath; left, Judith.

In 1534-41 under Paul III., nearly 30 years later than this ceiling, Michael Angelo painted on the altar-wall the 'LAST JUDGMENT', 64 ft. in width and 32 ft. in height (p. lxviii). As a preliminary step the two windows on the altar-wall had to be built up, thus destroying the fine proportions of the chapel. Careful and repeated study alone will enable the spectator to appreciate the details of this vast composition, which is unfortunately blackened by the smoke of centuries, and unfavourably lighted. To fathom the religious views and artistic designs of the talented master is a still more difficult task, imbued as he was with the influence of Dante. On the left of the figure of Christ as Judge hover the saints drawn back by devils and supported by angels, on his right the sinners in vain strive to ascend; above are two groups of angels with the Cross, the column at which Christ was scourged, and the other instruments of his passion; in the centre Christ and the Virgin, surrounded by apostles and saints; below the rising dead is hell, according to Dante's conception, with the boatman Charon and the judge Minos, whose face is a portrait of Biagio of Cosena, master of the ceremonies to Paul III., who had censured the picture on account of the nudity of the figures. Paul IV., who contemplated the destruction of the picture on the same account, was persuaded, instead, to cause some of the figures to be partly draped by *Daniele da Volterra*. Clement XII. caused this process to be extended to the other figures by *Stefano Poesi* in the 18th cent., whereby, as may be imagined, the picture was far from being improved.

Masses for the Pope are celebrated in the Sistine Chapel both on his coronation and at his decease; masses are also said on the occasion of pilgrimages, and for the souls of departed Catholic princes.

The Sala Ducale, which adjoins the Sala Regia, constructed by *Bernini*, is decorated with frescoes and landscapes by *Bril*. Special permission from the maggiordomo of the Vatican (p. xlii) is necessary for a visit to this hall, or to the Pauline Chapel (*Cappella Paulina*), built in 1540 by

Antico da Sangallo the Younger for Paul III., also adjoining the Sala Regia. In this chapel are two frescoes by *Michael Angelo*, painted by him in 1542-c. 1550: on the left, the Conversion of St. Paul, on the right, the Crucifixion of St. Peter (p. lxviii). The other pictures are by *Lor. Sabbatini* and *F. Zuccaro*, the statues in the corners by *F. Bracciano*. The chapel is used on the first Sunday in Advent for the *Quarantore*, or exposition of the host during 40 hrs., when, as well as on Holy Thursday, it is brilliantly illuminated.

RAFAEL'S STANZE AND LOGGE. CAPPELLA DI NICCOLO V.
PICTURE GALLERY. RAFAEL'S TAPETRIUM.

Comp. the Plan, p. 330.

We ascend the staircase indicated by the notice-board mentioned at p. 330, and on the second floor knock at the white door, through which Raphael's Stanze and Logge are entered from the back. — In front and to the right are two rooms with indifferent modern pictures by Roman artists, chiefly representing scenes from the lives of persons canonised by Pius IX. The room to the right also contains a picture representing the Relief of Vienna in 1683 by John Sobieski, by *Matajko*, presented by Poles in 1884. We traverse this room, and then a saloon, the *Sala dell' Immacolata*, decorated by *Podesti*, by order of Pius IX., with frescoes relating to the doctrine of the Immaculate Conception of the Virgin, promulgated on 8th Dec., 1854 (comp. p. lxiv). The magnificent cabinet in the centre, which was presented to Pius IX. in 1878 by the French clergy, contains the text of the dogma, translated into many languages. — The door straight in front of us leads to the first of —

Raphael's Stanza. The frescoes executed by *Raphael* in 1508-1520 in the papal state-apartments (*Stanze* or *Camere*) of the Vatican, by order of the Popes Julius II. and Leo X., are unquestionably the foremost among the creations of the master and are rivalled by no modern works of art in existence except the ceiling-paintings in the Cappella Sistina (p. 332). The work, however, in its entire grandeur had not been planned, nor the task committed to Raphael from the outset. Julius II. originally intended these rooms to be decorated in a much simpler style, and he entrusted the task to *Perugino*, *Sodoma*, and other painters of Umbria and Siena. These were joined by the young Raphael, who had probably been introduced by *Perugino*, and who soon became so prominent among his fellows, that the work was entrusted to him exclusively. Raphael did not, however, live to complete his task, and it was finished by his pupils. For each of these paintings he received 1200 gold scudi (nearly 500*l.*). They were seriously injured during the plundering of Rome in 1527, but were restored by *Carlo Maratta* under Clement XI. (comp. also pp. lxviii et seq.).

The development of Raphael's genius will be more fully realised if the frescoes are inspected in the order of their painting: *Stanza della Segnatura* (p. 336), *Stanza d'Elodoro* (p. 340), *Stanza dell' Incendio* (p. 338), *Sala di Costantino* (p. 341).

I. Stanza dell' Incendio, which we enter first, is the third in chronological order. The frescoes here were painted in 1517 by pupils of Raphael, from his designs. — The Ceiling Paintings (Glorification of the Trinity) are by *Perugino* (1503). — The Mural Paintings represent scenes from the pontificates of Leo III. and Leo IV.

Over the window: 1. OATH OF LEO III., sworn by him in presence of Charlemagne (with the gold chain, his back turned to the spectator), in order to exculpate himself from the accusations brought against him, executed by *Perin del Vaga*.

To the right of this, on the exit-wall. 2. VICTORY OF LEO IV. OVER THE SARACENS AT OSTIA, executed by *Giulio Romano*. The pope is represented as Leo X., accompanied by Card. Giulio de' Medici (Clement VII.), Card. Bibiena, and others. Below: Ferdinand the Catholic, and the Emp. Lothaire.

*3. INCENDIO DEL BORGO, or Conflagration in the Borgo, whence the name of the room. This work was probably carried out by *Francesco Penni* alone. The apparently ungrateful task of painting a miracle has been performed so happily by the genius of Raphael, that he has presented us with what would be termed in modern language a magnificent genre picture. The traditional incident — the extinguishing of a fire which had broken out in the Borgo, or Vatican quarter, by the sign of the cross made by Pope Leo IV. (9th cent.) in the Loggia of St. Peter's — is placed in the background. The foreground exhibits the terrors of a conflagration, the efforts of the people to save themselves and their goods, and the half-paralysed condition especially of the mothers and other women. We are then transported to the heroic age, by a group in the left corner, representing Æneas carrying the aged Anchises on his back and accompanied by Creusa and Ascanius, his wife and child. Raphael's object in introducing this group was probably to give an ideal example of filial devotion at a moment of great peril, and also perhaps to arrest the attention of his contemporaries by these well-known figures from the familiar *Æneid*. The Incendio is unquestionably the most popular picture of the series, and is well adapted to illustrate the superiority of Raphael's art to that of a later period. The antiquarian will also scan with interest the façade of the old church of St. Peter, represented here as it still existed in Raphael's time.

Below Godfrey de Bouillon and Aistulf.

4. CORONATION OF CHARLEMAGNE in the old Church of St. Peter. Leo III. has the features of Leo X., and the emperor those of Francis I. of France. Below Charlemagne.

II. *Stanza della Segnatura, so named from the court of justice (*Segnatura di Grazia*), presided over by the pope, which used to sit here every Thursday. The frescoes were begun in 1508 and com-

plotted in 1511. The sections of the vaulting of the apartment had already been arranged by Sodoma.

Ceiling Paintings. 1. THEOLOGY (*divinarum rerum notitia*), a figure among clouds, in the left hand a book, with the right pointing downwards to the heavenly vision in the Disputa beneath; adjacent, the Fall of man. 2. POETRY (*numine afflatur*), crowned with laurels, seated on a marble throne with book and lyre; adjoining it, the Playing of Maryas. 3. PHILOSOPHY (*causarum cognitio*), with diadem, two books (natural and moral science), and a robe emblematical of the four elements, adjoining it, Astronomy (comp. the representation of the same subject in Santa Maria del Popolo (p. 157)). 4. JUSTICE (*jus suum unicuique tribuit*), with crown, sword, and balance; adjacent, Solomon's Judgment.

Mural Paintings. Under the Theology: 1. THE DISPUTA. This name continues to be applied to this painting, although it is based on a misunderstanding and error. The scene represented is not a dispute about the doctrine of transubstantiation, as commonly supposed. The monstrance with the host on the altar, directing the attention from the assembly of the church on earth to the heavenly assembly, serves as a symbolical link between the two halves of the composition, just as the miraculous Incarnation of Christ unites the earthly with the heavenly sphere. The scene is rather to be defined as the *Glorification of the Christian Faith*. The congregation gathered round the altar, full of religious emotion and burning with enthusiasm, sees heaven open, disclosing Christ with the heroes of the faith grouped around him. The composition thus consists of two halves, the upper and the lower, whereby not only the heavenward direction of the religious sentiment is clearly indicated, but a definite basis for its formal expression is also obtained. In the upper half is Christ enthroned, attended by the Madonna and the Baptist; above him is the half-figure of God the Father; and below him is the symbol of the Holy Spirit, at each side of whom are two cherubim holding the books of the gospel. A choir of angels forms the background, and angels likewise bear the clouds, on which, a little lower down, the heroes of the Old and New Testament are sitting. These last are arranged alternately, and the heroes of the Old Testament at the same time represent the epochs of the world. To the left of the spectator sit St. Peter, Adam, St. John the Evangelist, David, St. Lawrence, and a half-concealed personage from the Old Testament (Jeremiah?); on the right, St. Paul, Abraham, St. James, Moses, St. Stephen, and lastly an armed hero of the Old Testament. — In the lower half the four Fathers of the Church, sitting next to the altar, constitute the historical foundation of the picture; to the left St. Gregory and St. Jerome; on the right St. Augustine and St. Ambrose. From a very early period attempts have been

made to attach historical names to the other figures, which are supposed to be portraits of theologians. Vasari states that they represent SS. Dominic and Francis, Thomas Aquinas, Bonaventura, Scotus, and Nicholas of Bari. The figure in antique costume beside St. Ambrose, stretching his right hand towards heaven, has been identified with *Petrus Lombardus*, the monk behind St. Augustine with *Thomas Aquinas*, the cardinal with *Bonaventura*, and the two popes with *Sixtus IV* and *Innocent III*. The artist has also shown his independence by introducing several personages of much later date. To the extreme left, in the background, is *Fra Angelico da Fiesole*, on the right side is the laurel-crowned profile of *Dante*, and, separated from Dante by an old man, appears the head of *Savonarola*.

In the space below the picture (added by *Perin del Vaga* under Paul III.), from left to right: Heathen sacrifice, St. Augustine finding a child attempting to exhaust the sea; the Cuman Sibyl showing the Madonna to Augustus; allegorical figure of the apprehension of divine things.

Under the Poetry: 2. The *PARNASSUS* (to the right of the Disputa). — This composition is the most perspicuous of the whole series. The spectator will not fail to appreciate the poetical life and exalted sentiment which pervade the picture, while the impression it conveys is at the same time exceedingly pleasing. Raphael has shown consummate skill in adapting his work to the unfavourable character of the space to be covered. *Apollo* sits under laurels playing the violin. This instrument was not chosen by Raphael from ignorance or for the purpose of paying a compliment to *Giacomo Sansevero*, a famous violinist of that period, but on the sole ground that the motion of the hand seemed to him more graceful when playing the violin than the lyre. Around *Apollo* are grouped the nine *Muses*, forming with him a compact central group. On the left is the imposing figure of the blind *Homer*, so inspired by the tones of the god that he begins to sing. Near him are *Dante* and *Virgil*. In the foremost group *Petrarch* and *Sappho* are recognizable, and the front figures in the opposite group are called *Pindar* and *Horace*. The personages behind are evidently contemporaries of Raphael, whose names cannot now be ascertained.

The paintings in grisaille, below, illustrate the legend that a sarcophagus filled with Latin and Greek books was found on the Janiculum in 181 B.C. (left painting) and that the consuls caused the Latin books to be preserved, but the Greek books to be destroyed as hostile to religion (right painting).

Under the Philosophy: 3. The so-called *SCHOOL OF ATHENS* (a name not originally applied to the work), the companion to the Disputa, not only in point of situation, but with respect to its subject likewise. There we are introduced to a congregation of believers, here to an *Assembly of Scholars*. The scene is not divided between heaven and earth, as in the case of the Disputa, but is

confined to earth alone; while at the same time, as in the Dispute, a gradation of knowledge, from the imperfect empirical to the perfect and universal, is suggested. A flight of steps leads to an open colonnade, crowned with a dome at the back (said to have been designed by Bramante), which forms the most admirable temple of knowledge ever created. Apollo, Minerva, and numerous gods adorn the niches. *Plato* and *Aristotle*, the princes in the realm of thought whom the Renaissance especially revered, surrounded by a numerous train, approach the steps which descend to the foreground, where, in contrast to the pure philosophers, is a crowd of representatives of the empirical sciences, of geometry, arithmetic, astronomy, and music. Such are the two main contrasts presented by the picture, and with them are combined a gradual raising of the sentiments and aspirations from mere mechanical learning and teaching, copying, meditating, and disputing, to the glorious revelation of the truth, as embodied in the 'divine Plato'. To these general features Raphael imparted the warmth of life and individuality by interweaving with the scene a number of ancient Greek and other personages, in conformity with the prevalent aims of his contemporaries, who were enthusiastic admirers of the antique. He by no means intended, as has been supposed, to give a complete picture of the development of Greek philosophy, but he merely introduced various popular characters of antiquity, with a view to direct the spectator's imagination into the proper channel, and, as it were, to localize a scene which would otherwise have been too general and abstract. Besides *Plato* and *Aristotle*, the faces of the bald *Socrates* (above, to the left), and of *Diogenes* lying on the steps, are unmistakable. *Ptolemy* (who from having been mistaken for one of the kings of that name is furnished with a crown), and *Zoroaster* with the globe in the foremost group on the right, are easily recognised. The names of the other figures are merely conjectural. The bearded old man in the corner to the left, in profile, is supposed to be *Zeno*, the Stoic, the vine-wreathed figure beside him, holding a book, is perhaps *Epicurus* or *Democritus*. To his right we perceive the young *Federigo Gonzaga*, a favourite of Julius II., here painted at the express wish of the Pope. The Oriental, who hands over the writing *Pythagoras*, is *Averrhoes* (or, perhaps, *Hermes Trismagistus*). By the base of a column sits *Empedocles*, who is also looking towards the tablet of *Pythagoras*. The figure resting his foot on a block of marble is either *Anaxagoras* or *Xenocrates*. Lastly, the isolated figure in the foreground, terminating the group to the left, is supposed to be *Heracitus*. In the *Socrates* group above is a youthful warrior, representing either *Alcibiades* or *Xenophon*, and the figure behind the warrior, beckoning to *Socrates*, is said to be *Chrysippus*. No clue, however, has yet been discovered to the names of the figures in the corresponding group to the right, in the upper part of the picture. Raphael has

introduced several of his contemporaries into this picture. Thus, the handsome youth in the foremost group to the left, bears the features of *Francesco Maria della Rovere*, Duke of Urbino; the geometer with the compasses, to the right, is a portrait of *Brugnato*. *Raphael* himself appears, with *Sodoma*, in the far corner on the right.

Below this picture, in different shades of brown, by *Perin del Vaga* (from left to right): Allegorical figure of Philosophy; Magi conversing about the heavenly bodies; Siege of Syracuse; Death of Archimedes.

Under the Justice: 4. Over the window the three cardinal virtues: Prudence with double visage looking to the future and the past; right, Temperance; left, Fortitude. Below, at the side of the window, the *Glorification of Ecclesiastical and Civil Law*. On the right, Gregory IX. (with the features of Julius II.) presenting the Decretals to a jurist (surrounded by numerous portraits; to the left in front Card. de' Medici, afterwards Leo X.). Below (by *Perin del Vaga*): Moses brings the tables of the Law to the Israelites. On the left, Tribonian presents the Pandects to the Emp. Justinian. In the space beneath: Solon's address to the Athenian people (?).

III. **Stanza d'Eliodoro*, the frescoes of which were painted in 1512-14, almost wholly by Raphael's own hand. The advance of the master in technical freedom and precision is easily recognizable.

The Ceiling Paintings (sadly damaged) from the Old Testament: Jehovah appears to Noah, Jacob's Vision, Moses at the burning bush, Sacrifice of Isaac. They were executed by *Peruzzi*, who, when the decoration of the Stanza was first contemplated, was probably entrusted with the entire scheme.

The Mural Paintings, from the first of which the saloon derives its name, were intended to commemorate the brilliant political and ecclesiastical achievements of Julius II. The Repulse of Attila (see p. 841) was not completed until the pontificate of Leo X. Below the Moses: 1. MIRACULOUS EXPULSION OF HELIODORUS from the Temple at Jerusalem by a heavenly horseman (*Maccab. ii, 3*), being an allusion to the deliverance of the States of the Church from their enemies. On the right, beneath the powerful horse, whose rider is followed by two attendants armed with scourges, Heliodorus lies on the ground; one of his companions attempts to defend himself, a second shouts, a third is securing his booty; in the background the high-priest Onias praying; to the left in the foreground women and children, and Pope Julius II. on his throne (the foremost of the two chair-bearers is the celebrated engraver Marcantonio Raimondi). This composition is remarkable for its vigour of expression.

Below the Sacrifice of Isaac: 2. THE MASS OF BOLENA. An un-
"aving priest is convinced of the truth of the doctrine of tran-

substantiation by the bleeding of the host (comp. p. 98), in allusion to those doubting the infallibility of the church and to the suppression of the schism by Julius II. (1572); below are women and children; opposite the priest, Julius II. kneeling with calm equanimity. The cardinal of florid complexion is Raffaele Riario (p. 226). This well-preserved work is probably the most perfect of Raphael's frescoes with respect to execution.

Below Noah: 3. *ATTILA REPULSED FROM ROME BY LEO I.*, in allusion to the retreat of the French from Italy after the battle near Ravenna in 1512. The pope, with the features of Leo X., is seated on a white mare, around him cardinals and attendants on horseback, above him St. Peter and St. Paul enveloped in a brilliant light, and visible only to Attila and his Huns, who are struck with terror at the apparition.

Below Jacob's Vision: 4. *THE LIBERATION OF ST. PETER*, in three sections, also in allusion to the expulsion of the French. Over the window St. Peter in the dungeon sleeping between the watchmen is being awakened by the angel; right, he is conducted away; left, the watchmen awake.

Under the pictures are painted eleven Caryatides and four Hermæ in grisaille. They are symbolical of a life of peace, and bear the distinct impress of Raphael's inventive genius, notwithstanding considerable restoration. The paintings in different shades of brown between these, of similar import with the large figures, have been still more freely retouched. Behind the window-shutters are some curious little paintings in chiaroscuro.

IV. Sala di Costantino. The pictures of this saloon were executed under Clement VII. (Giulio de' Medici) after 1520, the date of Raphael's death, by *Giulio Romano*, aided by *Francesco Penni* and *Raffaello dal Colle*. It has been supposed that the allegorical figures of Urbanity and Justice, which strange to say are in oil, were painted by Raphael's own hand; but it appears, from letters of Sebastiano del Piombo (who sought an interest in the work after Raphael's death) to Michael Angelo, that in 1520 one figure only was painted in oil by Raphael's pupils as an experiment and that the objects to be depicted were not finally agreed upon at the time of Raphael's death, or, at least, that they underwent many changes during their execution. Preliminary sketches had been made by Raphael himself, particularly for the Battle of Constantine.

On the long wall: 1. *BATTLE OF CONSTANTINE* against Maxentius at Ponte Mollo (p. 383), the emperor advancing victoriously, behind him flags with the cross, Maxentius sinking in the river, flight and defeat on all sides, painted by *G. Romano*. This fine composition is full of expression and vigour, but the colouring is less successful. — On the left side of the picture Sylvester I. between Faith and Religion; on the right Urban I. between Justice and Charity.

2. **BAPTISM OF CONSTANTINE** by Sylvester I. (with the features of Clement VII.) in the baptistery of the Lateran, by *Francesco Penni*. To the left of this: **DAMASUS I.** between *Prudence* and *Peace*; right, **LEO I.** between *Innocence* and *Truth*.

3. (on the window-wall) **ROME PRESENTED BY CONSTANTINE TO SYLVESTER I.**, by *Raffaello del Colle*; left, Sylvester with *Fertility*, right, Gregory VII. (?) with *Power* (?).

4. **CONSTANTINE'S ADDRESS** to his warriors regarding the victorious omen of the cross, designed by Raphael (?), and executed by *G. Romano*, who added the dwarf (perhaps *Giulio Borgetti* of Norcia, dwarf of *Card Hippolytus de' Medici*) and several other figures — On the left, **St. Peter** between the Church and Eternity; right, **Clement I.** between *Moderation* and *Urbanity*. — The scenes below are from the life of Constantine, designed by *G. Romano*.

The **CHILINE**, completed under Sixtus V., is adorned with an allegory of the triumph of Christianity over paganism. In the pendentives are Italian landscapes, with corresponding allegorical figures in the lunettes.

One of the custodians conducts us through the death-chamber of **Julius II.**, the splendid ceiling of which displays the emblems of the Medici, and opens (see pp. 150, 151) the *Cappella di Niccolò V.*, decorated by *Fra Angelico da Fiesole* with frescoes from the lives of **SS. Lawrence** and **Stephen**. They are the last and maturest works of that master, executed about 1450-55, restored under Gregory XIII. and Pius VII. The designs on the marble pavement represent the sun and the signs of the zodiac. Above the doorway are the arms of Julius II.

The **UPPER SERIES** of frescoes represents scenes from the life of **St. Stephen** 1. (to the right of the window) **Stephen consecrated deacon by Peter**; 2. **He distributes alms as deacon**; 3. **He preaches**; 4. **He is brought before the council at Jerusalem**; 5. **He is dragged away to his martyrdom**; 6. **His death by stoning** — Below, in the same order, scenes from the life of **St. Lawrence** 1. **Consecrated deacon by Sixtus II.** (with the features of *Nicholas V.*); 2. **The same pope gives him treasures for distribution among the poor**; 3. **Distribution of the same**; 4. **The saint is condemned by the emperor**; 5. **He converts his gaoler**; 6. **His martyrdom**. Also on the wall below 1. **St. Bonaventura**, r. **St. John Chrysostom**. In the vaulting: l. **St. Augustine**, r. **St. Gregory**. On the lower part of the right wall l. **St. Athanasius**, r. **St. Thomas Aquinas**. On the vaulting l. **St. Leo**, r. **St. Ambrose**. On the ceiling the **Four Evangelists**. Though thus in immediate proximity to the boundless energy of *Michael Angelo* and the lovely forms of *Raphael*, the frescoes of *Fra Angelico* yet hold their ground in virtue of their air of perfect devotion and calm contemplative worship.

Raphael's Loggia (admission, see pp. 150, 151). Leaving the *Sala di Costantino*, we proceed to the second floor of the loggia which enclose the *Cortile di San Damaso* (comp. ground-plan, p. 330), the W. (right) wing of which was embellished (1517-19) with stucco mouldings, painted enrichments, and ceiling-paintings, from designs by *Raphael* and under his superintendence, by *Giulio Romano*, *Giovanni da Udine*, and others of his pupils. The loggia were originally open and the paintings have therefore suffered seriously from exposure to

the weather, but since 1813 they have been protected by windows of glass. The stucco-work and the painted ornamentation are by *Giov. da Udine*, and its style has manifestly been influenced by the antique works of the kind which had been found a short time previously in the *Thermae of Titus* (p. 270). (*Giov. da Udine* also decorated the loggia on the first floor, p. 347.) Amongst the ceiling-paintings after Raphael's designs those in the first vault are by *Giulio Romano*, the others by *Francesco Penni*, *Perin del Vaga*, *Polidoro da Caravaggio*, and others. Each of the thirteen sections of the vaulting contains four Biblical scenes in quadrangular borders which are together known as '*Raphael's Bible*'. All these compositions display rare fertility of invention and gracefulness of treatment (20s. to the custodian who opens the door).

CHURCH PARTRISER. The first twelve vaults contain scenes from the Old, and the thirteenth scenes from the New Testament. We begin to the right of the principal approach, & on the side opposite the present entrance: 1 (over the door) 1 Separation of light from darkness, 2 Separation of land from sea, 3 Creation of the sun and moon, 4 Creation of the animals. - II 1 Creation of Eve; 1. The Fall, 2 Banishment from Paradise, 3 Adam and Eve working (injured). - III 1 Noah building the ark, 2 Deluge, 3 Escape from the ark (injured), 4 Noah's sacrifice. - IV 1 Abraham and Melchisedek, 2 God promises Abraham posterity (injured), 3 Abraham and the three angels, 4 Lot's flight from Sodom. - V 1 God appears to Isaac, 2 Abimelech sees Isaac carrying Rebecca, 3 Isaac blesses Jacob & Esau and Esau. - VI 1 Jacob's vision of the ladder, 2 Jacob and Rachel at the well, 3 Jacob oppresses Laban for having given him Leah (injured), 4 Jacob on his journey. - VII 1 Joseph relates his dream to his brethren, 2 Joseph is sold, 3 Joseph and Potiphar's wife, 4 Joseph interprets Pharaoh's dream. - VIII 1 Finding of Moses, 2 Moses at the burning bush, 3 Destruction of Pharaoh in the Red Sea, 4 Moses strikes the rock for water. - IX 1 Moses receiving the tables of the Law, 2 Adoration of the golden calf, Moses breaks the tables, 3 Moses ascends before the pillars of cloud (injured), 4 Moses shows the tables of the Law to the people. - X 1 The Israelites crossing the Jordan, 2 Fall of Jericho, 3 Joshua bids the sun stand still during the battle with the Ammonites, 4 Joshua and Eleazar dividing Palatine among the twelve tribes. - XI 1 Samuel anoints David, 2 David and Goliath, 3 David's triumph over the Syrians, 4 David meets Bathsheba. - XII 1 Sodom against Solomon, 2 Solomon's Judgment, 3 The Queen of Sheba, 4 Building of the Temple (injured). - XIII 1 Adoration of the Shepherds (injured), 2 The wise men from the East, 3 Baptism of Christ, 4 Last Supper.

STUCCO WORKMAN. Among these the charming small reliefs in the arches of the windows of the first section should be noticed as examples of the style. Here to the left, above, is preserved Raphael (?) sitting and drawing, with a grinder of colours below him. Lower down are a number of his pupils busied in executing their master's designs, and below them Fama, who proclaims the celebrity of the work. On the right an old bricklayer is seen at work, and there is a similar figure on the right end of the 2nd window, both evidently portraits. In the medallions and smaller panels on the pilasters, which are decorated with grotesques, numerous antique sculptures (reliefs from Trajan's Column, Apollo Belvedere, etc.) and also works by Raphael and Michael Angelo (Adam and Eve, Prophet Jonah to Santa Maria del Popolo, the lower figures in the *Bonino* (Napoli, etc.) are copied on a small scale. Raphael apparently permitted his pupils to make free use of their studies. The whole affords a charming picture of the life and habits of the artists during the execution of the work.

The decoration of the two other wings of the loggia of this story, with stucco work by *Marco da Fano* and *Paul Saher*, and

paintings by artists of the 16th and 17th cent., is very inferior to the above described works of Raphael's period. — Immediately to the left of the exit from the Sala di Costantino, in the N. (first) wing, is the approach to the picture-gallery; we ascend the stairs, and enter the first door on the left.

The ^{1st} Picture Gallery of the Vatican was founded by Pius VII. by collecting the pictures given back by the French in 1815, most of which had been taken from churches, and by adding others. This gallery is inferior to the great Roman private collections in the number of its works, but it contains a few masterpieces of the first rank and almost no work that is not good. — The permesso is given up here. The pictures are furnished with notices of the subjects and the names of the artists. Catalogue, see p. 380.

I. Room On the left: *Guercino*, John the Baptist; **Leonardo da Vinci*, St. Jerome, dead-colouring, in shades of brown, evidently a study of strong perspective, probably painted about 1480; *Raphael*, Annunciation, Adoration of the Magi, Presentation in the Temple, predella to the Coronation of Mary (p. 345), *Fra Angelico da Fiesole*, Scenes from the life of St. Nicholas of Bari; *Guercino*, Christ and Thomas, *Franc. Francia* (?), Madonnas with St. Jerome; *Murillo* (?), Martyrdom of St. Peter Arbues. — Window-wall: *Carlo Crivelli*, Dead Christ with Mary, St. John, and Mary Magdalen, The blessed Jacobus della Marca (1477); on the right, *Garofalo*, Madonna with SS. Joseph and Catharine. — On the entrance-wall: *Bart. Montagna* (not *Montegna*), Mary Magdalen anointing the Dead Christ, *Murillo* (?), Adoration of the Shepherds, *Murillo*, Betrothal of St. Catharine; **Franc. Cosca* (not *Benozzo Gozzoli*), Miracle of St. Hyacinth, the predella of an altar-piece the central portion of which is in London and the wings in Milan, *Perugino*, SS. Benedict, Scholastica, and Placidus; **Fra Angelico*, Small Madonna with angels on a gold ground; *Bonifazio*, Madonna with St. John and St. Catharine, and St. Peter and St. Paul. — Exit-wall: **Raphael*, Faith, Hope, and Charity, three charming female figures, predella of the Entombment (p. 192), in grisaille (1507).

II. Room On the right. **Domenichino*, Communion of St. Jerome, one of his best works (1614). — Opposite the window: ***Raphael*, Madonna of Foligno (1512); in the background the town of Foligno, into which a bomb falls, to the right, below, St. Jerome recommends to the Madonna Sigismondo Conti, secretary of Julius II., who ordered the painting for Santa Maria in Araceli, whence it was transferred to Sant' Anna delle Contesse in Foligno in 1566 (comp. p. 237); to the left St. Francis of Assisi, and John the Baptist. 'In its striking vigour, the lifelike individuality of its portraits, and the powerful and delicately-blended colouring the Madonna of Foligno far surpasses all Raphael's earlier oil-paintings'. The transference of the picture from wood to canvas, effected at Paris, whither the picture had been carried during the wars of the Revolution, has

necessitated a little restoration. — **Raphael*, The Transfiguration, his last great work, painted for Card. Giulio de' Medici (afterwards Clement VII.), and preserved down to 1797 in San Pietro in Montorio (p. 377). The upper part is by Raphael's own hand: Christ hovering between Moses and Elias; Peter, James, and John prostrate on the ground, dazzled by the light. The figures, to the left, in an attitude of adoration, are the martyred deacons Felicianus and Agapitus. The lower half (much darkened by age), where the other disciples are being requested to heal the possessed boy, was executed by *Franc. Penni* and *Giulio Romano* (about 1522).

III. Room. On the entrance-wall On the left, *Titian*, Portrait of Nicc. Marcello, Doge of Venice (1473-74), the ugly face full of individuality. On the right: **Titian*, 'Madonna of San Niccolò de' Frari', below are SS. Catharine of Alexandria, Nicholas, Peter, Anthony, Francis, and Sebastian (completed in 1523, and carried about 1770 to Rome, where the rounded upper part of the picture was cut off). The energetic fidelity of the colouring, the dignity of the design and forms, and the lofty gravity of the whole composition renders this much damaged work one of the most important of the master's middle period. *Guercino*, St. Margaret of Cortona. — Right long-wall: *Spagnoletto*, Martyrdom of St. Lawrence, *Guercino*, Mary Magdalen; *Bern. Pinturicchio*, Coronation of the Virgin, painted for the church della Fratta at Umbertide, 1503, below are the Apostles, St. Francis, St. Bonaventura, and three Franciscans. — *Perugino*, Resurrection, probably painted with some assistance from *Raphael* when a youth, the sleeping soldier to the right is said to be Raphael's portrait, the one fleeing to the left that of *Perugino*. — Coronation of the Virgin, designed by *Raphael* for the monastery of the Madonna di Monte Luce near Perugia, the upper half painted by *G. Romano*, the lower by *Francesco Penni* in 1525, *Lo Spagna*, Adoration of the infant Christ (formerly in La Spineta near Todi). — **Raphael*, Coronation of the Virgin, painted in 1503 in *Perugino*'s school, for San Francesco at Perugia; **Perugino*, Madonna on a throne with Laurentius, Ludovicus, Herculanus, and Constantius, the guardian saints of Perugia, painted in 1496. Altar-piece (14th cent.) in three sections, representing the Coronation of the Virgin, the Nativity, and the Adoration of the Magi. — End-wall: **Caravaggio*, Entombment, one of the ablest works of the Naturalistic School. — Window-wall: *Bassoferrato*, Madonna; *Niccolò (Alunno) da Foligno*, Crucifixion of Christ and Coronation of the Virgin (1466), two altar-pieces in several sections. Between these: **Melozzo da Forlì*, Fresco from the former library of the Vatican, representing Sixtus IV., the founder, with Card. Giul. della Rovere (Julius II.) and Pietro Riario; before him kneels Platina, prefect of the library (p. 365).

IV. Room. Entrance-wall: *Valentin*, Martyrdom of SS. Procopius and Martinianus; *Guido Reni*, Crucifixion of St. Peter; *N. Poussin*,

Martyrdom of St. Erasmus (mosaic copies of these three in St. Peter's). — Right wall: *Fed. Baroccio*, Annunciation; *A. Sacchi*, Mass of Gregory the Great (from St. Peter's); *Baroccio*, St. Michelina. — Window-wall: *Moretto*, Madonna with SS. Jerome and Bartholomew; *Puolo Veronesi*, Vision of St. Helena. — Left wall: *Guido Reni*, Madonna, with SS. Thomas and Jerome below; *Correggio*(?), Christ in a nimb; *A. Sacchi*, St. Romuald.

Among the treasures of the Vatican, in the domain of painting, must also be reckoned *Raphael's Tapestry*, exhibited along with some other tapestries in the *Galleria degli Arazzi*, adjoining the *Galleria del Candelabri* (p. 350), and accessible on Wed., 10-3. The tapestry was executed from cartoons drawn by Raphael in 1515 and 1516, seven of which were purchased in Flanders by Charles I. of England, and are now exhibited in the South Kensington Museum. These designs, derived from the history of the New Testament, are among the most admirable of the great master's works (p. lxxi). Each piece of tapestry, wrought at Brussels (not, as formerly supposed, at Arras, the cradle of the handicraft) with great skill in wool, silk, and gold, when complete cost about 700*l*. They were originally intended to cover the lower and unpainted part of the walls in the Sistine Chapel, and were exhibited there for the first time on St. Stephen's Day, 1519. During the plundering of Rome in 1527 the tapestry was carried off and seriously injured, but it was restored to Julius III. in 1563. In 1798 it fell into the hands of the French, and was sold to a Genoese Jew, from whom it was repurchased by Pius VII. in 1808. It is now sadly damaged and faded, especially in the flesh tints. The numerous other copies in tapestry of these cartoons, of which the oldest are in Berlin and others in Loreto, Dresden, Paris, and Vienna, testify to the widespread admiration which they excited.

The MURAL PAINTINGS in bronze-colour below the tapestries that deal with St. Peter represent scenes from the life of Leo X. until his coronation; those below the St. Paul tapestries illustrate further events in the life of that apostle. The decorations which surround the principal designs are chiefly by Raphael's pupil *Giovanni da Udine*. The following are the PRINCIPAL SCENES. *1st Section*: to the left, *1. St. Peter receiving the keys ('feed my lambs'); *2. Peter healing the lame man in the Temple; *3. The people of Lystra about to sacrifice to Paul and Barnabas; *4. Paul preaching at Athens. *Fragment of a representation of Elymas the Sorcerer struck with blindness. — *2nd Section*: 5. Christ appearing to Mary Magdalen; 6. Supper at Emmaus; 7. Presentation of Christ in the Temple; 8. Adoration of the Shepherds; 9. Ascension; 10. Adoration of the Magi. — *3rd Section*: 11. Resurrection; 12. Descent of the Holy Ghost. — We return by the other side 13. Religion between Justice and Mercy; *14. 'Feed my lambs'; 15. Massacre of the Innocents (on three pieces); 16. Bearing of the Cross, a small Dutch tapestry after Raphael's design; *17. Death of Ananias; 18. Coronation of the Virgin (originally presented by Paul III. to the Sistine Chapel); *19. Conversion of St. Paul; *20. Stoning of Stephen; *21. Miraculous Draught of Fishes; *22. St. Paul in prison at Philippi. Those indicated with asterisks are from the cartoons of Raphael (two others are *ting). The rest were executed from cartoons prepared by his pupils

after his death, some of them from small sketches by the master, the Adoration of the Shepherds, the Ascension, and the Massacre of the Innocents seem most in his style. This second series of tapestries was intended for the great Consistorial Hall.

The gallery of the tapestry is adjoined by the *Galleria Geografica*, a corridor with maps, 180 yds. long, designed by the Dominican *Ignazio Dante*, and executed by his brother *Antonio* under Gregory XIII. in 1580; ceiling-paintings by *Tempesta* and others; also a number of ancient busts, some of them valuable.

The **Appartamento Borgia*, situated on the first floor, below the stanze of Raphael, was re-opened to the public in 1897. Since the death of Leo XIII. these rooms have been appropriated by the Secretary of State as reception-rooms, and they are accessible with special permission only. For the former hours of admission, see pp. 150, 151. — We proceed to the end of the *Museo Chiaramonti* (p. 357), thence follow the *Galleria Lapidaria* (p. 359) straight on, and descend a few steps to the first floor of the *Logge* (p. 342). Immediately to the right is the entrance to the *Appartamento*.

The *Appartamento Borgia*, the domestic quarters of Alexander VI. (Borgia) and his family, was allowed to fall into neglect after the 16th cent., but in 1889-97 was skilfully restored by *L. Selts*, at the command of Leo XIII. These apartments, decorated by *Pinturicchio*, rank for brilliancy of colouring side by side with the chapter-library at Siena, which is frescoed by the same master. The majolica pavement has been restored in harmony with ancient fragments preserved in the *Museo Industriale* at Naples and *Cantagalli's* factory at Florence. — The rooms, which face the N., are poorly lighted.

Room I (Room of the Popes). The stucco ornamentation on the roof and the frescoes of constellations were executed by *Giovanni da Udine* and *Perin del Vaga* under Leo X. The tapestry on the walls represents the myth of *Cephalus* and *Procris*. In front of the rear-wall is placed a bust of Leo XIII., by *Ugolini*. In the left corner is the armour of *Julius II.* (?), in the right corner that of *Charles of Bourbon* (comp. p. 314). The door in the window-wall, with Biblical scenes in inlaid wood, is a modern copy of one of the doors at *Perugia* by *Damiano* of *Bergamo*, mentioned at p. 68.

Room II (Room of the Church Festivals) is adorned with frescoes, mostly of *Pinturicchio's* school. On the ceiling are medallions with bust-portraits of popes. On the walls, beginning at the left of the back-wall: *Annunciation*, *Nativity*, *Adoration of the Magi*, *Resurrection* (to the left kneels Alexander VI.; painted by *Pinturicchio* himself), *Ascension*, *Pentecost*, *Assumption*. The arms of *Nicholas V.* surmount the entrance. The *Apie-bull*, which frequently recurs in the stucco ornamentation of this and the following room, is a reference to the arms of the *Borgias* (comp. p. xli).

Room III (Room of the Lives of the Saints) has *Frescoes by *Pinturicchio* himself. On the ceiling is the legend of *Isis*, *Osiris*,

and the Apis-bull (see above). Above the door is a "Medallion of the Madonna. On the back-wall: "St. Catharine of Alexandria disputing before Emp. Maximianus (the saint is depicted with the features of Lucrezia Borgia, on the right the Turkish prince Djem; in the background appears the Arch of Constantine). Entrance-wall: Legends of St. Susanna, on the left, and of St. Barbara, on the right. Exit-wall: on the left, SS. Paul and Anthony, the hermits, in the Theban desert; on the right, the Visitation. Window-wall: Martyrdom of St. Sebastian (to the right appears the Colosseum). The handsome benches with inlaid wood were brought from the library of Sixtus IV.

Room IV (Room of the Seven Liberal Arts) is adorned with allegorical frescoes by Pinturicchio and his pupils: Grammar, Logic, Rhetoric, Geometry, Arithmetic, Music, and Astronomy. The chimney-piece, executed by Simon Mosca from a drawing by Sansovino, was brought from the Castello Sant' Angelo. To the right are some remains of the original majolica pavement. — A door leads hence to the bed-room where Alexander VI. died.

Room V (Room of the Creed), like the following, belongs to the Torre Borgia (p. 329). The ceiling-frescoes, representing the Apostles with the Creed, were perhaps executed by Pietro d'Andrea of Volterra. The mural decorations of painted canvas in Rooms V and VI are nearly all modern. Some good grotesques adorn the intrados of the window. Bust of Pius II., perhaps by Paolo Romano (?).

Room VI. (Room of the Sibyls). On the ceiling, Prophets and Sibyls, executed by pupils of Pinturicchio, freely retouched in places.

B. ANTIQUITIES: MUSEO PIO-CLLEMENTINO, MUSEO CHIARAMONTI, BRACCIO NUOVO. EGYPTIAN MUSEUM. ETRUSCAN MUSEUM.

ADMISSION, see pp. 150, 151. With the exception of those in the Cortile del Belvedere and the Braccio Nuovo there are practically no chairs or benches on which to sit. — A short CATALOGUE by *Ernst Meiss*, in English (2½ fr.), French, or Italian (2 fr.) may be bought at the entrance. — Comp. also *Hibig & Neusch*, *Antiquities in Rome*, vol. I, pp. 1-286, II, pp. 284-414.

THE VATICAN COLLECTION OF ANTIQUITIES, the finest in the world, was begun by Popes Julius II., Leo X., Clement VII., and Paul III. in the Belvedere (see p. 355). But only a few of the present masterpieces, such as the Torso of Hercules, the Apollo Belvedere, and the Laocoon, date their appearance in the Vatican from that period. By far the greater portion of the collection made by these art-loving popes was scattered by their successors in the second half of the 16th cent., especially by Pius V., and some of their treasures were even presented to foreign collections. Clement XIV. (Ganganelli, 1769-74) determined to institute a more extensive collection, in consequence of which the Museo Pio-Clementino arose under him and his successor Pius VI. This museum was arranged

by the celebrated *Ennio Quirino Visconti*. It was despoiled of its

costliest treasures by the French in 1797, but most of these were restored in 1816. Pius VII. added the *Museo Chiaramonti*, and in 1821 the *Braccio Nuovo*; and Gregory XVI. the *Egyptian* and the *Etruscan Museum*.

The ENTRANCE is $\frac{1}{2}$ M. from the piazza of St. Peter, on the W. side of the palace, not far from the N.W. corner. Approaching from the Borgo, we cross the Piazza San Pietro, proceed to the left of the great flight of steps of St. Peter's through the passage under the portico, walk round the whole of St. Peter's (comp. also plan, p. 318), and then, between the Vatican Gardens and the palace, reach the gate under the Sala della Biga. (This point may be reached by carriage, so that it is not necessary for visitors to alight in the Piazza of St. Peter, as the drivers sometimes pretend.) We turn to the right at the ticket-office, and ascend the steps to the left, entering the museum by the Sala a Croce Greca, described below. (The glass-door opposite the staircase leads to the Library, p. 364.)

The iron gate to the left at the foot of the steps opens upon a terrace (not always accessible to visitors) which commands a glimpse of the larger Garden of the Vatican, called also '*Il Boscareccio*', which is visited by special permission only. The garden extends to the walls of the Leonine city, and is beautifully laid out in the Italian style. To the left of the entrance, at the base of an eminence planted with trees, stands the *Casina del Papa*, built by *Flavio Ligorio* in 1560. The *Casina di Leone XIII.*, where that pope used to spend the hot days of summer, is situated on the top of this eminence.

MUSEO PIO-CLEMENTINO. MUSEO CHIARAMONTI. BRACCIO NUOVO.

The **Museo Pio-Clementino**, the real nucleus of the Vatican collection, contains several of the most celebrated antiques. It is divided into 11 departments, denoted by Roman numerals.

I. Sala a Croce Greca, constructed by *Simonetti*, under Pius VI., in the form of a Greek cross. On the floor are three ancient *Mosaics*. By the steps, between the two sphinxes, *Flower-basket from *Roma Vecchia* (p. 396). In the centre, Shield with a bust of Pallas, surrounded by a blue girdle on which the phases of the moon and constellations are depicted; found in 1741 in the Villa Ruffinella near Frascati. The greater portion (the central square and the immediately adjoining coloured border) is antique; but the external four segments of the circle are modern; some of the original marginal figures are now in the *Thermae Museum* (p. 167). At the entrance to the following room (*Sala Rotonda*, p. 361): *Bacchus*. — We here begin to enumerate the more important sculptures: 566. Large sarcophagus in porphyry, of *Constantia*, daughter of *Constantine the Great*, from her tomb, afterwards the church of *Santa Costanza* (p. 369); it is adorned with vintage-scenes (perhaps in allusion to the *Vineyard of the Lord*). *574. *Venus*, a copy of the *Cnidian Venus of Praxiteles* (p. xlix), drapery of metal modern; 578, 579. *Egyptian sphinxes* (mentioned above); 589. Sarcophagus of *St. Helena*, mother of *Constantine*, from her tomb at *Torre Pignattara*

(p. 381), transferred to the Lateran by Anastasius IV., and thence to the Vatican by Pius VI. By the stairs: to the right, 600. Recumbent river-god, said to have been restored by Michael Angelo (opposite the entrance to the Egyptian Museum, p. 360).

We now ascend the staircase (with 20 antique columns from Praeneste) leading to the right to the —

II. *Sala della Biga*, a circular hall with a cupola, whence the Vatican garden can be seen.

In the centre: *623. *Biga*, or two-horse chariot, from which the saloon derives its name. The body of the chariot, richly adorned with leaves, which was used for centuries as an episcopal throne in San Marco, and a part of the right horse (which, however, belonged originally to another group) are alone ancient. *608. *Bearded Bacchus*, inscribed 'Sardanapallus'; *610. *Effeminate Bacchus*. 611. *Bearded Athlete* (only the body, part of the left leg, and part of the head are antique), most probably a runner resembling Nos. 84 and 92 mentioned at p. 241. *612. *Toga Statue*, from the Palazzo Giustiniani in Venice, *615. *Discobolus*, of the Attic school (p. xlvi); 616. So-called Phocion, a statue of Hermes with a portrait-head from another work. *618. *Discobolus* of Myron (p. xlvii); the original was of bronze; head modern, and inaccurately placed; it should have been turned towards the spectator, as in the much superior replica in the Pal. Lancellotti (p. 215). 619. Roman charioteer, with the curious straps about his body customary in races in the circus, 621. Sarcophagus-relief, race of Pelops and Enomau. — 609, 613, 617. Sarcophagi, with chariot-races, the charioteers being Cupids.

The representations of the Circus, with the *Metas* or turning-posts, and the *Spina* or central wall, should be noted. On the spina were placed small sanctuaries and also the apparatus for counting the laps; on the completion of each round one of the wooden eggs was removed from the spina and one of the dolphins was turned round. Comp. also p. 395.

Turning to the right on leaving the *Sala della Biga*, straight in front of the staircase, we reach the —

III. *Galleria dei Candelabri*, a corridor 90 yds. in length, open only on Wed., 10-3. The ceiling-paintings, by L. Scits (1868-1886), consist partly of incidents in the pontificate of Leo XIII., partly of allegorical scenes (Apotheosis of St. Thomas Aquinas, Arts and Sciences under the protection of the Church). The handsome marble pavement is new. Numerous beautiful vases in rare marbles of various colours add a peculiar charm to this gallery.

SKETCH I, to the right and left of the entrance: 2, 66. Birds' nests and children; to the right, 11. Torso of a satyr pouring wine (after Praxiteles); *19. Boy in a stooping posture, as if aiming at scattered nuts or the like (comp. No. 497a, p. 358); to the left, 45. Head of the above-mentioned satyr after Praxiteles; 52. Sleeping satyr, in green basalt. — SKETCH II: to the right, 74.

Fountain-figure of Pan, removing a thorn from the foot of a satyr; 81. Diana of Ephesus, from Hadrian's Villa; 83. Sarcophagus, with the murder of Aglaëus and Clytemnestra by Orestes; 93 (to the right) and 97 (to the left), Candelabra from Santa Costanza, to the left, 113. Sarcophagus-relief of Proteus and Laodamia, *118a. *Ganymede* carried off by the eagle, a copy of a celebrated work by *Leochares* (p. xlix). — SECTION III to the right, 131. Mosaic of dead fish, dates, etc.; 134a. Modern copy of the circular top of a well (puteal; now in Madrid), companion-piece to 134c. Antique puteal, with Bacchanalian scenes; between the last two, 134b. Archaic figure of a god, on a base bearing a dedicatory inscription to *Somo Sancus*; to the left, 149a. *Hypnos*, god of sleep; 148. Satyr with the infant *Bacchus*. Built into the walls are eight frescoes of figures hovering in the air, from the ancient villa at Tor Marancia in which the mosaic mentioned at p. 359 was found. — SECTION IV. 167 (to the right) and 219 (to the left), Candelabra from Santa Costanza; to the right, 162. Statuette of *Nike* leaning on a trophy, 178. Sarcophagus with *Bacchus* and *Ariadne*, 176, 178. Two replicas of a statuette of a satyr looking at his tail, 177. Aged fisherman; 183. Upper part of a statue of *Cronos*, *184. *Tutelary Goddess of Antioch*, after *Eutychides* (p. li), 187. Candelabrum, with *Hercules* stealing the tripod (*Hercules*, *Apollo*, priest); to the left, 194. Boy with a goose, after the original by *Boethos* (3rd cent. B. C.); 204. Sarcophagus, with the children of *Niobe*; 208. *Marcellus* (?), nephew of *Augustus*. — SECTION V: to the right, *222. *Greek Girl Racing*, after a bronze of the 5th cent. B. C.; to the left, 248. Youthful *Pan* (fountain-figure). — SECTION VI to the right, 253. Sarcophagus, with *Diana* and *Endymion*; *253c. Statuette of *Proserpine*; 257. *Ganymede*, to the left, 264. Son of *Niobe*, 269. Sarcophagus, with the rape of the daughters of *Leucippus* by the *Dioscuri*. Upon the last: 269b. Statuette of an athlete (after *Polycletus*), *269c. *Statue of a Fighting Persian*, from the trophy of King *Attalus* at Athens (p. lii). — The next gallery contains the Tapestry of Raphael, p. 346.

We now return to the staircase, descend to the Sala a Croce Greca, and pass through it (comp. ground-plan, p. 348) to the —

IV. Sala Rotonda, erected under Pius VI by *Simonetti*, after the model of the Pantheon. The floor contains a large Mosaic, found in 1780 in the Thermæ at Otricoli, with *Nereids*, *Tritons*, *Centaurs*, and masks. In the centre a magnificent basin of porphyry, brought from the Villa di Papa Giulio to the Vatican in 1706 by *Clement XI*. On the right and left of the entrance: 554. *Julia Domna*, wife of *Septimius Severus*, 553. *Plotina*, wife of *Trajan*. Then, to the left, 552. *Juno Sospita*, from *Lanuvium* (p. 442), copy of an ancient Latin image made in the age of the *Antonines*, 551. *Claudius*; 550. Statue of *Claudius* as *Jupiter*, from *Lanuvium*; 549. *Jupiter Sospita*; 548. *Nerva*; on the pedestal a fine relief, of doubtful meaning; 547. Sea God, found near *Pezzuoli*,

perhaps a personification of the Bay of Naples or the Mediterranean Sea, the ornaments of leaves and fruits indicating the riches of the shores; *546. So-called *Barberini Juno*; 545. Bust of Antinous; 544. Hercules, colossal statue in gilded bronze (12 ft. in height), found in 1864 concealed in a pit near the Theatre of Pompey (p. 228); 543. Colossal head of Hadrian, in Pentelic marble, from that emperor's mausoleum (Castello Sant' Angelo; comp. p. 314); *542. Female statue restored as Ceres; 541. Faustina, wife of Antoninus Pius. 540. Antinous as Bacchus, from Hadrian's Praenestine villa (p. 429; 'Antinous Braschi'); the unchiselled state of the body seems to indicate that the statue was originally draped, perhaps with metal; the present drapery, however, is modern. **539. Bust of Zeus from Otricoli, the finest and most celebrated extant, formerly erroneously regarded as a reproduction of the Zeus of Phidias (p. xlvii), but really a new type of the 4th cent. B. C. Then, 550. Pertinax; 555. Genius of Augustus. At the entrance to the next room - 537, 538. Comedy, Tragedy, two herms from Hadrian's Villa. **V. Sala delle Muse.** We first enter an *Ante-Room*. Left: *525. Pericles; 523. Aspasia. Right: 531. Periander of Corinth; 530. Statue, erroneously named Lycurgus; 528. Bias, the pessimist of the Seven Wise Men.

The magnificent Sala itself, also constructed by Simonetti under Pius VI., is octagonal in form, covered with a dome, and adorned with sixteen columns of Carrara marble. It derives its name from the statues of the Muses preserved here, which, with the exception of Nos. 504 and 520, were found with the Apollo near Tivoli in 1774, and are probably reproductions of a group by Praxiteles or of his school. In the centre of the right wall. *516. *Apollo Musagetes*, in a long robe, with an air of poetic rapture, standing on an altar with a representation of the Lares. To the left of the Apollo: 517. *Tersichore* (Muse of dancing); to the right, 515. *Calliope* (epic poetry); 511. *Erato* (erotic poetry). Then, on the other side: 499. *Melpomene* (tragedy); *503. *Thalia* (comedy); 506. *Clio* (history); *508. *Polymnia* (higher lyric poetry). Between 503 and 506 is 504. Female statue restored as Urania (Muse of astronomy); opposite, 520. Nymph restored as Euterpe (music). — Interspersed among the Muses are portrait-herms: to the left, 509. Metrodorus, the favourite pupil of Epicurus; 507. Antisthenes, the Cynic; 506. Demosthenes; 502. Archimedes; 500. Zeno (?), more probably a celebrated astronomer, perhaps Aratus; 498. Epicurus, to the right, 512. Epimenides of Crete (?); 518. Hermes-bust of a Strategos of the 4th cent. B.C., erroneously named Themistocles; 519. Plato (the inscription 'Zeno' is modern).

Ante-Room on the other side, forming also the ante-room of the Sala degli Animali: (right) 494. Greek portrait-hermes; 496. Apollo Oitharodes (restored as Bacchus); 498. Sophocles at an advanced age. Left side: 492. Hermes of Sophocles, with a fragmentary in-

scription, which permitted the identification of the famous statue in the Lateran Museum (p. 307). 400. *Hermes of Diogenes*; 430. Greek war-dance, marble slab from a frieze.

VI. Sala degli Animali, containing a number of animal-pieces in white and coloured marble, most of them freely restored. A great part of the floor is paved with ancient mosaics.

This hall is divided into two sections by means of four granite columns, which form a passage from the Sala delle Muse into the court of the Belvedere (p. 355). To the right 152. Head of a braying ass; *154. Sow and litter, 212. Colossal camel's head (fountain-spout); 213. *Hercules with Geryon*; 210. *Diana*, badly restored; 215. *Hercules and Cerberus*. 228. *Frisson carrying off a Nymph*, in conception and execution recalling the recent works of the 18th cent., with a modern pedestal. 232. *Minotaur*.

To the left 110. Two greyhounds playing; 113a, 128a. Mosaics from *Hadrian's Villa*; 124. *Sacrifice of Mithras*; 124. *Hercules with the slain Nessus lion*; 137. *Hercules slaying Diomedes*; 138. Centaur with a Cupid on his back (a replica of the younger centaur in the Capitoline Museum, p. 267); 139. *Commodus on horseback* (Bernini's model for the statue of *Constantine* in the Portico of St. Peter's); 154. Sheep sacrificed on the altar; 155. Small group of a goat-herd and his goats; 157 (in the next window) Relief of a sow and calf.

VII. Galleria delle Statue, originally a summer-house of Innocent VIII., and converted into a museum by Clement XIV. and Pius VI. The lunettes and ceiling still show traces of the armorial bearings and emblems painted for Innocent VIII., part of the decorative scheme executed by Pinturicchio and his pupils in 1487. — To the right of the entrance: *250. *Thanatos*, god of death ('*Il Genio del Vaticano*', or the '*Ros of Cantocelle*'), found on the Via Labicana, on the back are traces of wings. Above, 249. Relief, erroneously attributed to *Michael Angelo*, *Cosimo I. expelling the Vices from Pisa*; 251. *Athlete*, resembling the *Doryphorus* of *Polyclitus*; *253. *Typhon*, upper part only, found near Tivoli; 254. *Nymph*; 255. *Paris*; 257. *Selene* in her chariot, in delicate relief (from a representation of her visit to *Endymion*); 259. Draped torso of *Apollo Citharædus*, incorrectly restored as *Pallas* (so-called *Minerva Pacifera*) with the olive-branch; 260. Greek tomb-relief, dedicated to the gods of healing. *261. So-called *Mourning Penelope*, a copy of an archaic work (head from another statue, comp. pp. 172, 358), on the pedestal a relief of *Bacchus* and *Ariadne*, with *Silenus*; *264. *Apollo Sauroctonus*, lying in wait for a lizard, after a bronze statue by *Praxiteles*; *265. *Amazon*, from the *Villa Mattei* (p. xlviii); 267. Drunken satyr; 268. *Juno*, from the *Thermae of Ostia*; 269. Relief of a late period, freely restored. *271. and 300. (one on each side of the arch which leads into the room of the busts) *Posidippus* and *Menander* (so-called), two admirable statues in *Pentellic marble* (remains exist of the original bronze straps of the sandals). — The visitor may conveniently quit this gallery here and inspect that of the busts (see p. 354).

Window-wall, beyond the *Menander*: 392. *Septimius Severus*. 393. *Suppliant seated on an Altar*, looking anxiously upward, w^t

a fragment of a twig in her right hand; a finer replica in the Pal. Barberini (p. 184). 394. Neptune Verospi; 396. Apollo Citharædus, archaic; 396. Wounded Adonis (the band of which there are traces was probably that of a Cupid dressing the wound); 397. Reclining Bacchus, from the Villa of Hadrian; 398. Macrinus, successor of Caracalla. In front of the last, in the centre, a large alabaster basin, found near Santi Apostoli. 399. Esculapius and Hygieia, from Palestrina; 401. Fragments of a son and a daughter from the group of Niobe (p. 358), found, like the Florentine statues, near the Lateran, 405. So-called *Danaid*, more probably a water-carrier; 406. Replica of the Resting Satyr of Praxiteles. — In the window-niche on the right, **Greek Stale* (Athlete receiving scraper and oil-flask from his attendant), found in the church of San Lorenzo in Piscibus (p. 818) in 1902. 421. Cinerary urn of oriental alabaster, found with the travertine cippi placed under the statues numbered 248, 406, 410, 417, and 420; it once contained the remains of a member of the imperial Julian family. End-wall: *414. *Sleeping Ariadne*, found in the reign of Julius II.; below it, **Sarcophagus* with battle of the giants. At the sides: *412, *413. The *Barberini Candelabra*, the largest and finest in existence, found in Hadrian's Villa; on each three reliefs, (1.) Jupiter, Juno, Mercury, and (2.) Mars, Minerva, and Venus. 416. Relief of the forsaken Ariadne, similar in treatment to the large statue; 417. Mercury; 420. Lucius Verus.

VIII. Hall of the Busts, in four sections. The decoration of the ceiling dates from the reign of Innocent VIII. and is probably due to the otherwise little known *Pier Matteo d'Amelia*. We begin on the right of the entrance, in the left corner. I. Section. Below, to the right, 263. Head of Hadrian; 277. Nero as Apollo Citharædus, with laurel-wreath; 274. Augustus, with chaplet of ears of corn, *273. *Bust of the Youthful Augustus* (on a revolving stand). Above, in the right corner, 292. Caracalla. — II. Above, 298. Zeus Serapis, in basalt. Below, 303. Apollo, 307. Saturn, 308. Isis. 311. Head of Menelaus, from the group of Menelaus with the body of Patroclus, found in 1772 in the Villa of Hadrian, a duplicate of the Pasquino group (see p. 225). The legs of Patroclus (No. 384b, by the window of the first section) were found beside this head. — III. Above, 313, 314. Masks, 315, 316. Satyrs. In the central niche: *326. Zeus, formerly in the Pal. Verospi. To the left above, 329. Barbarian; below, 338. *Portrait of a Diadochos* as Dionysus (holes for the horns on the head). — Once more in II: 346. Hercules. — IV. In the niche: 352. Woman praying, a so-called *Pieth*; under it, 353. *Sarcophagus*, adorned with Prometheus and the Fates; to the left, below, 357. Antinous; *363. *Hera*, from an original of the 5th cent. B. C. — In Section I, below, 376. Head of Pallas from the Castle of Sant' Angelo; 382, 384. Anatomical representations, in marble. In the centre, Column with three Horns. By the

entrance, to the right, *388. Roman man and woman, tomb-relief. In the passage leading to the next cabinet: *Youthful athlete with his slave, Greek bronze relief from the 5th cent. B. C.

IX. Gabinetto delle Maschere (adm., see pp. 150, 151), so called from the *Mosaic within a modern border on the floor, with masks, etc., found in Hadrian's Villa in 1780. On the right of the entrance: *425 *Dancing Girl*, in Pentelic marble, found at Naples; 427. *Crouching Venus in the bath*; 428. Greek votive relief. — On the entrance wall and the opposite wall: Four reliefs of the exploits of Hercules; 432. *Satyr in rosso antico*, replica in the Capitoline; 433. *Venus drying her hair*. — Window-wall: at the first window, 394. *Bathing-chair*, at the second, 435. *Fine vase*, both of rosso antico. — In the window, 439. Relief of *Bacchanalian procession*. — Entrance-wall: 443. *Apollo*. — The custodian sometimes opens (on request) the *Loggia Scoperta*, which commands a charming view of the mountains.

We now return to the Sala degli Animali, and enter the (left) —

X. Cortile del Belvedere (comp. ground-plan, p. 348). This was originally a square court with truncated corners and belonged to the Belvedere built by Innocent, VIII. (p. 329), which was at that time in direct communication with the apartments now converted into the Galleria delle Statue, which afforded the beautiful view. The inner arcade was not added until 1775, while the cabinets at the corners received their present shape in 1803. This court contains several of the most important works in the collection. The entrance is flanked with two *Molosian Hounds. In the centre is a fountain with ancient embouchure; above the arcades are ancient masks, and by the wall sarcophagi and statues.

The First Corner Cabinet on the right as we enter from the Sala degli Animali contains: *74. The famous group of *Laocoon* with his two sons, strangled by serpents by command of the offended Apollo. The elder son appears as if he might still extricate himself from the coils, and according to one version of the myth only one of the sons was killed. Pliny states that the group was executed by the three Rhodians *Agasander*, *Polydorus*, and *Athenodorus*, and was placed in the palace of Titus. It was discovered under Julius II. in 1506 near the Sette Sale (p. 188), and was termed by Michael Angelo a 'marvel of art'. The work (in Pentelic marble, but not of a single block) is admirably preserved, with the exception of the three uplifted arms, which have been incorrectly restored by *Gios. Ang. Montorsoli*. Owing to the delicacy of the workmanship, the dramatic suspense of the moment, and the profoundly expressive attitudes of the heads, especially that of the father, this group forms the grandest representative of the Rhodian school of art (p. 111). — Then, in the Arcade: 81. Roman sacrificial procession from the Ara Pacis of Augustus. In the niche: 85. *Hygieia*. In front, So-called Ara Casali, with reliefs referring to the fall of

Troy and the origin of Rome. Farther on, 88. Roma, accompanying a victorious emperor.

Second Corner Cabinet. *92. *Apollon Belvedere*, found at the end of the 16th cent., probably in a Roman villa near Grotta Ferrata (p. 410). The god seems to have originally held the bow in his left hand, raised in a threatening manner, while in his lowered right hand was probably a laurel branch or wreath, traces of which may be observed on the tree-stump. See p. xlix. (Comp. 'Othello Harold's Pilgrimage', Canto iv, line 161.) — On the left: 84. Relief, Women leading a bull to the sacrifice (the left half modern). — Then, over the door of this cabinet, outside: *Greek relief of the *Procession of Bacchus*. — In the Arcade: 96, 97. Reliefs with satyrs and griffins, from a *trapezophorus* (support of a table). 28. Large sarcophagus with lions' heads, dancing satyr, and *Bacchantes*, found in 1777 while the foundations for the sacristy of St. Peter's were being laid; 30. Sleeping nymph, a fountain-figure.

Third Corner Cabinet. *Perseus*, and two *Pugilists*, by Canova. These were placed here in 1811, when the chief treasures of the collection were still in Paris and when the gallery possessed only plaster casts of the *Apollon Belvedere* and the *Laocoon*, though it is inconceivable at the present day how they could have been thought worthy of the honours. — In the Arcade, (right) 38. Relief of *Diana and Hecate* contending with the *Titans* and *Giants*; 39. Roman sarcophagus, with relief of a general and vanquished barbarians. In the niche: 42. Wife of *Alexander Severus* as *Aphrodite*.

Fourth Corner Cabinet. *53. *Mercury*, formerly called *Antinous* of the *Belvedere*, after a Greek original (probably by *Praxiteles*) of the end of the 4th cent. B.C.; left, 55. Relief of a procession of priests of *Isis*. — Then in the Arcade: right, 61. Sarcophagus with *Nereids* with the arms of *Achilles*; on it, *60a. Torso of a *Nereid*.

XI. *Vestibule of the Belvedere* (comp. ground-plan, p. 348). The first section of it is the —

ATRIO ROTONDO. In the centre a beautiful basin of marble (*pavonazzetto*). To the left, under No. 7, is a cippus with relief of a *Diadumeneus*, or youth placing a fillet round his head, which conveys an idea of the famous statue of *Polycletus* (p. xlviii). In the niches are three fine specimens of sculptured drapery. On the balcony is an ancient vase, found in 1779 near the *Colosseum*. Fine view hence of the *Prati di Castello*, the *Pincio*, and the *Sabine mountains* beyond. — To the left is the —

ATRIO DEL MELLAGNO. In the centre, *10. *Statue of Meleager*, of the imperial period, found about 1500 outside the *Porta Portese* (comp. p. xlix). Left, 21. Colossal bust of *Trajan*; 20. Large sarcophagus-relief, perhaps representing the river-god *Tiber* and buildings in *Rome* and *Ostia*, an over-sordid work but technically remarkable; 22. Relief of a Roman war-ship, with two banks of oars (*tremis*), from *Palostina*.

The custodian opens a glass door which admits us to a balcony (fine view), whence *Bronzino's Spiral Staircase* (not accessible) may be seen. This is the only portion of his design for the Belvedere that he quite completed.

We now return through the *Atrio Rotondo* to the —

ATRIO QUADRATO. In the centre, *3. Celebrated *Torso of Hercules* (on a revolving stand), executed, according to the inscription, by *Apollonius of Athens*, who probably lived in the 1st cent. B.C. About 1440 this work was preserved in the *Palazzo Colonna* (p. 210) and may therefore probably at one time have belonged to the decoration of the *Therma of Constantine*. 'In their admiration of the torso, which has been extolled by *Winckelmann* in one of his famous odes, all critics are agreed, but many conflicting opinions have been expressed regarding the action intended to be portrayed. Formerly it was usually supposed that *Hercules* had been grouped with a figure standing in front of him (perhaps *Hebe* or *Auge*); another conjecture was that he was alone, leaning on a staff grasped with both hands on his left side; while a more recent view is that he was playing on the lyre'. More recently still the identification as *Hercules* has been disputed, on the ground that the skin beside the figure is not that of a lion — Opposite the window, *2. *Peperino Sarcophagus of L. Corn. Scipio Barbatus*, great-grandfather of the illustrious *Africanus*, and consul B.C. 298, with a remarkable inscription in *Saturnine verse*, recording his virtues and achievements. It was found in 1780 in the tomb of the *Scipios* on the *Via Appia* (see p. 293; comp. also p. 115), at the same time as that of his son *L. Corn. Scipio*, consul B.C. 259, and that of *P. Corn. Scipio* (son of *Africanus*), *flamen dialis*, whose inscriptions are built into the surrounding walls. The bust on the sarcophagus has been groundlessly regarded as the poet *Ennius*.

We next enter (comp. ground-plan, p. 348) the —

Museo Chiaramonti, arranged in one half of a corridor 22 ft. wide and 330 yds. long, which is divided by pilasters into thirty sections numbered with Roman numerals. The collection contains 700 sculptures in marble, many of them small and fragmentary.

[The door to the right leads to the *Giardino della Pigna*, to which visitors are not now admitted, containing numerous fragments of statues and reliefs. In the middle is a huge antique column, surmounted by a bronze statue of *St. Peter*, erected here in 1886 to commemorate the Council of 1870. On the right are a colossal *Pine Cone* (*Pigna*), the work of a certain *P. Clodius Pulcher* (comp. p. 216), which in the middle ages adorned a fountain in the fore-court of old *St. Peter's Church* (where it was seen by *Dante*, *Inf.* xxxi, 58), and the pedestal of the column in honour of *Antoninus Pius*, which stood near *Monte Citorio*, adorned with the *Apotheosis of Antoninus and Faustina* and the mounted procession (*decursio equestris*) accompanying the imperial funeral. On the left is a colossal portrait-head in marble.]

As the entrance was formerly at the other end, the numbers now begin with Section XXIX. Left, *704. *Ulysses* handing the goblet to *Polyphemos*; 693. Wreathed head of *Hercules*, after *Scopos* (p. xlix).

— XXVIII. Left, 682. Colossal statue of Antoninus Pius, from Hadrian's Villa. — XXVII. Left, 652. Head of a Centaur; 643. Relief of the Birth of Erichthonios (Gaea hands the child to Athena), *644. *Dancing Women*, relief. — XXVI Left, 636. Hercules and Tolophus; right, 638. Torso of a fleeing maiden. — XXV. Left, *607. *Head of Neptune*, in Pentellic marble, from Ostia; above, 503, 506, 504 Greek reliefs. — XXIV Left, 588. Bacchus with a satyr, 587. Ganymede. — XXIII. Left, 561. Portrait-bust. — XXII. Right, 547. Isis, left, 544. Silenus. — XXI Left, *513a *Head of Venus*, in Greek marble, found in the Baths of Diocletian; 512, 510a. Roman portrait-busts; right, 535. Head of a dying Gaul, in marble from Asia Minor (comp. p. II). — XX. Right, 497. Representation of a mill, 497a. Children playing with nuts (comp. No. 19, p. 350, and statuette in the New Capitoline Collection, p. 240); left, 496. Cupid bending his bow, *494. Tiberius, a colossal sitting figure, found in 1796 at Piperno. — XIX. *485. Fragment of a relief of the so-called *Mourning Penelope*, of finer workmanship than the better preserved replica in the Galleria delle Statue (p. 353). — XVII. Right, 441. Alcibiades (?), left, 422 Demosthenes; *420. Head of Vulcan; 419, 417. Roman busts of boys. — XVI. Left, 401 Augustus, 400. Tiberius sitting, both from Vell. — XV. Left, *372a Greek relief in Boeotian limestone, with fragment of a rider recalling the frieze of the Parthenon; above, 360. Archaic relief of three draped Graces, a copy of a very famous antique work popularly ascribed to the philosopher Socrates (who was a sculptor in his youth), fragments of which were found in the Acropolis at Athens. — XIV. Left, 353. Nymph; 352 Paris. — XIII. Right, 338. Boy from a group of talus-players; left, above, 300. Fragment of a shield with four Amazons, being a copy of the shield of Athena Parthenos by Phidias. — XII. Left, 294 Hercules, found in 1802, restored by Canova; 206. Torso, replica of the Hermes of Praxiteles (p. xlix); right, 297. Athlete. — XI Right, 286. Apollo with the hind on his hand, archaistic (i.e. in imitation of the archaic style); 287. Fisher-boy; 287a. Greek portrait-head; left, 263 Roman portrait-bust. — X Right, 244. Colossal mask of Oceanus, used to adorn a fountain; 245 Polyhymnia, left, 241 Goddess nursing a child (Juno Lucina, a Roman deity). — IX. Right, *229. Two *Heads of Silenus* as a double hermes, one archaic, the other Hellenistic in type; left, 197. Head of Athena (eyes modern), found at the ancient Laurentum, above, 186. Greek equestrian relief. — VIII Right, 179. Sarcophagus of C. Junius Euhodus and Metilia Acta, with relief of the myth of Alceste; left, *176. *Daughter of Niobe*, headless, found at Tivoli, an admirable Greek copy of a figure from the famous group attributed to Scopas or Praxiteles. — VII. Right, 166. Archaic Apollo, left, 145. Youthful head, *144. Bearded Bacchus; 135 Head of a Roman portrait-statue. — VI. Left, *122. Diana, Greek original of the Praxitelean period; *21. *Peotus*. — V. Left, 87 Cupid with the lion's skin; 79. *Frag-*

ment of a group of Scylla seizing a companion of Ulysses (comp. the mosaic in the Braccio Nuovo, below); above, 70, *71. Greek reliefs. — III. Right, 55. Torso of Hebe. — I. Right, 13. Winter; left, 6. Autumn; above, 2. Apollo sitting, a relief. — To the right is the entrance to the Braccio Nuovo (see below).

The S. half of the corridor, shut off from the Museo Chiaramonti by an iron gate, contains the *Galleria Lapidaria*, which is open to the public on the same conditions as the *Appartamento Borgia* (see pp. 150, 151). It contains a collection of more than 5000 heathen and early-Christian inscriptions, begun by Clement XIV. and Pius VI., and extended by Pius VII.; they were arranged and built into the walls under the direction of the learned *Gastone Martini*. The gallery also contains cippi, sarcophagi, and statues. To the right is the entrance to the reading-rooms of the library (p. 366).

The *Braccio Nuovo* (see ground-plan, p. 348), was constructed by *Raffaele Stern* under Paul VII. in 1821. This saloon, roofed with tunnel-vaulting, and lighted from above, is 77 yds. long and 8½ yds. wide, and is embellished with fourteen ancient columns of cipollino, giallo antico, alabaster, and Egyptian granite. It contains over 50 statues and about 90 busts. — Right, No. *5. Caryatid, an antique copy of one of the Caryatids of the Erechtheum at Athens, restored by Thorvaldsen (comp. No. 47, below); 8. Commodus in hunting-costume; 9. Head of a barbarian (found in Trajan's Forum along with Nos. 118 and 127); 11. Silenus with the infant Bacchus; *14. *Augustus*, found in 1863 near *Prima Porta* in the villa of Livia (p. 384), the best extant statue of the emperor, bearing distinct traces of painting (p. 111). In front of it, on the floor, a mosaic from *Tor Marancia*: Ulysses with Nereids and Scylla. 17. Statue of *Æsculapius* (without beard); *23. So-called *Pedicle*, from the *Villa Mattei*, head and right hand modern, 24. Archaic head of a youth, with remains of short horns and animal's ears, perhaps a river-god (bust modern); 26. Titus, found with the statue of his daughter Julia (No. 111, opposite) near the *Lateran* in 1828; 27. Medusa (also Nos. 40, 93, 110; the last a modern plaster-cast) from the Temple of Venus and Rome; 38a. Satyr playing the flute; 38. Artemis; 32-36. Fountain-figures; 31. Priestess of Isis, 39. (In the centre) Beautiful black vase of basalt, with masks; 41. Apollo Citharædus, 44 Wounded Amazon. 47. Caryatid; the position of the arms and feet and the curves of the drapery are less appropriate to the architectonic purpose of this figure than the firm attitude and vertical lines of No. 5 (see above). 48. Trajan; 50. Diana beholding the sleeping Endymion, 53. Statue of a tragic poet (the head from another statue of Euripides); *60. So-called Sulla, *62. *Demosthenes*, probably found near *Frascati*, the ancient *Tusculum* (the hands holding a scroll are incorrectly restored; they should be folded).

Standing alone: *67. *Apoxyomenos* (sculptor), an athlete cleaning his right arm from the dust of the palmetra with a scraping-iron, after *Lysippus* (p. 1), found at Trastevere in 1849 (the fingers of the right hand holding a disc are modern). Then, by the second long wall: *71. *Wounded Amazon Raising*, after a work by *Polykleitos* (p. xlviii), arms and feet restored by Thorvaldsen; 72. Portrait of a young barbarian chief; 81. Hadrian; 83. Juno; 86. Fortune with cornucopia and rudder, from Ostia; 92. Artemis. *109. *Colossal Group of the Nile*, surrounded by sixteen playing children (most of them restored), emblematic of the sixteen cubits which the river rises; at the back and sides of the plinth a humorous representation of a battle of the pygmies with crocodiles and hippopotami. This group was found near Santa Maria sopra Minerva in the time of Leo X. (p. li). In the semicircular space behind it, on the right: 97a. Mark Antony (?); 97, 99, 101, 103, 105. Athletes; 106. Bust of the triumvir Lepidus (?). On the floor behind the Nile is a mosaic with the Ephesian Diana. By the long wall, farther on: 111. Julia, daughter of Titus (see No. 26); *112. Head of a youthful goddess (the so-called *Juno Pentina*); *114. So-called *Pallas Giustiniani* (the family to whom it formerly belonged), in Parian marble (comp. p. 248); 117. Claudius; 118. Barbarian; *120. *Satyr Reclining*, after *Praxiteles* (p. xlix; a better copy in the Capitoline Museum, p. 248); *123. *Statue of an Athlete* with the head of Lucius Verus from another statue; *126. *Doryphoros*, after *Polykleitos* (p. xlviii); 127. Barbarian; *132. *Mercury*, restored by Canova (head ancient, but belonging to a different figure).

EGYPTIAN MUSEUM. *ETRUSCAN MUSEUM.

Comp. Plan, p. 348. Admission, see pp. 150, 151.

The Egyptian Museum (*Museo Egizio*), the entrance to which is from the Sala a Croce Greca (p. 349), close to the steps, is below the Etruscan Museum. The collection was founded by Pius VII., and though it cannot compare with those of London, Berlin, Paris, Florence, and Turin, nevertheless contains a number of valuable works, especially sculptures of the more recent period, not to mention the admirable imitations of Egyptian works of art found in and near Rome. Catalogue by Orazio Marucchi (1899), 5 fr.

Room I. (*Sala dei Sarcophagi*). 1, 2. Painted wooden coffin of a female singer of Ammon (ca. 1000 B.C.); Mummy-shaped coffin in basalt of a contemporary of King Psammetikh II. (594-589 B.C.); Coffins in stone and wood. — Room II. (*Sala delle Statue*). 8, 26. Seated statues of the lion-headed goddess Sekhmet; 9. Colossal head of a king, formerly thought to be one of the Hyksos, 'shepherd-kings' who conquered Egypt about 1700 B.C.; 10. Colossal statue of a princess of the Ptolemaic dynasty; 12, 14. Ptolemy Philadelphus (283-247 B.C.) and his wife Arsinoë; *16, 18. Lions couchant, presented by the Pharaoh Nektanebos (361-345 B.C.) to a temple in Lower Egypt; 17. Granite statue of Tu's, mother of Ramses II. (ca. 1800 B.C.). — To the right of the first two rooms is Room IX. (*Sala dei Monumenti di Isene*), with sculptures modelled more or less faithfully on the Egypt-

tian style, the majority from Hadrian's Villa (p. 42). *98. Colossal statue of Antinous ('Apollo Egizio'), in white marble; in the centre, 99. Canopic vase of alabaster; to the right of the exit, 56. Statue of the Nile (comp. the statue in the Braccio Nuovo p. 300). — Room III (*Sala del Naosforo*): Statues, tombstones, canopi with inscriptions, 10. Granite statue of King Saites I. (ca. 1800 B.C.), freely restored. *113. Statue of Uas Heremut, high-priest of the goddess Neith of Sais, holding before him a small shrine (naos) of Osiris. The inscriptions mention the conquest of Egypt by the Persians under Cambyses. — Courtyard IV (*Giardinetto*) Mummies, coffins in stone and wood (some from a grave where numerous priests of Ammon were interred, in the necropolis at Thebes), and tombstones. — Room V (*Gabinetto primo delle Votive*) Figures of gods and sacred animals; fayence figures of the dead, scarabs, alabaster vessels, etc. — Room VI (*Gabinetto secondo delle Votive*) Mummies of sacred animals, figures of gods and amulets, bronze censers. — Room VII (*Gabinetto terzo delle Votive*) Figures of gods and the dead, amulets, scarabs. In Case 8 is a large scarab of Amenophis III. (ca. 1400 B.C.), commemorating the ascension of a lake. — Room VIII (*Gabinetto dei Papiri*) Papyrus, mostly of a religious character, in hieroglyphic and hieratic writing. — Room IX (*Sala dei Monumenti Assiri*) contains Assyrian Antiquities. Reliefs from the palaces of Sargon (722-705 B.C.) at Khorsabad, and of Sennacherib (705-682 B.C.) at Kouyunjik and Nineveh, Storming of a city; Raft crossing a river; winged deities; cuneiform inscriptions. — Exit to the Museo Chiaramonte (p. 357).

Ascending to the passage into which the *Sala delle Dipe* and the *Galleria dei Candeliabri* (p. 350) open, and turning to the left, up a few steps, we reach on the right the entrance to the —

*Etruscan Museum (*Museo Etrusco Gregoriano*, visitors ring at the door; see). The museum, founded by Gregory XVI. in 1636, contains in its twelve rooms a number of antiquities excavated chiefly in 1828-36 in Vulci, Toscanella, and Chiusi, and other Etruscan cities, consisting of statues, paintings, vases, golden ornaments, and various domestic utensils in bronze, all extremely interesting as a link in the history of Italian art, and affording some insight into the habits of the still mysterious Etruscans. — See *Helbig and Reich*, *Antiquities in Rome*, vol. II, pp. 264-414.

I. Room. Three sarcophagi of terracotta with lifelike figures of the deceased on the covers. On the walls, numerous portrait-heads in terracotta, attractive from their lifelike conception of the individual peculiarities and their realistic reproduction of the same (comp. p. III). — II. Room, to the right. Numerous portrait-heads; smaller cinerary urns, some of them in alabaster, with mythological reliefs, from Chiusi and Volterra. — III. Room. In the corners are small cinerary urns in the form of houses and huts, found in the Italic (Latin) graves (dating from the so-called first iron age, about the 8th cent. B.C.) between Albano and Marino. 106. Large marble cinerary urn, with partly preserved painting; in the hands and head of the figure are holes for the insertion of bronze ornaments. 110. Gravestone of a certain Atacnatos, son of Drutos, with an early-Latin and Celtic inscription, from Todi. — IV. Room. Left wall, near the entrance 154-156. Fine terracotta frieze from Cerveteri; 158. Relief in stucco of Jupiter (beardless), Neptune, and Pluto. Fine decorative plaques of terracotta. By the

back-wall: to the left, 211, to the right, 234, 266. Fragments of female figures with rich drapery, from Tivoli; 215. Lid of an urn, with the dying Adonis, an interesting realistic work. In the middle of the wall, at the foot, Architectonic terracotta fragment with Pegasus, an archaic work. On the wall to the right, 265. Relief in stucco of Venus and Adonis. In the middle, Terracotta statue of Mercury.

The next four rooms contain the Collection of Vases. Some of these painted vessels were imported from Greece, others manufactured in Etruria itself, where Vulci, Chiusi, Volterra, Bomarzo, etc., are proved to have excelled in this branch of art. The Etruscans imitated the earlier Greek vases with black, as well as the later with red figures, often without a just appreciation of the subjects, and with an obvious preference for tragic scenes, especially murders. In point of drawing also they are far inferior to the Greek originals — V. Room: Vases of the earliest style, with figures in black; the first are from Corinth; from No. 12 onwards are Athenian. In the centre, a very ancient vessel with representations of animals. — VI. Room: In the middle, 77. Ajax with the body of Patroclus; *78. Achilles and Ajax playing at draughts (with the name of the manufacturer *Eraskios*). By the window-wall are prize-amphoræ of the Panathenæan Festival at Athens; under the window to the left, two vases with archaic Latin inscriptions. At the door, 70. Amphora in the form of a wine-skin (*askos*), with two men with oil-vessels and the inscriptions: 'O Father Zeus, would that I were rich', and: 'It is already full and even runs over'. — VII. Room Semicircular corridor. 138. Victorious warrior with Nike and his father. To the left, on the wall, a number of excellent vases with red figures, including *84. Vase with admirably-drawn figure of Achilles. Opposite, *134. Hector parting from Priam and Heoubæ. In the niche to the left, 89. Large vase from S. Italy, with polychrome ornamentation in gold, white, and violet, representing a funeral banquet. Farther on to the left: 91. Death of Orpheus; 93. Minerva and Hercules (Vulci), 97. Apollo on a winged tripod. In the niche, *103. Large vase, with whitish ground and coloured designs, representing the delivery of the infant Bacchus to Silenus, on the reverse, musicians. 121. Humorous representation of the visit of Jupiter and Mercury to Alcmena. At the exit, Vase from S. Italy, with the setting out of Triptolemus. — The VIII Room contains a large collection of graceful and delicately painted *Drinking Cups* (*Kylikes*), usually bearing scenes from everyday life. The cabinet in the middle of the rear wall contains small vases, some of them of irregular form. On the second shelf from the top: to the left, Menelaus and Helen, separated by Aphrodite; to the right, Cock-fight. In the middle of the next shelf, Jason and Athena. On the wall above are copies of paintings in a tomb at Vulci, showing that Etruscan art was at this period influenced by Greece. Below, as the inscriptions appear to indicate, is a historical scene, an adventure of Mastarna (Servius

Tullius) and Omnes Vibenna, besides mythological representations (Cassandra, Achilles slaying the victim for the funeral sacrifice of Patroclus). The glass-cases below the windows contain ancient glass vessels, many of fine workmanship and colouring.

We now return to the sixth room, in order thence to reach the — IX. Room on the right, where Bronzes of every description, domestic utensils, weapons, ornaments, etc., and jewellery are arranged. By the wall to the right, 313. Statue of a warrior, known as 'the Mars of Todi' (p. 69), with Umbrian inscription *Ahal Trutitis duxum dedit* (i. e. *Ahala Trutidus donum dedit*), proving it to be a votive offering (3rd or 2nd cent. B. C.). On the wall behind, helmets, shields, mirrors with engraved designs. In the corner between the door and the window, 283. Boy with a bird, in bronze. Then a glass-cabinet with votive objects found at the mineral springs of Vicarello, near the Lago di Bracciano (p. 104; chiefly gold and silver goblets); bronze vessels, rings, engraved stones. In front of the window, 327. Oval cista of bronze from Vulci, with stamped reliefs of Amazon battles, which when found contained articles of the female toilet.

In the centre of the room, a cabinet with objects excavated at Pompeii in presence of Pius IX., including a fine equestrian relief in marble. The revolving glass-cabinet in the centre contains *Gold Ornaments; in the upper section are arranged those found in 1829 in the Regulini-Galassi tomb at Cerveteri (p. 434), in the lower similar objects from other Etruscan tombs. These show the great skill and taste in workmanship of this kind to which the splendour-loving Etruscan had attained, and the chains, wreaths, rings, etc., afford models which are rarely equalled by Roman jewellers of the present day (see Castellani, p. 142). Many of the objects, however, are not of Etruscan origin, but were manufactured for export in Phœnician or Carthaginian workshops, from Assyrian and Egyptian models. Of this kind are the three silver dishes in the upper part of the cabinet, plated with gold and adorned with embossed scenes (resembling articles in the Treasure of Præneste, p. 204), and the gold ornaments to the right and left (breastplate, bracelets, etc.), with embossed ornamentation or fine granulated work. Opposite the 2nd window, 329. Bronze statuette of a boy with a bulla and Etruscan inscription. Then a brazier with tongs and poker. Opposite the 3rd window is (No. 207) a second, but less perfect cista, with engraving of a group of athletes. By the exit-wall: 175. Remains of a bronze statuette; 173. Upper portion of a portrait-statue; in front, 206. Restored biga. 206. Arm in bronze, of admirable workmanship, found at Civit  Vecchia along with the dolphin's tail to the right of the biga and the spear on the wall behind; all three fragments belonged to a colossal figure of an emperor in the guise of Neptune. In the cabinet, 170. Bronze objects of everyday use, in the corner, 145. Brazier. By the back-wall, Vessels, candelabra, cauldrons.

shields; 57. Four-wheeled censor; in front of it, 155. Brazen bed, both of great antiquity (ca. 600 B.C.). 69. Etruscan lituus or signal-trumpet; 32-34. Bronze plates like shields, with heads in relief in the middle, used as decorations for the ceilings and doors of graves. At the door, 16. Beautiful head of a woman, in bronze. — We now pass through a small door in the wall first described, and enter the —

X. Common room, in which are water-pipes and small bronzes. — Thence we enter the —

XI. Room. This contains all kinds of vases (some very ancient, with engraved geometrical patterns) and three large sarcophagi (the middle one painted), as well as copies of Tomb Paintings from Corneto and Vulci, invaluable in the study of early-Italian art. The most ancient style (down to about B.C. 450) is represented by the paintings on the ends of the saloon (excepting the scene over the door), which somewhat resemble early-Greek designs, but are ruder and more destitute of expression. The next stage (after B.C. 450) is exemplified by the designs on the long wall, where the progress is traced which the Etruscans had made in the art of drawing and in their ideas of the human figure, under the influence of the Greeks; at the same time Etruscan peculiarities are observable, especially in the heads, which are all in profile. These paintings, like the preceding, also represent games and dances performed in honour of the dead. The third and fully-developed period is represented by the picture, over the door, of Pluto and Proserpine (the latter full-face), which may probably be regarded as coeval with those in the 8th room. For economy of space several rows of these paintings are here exhibited one above another, but in the tombs each wall was embellished with a single row only. It is interesting to observe the gradual expansion of the colour-scale. The visitor should also notice that the paintings were intended to be seen by an artificial light, and hence the garlands, plants, and bronzes are painted blue instead of green. — We proceed straight on to Room XII., containing gold ornaments, vases, and terracottas found near Viterbo. — Returning through R. XI., we traverse the corridor and R. IX, to the —

XIII. Room. On the left is an Etruscan tomb, with three beds, vases, etc.; at the entrance, two lions from Vulci. The cabinet in the centre contains bronzes from Bolsena, including two heads in relief of idols with the attributes of several gods; by the window, objects in bone.

C. LIBRARY.

The Library and the Museum of Antiques may be conveniently visited in succession (adm., see pp. 150, 151). Entrance by the glass-door at the bottom of the staircase to the Sala a Croce Greca (see p. 349; visitors knock; fee 1/2 fr.). Entrance for readers, see p. 350. Comp. Plan, p. 313.

At a very early period the popes began to preserve and to collect documents and thus gradually formed the Archives, which are mentioned for the first time under Damasus I. After various losses,

caused especially by the migration to Avignon, and frequent change of locality, most of the library is now finally established in the Vatican in twenty-five rooms, in addition to the great library-hall. The Archives comprise a large number of the most interesting and important documents, especially of the middle ages, registers of the papal acts, letters of the popes from Innocent III. downwards, and correspondence with uncles and foreign courts. Visitors and readers, who require the permission of the Cardinal-Secretary, are admitted 8.30-12 on the same days as the library is open (p. 146).

Besides this collection of documents, the popes possessed their private libraries until Nicholas V. instituted a public Library, with 5000 vols., and appointed *Giovanni Tortelli* as the first librarian.

The library was neglected and dispersed by his successors. Sixtus IV. was the first to revive the institution; he assigned the rooms under the Appartamento Borgia for the collection, appointed Platina (1479) director, and set apart definite revenues for its maintenance. (These premises are now used as store-rooms and are only accessible by special permission; they are decorated with frescoes of the school of Ghirlandajo and admirable designs painted by *Giulio da Porti*. Thus endowed, the library increased steadily and the allotted space became more and more inadequate, until in 1585 Sixtus V. caused the present magnificent edifice to be erected by *Domenico Fontana*, intervening the great court of Bramante. To this ever-increasing collection several considerable libraries have been added by purchase or donation, some of which are catalogued and preserved separately. In 1623 the Elector Maximilian presented to the Pope the *Sibthorpian Patristics* of Heidelberg, when that town was taken in the Thirty Years War; and in 1637 the *Bibl. Crœman*, founded by Duke Federico da Montefeltro, in 1680 the *B. Raynolds* came the property of Queen Christina of Sweden, and in 1746 the *B. Ottobonian*, purchased by Alex. VIII. (Ottoboni), were added. In 1797, 843 MSS. were carried off by the French but were restored in 1814 with the exception of 35 from the *B. Palatina* which were returned to Heidelberg. In 1816 the German MSS. (849 in number) of the same collection were also restored to Heidelberg. In 1903 Leo XIII. purchased the *Sibthorpian Barbertonia* at a cost of 500,000 fr.

The Vatican Library now contains upwards of 31,000 MSS. The principal librarian is a cardinal, who in ordinary business is represented by the under-librarian and a prefect. Permission to use the library (p. 146) can be obtained only from the Cardinal-Secretary on the recommendation of the traveller's ambassador, or of a learned institution, the applicant stating the branch of study contemplated.

Visitors first enter (by the glass-door, mentioned at p. 349, opposite the staircase leading to the Museum of Statuary) a long Concession below the Galleria dei Candelabri, divided into several rooms and sections. — Section I. *Museo Pio-Clementino*. To the right, by the door. **Bronze Head of Augustus*, one of the finest extant portrait-heads of that emperor, left, *Bronze Head of Nero*, below, on the table, a small, finely executed head of a girl. — At the entrance to the next room, or section, are two prophetic columns from the *Thermae of Constantine* (p. 177), on each of which are carved the figures of two kings. The closed cabinets along the walls contain the *Bibliotheca Ottoboniana*, the *Bibliotheca Regimensis*, and the MSS. of the Vatican Library. — Continuation of the corridor, see p. 366.

We now turn to the left and enter the **GRAND HALL**, 77 yds. long, 16 yds. wide, and 20 ft. high, supported by 6 pillars, constructed by Fontana and paved with marble by Pius IX. The paintings (of the 17th cent.), representing scenes from the life of Sixtus V., are interesting on account of the views of the buildings of that pope, who entirely altered the E. part of Rome (Rione Monti). By the walls and round the pillars are 46 small cabinets containing the MSS.; the antique vases upon the cabinets are of little interest. The most celebrated MSS. are exhibited in glass-cases: palimpsest of the Republic of Cicero, Dante with miniatures by Giulio Clovio; the ritual of Cardinal Ottoboni, breviary of King Matthias Corvinus; celebrated MSS. of the Greek New Testament (5th cent.), of Virgil (5th cent.), and Terence (the so-called 'Bombinus'; 4th cent.), also autographs of Petrarch, Luther, and Tasso, and a small volume of Henry VIII.'s love letters to Anne Boleyn.

Also a number of gifts presented to the popes: *Sèvres* candelabrum presented by Napoleon I. to Pius VII.; a cross of malachite, from Prince Demidoff, two vases of Berlin porcelain, presented to Pius IX. by Fred. William IV. of Prussia after his last visit to Rome; vase of *Sèvres* porcelain, presented by Charles IX.; vase of Scottish granite, presented by the Duke of Northumberland to Card. Antonelli; font, in *Sèvres* porcelain, in which the Prince Imperial (d. 1879) was baptized, presented by Napoleon III. to Pius IX.; malachite vase, presented by Emp. Nicholas I. to Gregory XVI.; three *Sèvres* vases a gift of Marshal MacMahon to Pius IX.; large vase of oriental alabaster, presented by the Khedive Ibrahim Pasha of Egypt to Pius IX.; vases of Berlin porcelain, presented by King William I. of Prussia, afterwards German Emperor; huge block of malachite, from the Grand Duke Constantine of Russia.

The adjoining **LIBRARY ROOMS** are entered from the *Galleria Lapidaria* only (p. 356). In them are suspended the portraits of the cardinal-librarians, framed papyrus-scrolls, and a facsimile of the two columns from the *Troplæum* of Herodes Atticus on the *Via Appia*, with an imitation of ancient Attic characters the originals of which are in Naples.

We now retrace our steps through the Great Hall to the **COMMON**, the continuation of which is also divided into sections. The first two sections contain the Latin MSS. of the *Palatine* and *Urbino Libraries*. In the first, over the entrance, is represented the interior of *Santi Apostoli*, over the egress, interior of the old church of St. Peter, in the second, over the entrance, the Erection of the Vatican Obelisk by Fontana (see p. 318), over the egress, St. Peter's, according to Michael Angelo's design. To the left, view of the Vatican and its environs, statue of St. Peter, by Amalia Dupré. In the third section, quattrocento and oriental MSS.; various costly gifts presented to Leo XIII. on his jubilee as priest; by the sides of the egress, two ancient portrait-statues. — We next enter the —

MUSEUM OF CHRISTIAN ANTIQUITIES The 1st Room contains curiosities from the catacombs and ancient church-furniture: lamps, glasses, gems, statuettes, pictures, altar-pieces, crosses, etc., the most interesting of which are preserved under glass. Second case on the right: several fine diptychs and triptychs in ivory. — The 2d Room, the *Stanza de' Puppi*, with ceiling-paintings by Raph.

Mengo, is filled with documents on papyrus of the 5-8th cent., found at Ravenna. — The glass-cabinets of the 3rd Room contain numerous small pictures of the 13-15th cent. (*School of Fra Angelico*, Triptych by *Ant. da Viterbo*, etc.), unfortunately not well seen. On the wall of the apse, on the right, a Russian painted calendar in the form of a cross, of the 17th cent.; next to it, a large cross of rock-crystal, on which the Passion is represented, by *Valerio Vicentino*, presented by Pius IX. The handsome carved prie-dieu of Pius IX. is of French workmanship. Under glass is a sumptuous prie-dieu, presented to Leo XIII. by the Genoese. — The adjoining room, formerly the CHAPEL of Pius V, adorned with frescoes by *Giorgio Vasari*, and containing a Cabinet of Coins (not shown) which was seriously pillaged in 1797 and 1849, contains a large stained-glass portrait of Pius IX. in his papal robes. In this and the following room are deposited also the numerous addresses which Pius IX. received in the course of his pontificate. — To the right in the third room is the entrance to a collection of —

ANCIENT PICTURES. On the floor, ancient mosaics. On the right wall: *Phædra and Scylla*; above, *Ulysses and Circe*; then the so-called **Aldobrandine Nuptials*, one of the finest ancient pictures in existence, found at Rome about 1600; next to it, to the left, *Warrior in armour*, found at Ostia in 1868; above it, *Ulysses encountering the Læstrygones*; to the left, by a door, *Ship being loaded*, found at Ostia. By the window, Oriental gold and silver trinkets and plate, presented by the Emperor of Siam to Pius IX. To the left and right of these: *Myrrha and Pasiphaë*. By the long wall, farther on: the *Spies of Ulysses among the Læstrygones*; below, a chariot with *Cupids*, to the right, sacrificial procession in front of a statue of *Artemis*; to the left, a boat mounted on a waggon, probably connected with the worship of *Isis* (*Isidis navigium*). Then, *Ulysses in the infernal regions*; below it, an unknown female figure and *Canace*. The above-mentioned mythological figures of women celebrated for their misfortune in love are from *Tor Marancia* (comp. p. 359). The representations from the *Odyssey* were found on the *Esquiline*. — An adjacent cabinet contains a collection of *Ancient Brick Stamps* and another of *Majolica*, transferred from the papal summer-palace at *Castel Gandolfo*.

The *Studio del Mosaico*, or *Papal Manufactory of Mosaic*, is under the gallery of the inscriptions; entrance in the left angle of the farther side of the *Cortile di San Damaso* (p. 330). Permessi obtained at the *Segretaria*, of the *Maggiordomo*, on week-days from 8 to 11 o'clock. Numerous workmen are employed here in copying celebrated pictures for churches, etc. The material used is a kind of coloured glass, of which there are said to be 28,000 different shades.

d. The Lungara.

The Borgo is connected with Trastevere by the *VIA DELLA LUNGARA*, $\frac{3}{4}$ M. in length, constructed by Julius II. The Borgo is quitted by the *Porta di Santo Spirito* (Pl. II, 9; p. 318), begun by Antonio da Sangallo the Younger, and occupying nearly the same site as the old Gate of the Saxons. — Immediately to the right diverges the broad *Via del Gianicolo* ascending the hill in a curve. This is the N. approach to the *Passeggiata Margherita*, described at p. 379. At the top it traverses the former garden of the convent of *Sant' Onofrio*, whither also the steep *Via di Sant' Onofrio* ascends direct in 5 min. from the gateway.

Sant' Onofrio (Pl. II, 9), on the slope of the Janiculum, erected about 1430 in honour of the Egyptian hermit Honuphris, is adjoined by a monastery of the order of St. Jerome. The church and monastery are preceded by a colonnade of eight columns; in the lunettes to the right are three frescoes from the life of St. Jerome by *Domenichino* (Baptism, Chastisement, Trance). If the church is closed, visitors ring (r.) at the door of the monastery ($\frac{1}{2}$ fr.).

Left Side. The 1st Chapel contains the tomb of the poet Torquato Tasso, who died in this monastery in 1595; the monument was erected by Pius IX. in 1867, the statue is by *De Fabris*. In the 2nd chapel, the tomb-stone of the linguist Card. Mezzofanti (d. 1849). — *Right Side.* The 2nd chapel contains a Madonna, altar-piece by *Ann. Carracci*. At the end of the right wall monument of Archbp. Giov. Sacchi (d. 1835); in the lunette St. Anna teaching the Madonna to read, by *Pisturcchio* (school-piece). The *Trinova* contains restored frescoes by *Bald. Peruzzi*.

The MONASTERY contains, in a passage on the first floor, a Madonna with the donor, an admirable fresco of the school of *Leonardo da Vinci* (*Botticelli*?), which has unfortunately been much injured by retouching (the attitude of the raised arm of the child, for example, has been entirely spoiled). The cell is still shown in which Tasso resided, when about to receive the laurels on the Capitol, and in which he died, 25th April, 1595. It contains his bust in wax, taken from the cast of his face, his portrait (by Balbi, 1864), autograph, etc. — On the hill-slope, to the left of the monastery, are the remains of an oak (shattered by lightning in 1842 and again seriously injured by a storm in 1891), under which Tasso was in the habit of sitting. Admirable view.

In the *LUNGARA*, farther on, to the left, is a suspension-bridge (Pl. II, 9, 12; toll 5 c.), on the left bank rises *San Giovanni dei Fiorentini* (p. 228). Opposite the bridge, in the Lungara, is the extensive *Palazzo Salviati* (Pl. II, 9), with a handsome court of the 16th cent., now a 'Collegio Militare' (cadet academy). The adjacent garden includes the *University Botanical Garden*.

About $\frac{3}{4}$ M. from the *Porta Santo Spirito* and opposite the *Pal. Corsini* (p. 370), to the left, is the entrance to the —

²²*Villa Farnesina* (Pl. II, 11; adm., pp. 150, 151; visitors should ; hand-mirrors), the garden of which, extending to the Tiber,

has been greatly curtailed by the recent alterations made in the course of the river. The small two-storied building, an exceedingly pleasing Renaissance edifice, was erected about 1508-11 by *Bald. Peruzzi* (?) for the papal banker Agostino Chigi, an enthusiastic admirer of art and patron of Raphael (see pp. 222, 228). In 1580 Cardinal Al. Farnese inherited the villa, which remained in the possession of the Farnese family until the extinction of the latter in 1731. It then passed to the King of Naples; and in 1861 it was let by Francis II. for 99 years to the Duke of Ripalda.

From the garden we enter a hall (64 ft. long, 23 ft. wide) on the ground-floor between two projecting wings, originally open, but now enclosed with windows. The ceiling, with its pendentives and spandrels, was decorated from the designs of Raphael (1516-18) by *Giulio Romano*, *Francesco Penni*, and *Giovanni da Udine* (who executed the enclosing garlands), with twelve illustrations of the *MYTHS OF PSYCHE*, which are among the most charming creations of the master (comp. p. lxxi). Raphael has followed the account of Apuleius, a Latin author of the 2nd cent. A. D. much read during the Renaissance period, but has restricted himself to the incidents that took place in Olympus. A very plausible suggestion has recently been made that the walls were intended to be covered with representations of the much more dramatically effective scenes that took place on earth, in Psyche's palace. But even in the absence of the latter, and in spite of C. Maratta's unfortunate restoration which has especially injured the blue ground, the whole produces a charming and brilliant effect owing to the indestructible beauty of the designs. The room is justly regarded as unique of its kind, even in a period so rich in noble creations of art.

The series of illustrations begins on the left, and is continued to the right on the wall opposite the entrance. The fable of Apuleius may be briefly told as follows. A certain king has three daughters, of whom Psyche, the youngest, excites the jealousy of Venus by her beauty. The goddess accordingly directs her son Cupid to punish the princess by inspiring her with love for an unworthy individual (1). Cupid himself becomes enamoured of her, and shows her to his hand-maidens after the king has abandoned her to him (2; this is the best preserved of the paintings). He visits her by night only, warning her not to indulge in curiosity as to his appearance. Psyche, however, instigated by her envious sisters, disobeys the injunction. She lights a lamp, a drop of heated oil from which awakens her sleeping lover. Cupid upbraids her and quits her in anger. Psyche wanders about, filled with despair. Meanwhile Venus has been informed of her son's attachment, imprisons him, and requests Jove and Ceres to aid her in seeking for Psyche, which both goddesses decline to do (3). She then drives in her dove-chariot to Jupiter (4), and begs him to grant her the assistance of Mercury (5). Her request is complied with, and Mercury flies forth to search for Psyche (6). Venus torments her in every conceivable manner, and imposes impossible tasks on her, which, however, with the aid of friends she is enabled to perform. At length she is desired to bring a casket from the infernal regions (7), and even this, to the astonishment of Venus, she succeeds in accomplishing (8). Cupid, having at length escaped from his captivity, begs Jupiter to grant him Psyche; Jupiter grants his request, kisses him (9), and commands Mercury to summon the gods to deliberate, and to conduct Psyche to Olympus (10). Psyche appears in

the assembly of the gods and Mercury leads her the draught of immortality (ceiling-painting on the right). The gods celebrate the nuptial banquet (ceiling-painting on the left). — Below the spandrels, fourteen Cupids with the attributes of the gods, all of whom have been vanquished by love.

The apartment adjoining the entrance hall on the left, which also was once without the protecting windows, contains a second mythological picture by *Raphael*, which is no less charming than the *Psyche* series, and indeed far surpasses them in point of execution, being painted entirely by the master's own hand in 1514. **GALATHEA*, borne across the sea in a shell, and surrounded by *Nymphs*, *Tritons*, and *Cupids*. To the left, *Sebastiano del Piombo* painted *Polyphemos* trying in vain to move the heart of *Galathea* by his love-songs (restored and ruined in the 18th cent.). The **Ceiling Paintings*, masterly in design and execution, by *Baldassare Peruzzi* (completed in 1518), represent the starry heavens in a border painted to resemble plastic work. The large pictures present the constellation of *Pegasus* and the chariot, with the nymph *Callisto* as the charioteer; in the fourteen pointed arches are other constellations, and in the ten hexagonal spaces, the twelve signs of the zodiac and the gods of the seven planets, mostly arranged in groups. The lunettes were afterwards filled by *Seb. del Piombo* with scenes from the kingdom of the air and from metamorphoses in which human beings are changed into birds. — The restorations carried out in 1861-70 in this and the entrance-hall have had only a modified success.

The subjects in the lunettes are taken from *Ovid's Metamorphoses* but the meaning is not in every case clear. 8 and wall 1 *Torquus* with *Philomela* and *Proetus* (?), 2 *Daughters of Cecrops* and *Erichthonius*. Long wall 3 *Daedalus* and *Icarus*; 4 *Juno* in her chariot drawn by peacocks; 5 *Scylla* betrays her father *Nisus* by cutting off his purple lock, 6 *Phaethon*; 7 *Dionysus* and *Orithyia*. 8 and wall 8 *Flores* and *Eephyr*; 9 *Colossal head* in grisaille, wrongly ascribed to *Michael Angelo*. The landscapes are erroneously attributed to *Gasp. Poussin*.

The *Upper Floor* of the *Farnesina*, to which, however, visitors are seldom admitted, contains in the 1 *Room (Salone)* five architectural scenes by *Bald. Peruzzi* (*View of Rome*, the *Borgo*, *Janiculum*, etc.), one of the best examples of this kind of deceptive painting. *Peruzzi* also executed the frames of mythological scenes. Entrance-wall *Dionysus* and the *Flood*, *Apollo* and *Daphne*. Long wall *Venus* and *Adonis*, *Bacchus* and *Ariadne*, *Race of Priapus* and *(Eu)nomus*, *Parnassus*, *Triumph of Venus*. East wall *Endymion* and *Lena*, *Cephalus* and *Procris*. Over the windows (badly lighted) *Bacchanalian* scenes; *Arion* on the dolphin. Over the fireplace *Vulcan's forge* — 11 *Burnoon*. **Bedroom*, *Marriage of Alexander* and *Roxana*, painted in 1511-12. The conception of this masterpiece is based on *Lucian's* description of a painting by *Ekton*. *Alexander* is conducted by *Cupids* to the nuptial couch of *Roxana*, *Hymen* and *Hephæstion*, the groomsmen, stand last in admiration; other *Cupids* play with the weapons of *Alexander* — East-wall *Bedroom*, *Family of Darius* in presence of *Alexander* — The third picture, *Alexander* on *Bucephalus*, is a poor work by an affected Roman artist of the second half of the 16th century.

On the other side of the *Lungara*, opposite the *Farnesina*, is the **Palazzo Corsini* (Pl. II, 11), formerly the property of the *Ricci* family, purchased for *Card. Nori Corsini*, nephew of *Clement XII.*, 1729, and rebuilt by *Pape*. In 1668-80 it was occupied, after

her conversion to the Church of Rome, by Queen Christina of Sweden, daughter of Gustavus Adolphus, who died here in 1689. In 1884 the palace was purchased by government and assigned to the *Reale Accademia de' Lincei*, or Royal Academy of Science. — A double staircase ascends from the principal portal to the 1st floor, on which is the —

GALLERIA NAZIONALE (adm., see pp. 150, 151). — In 1894 the collection of paintings bequeathed to the city of Rome by *Prince Giovanni Torlonia* (d. 1829) was removed hither from the Palazzo Torlonia in the Piazza Venezia and united with the older Corsini collection, a number of paintings from the *Monte di Pietà* (p. 230) and the contents of the *Galleria Sciarra* (p. 201) were subsequently added, so that the Corsini Gallery now contains works of nearly every school and period, including a few of rare merit. The earlier stylistic school of landscape painting (*Andr. Locatelli*, 1660-1741) especially is represented by good examples; and the German and Dutch paintings, though few in number, are worthy of attention. — Director, *Prof. Ad. Venturi*.

In the court to the right of the entrance-hall is a marble group, *Hercules and Lichas*, one of *Canova's* principal works. — In the **Corridor** leading from the staircase to the vestibule are antique heads; the second on the left, *Head of Hercules*, after *Scopas*. — **Vestibulum**. In the centre *Psyche* supported by *Zephyrs*, by *Gibson*. At the back-wall, to the right, *Dancer* by *Canova*, sculptures of the school of *Canova* and three antique statues. To the right is the —

I. Room On the entrance-wall: Good landscapes by *Locatelli*. Back-wall, *Views of Rome*, by *Panini*. By the door, *H. Vernet*, *Portrait*. Exit-wall, 136. *Poussin*, *Landscape*. Between the door and the window, *Views of Rome* by *Vanvitelli* (*Van Witel*).

II. Room. In the middle, *Antique marble chair*, with reliefs relating to war, sacrifice, and the chase. Entrance-wall: *Views of Venice* by *Canaletto*. Left wall 3725 *Baciccio* (*Giov. Batt. Gaulli*), *Portrait of Bernini*; 197. *Maratta*, *Holy Family*; *Carlo Dolci*, 241. *St. Apollonia*, 229. *Mary Magdalen*, 243. *St. Agnes*. In the recess stands the **Corsini Vase* (No. 215) in silver, with the *Purification of Orestes* in chased work (antique). On the walls of the recess: 204-214. *Fragments of decorative paintings* by *Petrus del Vaga*, from the old Palazzo Altoviti, which formerly stood near the *Castello di Sant' Angelo*. Farther on. 395. *Salvator Rosa*, *Battle-scene*; 246, 294. *Guido Reni*, *Ecco Homo*. To the right is the —

III. Room. 397, 400 *Botari*, *Female heads*; 186. *Ribera*, *Old man*; 196. *Mola*, *Homer*, 244. *Luca Giordano*, *Christ among the Scribes*; 430, 437, 188, 730, 1099 *Pictures* by *Guercino*; *191. *Murillo*, *Madonna*; 732. *Carlo Dolci*, *Madonna*.

IV. Room (*Torlonia Collection*). *Netherlandish Schools*. 336, 337, 342, 343. *Snyders* (or *De Vos*), *Hunting-scenes*; 440. *Karel du Jardin*, *Farrier*; 445. *Teniers the Younger*, *Barrack*; 499. *Rem-*

brandt (?), Christ at Emmaus; 401. *Pieter de Hoogh*, Lancer; 478. *Ferd. Bol*, Olmen and Pera.

V. Room, said to be the one where Christina of Sweden died (p. 371). *Torlonia Collection*. Flemish School; 971. Rubens, Monk (school-piece); 225. Rubens (?), St. Sebastian. Between the windows: 220 *Van Dyck* (?), Madonna.

VI. Room. *2171. *Bronzino*, Stefano II. Colonna (1543); 632. *Dosso Dosso*, Portrait; 581. *Venetian School*, Portrait; 615. *Titian*, Philip II. (school-piece; original in Naples); 584. *Bugiardini*, Copy of Raphael's Leo X. in the Palazzo Pitti at Florence (with alterations in the subsidiary figures).

VII. Room. 631. *Titian*, Portrait (school-piece); 659. *P. Veronese*, Betrothal of St. Catharine (school-piece); 618. *Cariani*, Holy Family; 623. *Rocco Marconi*, Christ with the Woman taken in adultery; 627. *Garofalo*, Bearing of the Cross; 644. *Ferrarese School* (*Nic. Pisano* ?), Pieta; 640. *Inn. da Imola*, Holy Family; 648. *Amico Aspertini*, St. Pellegrinus; 574. *Bronzino*, Noble Florentine lady; 590. *Rosso Fiorentino*, Holy Family; 579. *Fra Bartolomeo*, Holy Family; 589. *Bagnacavallo*, Holy Family; 580. *Bugiardini*, Madonna; 647. *Old Copy of Titian*, Venus and Adonis; 610. *Bart. Veneto*, Portrait; 610. *Andrea del Sarto* (?), Madonna.

VIII. Room. *Pietro Alemanno*, 716. St. Michael; 721. St. Peter; 708. *Nic. da Foligno*, Triptych; 710. *Palmezzano*, God the Father; 729. *Nic. Rondinelli*, Madonna; 715. *Palmezzano*, St. Jerome; 2371. *Antoniazio Romano*, Madonna enthroned, with SS. Paul and Peter; 712. *Franc. Francia*, St. George; 2370. *Blanchi Ferrari* (?), Agony in the Garden; 727. *School of Perugino*, St. Jerome (school-piece); 733. *Fra Angelico da Fiesole*, Last Judgment; *Ant. di Alatri*, Triptych. In the middle, 4129. *Giorgione* (?), St. George and the dragon. — To the right is the —

IX. Room (Cabinet). 752. *Master of the Death of the Virgin*, Card. Bern. Clesius, Prince-Bishop of Trent; 750. *Holbein* (?), Henry VIII.; 758. *Hans von Schwaz*, Portrait of Wolf Tamvelder; 733. *Hans Hoffmann* (end of 16th cent.), Hare (copy after Dürer); 767. *Moreelse*, Portrait; 1882, 1887. *Pozzo*, Sketches for the ceiling of Sant' Ignazio (p. 203). — We retrace our steps and go straight to the —

X. Room, containing the celebrated *Corsini Collection of Drawings and Engravings*, one of the most extensive in the world. Some of the engravings are hung on the walls, while the remainder are shown on request on Tues., Thurs., and Sat., 10-12. Director *Dr. F. Hermann*. — The small room between this room and Room I contains frescoes from the Palazzo Altoviti.

The Library of this palace (adm., see p. 148, entrance by the principal portal; traverse the open corridor to the right before the main staircase, and ascend the winding staircase to the 1st floor), was founded by Card. Neri Corsini in 1754. It contains 70,000 vols. and about 200 MSS.

At the S. end of the Lungara stands the *Museo Torlonia* (Pl. II, 10, entrance *Vicolo Corsini* 5), the property of *Prince Don Giulio Torlonia*, containing the most extensive collection of antiquities in Rome after those at the Vatican and the Capitol (not open to the public). The collection, which includes over 600 objects from almost every epoch of Græco-Roman art, consists chiefly of the contents of the former *Galleria Giustiniani*, of a number of works formerly in the *Villa Albani*, and of the yield of the late *Prince Torlonia's* excavations. The *Vesta Giustiniani* (No. 490) and the fine collection of imperial busts may be specially mentioned. Catalogue by *P. E. Visconti*.

A little to the S. of the *Museo Torlonia* the *Via della Lungara* is terminated by the *Porta Settimiana* (Pl. II, 10), a gate in the older wall of Trastevere. — The *Via Garibaldi* and the *Via di Santa Maria della Scala* begin here; see pp. 377 and 375. — The house with the old Gothic window, at the corner of the *Via di Santa Dorotea*, to the right, is pointed out as the abode of Raphael's 'Fornarina'.

e. Trastevere.

ELECTRIC TRAMWAY from the *Piazza delle Terme* viâ the *Piazza Venezia* and the *Ponte Garibaldi*, see No. 9 in the Appendix.

The *Janiculum* (275 ft.) rises to a commanding height near the river, the banks of which were connected in ancient times by the *Pons Sublicus*, a wooden bridge, which was broken down in times of danger. No mention of a fortification on the *Janiculum* is made until near the close of the republican period. The hill was annexed to the city by Augustus as a 14th quarter, which he named the *Regio Transiberina*. The banks of the Tiber here were bordered with handsome villas, but the quarter always retained the character of a suburb, and was much frequented by foreigners, particularly by Jews, who formed a community here down to the beginning of the 16th cent. (comp. p. 232). Trastevere is now inhabited almost exclusively by the working classes, among whom many well-built and handsome persons of both sexes will be observed. The inhabitants of Trastevere maintain that they are the most direct descendants of the ancient Romans, and their character and dialect differ in many respects from those of the citizens of other quarters.

The northernmost of the bridges by which Trastevere is connected with the city is the *Ponte Sisto* (Pl. II, 10, 13), constructed under Sixtus IV., in 1474, on the site of the *Pons Valentinianus*, built in 366 A.D. by Symmachus, prefect of the city. Opposite is the *Fontanone di Ponte Sisto*, re-erected here in 1809. This fountain was constructed under Paul V. by *Giov. Fontana* in 1618 at the other end of the bridge, whence it was removed in 1879. — To the right the *Via di Ponte Sisto* leads in 3 min. to the broad *Via Garibaldi*, a little on this side of the *Porta Settimiana* (see above), which ascends to *San Pietro in Montorio* (p. 377). The side-streets to the left lead to *Santa Maria in Trastevere* (p. 374).

Below the *Ponte Sisto* the Tiber is spanned by the *Ponte Garib-*

baldi (Pl. II, 13), an iron bridge with two spans of 180 ft., built in 1886-88. At the Trastevere end of the bridge is the *PIAZZA D'ITALIA*, which is traversed by the main street of Trastevere, the *Via della Lungarina*, continued on the W. by the *Via della Lungaretta*. To the left is the *Torre degli Anguillara*, built in the 12th cent. by the powerful Count Anguillara, a scion of the Orsini family, and recently restored. With the remains of the adjoining fortified mansion, this forms one of the largest private buildings of mediæval Rome.

The church of *San Grisogono* (Pl. II, 13) is a basilica of early foundation but frequently restored. The portico dates from the last restoration, by Giov. Batt. Borla, in 1624.

The *IRRADIUM*, with a richly gilded ceiling executed at the last restoration, is interesting on account of its fine old mosaic pavement, and ancient columns, particularly the two of porphyry supporting the arch of the choir, which are the largest in Rome. The ceiling-painting of the transept is by the *Cavaliere d'Arpino*. The mosaic on the wall of the tribune represents the Madonna between SS. Chrysogonus and James. Fine carved stalls of 1606.

In the *Via Monte di Fiore*, to the E. of the *Piazza San Grisogono*, an *Excubitorium* of the VII. Cohort of the *Vigiles*, i.e. a station of the Roman firemen (p. xxxii), has been excavated at a depth of about 30 ft. (see $\frac{1}{2}$ fr.). A modern flight of steps descends to a small mosaic-paved court-yard, with a cistern in the centre, a chapel with mural paintings (right), and several rooms, on the walls of which are numerous rude inscriptions of the beginning of the 3rd cent. A.D.

The *Via della Lungaretta* leads to the right from the *Piazza San Grisogono* to (5 min.) the *PIAZZA DI SANTA MARIA IN TRASTEVERE* (Pl. II, 10, 13), with a fountain and the church of —

**Santa Maria in Trastevere*, which is said to have been founded by Calixtus I. under Alexander Severus, on the spot where a spring of oil miraculously welled forth at the time of the birth of Christ. It is mentioned for the first time in 499, was re-erected by Innocent II. about 1140, and consecrated by Innocent III. in 1198. The present vestibule was added by Carlo Fontana under Clement XI. in 1702; and a somewhat meretricious restoration of the church was carried out in 1866-74. On the façade are *Mosaics* of Mary and the Child, on each side the small figure of a bishop (Innocent II. and Eugene III.) and ten virgins, eight of whom have burning, and two extinguished lamps, a work of the 12th cent., freely restored in the 14th (comp. p. lxi). The mosaics on the pediment above are modern. The vestibule contains two Annunciations, one attributed to *Pietro Cavallini*, but now entirely repainted, and numerous inscriptions.

The *IRRADIUM* (best light in the afternoon) contains twenty-two ancient columns of unequal sizes, supporting a straight entablature. Some of the capitals were formerly decorated with heathen deities (e.g. Jupiter, Harpocrates with his finger on his mouth, etc.), but these were removed when the church was restored in 1870. The fine pavement is laid with verde antico, and other marbles, in the style known as *Cosmate*.

work (comp. p. 131). The ceiling, decorated with richly-gilded carved work, is attributed to *Domenichino*. The oil-painting on copper in the centre, a Madonna surrounded by angels, is by the same master. Immediately to the right of the entrance to the Nave is an elegant tabernacle by *Mino da Fiesole*. The chapels of the aisles contain little to detain the traveller. The TRANSSEPT is reached by an ascent of seven steps, on which is the inscription *Fons Olei*, indicating the alleged site of the spring of oil. In the right transept are the tombs of two *Armailini* (1534). Opposite is an altar erected to St. Philip and St. James by Card. Philip of Alençon; l. his tomb (d. 1597); r. tomb of Card. Stefaneschi (d. 1417), with recumbent "Figure by 'Magister Paulus.' — The "Mosaics in the TRANSSEPT belong to different periods. Above are the older ones, dating like the triumphal arch itself ('the first Romanesque work of importance in Italy') from 1150-55. On the arch: the Cross with Alpha and Omega, under the symbols of the Evangelists; r. and l. Isaiah and Jeremiah. On the vaulting Christ and the Virgin enthroned; l., St. Calixtus, St. Lawrence, Innocent II.; r., St. Peter, St. Cornelius, Julius, Calpodius. The lower mosaics are ascribed by Vasari to *Pietro Cosulich*, a master of the transition period from the Cosmas family to Giotto, and have been restored by Camuccini. They represent the thirteen lambs and scenes from the life of Mary; in the centre of the wall a mosaic bust of Mary with St. Peter, St. Paul, and the donor Stefaneschi (1290). — In the chapel to the right of the CHORUS is a Madonna with SS. Rochus and Sebastian (*Umbrian School*). — The SACRISTY contains a fragment of ancient mosaic (ducks and ushermen, the former admirable).

The *Via di Santa Maria della Scala*, to the N.W. of Santa Maria in Trastevere, leads past the church of *Santa Maria della Scala* to the *Porta Settimiana* (p. 373) and the beginning of the *Via Garibaldi* (p. 377). — The *Via di San Francesco a Ripa* leads to the S.E. from the Piazza Santa Maria in Trastevere to (6 min.) the church of *San Francesco a Ripa* (see p. 376); and the *Via San Cosimato* leads to the S. to (4 min.) the Piazza San Cosimato. On the S. side of this piazza is the —

Monastery of San Cosimato (Pl. III, 10, 13), dating partly from the 11th, partly from the 15th cent., and since 1892 the property of the *Congregazione di Carità*. The CHURCH was built in 1476 on the site of an early Christian basilica (9th cent.?), the small fore-court of which is still extant. In the interior are some antique columns and a fresco by *Ant. da Viterbo* (Madonna and saints). The 2nd chapel (left) contains the tomb of Lorenzo Cibo (d. 1504), which, after the coffin had been removed, was used as an altar, by *Michelangelo* (?). It was formerly in Santa Maria del Popolo.

The *Ponte Palatino* (Pl. II, 16), the iron bridge (p. 285) near the Piazza Bocca della Verità, lies immediately opposite the E. end of the *Via della Lungarina* (p. 374); while to the S.W. the *Via de' Vascelli* and its prolongation, the *Via di Santa Cecilia*, lead to —

"Santa Cecilia in Trastevere (Pl. III, 13), originally the dwelling-house of the saint, which was converted into a church by Urban I., restored by Paschalis I. in the 9th cent., and entirely rebuilt by Card. Franc. Acquaviva in 1725. It was thoroughly restored in 1899-1901 by G. B. Giovenale (p. 285) at the expense of Card.

Rampolla, titular of the church. It is approached by a spacious court, which is embellished with an ancient marble vase, and by a portico resting on four columns (two of African marble and two of red granite).

Interior. The columns which formerly supported the nave were replaced by pillars in 1688. To the right of the entrance is the tomb of Card. Adam of Hertford, an English prelate (d. 1588), by 'Baptista Pucchi' (?), and to the left that of the warlike Card. Portiguerre (d. 1475) by *Alfonso de Pisano* (reconstructed and partly restored in 1891). — The beautiful *Ugon Agazzi* with columns in pavanesette was executed by the Florentine *Arnolfo di Cambio* (1704), adjacent is an ancient candelabrum for the Easter-candle, beneath the high altar the recumbent Figure of the martyred St. Cecilia by *Stefano Maderno*. The saint had converted her husband Valerianus, her brother, and even her judges, but was at length condemned to be executed during the persecution that took place either under Marcus Aurelius or Alexander Severus. The executioner, being unable to sever her head from her body after three attempts, had to dismember. Bishop Urban intervened the remains of the holy woman in the catacombs of St. Callistus (p. 405). In 621 Paschalis I transferred her remains to this church. The Treasury contains ancient *Mosaics* of the period of the foundation (5th cent.): the Saviour standing with the Gospel, 1. St. Paul, St. Agatha, and Paschalis, 2. St. Peter, St. Valerianus, and St. Cecilia. — In the 1st CHANCEL, on the right, an ancient picture of Christ on the Cross, the 2nd CHANCEL, a little farther back, said to have been the bath-room of St. Cecilia, is an antique bath, the fluted of which are still seen in the wall. — The opposite door leads to the SACRISTY, the vaulting of which is adorned with the Four Evangelists (*Umbrian School*) and a relief of the Madonna by *Alfonso de Pisano*. — On the right wall of the last CHANCEL are preserved the remains of frescoes of the 13th cent. detached from the façade of the church (Entombment of the saint and her Appearance to Pope Paschalis I.). — Music on St. Cecilia's day, see p. 145.

The Lower CHANCEL (entrance near the tribune) contains the sepulchral chapel of St. Cecilia and her co-martyr. It was gorgeously restored in the Byzantine style in 1884. Below the nave are the remains of an ancient building (sanctuary, a niche in the wall contains a small well preserved relief of Minerva, the patroness of the industry), numerous Christian inscriptions, sarcophagi and fragments of sculpture from the old basilica. — Some valuable frescoes (Last Judgement) by *Paolo Cavallini* (p. 575) were discovered in 1891 in the organ loft of the chapel belonging to the adjacent Benedictine convent (admission only by special permission from the Minister of Public Instruction).

To the S. R. of Santa Cecilia stands the extensive Ospizio di *San Affonso* (Pl. III, 19, 16), founded as a poorhouse in 1680 by Tommaso Odonelechi. After his death it was extended by Innocent XII., and is now chiefly occupied by a government working-school for boys and girls (printing, carpet-weaving, wood-carving, etc.). Skirting the river is the *Ripa Grande*, with the harbour.

The VIA AVICCA (Pl. III, 13), passing the choir of Santa Cecilia, leads to Santa Maria dell' Orto, begun in 1480, continued after 1612 by Ottavio Romano (façade of 1782, interior overladen with ancient ornamentation, tasteful font of about 1600), and to a large government *Fabbrica de' Tabacchi*. Thence it is continued to the piazza and church of —

San Francesco a Ripa (Pl. III, 18), the latter built in 1291 and idealized in the 17th century. The last chapel on the left con-

tains the recumbent statue of St. Ludovico Albertoni, by Bernini. St. Francis of Assisi resided for some time in the adjoining monastery. — To the N.W. of the piazza begins the *Via di San Francesco a Ripa* (p. 375), which leads in 8 min. to Santa Maria in Trastevere.

To the S. of San Francesco is the *Porta Portese* (Pl. III, 18), from which the Porto road issues (see p. 434). Outside the gate is the *Trastevere Station* (comp. pp. 9, 158).

The *VIA GARIBOLDI* (Pl. II, 10; p. 378) leads in about 5 min. to a small piazza, whence, to the right, the steep *Via San Pancrazio* ascends direct to the *Acqua Paola* (see p. 379), quitting the piazza beside the '*Bosco Parrasio degli Arcadi*', the garden in which were held the meetings of the '*Arcadia*', a poetic academy of the 18th century. On the hill above is the *Spanish Academy*, an institution resembling the French (p. 159), built by A. del Herrero. The *Via Garibaldi* continues to ascend in windings to San Pietro in Montorio, the *Acqua Paola*, and the *Porta San Pancrazio*. About 80 paces from the above-mentioned small piazza, a footpath to the right, flanked with oratories, and ascending in steps, also leads to the church.

San Pietro in Montorio (Pl. II, 10), erected after 1472 for Ferdinand and Isabella of Spain by *Baccio Pintelli* (or *Meo del Caprino?*), on the spot where St. Peter is said to have suffered martyrdom (comp. p. 319), stands on the slope of the Janiculum, 195 ft. above the sea-level. The campanile and tribune were almost entirely destroyed during the siege of 1849. If the church is closed, visitors ring at the door on the right (25-50 c.).

Inner Sun. In the 1st Chapel: *Scourging of Christ*, painted in oil by *Seb. del Piombo* from Michael Angelo's drawings in 1518; adjoining, St. Peter on the left and St. Francis on the right; on the ceiling the *Transfiguration*; on the exterior of the arch two prophets with angels, in fresco, also by *Seb. del Piombo* (best light about midday). The 2nd Chapel (*Coronation of Mary* on the arch) was painted by pupils of *Perugino*. The altar-piece of the 3rd Chapel, *Conversion of St. Paul*, is by *Fasari*. The tomb of *Card. Ant. del Monte* is by *Bart. Ammannati* (after 1580). — The High Altar was once adorned by Raphael's *Transfiguration* (p. 345). — **Left Sun.** The last chapel contains an altar-piece by *Dantele da Volterra* (?), *Baptism of Christ*; in the 6th Chapel an *Entombment* by *Theodor van Seburen* (1617), a Dutch pupil of *Caravaggio*; in the 3rd, an altar-piece and ceiling, probably by *Annibale Carracci*; in the 2nd, sculptures of the school of *Bernini*; in the 1st, St. Francis by *G. de' Vecchi*. By the wall near the door, tomb of St. Julian, Abp. of Ragusa, by *G. A. Doria*, 1510.

In the court of the monastery rises the '*Tempietto*', a small circular building with sixteen Doric granite columns, erected in 1490-1502, from *Brugnante's* designs, on the spot where the cross of St. Peter is supposed to have stood. A chapel in the interior contains a statue of St. Peter, and below it is a second chapel (redecorated in 1628, according to an inscription) with an opening in the floor indicating the spot which the cross is said to have occupied.

The piazza in front of the church commands a magnificent ^{SW}VIEW

of Rome and the environs, for the orientation of which this point is admirably adapted (comp. annexed Panorama, from which the omission of unimportant new erections will be no disadvantage; p. 149). The most important places are enumerated here from right to left. To the S. is the Tiber, which is crossed by the iron bridge of the railway to Civit  Vecchia and Leghorn, beyond it the great basilica of San Paolo fuori le Mura. Then part of the city-wall, in front of it the Monte Testaccio (adjoined by the new quarter to the S.W. of the Aventine), the pyramid of Cestius, and the Porta San Paolo. The Tiber, which flows between us and Monte Testaccio, is not visible hence. On the Aventine rise the huge new Collegio Sant' Anselmo of the Benedictines and the three churches of Santa Maria Aventina, San Alessio, and Santa Sabina. Beyond are the Alban Mts., with Mte. Cavo (3180 ft.) on the right, and Frascati on the left. On the Caelius, the Villa Metelli and Sante Stefano Rotondo, above which, on the extreme spur of the Alban Mts., is Colonna, between this and the Sabine Mts., near Palestrina, the heights of the Abruzzi. Then the Palatine, with the ruins of the palaces of the emperors and the cypresses of the former Villa Mills, above which rise the statues on the facade of the Lateran. Next, the Colosseum, the three huge arches of the basilica of Constantine, then the Capitol with the German Archaeological Institute, the Pal. Caffarelli, the tower of the senatorial palace, parts of the facade of the Capitoline Museum, and of the church of Araceli, the two domes with the campanile above these belong to Santa Maria Maggiore on the Esquiline. The finely shaped, double-peaked mountain in the extreme distance is the Monte Velino (8165 ft.), which rises to the N.W. of the Lago di Fucino. Farther on, near the cypresses, the extensive royal palace on the Quirinal, in front of which, near a light-coloured dome, rises Trajan's column; more towards the foreground the church del Gesù with its dome, beyond which is the Monte Gennaro (4160 ft.). Then, on the Pincio, the northernmost of the Roman hills, the light Villa Medici, and to the right of it Santissima Trinit  de' Monti, rising with its two towers above the Piazza di Spagna. Nearer, not far from the Tiber, rises the Pal. Farnese with its open loggia. To the right of it, the spiral tower of the University; farther to the right, part of the dome of the Pantheon, concealed by the dome-church of Sant' Andrea della Valle, to the right of which the column of M. Aurelius in the Piazza Colonna is visible. Again to the left, on the height, are the wall and the gardens on the Pincio with the two dome-churches of the Piazza del Popolo. Then, near the river, the Chiesa Nuova; beyond it the indented outline of Soracte (2266 ft.) On this side of the Tiber rises the castle of Sant' Angelo; beyond it, the heights of Baccano. By the chain-bridge is the dome-covered church of San Giovanni de' Fiorentini. Farther off, Monte Mario with the Villa Mellini, lastly, at the extreme angle to the left, rises the dome of " Peter's. In Trastevere, at the foot of the hill, is the church of

1

.

.

.

.

.

1

1

Santa Maria in Trastevere, the light-coloured tower to the right of which belongs to Santa Cecilia.

If we descend from San Pietro in Montorio in a straight direction, traverse the *Vicolo della Frusta* to the right, and then the *Vicolo della Paglia* to the left, we reach the *Piazza di Santa Maria in Trastevere* (p. 374).

The *Via Garibaldi* continues to ascend the hill to the *Acqua Paola* (Pl. II, 10, 7), the ancient *Aqua Trajana*, which was supplied by the Lago di Bracciano (p. 108), upwards of 30 M. distant. The aqueduct fell into disrepair, but was restored by *Fontana* and *Maderna* in 1611 under Paul V., who decorated the great fountain with marble from the Temple of Minerva in the Forum of Nerva (p. 274). The granite columns were brought from the vestibule of the old church of St. Peter; the massive basin was added by Innocent XII.

Opposite, on the right, is an iron gate forming the entrance to the **Passeggiata Margherita* (Pl. II, 7, 8), opened in 1884, which embraces the former garden of the Palazzo Corsini (p. 370) and is often called *Villa Corsini* in consequence. It is continued along the summit and slope of the Janiculum. The broad carriage-road which traverses the gardens is flanked with busts of modern Italian celebrities and leads past the imposing bronze *Equestrian Statue of Garibaldi*, by Gallori, erected in 1896. The statue, over 20 ft. in height, stands on a tall pedestal of granite, surrounded by bronze groups: in front, *Attack on Rome in 1849*; behind, *Battle of Calatafimi in 1860*; on the right, *America* with allegorical representations of *Trade* and *Agriculture*; on the left, *Europe* with allegorical representations of *History* and *Genius*. Farther on, to the right, is the *Casino of the Villa Lante* (16th cent.). The road then descends in curves past Tasso's oak-tree and *Sant' Onofrio* (p. 368), and ends at the *Porta di Santo Spirito* (p. 368). From the *Acqua Paola* to *Sant' Onofrio* is an easy walk of 15-20 minutes. The **Views* of the city and the Campagna, especially fine at sunset, almost excel in their variety the view from San Pietro in Montorio.

The *Via di Porta San Pancrazio* leads in 5 min. from the *Acqua Paola* to the *Porta San Pancrazio* (Pl. II, 7), on the summit of the Janiculum (275 ft.), adjoining the ancient *Porta Aurelia*. — Outside the gate are several osterie. The church of *San Pancrazio* (Pl. III, 4), 1/4 M. to the left, was erected by Symmachus about the year 500, but has been frequently restored. — In a straight direction we reach the entrance to the —

**Villa Doria Pamphili* (Pl. II, III, 4, 1; admission, see pp. 150, 151; cars not admitted, see p. 149), planned in the middle of the 17th cent. and skilfully adapted to the undulating character of the ground by *Algardi*, at the instance of Prince Camillo Pamphili, nephew of Innocent X., and now the property of Prince Doria. It is

sometimes called by the Italians *Belrespiro*, and the grounds are the most extensive and perhaps the pleasantest near Rome.

On entering, we follow the carriage-road, which passes under a triumphal arch, and leads in windings to (8 min.) a *Terrace* commanding a fine view of Mte. Mario and St. Peter's, between which the horizon is bounded by Soracte, and a part of the Campagna. The iron gate on the left is the entrance to the private garden surrounding the *Casino*, built by Algardi, which contains reliefs (chiefly from ancient sarcophagi) and statues (no admission). Near the entrance to the casino-garden, under the trees to the right, are several *Columbaria* (Pl. II, 1), discovered in 1838, and situated on the ancient *Via Aurelia*. One of them is well preserved and contains some interesting paintings (Prometheus delivered by Hercules, Death of the children of Niobe, etc.; comp. p. 293). Fee 20-30 c.

The carriage-road turns to the left beyond the casino-garden and skirts a meadow, carpeted in spring with anemones. In the centre of the latter is an altar, with seven gods and Antoninus Pius (?) holding one of the Penates. After 5 min., where the road turns to the right, a beautiful view is obtained of the Alban Mts. and the Campagna; it then winds past some pine-trees and leads along the bank of a (10 min.) pond with swans to the (5 min.) fountain by which it is supplied. The casino-garden may now be regained either by the direct path, or by the carriage-road, which leads in 4 min. to the hot-houses (r.), and the pheasantry (l.), with its beautiful silver pheasants. On the roadside (l.), 50 paces farther on, a monument was erected by Prince Fil. Andr. Doria in 1851 to the memory of the French who fell in 1849 at the storming of the Porta San Pancrazio.

THIRD SECTION.

ENVIRONS OF ROME.

1. Immediate Environs and the Campagna	381
<i>a. From the Porta del Popolo (Ponte Molle. Via Flaminia. Via Cassia. Acqua Acetosa. Villa Madama. Monte Mario), 383. — b. From the Porta Salaria (Villa Albani. Ponte Salario. Fidenae), 385. — c. From the Porta Pia (Sant' Agnese Fuori. Santa Costanza. Ponte Nomentano. Mons Sacer), 388. — d. From the Porta Maggiore (Tor de' Schiavi. Torre Pignattara), 390. — e. From the Porta San Giovanni (Via Latina. Porta Furba), 391. — f. From the Porta San Sebastiano (Via Appia. Domine Quo Vadis. Deus Rediculus. Sant' Urbano. Grotto of Egeria. San Sebastiano. Circus of Maxentius. Cecilia Metella), 393. — g. From the Porta San Paolo (San Paolo Fuori. Tre Fontane), 397.</i>	
The Catacombs	400
2. The Alban Mountains	407
<i>From Rome to Frascati, 407. — Grotta Ferrata. From Rome to Albano, 411. — Ariccia. Genzano, 414. — Lake of Nemi, 415. — Rocca di Papa, 416. — Monte Cavo, 417.</i>	
3. The Sabine Mountains.	417
<i>From Rome to Tivoli. Monte Genaro. Hadrian's Villa, 418-420. — From Tivoli to Subiaco. Valley of the Liris, 425. — From Rome to Palestrina, 428. — From Palestrina to Subiaco via Olevano, 430.</i>	
4. Etruscan Towns	432
<i>Veli, 432. — Cerveteri (Caiere), 433.</i>	
5. The Sea Coast of Latium.	434
<i>Porto. Fiumicino. Ostia, 434. — Anzio. Nettuno, 438.</i>	
6. The Volscian Mountains and the Railway to Terracina	440
<i>From Rome to Segni, 441. — From Rome to Terracina, 443.</i>	

1. Immediate Environs and the Campagna.

The vast *Campagna di Roma*, bounded on the N. by the Monte Cimino (p. 101), on the W. by the sea, on the S. by the Alban Mts., and on the E. by the Apennine chain of the Sabina, affords an ample field for a number of the most interesting excursions. The mountains with their picturesque outlines, and the wild and deserted plain, covered in every direction with imposing ruins, chiefly of ancient origin, present attractions of the highest order, to which years of study might fitly be devoted.

The Campagna in the latest tertiary period was a bay with several islands, but owing to volcanic upheavals which took place in a large cleft or cañon at that time running parallel to the Apennines its topography was entirely altered. Monte Cimino together with the craters round the Lago Bracciano (p. 103) were uplifted on the N., while on the S. gradually arose the Alban Mts. (p. 407). The

tufa and ashes ejected from the volcanoes filled up the bay, converting it into a marsh, the home of the rhinoceros, the elephant, and the stag; while streams of lava extended almost as far as Rome (see p. 396). The historical associations connected with this plain are, however, of still higher interest than its natural features. The narrow strip of land which stretches between the Alban Mts. and the Tiber towards the sea is the ancient *Latium*, the home of the Roman people, which victoriously asserted its superiority over the Etruscans on the N., the Sabines on the E., and the Volscians on the S., subsequently effected the union of the Italian peninsula, and finally acquired supremacy over the whole world. Once a densely peopled land, with numerous and prosperous towns, it is now a vast and dreary waste, of which barely one-tenth part is furrowed by the ploughshare. In May, when the *Malaria* (p. xxv) begins to prevail, herdsmen and cattle retire to the mountains, while the few individuals who are compelled to remain behind lead a miserable and fever-stricken existence. Since 1900 the Italian Red Cross Society has come to their aid by opening stations where medical treatment can be obtained. The cause of this change dates from so remote a period as the last centuries of the republic, when the independent agricultural population was gradually displaced by proprietors of large estates and pastures. This system inevitably entailed the ruin of the country, for a dense population and a high degree of culture combined with efficient drainage alone can avert the malaria. In the middle ages the evil increased. The popes repeatedly endeavoured to promote the revival of agriculture, and the Italian government has continued their policy, but such attempts cannot be otherwise than abortive as long as the land is occupied by farms and pastures on a large scale. An entire revolution in the present system, energetically and comprehensively carried out, will alone avail to restore the prosperity of the land. The large estates are usually let to *Mercanti di Campagna*, or contractors on a large scale. These entrust the management of the land to a *Fattore*, or bailiff, who resides at the *Tenuta* or *Casale*, as the farm-house is called. The system of tillage and the implements used have hitherto been of a very primitive character, but modern agricultural machinery is being gradually introduced.

Excursions to the Campagna generally require at least half-a-day. Those whose residence in Rome is sufficiently prolonged should make these excursions in the plain in winter, and those among the mountains in the warmer season. In the height of summer excursions in the plain should be made with great caution. As far as the gates, and for $\frac{1}{2}$ M. or more beyond them, the roads are dull and uninteresting from being flanked by lofty walls. A cab should therefore be taken at least as far as the gate. *Fores*, see Appx., *Carriages and Saddle Horses* for the Campagna, see p. 156. — *Giules*, for which the modern roads in the Campagna are admirably adapted, may be hired at various shops in Rome (p. 136).

The traveller is particularly cautioned against the risk of taking cold, owing to the great and sudden change of temperature which generally takes place about sunset. Lying or sitting on the ground in winter, when



Porta Angelica (see below) and to the extreme right, near the river, a road leads viâ the ($\frac{3}{4}$ M.) *Tiro Nomentale* (rifle-range) to the (1 M.) *Ross Courne*, named after the adjacent *Tor di Quinto*, the ruins of an ancient tomb (fine view).

From the *Via Flaminia* a road diverges to the left, after about 25 mi., to the *Fai di Positano*, with a picturesque situated farm. At *San Paolo*, farther on, the road from the *Tor di Quinto* (see above) joins the *Via Flaminia* on the right. About $\frac{1}{2}$ M. farther on, on the left side of the road, is the vaulted tomb of *Masenta*, with traces of painted stucco-work. About 3 M. from the *Ponte Mollo* the *Via Flaminia* crosses the *Falchetta*, the ancient *Cremora* (p. 432). A new road, diverging to the right at this point, crosses the Tiber by a long iron bridge and joins the *Via Salaria* at *Castel Giustiniano* (p. 388, seen on the other side of the river). About 1 M. farther on the *Via Flaminia* reaches the *Casale di Prima Porta* with the ruins of the Imperial Villa of *Livia*, or *Ad Gallinas*, where the statue of Augustus (now in the Vatican, p. 350) was found. A room with admirably preserved mural paintings, representing a garden with trees and birds is particularly interesting (30 c.). The remains of another villa were found in 1892 in the adjoining *Fuori Pincetti*, with a fine mosaic pavement in the Egyptian style. — Not far from *Prima Porta* is a station of the ancient road called *Strada Subura*. Here, in the plain by the river, *Maxentius* was defeated in 312 by *Constantine* fighting under the sign of the cross ('*labarum*'). *Maxentius* was drowned in the Tiber at the *Ponte Mollo*.

The *Via Cassia*, which leads viâ *Bolsena* and *Chiusi* to *Arezzo*, gradually ascends to ($\frac{3}{4}$ M. from Rome) *La Motta* (p. 104), commanding views of the *Alban* and *Sabine* mountains and of *Soracte*. About $\frac{2}{3}$ M. from the *Ponte Mollo* the road passes (on the left) a sarcophagus on a raised base, groundlessly called the *Tomb of Nero*. The inscription on the back, past which the ancient road ran, distinctly states that this monument, which dates from the 2nd cent. after Christ, was erected by *Fidia Maria Martina* to her father *P. Vibius Marianus* and her mother *Regina Maxima*. At this point an ancient road diverges to the right to *Veli* (p. 432), but it is not easy to find.

We may return from the *Ponte Mollo* either via the *Acqua Acetosa* or viâ the *Villa Madama*. The former route, commanding fine views of the *Sabine Mts* and of *Mt. Soracte* on the left, diverges to the E. from the highroad on the left bank of the Tiber, immediately beyond the bridge. It follows the river-bank and reaches ($\frac{1}{2}$ M.) the *Acqua Acetosa*, the mineral water of which (slightly chalybeate) is much esteemed, and is sold in the streets of Rome. The well-house, designed by *Bernini*, was erected under *Alexander VII.* in 1661. — A short distance to the S. passes the *Viale dei Parioli* (p. 383), which we may follow, to the right, to the highroad from the *Porta del Popolo*; or, turning to the left, we may take the *Viale della Regina*, which brings us in 20 min. to the suburb outside the *Porta Salaria* (p. 388). Here we turn to the right, and skirting the W. side of the *Villa Albani*, reach the *Porta Salaria*.

From the *Ponte Mollo* the '*Via di Porta Angelica*' follows the right bank of the Tiber, and from it, after $\frac{3}{4}$ M., the *Vicolo Macchia Madama* diverges to the right to ($\frac{1}{2}$ M.) the *Villa Madama* (open on Sat. after 9 a.m., entrance on the N.W. side), situated on the N. slope of the *Monte Mario*. The villa was erected by *Giulio Pomodoro* from *Raphael's* designs for *Card. Giulio de' Medici*, after-

wards Clement VII., and subsequently came into possession of the Princess Margaret, daughter of Charles V., from whom it derives its name (comp. p. 220). It next belonged to the Farnese family, and then to the kings of Naples. The villa was at one time important as a model for the arrangement of gardens in Italy, but is now much neglected. It contains a picturesque, overgrown fountain-basin, a charming loggia with mouldings and half-effaced frescoes by *Giulio Romano* and *Giovanni da Udine* (1520-25), and a room with a frieze of putti, by *Giulio Romano*. Beautiful view in front of the villa. — We return to the Via di Porta Angelica, and passing the barracks (caserma; Pl. I, 7; p. 316), reach the Ponte Margherita (Pl. I, 14; p. 156) in about $\frac{3}{4}$ hr.

Monte Mario (458 ft.) was anciently named *Clivus Clnas*, in the middle ages *Monte Malo*, and its present name is derived from Mario Mellini, the owner in the time of Sixtus IV. of the *Villa Mellini* on the summit. This villa is now included in the *Forte Monte Mario*, and visitors therefore require a permesso (to be obtained at the Direzione del Genio Militare, in the Via del Quirinale, opposite the Palazzo Rospigliosi, p. 178). The *Pine of Monte Mario*, to which Wordsworth wrote a sonnet, is still preserved in the garden. Beautiful view from the top of the hill.

The Villa Mellini and the fort are about 2 M. from the Porta Angelica by the Via Leone Quarto and the Via Trionfale (comp. Pl. I, 5, 4, 1). If we follow the road for $\frac{1}{4}$ M. more, passing the church of *Sant' Onofrio* (on the right), and then take the field-road leading back towards the left, we reach the *Valle dell' Inferno*, a deep ravine through which runs the railway to Viterbo, affording an unimpeded view of the dome of St. Peter's, framed by the Alban Mountains.

b. From the Porta Salaria.

OMNIBUS from the *Piazza della Cancelleria* to the *Porta Salaria*, see No. 17 in the Appendix. — From the *Porta Salaria* to the *Ponte Salaris*, 2 M. — From the *Ponte Salaris* to the *Villa Spada* (Fidenas), 3 M.

The *Porta Salaria* (Pl. I, 25), which has been restored since the bombardment of 20th Sept., 1870 (p. 165), is the starting-point of the *Via Salaria*, a very ancient road, which quits Rome by the bank of the Tiber and then turns towards the country of the Sabines. The restoration of the gate brought to light a well-preserved ancient monument in peperino, resembling that of Bibulus (p. 202).

On the *Via Salaria*, to the right, $\frac{1}{4}$ M. from the gate and partly shut in by unattractive modern houses, is the —

Villa Albani (Pl. I, 25, 28), founded about 1760 by Card. Alessandro Albani, and embellished with admirable works of art with the co-operation of the famous German archaeologist Winckelmann, who was a friend of the founder. Napoleon I. sent 284 of the statues to Paris, and on their restitution in 1815 some were sold there by Card. Giuseppe Albani, in order to avoid the cost of transport, and now adorn the Glyptothek at Munich. The villa was purchased in 1886 by Prince Torlonia and now belongs to Don Giulio Torlonia, w'

occasionally admits visitors when furnished with a personal introduction.

The buildings were designed by C. Marchionni: to the left the Casino (Pl. I, 26) with the galleries on each side; opposite the so-called *Digiardo*, a small building flanked with cypresses, on the right the crescent-shaped 'Caffè' (Pl. I, 28). In the *llex-avenue* beginning at the left gallery is a colossal bust of Winckelmann, by E. Wolff, erected at the expense of King Louis I. of Bavaria in 1857.

Casino Ground Floor Vestibule. In the six niches here and on the other side of the under-mentioned anteroom to the staircase are figures of Roman emperors. In the centre, 61 Sitting female figure (Fountain), 62 Circular Ark with a female arch-beaver (Hecate?) and the Genes, 74 Puella with Bacchus, Ceres, Proserpine and three Horae, 75 Sitting female figure. By the pier on the left and right are herms: by the last on the right, 63 Hermes by the 4th on the left, 64 Female, and on the right, 67 Male double herms, by the 7th on the right, 66 Heracles. — We now return to the beginning of the Vestibule and enter the *Atrium* *suba* *Castellum*, to the left 18 24. Two caryatids, found between Praeneste and Monte Porzio (basalto moderno). In the centre, 19 Caryatid, by the *Athenian* *Criton* and *Musone* (the names engraved on the back of the caryatids on the head), found in 1766 near the *Caelian Metula*, on the pedestal "20, so-called *Capeneus* struck by lightning. In the Gallery adjacent, on the left: *herm*, the third to the right, 25 *Helios* *Africanus*, to the left 23 *Epitaph*.

From the vestibule we pass through a small anteroom on the left to the *Staircase*. In front of the staircase (left): 8 *Roma* sitting on trophies (ruler). Adjacent, 11 Tombstone of a butcher, bearing a relief of his shop. On the staircase, relief on the first landing, (r) 22 *Death of St. Peter's Children*, (l) 23 *St. Peter*, the giant of the *Isthmus of Corinth* (r), third landing, above, 24, 25 *Dancing Hamantas*.

Upper Floor. I *Salon Ovale*. In the centre, 90 *Apollo* on the tripod, with his feet on the omphalos. To the right of the door, 91 *Statue of a youth* by *Stephanos*, a pupil of *Pastor* (p. 111). Opposite "92 *Cupid* holding his bow perhaps a copy of *Lycippus*. On the right —

II *Galleria Grande*, the principal saloon (on the ceiling *Apollo*, *Hermes*, and the *Muses* painted by *Raph. Mengs*). In the niches of the entrance wall "1012 *Pallas*, and 1013 *Low* *Statue* 1004 (over the door) *Apollo* *Dion*, and 1005 in front of the temple of *Delphi*: the votive monument of a lyre-player in memory of his victory in the *Pythian games* (archaistic). Then to the left 1014 A youth with his horse, right, 1015 *Antinous* *Fine* with *Fax* and *Roma*. The eight fragments of mosaic at the sides of this door and that of the balcony, and in the four mirrors, are the most part antique. — By the left wall 1006 Two women sacrificing, to the right, 1007 *Dancing Bacchantes*. By the window-wall, 1008 *Heracles* and the *Neoplaton*, 1009 *Dionysos* and *Leuco*. Beautiful view from the balcony of the *Sabine Mts.* and *Monte Cavo* (p. 417).

To the *Right* of the main saloon III *First Room*. Over the chimney-piece "1011 *Hermes* leading *Eurydice* back to *Hades*, *Orpheus* having broken the conditions of her liberation; an Attic relief of a period soon after *Phidias*, an exquisite example of the noble simplicity and calm dignity for which ancient art is so justly celebrated. — *Hermes* by the entrance-wall, (l) "1004 *Theophrastus*; window wall (r) 1005 *Hippocrates* wall of the apse, (r) 1006 *Amor* — IV *Second Room*. Wall of the entrance, on the left 35 *Statue of Signorini*, *Madonna* with 35 *Lawrence* and *Sebastian* on the left. St. James and the *Donor* on the right. To the left of the entrance, 45 *Lunetta* by *Correggio*. *Dead Christ* with mourning angels. Near wall 36 *Statue of Diana*, *de Fontaine* *Altar piece* *Madonna* and saints (1475). Wall of apse "37 *Peter's Perseus*, a picture in six sections *Joseph*

* Mary adoring the infant Christ, *Crucifixion*, *Annunciation*, *Saints* (1491).

Third Room. Rear wall 66 *Fax* *Dyon*, *Christ* on the Cross.

To the **Left** of the principal saloon VI First Room. Over the chimney piece, 904. the celebrated *Statue of Antinous*, from the Villa of Hadrian, the only sculpture brought back from Paris to 1815 Entrance-wall 907. Female from playing the flute - VII Second Room To the right of the entrance 908. Archais Greek relief from a tomb. Base wall 909. Great relief in the best style a group of combatants found in 1764 near San Vito from a tomb (p. 1111). Below it 910. Procession of Hermes, Athena, Apollo, and Artemis (archaisic style). By the window to the left 970. Archais statue of Pallas found near Tivoli, on the right 970. Archais Venus. Wall of apse, on the left 901. Two fragments of ancient reliefs united in the same frame (freely retouched). - VIII Third (corner) Room 21. *Stethon* (?), Portrait (freely retouched), 1037. 22. *Naphe*, so-called *Formarina*, a copy (p. 114). 23. 27. *Gaudia Romana* coloured designs (in oils, on paper) for the frescoes from the myth of *Psyche* in the *Pal. dei T. di M. stea*. - IX Fourth Room. In front of the window 904. *Alce*, perhaps after *Leopold*, the head admirably characteristic. In the niche in the entrance wall, 902. *Apollo* *Embracatus*, a bronze statuette, after *Praxiteles*. Opposite, 903. *Paras* *Hercules*, a small copy in bronze. Window wall on the right, (r.) 982. *Statue* of *Diogenes*. East wall, (l.) 907. Small relief of *Mercurius*, on the pillars at the sides a record of his exploits is inscribed (resembling the *Tabula* *Alina* in the Capitol, p. 240). - X Room with pictures of inferior value. XI Room with tapestry.

Returning to the oval saloon we again descend to the -

Ground Floor, and inspect the other wing of the vestibule. Here, at the extremity to the left, corresponding to the *Atrio della Caristide*, is the: I *Atrio della Giunone* 91, 97. Two *Canephore*, 98. So-called *Junon*. - II *Salotto*. In the niche, 908. *Bacchantes* with the *nebris*, 908. *Satyr* with the young *Bacchos*. Some of the *hermes* by the pillars are *Gna*, but arbitrarily named. - In a straight direction 111. *Statue della Colonne*. Antique columns of variegated alabaster found at the *Marmorella* (p. 235). On the left 121. *Bacchophagus* with the *Nuptials* of *Peleus* and *Thetis*, above, four *caricatures* reliefs; on the left, 125. *Hippolytus* and *Phaedra* over the *apse*. 126. *Rape* of *Procopius* on the right, 141. *Bacchanalian* procession, over the entrance 140. *Death* of *Alcantis*. IV *Passage* *Bearded Bacchus* (archaisic). - V, *Stanza della Terracotta*. By the left wall, close to the entrance 146. *Attic* *votive* relief 147. *Greek* *votive* relief. Beyond the door 157. *Love* with *Poliphemus* and *Cupid*, 166. *Diogenes* and *Alexander*. Opposite the entrance 164. *Stedals* and *learned* in *rocco* *action*. Below, 165. *Ancient* *landscapes* in *fresco*. On the right wall, 171. *Mask* of a river god, to the left of it, 160. *Bacchus* pardoning *rapine* *Indians*, once to the possession of *Winchelmans*. to the right of the mask and on the entrance wall, several fine reliefs in *terracotta*. VI Room. In the centre, *Leda* with the *swan*. - VII Room. Above the entrance door, 213. *Bacchanalian* procession of children, from *Hadrian's Villa*, in *pavonazzetto* or speckled marble; left, statue of a recumbent river god right, 201. *Thetis* with the *Minotaur*, found near *Genzano* in 1740. - VIII Room. In the first window to the left, 210. *Relief* of *Hypnos*, god of sleep.

An avenue of oaks, flanked with cippi (tombstones), leads from the last-named apartments of the Casino to the -

Bibliamio, containing a few unimportant antiquities, and to the -

Cappella. In the semicircular *Portico*, to the left 304. *Hermes* of *Alot* *hinds* (a cast from the original in the *Museo Torlonia* p. 573). 304. *Statue* of *Hera* 310. *Hermes* of *Carynopus*, 317. *Apollo* *reproving*, 323. *Caryatid* *Portico* on, beyond the entrance to the saloon (l.) on a detached column, 721. *Homer*. Adjacent, 725. *Caryatid*, (r.) by the 3rd pillar 737. *Mask* of *Pompeian*. Obliquely opposite (l.) 744. *Archais* *Greek* *portrait* *head*, (l.) 749. *Statue* of *Persephone* (*Phidias* *period*). - We now return to the middle of the hall and enter the *Atrio* *Room*. Here, in the section to the right, 711. *Leda* *demanded*, (l.) 708. *Thetis* with *Athena*. In the section to the left, 661. *Mercurius* bound to the tree, (l.) 613. *Relief* of *Venus* and *Cupid*. Also several statues of comic actors. - **Salons** to the right -

the left of the door, 682. Artemis with a fawn. Below, 683. Mosaic with meeting of seven philosophers. Corresponding to the latter, to the right of the door, 686. Mosaic, liberation of Hesione by Hercules. To the right of the balcony-door, 682. This, in rosso antico; 684. Atlas, bearer of the Zodiac; (1) 678. Boy with large comic mask; 678. Colossal head of Serapis, in green basalt.

Before entering the portico of the Caffè, we may descend a flight of steps to the left, leading to its basement. Fragments of sculpture are here built into the walls, and a few Egyptian statues are placed in a hall.

The *Via Salaria* passes farther on through a new quarter with unattractive lofty houses, most of which are still unfinished although already in dilapidation. About $\frac{3}{4}$ M. from the gate, the *Viale della Regina* (p. 384) diverges to the left to the Monti Parioli and Acqua Acetosa (p. 384). About 1 M. from the gate is the *Osteria di Flaminio*, whence a fine view may be obtained, especially towards evening, of Sant' Agnese and Santa Costanza.

On the hill to the left is the *Fortessa Antenne*, occupying the site of the ancient *Antemne*. On the left side of the road is the entrance to the *Catacombs of St. Priscilla* (p. 406). The *Via Salaria* reaches the *Anio* about 2 M. from the city-gate. The *Ponte Salario* over the *Anio*, several times destroyed and renewed, and again blown up during the invasion of Garibaldi in 1867, has preserved little of the original structure. — Beyond the bridge is an ancient tomb, built over in the middle ages.

About 5 M. from the gate is the *Villa Spolia*. From this point to the height on the right extended the ancient *Fidene*, the ally of *Vols* against *Rome*, subdued only after protracted struggles. The traces of the ancient city are scarcely recognisable. The fortress lay close to the river, on the hill which is now occupied by *Castel Giubileo*. The summit (205 ft.) affords a beautiful and extensive view. The castle was erected by *Boniface VIII.* in 1800, the first year of jubilee (hence the name). Over the iron bridge to the *Via Flaminia*, see p. 384.

The road continues to skirt the river in the plain. About 7 M. from *Rome* is the railway-station of *Stato Regio* (p. 97). — 8 M. the *Casale Marziliano*. The *Fosso della Battina*, which crosses the road a little farther on, has been identified with the ancient *Allia*, which gave name to the battle in which the *Romans* were signally defeated by the *Gauls* in B.C. 390. The actual battlefield, however, was on the right bank of the *Tiber*, opposite the mouth of the *Allia*. — 12½ M. Railway-station of *Montefiore* (p. 97).

c. From the Porta Pia.

EXPRESS TRAMWAY from the *Piazza San Silvestro* (p. 100) to *Sant' Agnese*, via the *Via Venti Settembre* and the *Porta Pia*, see No. 5 in the Appendix. — We may reach the *Porta Pia* also by the electric tramway No. 10 and the omnibus line No. 17 in the Appendix. — From the *Porta Pia* to *Sant' Agnese* about 1½ M.; thence to the *Ponte Nomentano* and *Nons Scur*, to which point most travellers will extend their walk, also 1½ M.

The *Porta Pia* (Pl. 1, 29), see p. 165. A new suburb is springing up outside the gate, like that adjoining the *Via Salaria* (see above). Following the main road, the ancient *Via Nomentana*, which crosses the broad *Viale della Regina* leading to the *Monti Parioli* (see p. 383 and above), we pass the *Villa Torlonia* (on the right; no admittance), and reach, on the left, 1½ M. from the gate, —

**Sant' Agnese fuori le Mura*, a church founded by Constantine, over the tomb of St. Agnes, and still retaining many characteristics of an early-Christian basilica (p. ix). It was re-erected by Honorius I. (625-38), restored by Giuliano della Rovere in 1479, and again restored by Pius IX. in 1856. The principal festival, on 21st Jan., is the 'blessing of the lambs' from whose wool the archiepiscopal pallia are woven.

We enter by a gateway, where, in the right, is the entrance to the residence of the canons, with remnants of old frescoes in the corridor of the 1st floor, dating from 1484, and including an Annunciation. In the COURT, through a large window to the right, we observe an unhappy fresco painted in commemoration of an accident which happened to Pius IX. on 16th April, 1856. The floor of a room adjoining the church, to which his Holiness had retired after mass, gave way, and he was precipitated into the cellar below but was extricated unhurt. On the farther side of the court, on the right, is the entrance to the church, to which a staircase with 46 marble steps descends. On the walls of the staircase are numerous ancient Christian inscriptions from the catacombs.

The interior (best light in the afternoon) is divided into nave and aisles by 16 antique columns of breccia, porta santa, and pavonazzetto, which support arches. Above the aisles and along the wall of the entrance are galleries with smaller columns. The Subsanctuary of 1616, borne by four fine columns of porphyry, covers a statue of St. Agnes, in alabaster, a restored antique. In the tribune, **Mosaic*, representing St. Agnes between Popes Honorius I and Symmachus, dating from 625-38, an important illustration of the transition to the Byzantine style, and an ancient episcopal chair. 2nd Chapel on the right. Head of Christ in marble, a mediocre work of the 16th cent.; also a beautiful inlaid altar, above it an excellent relief of St. Stephen and Lawrence by Andrea Bregno (1490), taken from an altar presented by G. de Perottis. In the left aisle, over the altar of the central chapel, a fine old fresco, Madonna and Child. — The Catacombs (see p. 406), to which there is an entrance in the left aisle, are shown by the sacristan, from whom tickets are also obtainable (1 fr.). Not more than five persons are admitted at once.

On leaving the staircase which descends to Sant' Agnese, we proceed a few paces straight on and then descend to the right, to —

Santa Costanza (if closed, apply to the custodian of Sant' Agnese, 30-50 c.), originally erected as a monument by Constantine to his daughter Constantia, but converted into a church in 1258. The dome, 74 ft. in diameter, is borne by twelve pairs of columns of granite. A few fragments only of the vestibule and the wall of the central part of the edifice now exist. In the tunnel-vaulting of the aisle are blue **Mosaics* of the 4th cent. on a white ground, with gnomi gathering grapes, birds, etc., in the ancient style, but bearing traces of decline. The porphyry sarcophagus of the saint (now in the Vatican Museum, p. 349), is similarly adorned. The mosaics in the niches are less interesting. Christ as the ruler of the world with apostles, trees, and lambs. — For the *Coemeterium Ostrianum*, 1/4 M. from this point, see p. 406.

About 2 1/2 M. from the gate the road crosses the Anio by the Ponte Nomentano, an ancient bridge which has been frequently restored. It is surmounted by a mediæval tower. Beyond the bridge is a hill, conjectured to be the Mons Sacer rendered famous by the

Secession of the Plebs in B. C. 494; at its foot an *osteria*. Pretty view from the top, especially to the E. over the winding course of the Tevere and the pine-surrounded farm of Casal de' Pazzi.

At the *Vigna Galloni*, about 2 M. from the Ponte Nomentano by the 'Strada delle Vigne Nuove', are the insignificant remains of the lonely *Villa of Phoca*, where the Emp. Nero came to his miserable end in 68 A. D. A tablet to the memory of Claudia Eulogia, the emperor's faithful nurse, was found here during recent excavations and is now replaced by a fac-simile.

About 4 M. beyond the bridge are the *Oratorio and Catacombs of Sant' Alessandro* (p. 40.) A little beyond the Catacombs a road to the right diverges to *Falerone* (p. 418). — The road to the left leads to *Montano*, a village belonging to the Borgese family, near the ancient *Nomentum*, 14 M. from Rome, known from the battle that took place here on 3rd Nov., 1807 (p. 97). The district is extremely bleak, but affords beautiful views of the Sabine Mts. From *Montano* to *Monte Astense* 2 M., at the foot of which the railway-station of the same name is situated (p. 97).

d. From the Porta Maggiore.

TRAMWAY to the Porta Maggiore, see No. 13 in the Appendix.

Two roads issue from the *Porta Maggiore* (Pl. II, 34; p. 186). to the left the *Via Praenestina*, to the right the *Via Cassina* (*Via Labicana*).

The ancient *VIA PRAENESTINA*, or *Palustrina* road (p. 428), to the left, is little frequented. About 1 M. from the gate the vineyard-walls cease. Numerous ruins of tombs on the right indicate the direction of the ancient route, which, lying higher, affords a finer view than the present lower level of the road, and may be reached by crossing the fields. About 2½ M. from the city-gate is the *Tor de' Schiavi*, the scanty ruins of an extensive edifice, referred to the time of Diocletian by the brick-stamps found here.

First, to the left of the road, is a *Hexagonal Domed Structure*, almost entirely fallen to decay. A column in the centre and the additional erection on the summit, both medieval, impart a grotesque appearance to the place. — Farther on is a *Circular Building* with niches and dome, used in the middle ages as a church, with now nearly obliterated frescoes; below, entered from the back, is a vault supported by strong pillars in the centre. Both these buildings are supposed to have belonged to baths. — Among the extensive ruins on the right of the road are a few *Columbaria* (p. 208).

The *Via Collatina*, diverging here to the left, skirts the *Aqua Vergine* and leads to *Lunghezza* (p. 418). — Beyond this point the *Via Praenestina* offers little of interest.

On the *Via Praenestina*, 3½ M. from the gate, are the ruins of *Tor Tre Teste* and *Tor Sapienza*, the so-called *Villa of the Gordiani*. About 3½ M. farther on the road crosses the *Ponte di Ponte di Nona* by an ancient bridge of seven arches. Near the *Osteria dell' Osa*, 2 M. farther on, to the left of the road, is the site of the ancient *Gabii*, on the bank of the drained *Lago di Castiglione*. Some ruins are visible near the conspicuous tower of *Castiglione*, the most interesting of which are the hewn stone remains of the celebrated temple of *Juno Gabina*.

At the (*Osteria dell' Osa*) the ancient *Via Praenestina* turned to the right towards (6 M.) *Galliano* (see below), but the modern road bends to the N.E. and forks at the foot of the mountain, the left arm leading to the *Via Tiburtina*, which it reaches at the *Ponte Lucano* (p. 419), the right arm, passing *Corroio* and *Passerano*, to *Galliano*, the ancient *Fidum* (10 M. from the *Osteria dell' Osa*). The ancient and modern roads unite just before the last-named place at the *Osteria di Cammone*, the name of which recalls a well, 65 ft. deep, made for the old road in the tufa rock. The

Aqua Claudia (p. 155) passes over it. The road finally leads past the monastery of *San Pastore* to (3½ M.) *Palestrina* (p. 425).

The road leading to the right from the *Porta Maggiore*, the ancient *Via Laticlavia*, now called *Via Cassilina*, is more frequented than the preceding. On this road, 1¾ M. from the gate, are situated the remains of the octagonal *Tomb of the Empress Helena*, whose sarcophagus found here is now preserved in the Vatican (p. 349). The building, which has been fitted up as a small church (*Santi Pietro e Marcellino*; catacombs, see p. 406), is named *Torre Pignattara* from the 'pignatte', or earthenware vessels used for the sake of lightness in the construction of the vaulting, as was customary during the empire; it is otherwise uninteresting. Several tufa-quarries are worked in the neighbourhood.

About 5 M. from the gate, near the *Ponte delle Cattedre*, is a modern aqueduct, the *Aqua Felice* (p. 155). Farther on, to the left, are remains of the arches of the ancient *Aqua Alexandrina*. A lake, now drained, to the left of the road, at the foot of the *Monte Palatino*, is supposed to be the famous *Lake Regillus*, where the Romans defeated the Latins (B. C. 496).

c. From the *Porta San Giovanni*.

TRAMWAYS and OMNIBUSES to the *Lateran*, see Nos. 3, 11, and 13 in the Appendix. — TRAMWAY from *Porta San Giovanni* to the *Vicolo delle Cave*, about 1 M. short of the tombs, every ¼ hr. in 5 min. (10 c.) This tramway will be continued to *Grotta Ferrata* (p. 410), *Frascati* (p. 408), *Marino* (p. 411), *Castel Gandolfo* (p. 412), *Albano* (p. 413), *Ariccia* (p. 414), and *Genzano* (p. 414). — A carriage-road leads from the tombs to the *Porta Porta* (p. 392) in 6-7 minutes.

From the *Porta San Giovanni* (see p. 311, and comp. Pl. III, 81) runs the road leading to the *Alban Mts.*, dividing at the *Osteria del Quintale* (formerly *Baldinotti*), 5 min. from the gate, into the *Frascati* road (to the left) and the *Marino and Albano* road (to the right). The former is the ancient *Via Tuscolana*. The latter, known as the *Via Appia Nuova*, crosses the railway to *Civita Vecchia* about ¼ M. farther on, and after about 1 M. from the gate, intersects the ancient *Via Latina*, which began at the former *Porta Latina* (p. 293), enters the valley of the *Sacco* (p. 441) between the *Alban* and the *Sabine Mts.*, and ends at *Capua*. Like the *Via Appia* and the other roads emerging from *Rome*, it was flanked by tombs on both sides.

We follow the *Via Latina*, cross the line to *Albano* (p. 411), and in 5 min. reach two *Ancient Tombs, interesting on account of their tasteful decorations. The custodian is on the spot from noon to sunset, except in midsummer (see ½ fr.; for a party 1 fr.).

The 1st Tomb, *Tomba dei Valerii*, to the right of the road, with the two recently-restored Roman pilasters, consisted of an anterior court and subterranean tomb, over which rose the now re-erected sacellum with two columns. The interior of the chamber is decorated with interesting reliefs in stucco: sea-monsters, nymphs, and genii.

The 2nd Tomb, *Tomba dei Fineratii*, under a shed opposite, contains in its single chamber landscapes framed in stucco ornaments and four stucco reliefs (*Judgment of Paris*, *Alceus*, *Priam* and *Achilles*, *Hercules* playing the lyre before *Bacchus* and *Minerva*). The 'Pancrati' were one of the burial societies common in the 3rd and 4th cent., but the plan and arrangements of the tomb prove that it dates from the 2nd century.

The other tombs are interesting only for their brick ornamentation (Corinthian pilaster-capitals and cornices).

In the immediate vicinity are the foundation-walls of a *Basilica*, dedicated to *St. Stephen* in the 5th century. The custodian of the tombs keeps the key. Fine view of the Alban Mts.

Pedestrians may reach the *Via Appia Antica* (about 1 M.) hence by following the *Strada Militare*, or military road, which crosses the *Via Latina* immediately before (to the W. of) the railway, then the *Via Appia Nuova* 3 min. to the S., and finally the *Via Appia Pignatelli* (p. 394), $\frac{3}{4}$ M. farther on. It strikes the *Via Appia Antica* not far from the tomb of *Cæcilia Metella* (p. 398). Between the *Via Appia Nuova* and the *Strada Militare* lie the cold mineral-baths of *Acqua Santa* (rail. station, see p. 411).

PORTA FURBA. This excursion of 2-3 hrs. is pleasanter than many others, as the view is obstructed by walls for short distances only (cab thither from the gate and back, 3-4 fr.).

From the *Porta San Giovanni* we proceed straight on for 6 min. (see p. 391), and at the *Osteria del Quintale* we take the *Frascati road* (*Via Tuscolana*) to the left, which crosses successively the (1 M.) railway to *Civita Vecchia*, the ($\frac{3}{4}$ M.) railway to *Albano*, and immediately beyond the latter, the *Strada Militare* (see above). To the left runs the unbroken series of arches of the *Acqua Felice* (p. 165), and in front of them occasionally appear the imposing remains of the *Acqua Claudia* (p. 185) and *Aqua Marcia*, running one above the other. The *Aqua Marcia*, 56 M. long, constructed by the *Prætor Q. Martins Rex* in B.C. 146, and restored in 1869, brings a supply of water from the *Sabine Mts.* To the right, a view of the *Via Appia* with the tomb of *Cæcilia Metella*.

About 2 M. from the gate we reach the so-called *Porta Furba*, an arch of the *Acqua Felice*, under which the road leads. An exquisite view is enjoyed hence of the *Campagna* and the *Alban Mts.*, and a little farther on, the *Sabine Mts.* also come in sight. Below runs the railway to *Naples* and *Terracina*. — About $\frac{1}{2}$ M. farther on rises the *Monte del Grano*, which commands a fine *PANORAMA*. A long shaft leads to an ancient circular tomb-chamber in the interior of this hill, where the so-called sarcophagus of *Alexander Severus* (now in the *Capitoline Museum*, p. 245) was found.

2. From the Porta San Sebastiano.

The excursion to the *VIA APPIA* by carriage, including halts, requires 3-3½ hrs., returning via the tombs on the *Via Latina* (p. 391), 4 hrs. An exact bargain should be made with the driver on the basis of the tariff for drives outside the city (comp. p. 4 of the Appx.). Good walkers take 26 min. from the Arch of *Constantine* to the *Porta San Sebastiano*; from the gate to the *Catacombs of St. Callixtus*, 25 min.; thence to the beginning of the excavated portion of the ancient *Via Appia*, 20 min.; to the *Casale Rotondo*, 40 min. more. — The traveller is recommended to drive to the *Porta San Sebastiano* at least (one-horse cab 1½ fr.), or, still better, as far as the *Catacombs of Callixtus*, a visit to which is conveniently combined with this excursion, and to walk thence to the

Casale Rotondo and back to the tomb of *Onofria Metella*; thence follow the *Strada Militare* to the right to (20 min.) the *Via Appia Nuova* and the tombs on the *Via Latina* (p. 391); and finally return by the *Porta San Giovanni* to the *Piazza di San Giovanni in Laterano* (p. 302) where trams-ways and omnibuses are to be found, a walk of about 8 hrs. in all from the *Colosseum* to the *Porta San Giovanni*. — The *Roma, Marino, and Albano* railway (p. 411) may also be used in either direction, to or from the stations of *Capannelle* or *Aqua Santa* on the *Via Appia Nuova*, whence the *Via Appia Antica* is easily reached.

The route by the *Via di Porta San Sebastiano* to the *Porta San Sebastiano* (Pl. III, 30), and the ruins and buildings situated near it, are described at pp. 291 et seq.

The *Via Appia*, the military road constructed by the censor *Appius Claudius Cæcus* (in B.C. 312), led through the ancient *Porta Capena* (p. 291), viâ *Terracina* (p. 446), to *Capua*, whence it was afterwards extended to *Beneventum* and *Brundisium*. In 1850-53 it was excavated as far as the 11th milestone, where it is now intersected by the railway to *Terracina* and *Nettuno* (p. 442). Even at the present day the *Via Appia* merits its proud ancient title of the 'queen of roads'. It affords perhaps the finest of all the shorter excursions from *Rome*. As far as the church of *San Sebastiano* the road is flanked on both sides by vineyard walls, but beyond that point we enjoy a magnificent prospect, embracing the *Campagna*, the ruins of the aqueducts, and the mountains, while numerous ancient tombs are situated on each side of the road. Very few of the latter are preserved intact; but the remains of others have been carefully restored and enclosed.

The road descends from the *Porta San Sebastiano* by a declivity corresponding with the ancient *Clivus Martii*, and after 4 min. passes under the railway to *Civita Vecchia* and *Leghorn*. It then (3 min.) crosses the brook *Almo* (p. 394), where ruins of tombs are observed on both sides. The *Via Ardeatina* now (5 min.) diverges to the right; and on the left stands the small church of *Domine Quo Vadis*, so named from the legend that St. Peter, fleeing from the death of a martyr, here met his Master and enquired of him, 'Domine quo vadis?' to which he received the reply, 'Venio iterum crucifigi'; whereupon the apostle, ashamed of his weakness, returned. A copy of the footprint which Christ is said to have impressed on the marble is shown here (original at *San Sebastiano*, p. 396). — By a small circular chapel, a few hundred paces beyond the church, a field-road (*Vicolo della Caffarella*) diverges to the left.

This field-road, which is very muddy after rain, leads for $\frac{1}{2}$ M. between hedges. On reaching the open fields, we follow the road descending to the left to the mill. Near the latter is situated the so-called *Temple of the Deus Medicus* (the 'God of Return'), a Roman tomb on the ancient road which formerly issued from the now closed *Porta Latina* (comp. p. 391). The building has been assumed by some, but without authority, to be a temple erected by the Romans after the retreat of *Hannibal*. The front, facing the N., was approached by a flight of steps; the entrance to the tomb is in the left side-wall. One side is ornamented with hexagonal pilasters in niches, the whole being an excellent example of skilful brick architecture. The interior (25a.) contains two stories with

4 min. farther on the *Strada Militare* mentioned at p. 392 diverges to the left; it is frequently closed to carriages.

As far as this neighbourhood extends the lava-stream from the Alban Mts. (see p. 382), which yielded paving material for the ancient road. The more interesting part of the Via now begins; the ancient pavement is visible in many places, the tombs skirting the road on both sides become more numerous (though many have left but scanty remains), and the view becomes more extensive at every step. On the left are perceived the adjacent arches of the Aqua Marcia and the Aqua Claudia, the latter now partly converted into the modern Acqua Felice (comp. p. 391). About $2\frac{1}{4}$ M. from the city-gate we reach the entrance (a notice on a house to the right) to the part of the Via Appia excavated since 1851, flanked beyond this point by a constant succession of tombs. Many of these contain reliefs and inscriptions worthy of careful inspection.

On the right is the *Fortessa Appia Antica*, an outwork of the new fortifications of Rome. — In the Vigna Lugari, to the right of the road, less than $\frac{1}{4}$ M. farther on, is the large so-called *Tomb of St. Urbanus*. Behind it the interesting remains of a *Roman Villa* have been excavated, including the store-room with its huge terra-cotta vessels, the bath-room, etc. (see 25 c.).

About $1\frac{1}{4}$ M. farther on, on the left, is the *Casale di Santa Maria Nuova*. Beyond it lie the extensive ruins named *Roma Vecchia*, which appear to have belonged to a spacious villa of the Quintilii. Several of the chambers were employed as baths. On the right are two conical tombs, overgrown with grass and trees, commanding an extensive view of the Campagna. Close by is an *Ustrinum*, or place used for cremations, surrounded by a wall of peperino.

A large tomb on the left, the site of which is now occupied by a small farm, $\frac{3}{4}$ M. from Santa Maria Nuova, is named the *Casale Rotondo*. It may be ascended for the sake of the fine view (25 c.; often closed). The lofty building on the left, 7 min. from the Casale Rotondo, is also an ancient tomb, on which the Arabs and Normans erected a tower, named *Tor di Selce* (tower of basalt).

The Via Appia from the Tor di Selce to Albano ($7\frac{1}{2}$ M.) is less interesting. Among the tombs may be mentioned, on the left, 2 M. beyond Tor di Selce, the circular *Terracotta di Paleomere*. The road is crossed by the Terracina and Nettuno railway, a little beyond which is the *Osteria delle Frattocchie* (railway-station, p. 442), where the old road and the Via Appia Nuova unite. On the left side of the road Clodius once possessed a villa; to the right in the valley lay *Bevillae*, a colony of Alba Longa, with a sanctuary of the *Gens Julia*, where the remains of a theatre and circus may still be traced. Remains of walls and tombs are seen on both sides of the road. A large square structure, about 33 ft. in height, with three niches, was long erroneously regarded as the tomb of Clodius. The road ascends. Near the gate of Albano, on the left, is the so-called Tomb of Pompey (p. 413).

Picturesquely situated in the Campagna, between the Via Appia and the Via Laurentina (p. 398), is the former chateau of Cecchignola, with an old tower and a garden, built by Paul V. and Leo XII. It may be reached by the *Via Ardeatina* (p. 398) in about $1\frac{1}{2}$ hr. from the Porta v. Sebastiano.

g. From the Porta San Paolo.

The basilica of *San Paolo Fuori* may be reached by electric tramway from the Piazza Venezia (p. 201) via the Piazza Bocca della Verità (p. 250); comp. No. 4 is the Appendix. — Walkers from the Piazza Bocca della Verità to the *Porta San Paolo* take 20 min., thence to the church of *San Paolo Fuori*, $\frac{1}{2}$ hr.; to the *Tre Fontane*, $\frac{1}{2}$ hr. more. — A digression to the three churches on the Aventine (pp. 286-287), or to the Monte Testaccio (p. 288), the Protestant Cemetery (p. 289), and the Pyramid of Cestius (p. 290), may be conveniently made from the route to the *Porta San Paolo*. — The tramway should be used outside the gate at least.

Porta San Paolo (Pl. III, 18), see p. 290. — A few hundred paces from the gate the road is crossed by the railway to Olivetti Vecchia and Leghorn. About 3 min. farther on a small chapel on the left indicates the spot where, according to the legend, St. Peter and St. Paul took leave of each other on their last journey. — Immediately before we reach the church, the pleasant *Via delle Sette Chiese* diverges to the left at an acute angle and leads to S. Sebastiano on the *Via Appia*, 2 M. distant; comp. p. 396.

**San Paolo fuori le Mura*, founded in 388 by Valentinian II. and Theodosius on the site of a small church of Constantine, was completed by Honorius and was restored and embellished by many of the popes, especially Leo III. Prior to the great fire of the night of 15th July, 1823, which destroyed almost the entire building except the choir, this was the finest and most interesting church at Rome. It was a basilica with double aisles and open roof; and the architrave, supported by eighty columns of pavonazzetto and Parian marble, was adorned with busts of the popes. It contained numerous ancient mosaics and frescoes, and in the Confessio the sarcophagus of St. Paul, who, according to tradition, was interred by a pious woman named Lucina on her property here. The front towards the Tiber was approached by a colonnade, and early in the middle ages an arcaded passage connected it with the city.

Immediately after the fire Leo XII. began the work of restoration, which was presided over by *Brilli*, and afterwards by *Poletti*. The transept was consecrated by Gregory XVI. in 1840, and the whole church by Pius IX. in 1854, on the occasion of the meeting of the Council. The explosion of a powder-magazine outside the *Porta Portese* in 1891 again considerably injured the church. The plan and the dimensions are the same, but for slight divergences, as those of the original building, though the gorgeous decoration is somewhat inconsistent with the character of an early-Christian basilica. — The chief Façade, with a porticus (now being constructed) borne by splendid monolithic columns of Simplon granite, is turned towards the Tiber. The mosaics on the upper part of it, representing Christ with SS. Peter and Paul, in the symbolical style of the early Christians, with the four great prophets below them, were executed by F. Agricola and Consoni, in the papal mosaic manufactory (1886).

The **Interion* (130 yds. in length, 65 yds. in width, 75 ft. in

height), with double stiles and a transom, is entered by the parties on the N. side (or from the end at the E. end, by a side-door adjoining the campanile, and through the vestibules mentioned below). The ceiling of the nave, which is richly coffered instead of being open, as formerly, is borne by 40 columns of granite from the Stupian.

The imposing effect of the vast dimensions and the costly materials of the church is first perceived from the W. end of the nave, a little on one side. The two pillowed columns of ornate alabaster at the entrance as well as the base of the canopy of the high altar were presented by Bahmet Ali, Viceroy of Egypt, and the marble pedestals by the Emp. Nicholas I. of Russia. Above the entrance of the nave and inner apse, and in the transept, is a long series of *Parvuli Basiliani* of all the ages in mosaic, each 1 ft. in diameter. Between the windows in the upper part of the Nave are representations from the life of St. Paul by Guglielmi, Podetti, Cagnola, Bacci, etc. The windows of the eastern apse were shattered by the explosion in 1834. In the midst of the approach to the transept are the colossal statues of St. Peter and Paul, the *Confessores* or *doctores*, is richly decorated with red and green marble from Paropamassian quarries, which were known to antiquity.

The eastern Apse is adorned with (fully restored) Mosaics (1850-51), executed by order of Della Piazzola, master of Hieronymus and Arcadius (Christ with the 14 Elders of the Revelation). On the side next the transept (Christ to the centre, left St. Paul, right St. Peter) - Under the arch is the *Gladius* Aeneas, with a canopy by Arcangelo di Ceccato (?), the architect of the cathedral of Florence and his assistant Pandino (1476). The *Sancti Constantini*, in the right transept, with scenes from the life of Christ and ornamentation of animal forms and foliage in raised work, is by Filippo di Angello and Pietro Fontana (p. 200, ca. 14-15). In the Transept are 4 Mosaics of the beginning of the 13th cent. to the centre (Christ with Pope Innocent III at his feet) on the right St. Peter and Andrew, on the left St. Paul and Luke. Under them are the *Agonias* and two angels. Below them is the modern episcopal throne. Last Tracery Altar with the Conversion of St. Paul by Cagnola and the statue of St. Bernard by Simonetti and St. Gregory by Laboureur (16th Century) or by Giovanni with a statue of the saint by Ben. Simonetti and two pictures (Stoning of St. Stephen by Podetti and the Conversion of high priests by Cagnola). 2nd, Carracci's *San Constantino* in front of the mosaic below the crucifix in this chapel Ignatius Loyola and his adherents pronounced the vows of their new order 22nd April 1562. - Next Tracery Altar with a copy in mosaic of the Coronation of the Virgin by Guido Reni and *Sancti* (p. 345), and statues of St. Benedict 1st and Scholastica by Guglielmi and Bacci (16th Cent. San Carlo designed by Carlo Maderno adjoining the Tribune was spared by the fire (2nd) Carlo San Donato with a statue of St. Benedict by Fieschi.

In a straight direction from the right transept to the entrance to the church (p. 330) to the left we pass through several chapels containing some ancient but fully restored frescoes and statues. Various with a mosaic statue of Gregory XVI; and a few others from 16th and 17th cent. (half figures of St. Peter and Paul dating from about the 16th cent. etc.) In this room is the entrance to the church outside the campanile mentioned above, and to the right is the entrance to the *Sanctuary*, which contains several good oil paintings. Over the door the Saviour of Christ by Giovanni F., on the right a Madonna enthroned with St. Benedict, Paul, Peter and Justina. Also four single figures of the same saints. In a room beyond the sacristy (generally closed) is a sitting marble figure of Pope Innocent III. an interesting work of the beginning of the 13th century. A closed cabinet here contains the bronze door of the ancient basilica, executed at Constantinople in 1176 by Aliragius by order of the consul Pandemon, in spite of injuries inflicted by fire and thieves, it still retains much of its former magnificence. It is adorned with scenes from sacred history inscribed in silver.

The monastery attached to the church, which belonged to the Benedictines from 1442, has been secularised. The beautiful *CLOISTERS (*Chiostro*) of the 13th cent. (p. lxi) are not inferior even to those of the Lateran. According to the mosaic inscription round the wall they were commenced by the abbot *Petrus de Cupus* (ca. 1220), and completed under John V. (ca. 1241); the decoration is perhaps by *Petrus Vasculictus*, a master in this kind of work (comp. p. 306). On the walls are numerous heathen and early-Christian inscriptions from the Catacombs, and a few fragments of ancient and mediæval sculptures, among them a large sarcophagus with the history of Apollo and *Maryas*. The cloisters have been declared a 'monumento nazionale' (no fee).

The main road leads on in a straight direction and (7 min. beyond the church) divides at the *Osteria del Ponticello*: on the right the ancient *Via Ostiensis* diverges to Ostia (p. 450), and on the left the *Via Laurentina* leads, past the prettily-situated *Osteria Montagnola*, to the (25 min.) —

Abbadia delle Tre Fontane (ad *agras Salviae*), which for a time was almost deserted owing to malaria, and was made over in 1868 to French Trappists. Owing to extensive plantations of the rapidly-growing eucalyptus the sanitary condition of the place has improved. The name is derived from the legend that the apostle Paul was executed here, and that his head was observed to make three distinct leaps, corresponding to which there welled forth three different fountains. The court surrounding the three churches is approached by an archway bearing traces of painting, which is supposed to have belonged to an earlier church of John the Baptist (visitors ring, 25 c.).

Santi Vincenzo ed Anastasio, the largest of the churches, a basilica in the ancient style, founded by Honorius I., and restored in 1231 by Honorius III., as the inscription to the left of the choir records, has lately again undergone restoration. It has retained many mediæval peculiarities, and in particular the marble windows over the nave. The portico bears traces of paintings, including the portrait of Honorius III.

To the right is the second church, the circular *Santa Maria Scelsa Gmit*, so called from the 'vision' here vouchsafed to St. Bernard, to whom Innocent II. had presented the monastery, of a heavenly ladder, on which angels were conducting to heaven the persons whom his prayers had released from purgatory. In its present form the church dates from the close of the 16th century. The tribune contains good mosaics by *Frans. Zucco*. St. Sene(?), Bernard, Vincent the deacon, and Anastasius(?), revered by Clement VIII. and Card. Aldobrandini, the finisher of the church.

The third church, *San Paolo alle Tre Fontane*, stands on the spot where the apostle is said to have been beheaded, and contains the three springs already mentioned. In the centre is an antique mosaic representing the four seasons, found at Ostia in 1892. By the spring to the right stands the column of white marble to which St. Paul is said to have been bound at the time of his execution. The present edifice dates from 1500.

Before leaving, the visitor is conducted to the distilling room, where a glass of eucalyptus liqueur is offered to him (20 c.).

The hills above the abbey, which are honeycombed with *puzzolana pits*, command delightful views. *Puzzolana-earth*, mixed with lime, produces the excellent Roman cement.

The Catacombs.

Ancient and Christian Rome seem to be separated by a wide chasm, if the modern appearance of the city alone be regarded. The most ancient churches having disappeared, or being concealed beneath a modern garb, the earliest Christian monuments of any importance are several centuries later than the last Roman structures. This interval is satisfactorily filled up by the Catacombs, or burial-places of the early Christians. — Most travellers will be satisfied with a visit to the *Catacombs of St. Calixtus*, and perhaps those of *St. Domitilla* or *St. Agnes* (all shown daily, except in mid-summer, comp. pp. 404, and 405, 406). The custodians furnish lights, but for anything like a close inspection visitors are advised to provide themselves with candles also. On 22nd Nov. the Catacombs of Calixtus are illuminated and open to the public. Information as to admission to the other catacombs may be obtained of the custodians of the Calixtus Catacombs. The temperature in the Catacombs is mild and the air dry, but a light wrap is advisable for those entering them on a hot sunny day. The passages are sometimes muddy.

Scientific visitors may apply for additional information to the *Commissione di Scavi Archeologici*.

I. HISTORY OF THE CATACOMBS The term 'Catacombs' is modern, having been extended from those under San Sebastiano, to which the topographical name '*ad catacumbas*' was anciently applied, to the others also. The early Christians gave their burial-places the Greek name of *Cosmeteria*, i. e. resting or sleeping-places, with reference to the hope of the resurrection. The Roman law, frequently re-enacted during the empire, prohibiting the interment of the dead, or even their ashes, within the precincts of the city, was of course binding on the Christians also. We accordingly find their burying-places situated outside the gates, on the great highroads.

While the European nations had become accustomed to dispose of their dead by cremation, the Egyptians and the Jews retained the practice of interment. The prevalence of the Jewish influence among the Christians gave rise to the excavation of subterranean passages, in the lateral walls of which recesses were made for the reception of the corpses. Burial-places of this description are to be found at Naples, Syracuse, Chiusi, Viterbo, in Alexandria (in Egypt), and elsewhere, as well as at Rome, where they are chiefly excavated in the strata of soft tufa which is found in the immediate vicinity of the town, and is of no value for building purposes.

The Roman Catacombs took their rise from *Family Tombs*, which were named after their original proprietors, such as those of *Lucina*, *Priscilla*, *Pontianus*, and others. The approaches to them were everywhere wide and conspicuous. The oldest belong to the first century of our era, the most recent to the first half of the 4th century. In the 3rd century the Church began to establish burial-places of its own and to take the management of those already existing; and this supervision seems soon to have embraced all the Christian burial-places. Each district was presided over by a presbyter.

During the 3rd cent. the persecuted Christians frequently sought *refuge* in the Catacombs; and not a few suffered martyrdom in

their subterranean places of refuge. Peace was at length restored to the Church and security to the Catacombs by Constantine the Great's edict of Milan. Throughout the 4th cent. interments here were customary, but they became rarer towards the end of that cent., and were entirely discontinued in the 5th, as it then became usual to inter the dead near the churches. The last three Catacombs appear to have been constructed by Pope Julius I. in 336-47.

The Catacombs, however, as well as the tombs of the martyrs, still enjoyed the veneration of pilgrims and the devout. Pope Damasus I. (366-384) caused numerous restorations to be made, and many of the tombs to be furnished with beautiful metrical inscriptions; apertures for light and staircases were constructed to facilitate the access of visitors, and the walls at a comparatively late period were decorated with paintings, which differ materially from those of the earliest Christians in subject and treatment. During the frequent devastations undergone by the city, however, the Catacombs were also pillaged and injured, the first time on the occasion of the siege by the Goths in 537, and afterwards during the siege by the Longobards in 755, when they suffered still more seriously. 'The invaders ransacked the burial-places of the martyrs with pious zeal, searching for the bones of saints, which they deemed more precious than gold, and giving them arbitrary names, carried them home in hope of selling them at a great price. These men dug with the ardour of gold-seekers: that a skeleton was found in Roman soil was sufficient warrant to them for attributing miraculous virtue to it, and thus it probably happened that the bones of those who had in their time descended to the Catacombs as sinners, were suddenly brought to light again as the remains of the saints of heaven.' After these different plunderings the Catacombs were restored by John III. (560-73) and Paul I. (757-68); but the transference of the remains of the martyrs to the altars of the city had already taken place in the most wholesale manner. In 609, when Boniface IV. consecrated the Pantheon as a church, he caused twenty-eight waggon-loads of the bones of 'saints' to be deposited beneath the altar, and an extant inscription records that no fewer than 2300 corpses of 'martyrs' were buried in Santa Prasseda on 20th July, 817. Hadrian I. (772-96) and Leo III (795-816) also made attempts to preserve the Catacombs from ruin, but the task was abandoned by Paschalis I. (817-24), after whose time the Catacombs gradually fall into oblivion, those under San Sebastiano alone remaining accessible to the visits of pilgrims.

At length we find traces of renewed visits to a few of the Catacombs in the 15th cent. partly by pilgrims, and partly by members of the Roman academy of the humanists, but the scientific exploration did not begin until fully a century later. On May 31st, 1578 some workmen accidentally discovered an ancient Cemetery near the Via Salaria, and from that period the subject began to excite

general and permanent interest; and the Roman church has since then regarded the supervision of *Roma Sotterranea* as a point of honour. The pioneer of the scientific examination of the Catacombs was Antonio Bosio of Malta, who devoted thirty-six years of his life to the task; his '*Roma Sotterranea*' was not published till 1632, three years after his death. His researches, although afterwards followed up by other scholars, were at length threatened with oblivion, but in the 19th cent. he has been worthily succeeded by the Jesuit Marchi and, above all, by Giovanni Battista de Rossi (d. 1894), the archaeologist. The last published the result of his indefatigable labours in a *Collection of Ancient Christian Inscriptions* (1st vol. 1861, 2nd vol. 1869), in a work entitled '*Roma Sotterranea*' (3 vols., 1864-77), and in the '*Bullettino di Archeologia Cristiana*' (1869 et seq.). English readers may consult *Roma Sotterranea* by Northcote and Brownlow (London, 1878-80). The most recent works on the subject are *Le Catacombe Romane*, by Orazio Marucchi (Rome, 1903; 10 fr.), and *Le Pitture delle Catacombe Romane*, by G. Wilpert (Rome, 1903; 3 vols., 375 fr.). Comp. also p. xxvii.

II. THE ARRANGEMENT OF THE CATACOMBS was originally extremely simple. Narrow passages, $2\frac{1}{2}$ ft. in width, afterwards even less ($1\frac{3}{4}$ ft.), were excavated and furnished with *loculi*, or recesses in the sides, of the length of the body to be interred. These niches were placed one above the other, as many as three and more being sometimes thus disposed, and when the body was interred they were closed with tablets of marble, or terracotta, which were either left plain, or (at first) merely recorded the name of the deceased, with the addition '*in pace*'. The older inscriptions are usually in Greek, but the later always in Latin. This change illustrates the progress of Christianity from the position of an alien creed to that of the accepted religion of a native and national community. Various ornaments and memorials and sometimes domestic utensils were interred along with the deceased. Adjacent to the slabs which closed the niches were frequently placed earthen lamps, for the purpose of lighting the dark passages. The niches are generally empty in consequence of the mania for relic-hunting, already mentioned. The practice of leaving all the monuments in the places in which they are found is of very recent introduction.

The increase of the community and the transformation of burial-places originally intended for families and their co-believers into public cemeteries could not fail to affect the external arrangements of the Catacombs. By degrees they were extended; the passages became narrower and higher, or rose in several stages, sometimes as many as five, one above another. Catacombs originally distinct were connected by means of new excavations, and the complicated nature of these alterations and extensions is still apparent to the observer. These operations were carried out by a regular body of *Fossores* (or diggers), who ceased to exist only when the

use of the Catacombs was discontinued. The system of monotonous passages was sometimes broken by the introduction of larger chambers, which were used as *cubicula* ('bed-rooms'), or family burial-places, and were private property. Lastly we also find chambers that were set apart for the celebration of divine worship; but these all date from the 4th cent., when the celebration of ecclesiastical festivals in honour of the martyrs came into vogue. The ordinary services were performed in the private dwelling-houses in the city, and not in the Catacombs, as has been erroneously supposed. The community assembled at the tombs only on the occasion of the general festivals of the dead.

III. THE DECORATION OF THE CATACOMBS is one of their most interesting features. Christian art in origin could, of course, be but an application of ancient forms to the new objects and conceptions introduced by the new religion. The paintings and sculptures of the Catacombs are therefore in no respect different in style from contemporaneous works, and with them shared in the at first gradual but afterwards precipitate and almost total degradation of art. The best frescoes belong to the end of the 1st and beginning of the 2nd century. With the general decline of the Roman empire in the 3rd and 4th centuries, artistic forms became distorted and unpleasing. Even in the case of decorative works there is no essential difference between Christian and heathen art, at least during the earlier periods.

On the other hand, a peculiar significance in the choice and treatment of the subjects is observable from the earliest period. Comparatively few *historical* paintings are met with, i.e. paintings intended simply to illustrate some event from Jewish or Christian history. Once the Madonna and Child by themselves are observed (Catacombs of Priscilla); generally they are accompanied by the Magi, varying in number, who present their offerings, as in the Catacombs of SS. Callixtus, Domitilla, and Priscilla. Scenes of martyrdom do not occur earlier than the 5th century.

The great majority, however, of the paintings represent scenes *symbolical* of the doctrines and hopes of Christianity. That of most frequent recurrence is the *Resurrection*, typified either by the raising of Lazarus, who appears at a door wrapped in his grave-clothes, while Christ, represented beardless, stands before it with a wand, or by the history of Jonah sitting under the gourd, the prophet swallowed by the whale, and his final escape. The Good Shepherd also frequently appears, with the lost sheep on his shoulders, and sometimes surrounded by lambs. Abraham's Sacrifice, Noah in the Ark, and the Hebrew Children in the fiery furnace belong to the same category. Daniel in the lions' den is another favourite subject, and he is generally represented with his hands raised in prayer, an attitude in which the deceased themselves are often depicted ('*orantes*'). The Miracles of Christ also recur frequently. In the

'sacrament-chapels' of the Calixtus Catacombs we also meet with representations of *Baptism*, in realistic style, and the *Last Supper*, treated symbolically. The fish, too, by a kind of acrostic, formed an important Christian symbol, as the Greek *ἰχθύς* (fish) consists of the initial letters of *Ἰησοῦς Χριστός Θεοῦ Υἱός Σωτῆρ* (Jesus Christ the Saviour, Son of God). All these subjects and many others, especially the traditions of the Old Testament which contain a typical reference to New Testament history (such as Moses smiting the rock), recur continually in the paintings of the Catacombs and in the sculptures on the ancient Christian sarcophagi. The inscriptions corresponding to these were, as already mentioned (p. 402), of a very simple description down to the middle of the 3rd cent., after which they become more lengthy, and contain more elaborate ejaculations of grief and hope. — For purposes of study, the collections in the Christian Museum at the Lateran (p. 808) will be found convenient. Important inscriptions are also preserved in the *Galleria Lapidaria* in the Vatican (p. 359).

The Catacombs extend around the city in a wide circle, the majority, however, being concentrated between the *Via Salaria* and the *Via Nomentana* on the one side, and the *Via Latina*, the *Via Appia*, and the *Via Ostiensis* on the other. Upwards of forty different Catacombs, varying greatly in extent, and only partially accessible, have been discovered. According to Michele de Rossi's careful calculations, they cover an area of 815 acres. In order, however, to form an accurate idea of their extent, it must be borne in mind that the passages run one above another, as many as five being sometimes thus disposed. The highest of these lie 22-25 ft. below the surface of the earth, while the lowest are 40-50 ft. deeper. If the whole of these subterranean passages were placed in a continuous line, their total length would be about 545 English miles. The most important of the Catacombs only need be enumerated here, and of these the most instructive are the —

*Catacombs of St. Calixtus on the *Via Appia*, $1\frac{1}{4}$ M. beyond the *Porta San Sebastiano* (p. 394). On entering the *vigna* in which they are situated, we perceive a small brick building with three apses beside the custodians' hut (where the entrance-fee of 1 fr. is paid and a monk obtained as guide). This was identified about 1850 by Giov. Batt. de Rossi as the ancient *Oratorium Sancti Calixti in Arcuaria*. It now contains inscriptions and reliefs from the Catacombs, and a bust of De Rossi. — The present entrance to the Catacombs immediately adjoins this building. A passage with tombs is traversed, and the **Camera Papale*, or *Cubiculum Pontificium*, a chamber of considerable dimensions, is soon reached on the left, containing the tombs of several popes or 'bishops' (Anteros, Lucius, Fabianus, and Eutychianus), originally also that of Sixtus II., who died as a martyr in the Catacombs in 258. In front of the rear wall is a long metrical inscription in honour of the last,

composed by Pope Damasus I. about the close of the 4th cent., and engraved in elegant and decorated characters invented specially for the purpose by Furius Dionysius Philocalus, the secretary of that pope. Outside the entrance, on both sides, a great number of inscriptions have been scratched by devout visitors of the 4-8th centuries. We next enter a chamber, open above, which once contained the Tomb of *St. Cecilia*, whose remains are now in the church of *Santa Cecilia in Trastevere* (p. 376). On the wall here are several Byzantine paintings of the 7-8th cent. *St. Cecilia*, *St. Urban*, and a head of *Christ*. The walls of the aperture for light bear traces of other frescoes. On *St. Cecilia's Day* (22nd Nov.) mass is celebrated here (comp. p. 400). In the sides of the passages near these chapels are several tomb-chambers known as 'sacrament chapels', which are adorned with symbolical representations of the communion, baptism, and similar scenes (comp. p. 403). Then follow the Tomb (Chamber) of *Pope Eusebius* (308-11), with a 6th cent. copy of an inscription by Damasus, and another with two sarcophagi still containing the remains of the deceased, one of them preserved in a mummy-like form, the other almost entirely destroyed. The Tomb of *Pope Cornelius* (251-52) originally belonged to the separate cemetery of *Lucina*.

Adjoining the catacombs of *St. Calixtus* and entered from the *Chiesa del Trappisti Via Appia 26* (not always accessible), are the remains of the *Septichest Chapel of St. Marcellinus*, with much damaged mural paintings, and the *Crypt of Pope Damasus I* (382-86), with the funeral-inscription of his mother, discovered in 1903. The excavations are being continued.

The *Catacombs of Domitilla*, or of *St. Nereus and Achilleus* (open daily, from 9 a.m. till dusk; adm. 1 fr.), near the Catacombs of *Calixtus*, on the *Via delle Sette Chiese 22 a* (p. 396), contain the greatest number of inscriptions (upwards of 900), and are among the earliest foundations of the kind, vying in antiquity with the Crypts of *St. Lucina* and the Catacombs of *St. Priscilla*. *Domitilla* was a member of the imperial house of the *Flavii*. In two of the five ancient entrances are frescoes of the end of the 1st cent., representing *genii* in the *Pompeian* style, the earliest figures of the *Good Shepherd*, *Daniel*, etc. In the centre of the catacomb is the large and nearly quadrangular *Basilica of St. Petronilla*, who, according to the legend, was the daughter of *St. Peter*. The basilica, excavated in 1876, is built in the second story of the catacomb and projects with its roof into the open air. It contains nave and aisles with a forecourt, and its ground-plan is approximately a square. On the column of a canopy is represented the martyrdom of *St. Achilleus* in relief, perhaps the earliest work of the kind (5th cent.). Everything else is in a ruined condition, but the church has recently been partly restored. It was used from the 5th to the 8th cent. only.

The *Catacombs of St. Protextatus*, not far from the *Via Appia*, towards *Sant' Urbano* (p. 394), contain decorations similar to those of the station of the *Vigiles* at *Trastevere* (p. 374). In the burial-chapel

of Vibia here are still to be seen gnostic heretical representations (Hermes as conductor of the dead, etc.).

The Catacombs of St. Priscilla lie on the Via Salaria, $1\frac{3}{4}$ M. from the gate (p. 388). The oldest part consists of a square chamber, called the 'Cappella Greca', owing to its Greek inscriptions, which contains interesting paintings of the 3rd century. Among the decorations of the ceiling in another room are a Madonna and Child, with Isaiah pointing to the new light in Israel (a star). This is the oldest Madonna in existence, dating from the latter half of the 2nd century. Coloured inscriptions on bricks, of the earliest and simplest type, are also occasionally found here.

The Catacombs of St. Agnes, under the church of Sant' Agnese fuori le Mura (p. 389), are destitute of painting, but are to a great extent in their original condition. They are shown by the sacristan. — About $\frac{1}{4}$ M. beyond the church is another catacomb, called the *Cosmetarium Ostrianum*, remarkable for its family burial-places.

The Catacombs of San Sebastiano, below the church of that name on the Via Appia (see p. 395), the only burial-places of the kind which continued to be visited in mediæval times, have been almost entirely deprived of their enrichments. — The so-called *Platonis di San Damaso*, retaining remains of stucco ornamentation, is the tomb of the martyred Quirinus, Bishop of Siccia, not, as has been erroneously supposed, a tomb built by Damasus for the bodies of the apostles Peter and Paul — In the vicinity are the —

Jewish Catacombs, in the *Vigna Randanini* (p. 394, adm. daily, 9-5, 1 fr.), which were excavated about the 3rd century. They rather resemble the catacombs of Naples than the other Roman catacombs. The inscriptions are exclusively Greek and Latin. The most frequently recurring symbol is the seven-branched candelabrum. Two chambers are enriched with decorative paintings, in which, contrary to the Mosaic law, figures of animals are depicted. A sarcophagus here still retains traces of gilding.

The Catacombs of SS. Peter and Marcellinus, near the Torre Pignatara (p. 391), are among the most extensive. The ceiling of a lofty chapel bears an Enthroned Christ, with St. Paul on the right, and St. Peter on the left, with four saints below, quite in the style of the earliest mosaics. Other frescoes, such as two scenes of family feasts, belong to the 3rd century.

The Catacombs of St. Pontiano, situated in the *Vigna di San Michele*, $\frac{1}{2}$ M. from the Porta Portese (p. 377; to the right before the *Strada di Monteverde*), are excavated in the breccia of Monte Verde. At the foot of a staircase descending into it is a basin with water, serving as a baptistery. On the wall beyond is the Baptism of Christ (with a stag near the Jordan), above a large cross in the later style. Above the staircase are two large medallions with heads of Christ of the 6th and 9th (?) centuries.

The Oratory of Sant' Alessandro, 6 M. from the Porta Pia (p. 390), in the *Tenute del Cozzo*, is a long, half-subterranean building, the very poor masonry of which is well preserved in the lower part. According to an inscription on the altar, this was the tomb of a certain Alexander, perhaps the bishop of that name. The oratory is surrounded with lofty passages still containing undisturbed tombs.

Catacomb of St. Genesio, see p. 425.

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28



3. The Alban Mountains.

The well-wooded *Alban Mountains* (*Monti Albani* or *Larici*) consist of an isolated group of basaltic formation (lava and tuff) gradually rising from a plain overlaid with volcanic ashes and forming an imposing pyramid, which culminates in *Monte Cavo* 5,415 ft., and the *Punta Piccola* 5,135 ft. In the middle of the cone there is a wide basin shaped depression which is enclosed on the E. by a continuous wall of rock, while to the W. it includes three smaller basins (Lago di Albano, Lago di Bracciano, partly filled with water and the tiny Lago di Tivoli now dry). It was formerly supposed that these represented a central and three lateral craters, but they were more probably formed by subsidence occurring during a pause after the chief period of volcanic activity. When this activity was resumed the Monte Cavo, which has its crater in the Campo di Marone, was formed above the ancient outlet. Long streams of lava were poured out towards Rome, towards Viterbo, and towards the N.; these may be recognized in the hill ridges which are now intersected by the railways. The lava could become in several varieties, one of the most widespread of which is that called *pozzolana*, whose variegated appearance is due to the minerals it contains, and to the baked and fired fragments of limestone and clay. The presence of these agglutinates indicates very violent explosions, which shattered the rocks below the volcano, and expelled masses of the fragments. Within the historic period the volcano has been extinct, but the earthquakes which occasionally occur at Albano, Bracciano, and near di Poggio remind the fact that the whole mountain mass is of recent origin. Its height and its isolated situation make it a healthy district abounding in springs and surrounded by interesting cultivation. A ban wine was famous even in antiquity. On the S. slope of the group are *Pranesti* and on the S.W. slope *Albano*, both of which have been surrounded since the most ancient times with the country houses of wealthy Romans. The great natural beauty of the scenery here has always made these mountains a favourite resort of visitors from Rome. The inhabitants have preserved many of their peculiarities though the customs of the Alban women to widow men except on Sundays and holidays.

Plan of Excursion for one day (reaching *Pranesti* for a special afternoon's visit from Rome). By railway to Castel Gandolfo (p. 412), walk thence by the *Valletta di Sopra* to the highroad from Albano, and thence as described at pp. 412, 416, to *Roma di Poggio* (p. 416) whence *Monte Cavo* (p. 417) may be ascended (3-4 hrs. to go, from Castel Gandolfo). Descend with guide to (1) *br.* *Navoli* (p. 418) and proceed guide unnecessary; (2) *br.* *Genzano* (p. 414) where a carriage may be hired (if desired) to (3) *br.* *Albano* (p. 414) and (4) *br.* *Albano* (p. 412). The excursion may be made in one day in the reverse order from Castel Gandolfo to Albano, (4) *br.* *Albano*, (3) *br.* *Genzano*, (2) *br.* *Navoli*, (1) *br.* *Monte Cavo* 3 hrs. *Roma di Poggio* 1/2 hr., and thence to *Pranesti* in 2 1/2 hrs. by a footpath passing *Tuscolana*. *Griffin Passate* is interesting mainly on account of the frescoes by *Domenichino* (p. 410) this part of the mountain offers least in the way of scenery.

Those who have plenty of time, and do not object to an occasional deviation from the direct route, will have no difficulty in finding their way with the aid of the map and the following directions. When horses (3-4 for a day) or Donkeys (about 5 for a day, including driver's fee) are made use of, a precise programme of the excursion should be agreed upon beforehand, as the men are apt to cut the journey short to the traveller's disadvantage. In spring and autumn *Waller* in this district will be found pleasant, but in the warmer months the traveller will find it convenient to follow the native custom of using donkeys, or to hire a carriage. Carriages may be hired at *Pranesti*, *Castel Gandolfo*, and *Albano*, where the charges are as high as at Rome (25-30 fr. per day).

From Rome to *Frascati*, 15 M. railway in 3/4 hr., fares 2 fr. 80, 1 fr. 00, and 1 fr. 30 c., return-tickets, comp. p. 215). Tramway under construction (see p. 391). — Journey to (25/4 M.) *Albano*.

Campino, see p. 428. The main lines go on to Naples and Terracina (pp. 428, 442). The branch-line to Frascati gradually ascends. The station lies a little below the town.

Frascati. — *Hotels.* *GRAND HOTEL FRASCATI, with electric light and baths, R. from 3, L. $\frac{1}{2}$, A. $\frac{1}{2}$, B. $1\frac{1}{2}$, ddj B, D. 4, pens. 8-10 fr. — ALBERGO FAVRELLI, above the steps leading to the station, plain — Trattorie (the landlords procure clean bedrooms for travellers). *Villas* with garden and view halfway up the steps from the station, to the left in the Viale Giuseppe Perry; Leone, Piazza Romana, at the top of the steps; Cipollini, in the Via Re Umberto, the street to the left of the church, reached through the double archway leading to the Piazza del Mercato. — Lodgings easily obtained (single rooms 30-40 fr., 2-4 rooms about 100 fr. per month).

Omnibus to Rocca di Papa (p. 416), thrice daily in summer, twice in winter, in connection with the trains, fare $1\frac{1}{2}$ fr. (recommended). — Donkey to Rocca di Papa, $1\frac{1}{2}$ fr.

A visit to Tusculum takes 3-4 hrs., the best route being by Villa Aldobrandini and Ruffinella in going, and by Camaldoli and the Villa Mondragone in returning. Guides and Donkeys, necessary only when time is limited, 2-3 fr. Some of the Villas are not always open to the public.

Frascati (1058 ft.), in a healthy situation, on the slope of the mountains, with its beautiful, shady, and well-watered villas, commanding an admirable view of the Campagna, is adapted for a stay of some time. The town (8453 inhab.), which is noted for its wine, is of modern origin. Two churches, *Santa Maria* and *Sanctus Sebastianus* (in *Frascata*), were first mentioned in the 9th cent., these seem to have stood on the ruins of a Roman villa (perhaps that of the Anicii), overgrown with underwood (*frasca*), whence the name. The town remained quite unimportant until after the destruction of Tusculum (p. 409).

A carriage-road and a path with flights of steps lead from the station to a piazza, embellished with gardens, in which, to the right, is the entrance to the *Villa Torlonia* (formerly *Villa Conti*; see), with dilapidated fountains and beautiful points of view, the property of the Duca Torlonia. Straight on are the lower entrances (sometimes closed) to the *Villa Lancellotti* and *Villa Aldobrandini* (see below), while about 2 min. to the left is the main piazza of the town. — In the piazza, which is embellished with a pretty fountain, rises the cathedral of *San Pietro*, erected in 1700 under Innocent XII. To the left of the high-altar is a memorial tablet to Charles Edward, the Young Pretender (d. 1788), grandson of James II, who was first buried at Frascati, afterwards in St. Peter's (p. 328).

From the piazza we ascend the steep street (Corso Volfango Goethe) to the right, past the cathedral of San Pietro and the donkey-station. Above the town, on the left, rises the *Villa Lancellotti* (formerly *Villa Piccolomini*), in which the learned Cardinal Baronius (d. 1607) wrote his church-history. The entrance is in the Via Lancellotti.

Farther on we reach, on the right, the handsome **Villa Aldobrandini*, erected in 1603 by *Giulio della Porta* for Card. Pietro Aldobrandini, nephew of Clement VIII. The palace contains paintings by the Cavaliere d'Arpino. The grounds are adorned with cascades and beautiful oaks, and the views are very extensive, especially from the flat roof of the semicircular building.

The road to Tusculum next passes the *Cypuchin Church* (1 M. above the town, containing a few pictures), and soon reaches the entrance to the **Villa Tusculana* or *Ruffinella*, of the 16th cent., formerly the property of Lucien Bonaparte, afterwards that of King Victor Emmanuel II, and now belonging to Prince Lancellotti. In Nov., 1818, Lucien was attacked and robbed here, an event admirably described in Washington Irving's 'Adventure of the Artist'. Inscriptions and antiquities found in the neighbourhood are shown.

From the *Villa Ruffinella* we ascend to the right, either by the paved or the unpaved road, and afterwards follow a steep and partly ancient road to the site of the venerable town of Tusculum, the foundation of which is traditionally ascribed to Telegonus, the son of Ulysses and Circe, the birthplace of the elder Cato and a favourite residence of Cicero. In the middle ages the ancient castle on the summit of the hill was occupied by a warlike race of counts, who were generally in league with the emperors against the Romans. The latter, having been signally defeated in the reign of Frederick I. (1167), retaliated by dismantling the castle in the pontificate of Celestine III., in 1191. Nothing therefore now remains of the ancient Tusculum but a heap of ruins.

In ascending from the *Villa Ruffinella* we soon obtain a view of the *Amphitheatre* (with accommodation for 3000 spectators) outside the town-walls (longer diameter 77 yds., shorter 57 yds.; arena 52 yds. by 31 yds.), which is called by the guides *Scuola di Cicero*. About $\frac{3}{4}$ M. to the left are some extensive ruins to which the name *Villa of Cicero* has been given, as the famous 'Tusculanum' may possibly have lain in this vicinity. Straight on is the ancient *Forum* and the well-preserved *Theatre* (about $3\frac{1}{2}$ M. above Frascati), excavated in 1889, as an inscription records, in presence of Maria Christina, dowager Queen of Sardinia. At the back is a *Piscina*, or reservoir, in four compartments. Passing through the gate on the left, and descending by the ancient road, we observe a fragment of the old town-wall, and adjoining it a curious construction of massive blocks built over a spring, with ancient pointed vaulting.

To proceed from the theatre to the *Castle* (ark, 165 ft. higher; $\frac{1}{4}$ hr.), we follow the narrow footpath to the right. The castle lay on an artificially hewn rock, now surmounted by a cross (2198 ft.). Magnificent *View from the top. On the right are *Camaldoli* and *Monte Porzio* (p. 410); farther distant the *Sabine Mts.*, with *Tivoli* and *Montecelio*, then *Soracte* and the *Ciminian Mts.*; towards the sea the broad *Campagna* with its aqueducts, *Rome*, and the dome of *St. Peter's*, to the left, *Grotta Ferrata*, *Marino*, *Castel Gandolfo*, and the *Monte Cavo*, with *Rocca di Papa* below it.

From Tusculum to *Rocca di Papa*, see p. 416.

In returning we pass through the first gate to the right, immediately below the castle, and descend the path leading to the E., keeping to the left at the first fork, to the right at the second. At

the foot of the hill of Camaldoli, a suppressed monastery founded by Paul V. in 1611, we take the road to the left (1 M. straight on is the road from Frascati to Palestrina, see below). In about $\frac{1}{2}$ hr. we reach the wall of the *Villa Mondragone*, erected by Cardinal Altompe under Gregory XIII., now occupied by the Jesuits as a school. Visitors to the fine garden and view-terrace skirt the wall to the right to the gate (knock; fee), and should quit the garden by the cypress avenue and the lower exit. The road to the left runs between walls, passing on the right the *Villa Falconieri*, the oldest near Frascati, planned by Cardinal Ruffini before 1550, with a palace by Borromini and pictures by Carlo Maderna. It is now in possession of the Trappists of Tre Fontane (p. 399).

The road from Frascati to Palestrina, 15 $\frac{1}{2}$ M. (diligence to Monte Compatri in about 1 hr., fare 1 fr., to Monte Porzio 70 c.; comp. *Mapa*, pp. 408, 428), especially the first half, is beautiful, but destitute of shade. From the N.E. corner of the town the road leads past the lower entrance to the *Villa Mondragone* (see above), which is approached by an avenue of cypresses. Farther on are the ruined vaults of an ancient villa, arbitrarily said to have belonged to Cato. After 2 M. the road passes (r.) the olive-clad hill on which *Monte Porzio Catone* (1480 ft.; fine view from the Piazza Borghese) is picturesquely situated, $1\frac{1}{2}$ M. farther on it reaches *Monte Compatri* (1912 ft.; railway-station, p. 428), with a chateau of the Borghese. We do not enter the village, but pass the approach to it, and descend by a somewhat rough road, passing a washing-trough. Near a (1 M.) considerable group of trees we turn to the right, and close to ($\frac{1}{2}$ M.) a small chapel with an image of the Madonna, again ascend to the right. About 2 M. farther on the broad road leads us to the highroad from Rome, following the latter for $\frac{1}{4}$ M. we reach the *Osteria di San Cassio*, beyond which the *Via Labicana* diverges to the right. About $\frac{1}{4}$ M. farther on our road crosses the Rome and Naples railway (p. 428), and then, leaving on the right the road to the station of *Sagorale* (p. 428), ascends to (4 M.) *Palestrina* (p. 424).

Two routes lead from Frascati to (2 $\frac{1}{2}$ M.) *Grotta Ferrata*: the carriage-road to Marino (p. 410), and *Rocca di Papa* (p. 416), and the shorter path diverging, below the *Villa Torlonia* (p. 408), to the left from the highroad. (In descending, keep to the left; $\frac{1}{4}$ hr. farther on, where the path divides, turn to the left, and again to the left 5 min. farther on, at the entrance to the wood.)

Grotta Ferrata (1080 ft.), a Greek monastery of the Basilians, was founded by St. Nilus under the Emperor Otho III. in 1002. At the end of the 15th cent. it belonged to Giul. della Rovere, afterwards Pope Julius II., who fortified it with moats and towers. Of the old Church only the vestibule remains, with (r.) a beautiful statue of the Madonna. The portal, with ornaments and a Greek inscription, dates from the 11th cent.; over the door are mosaics of the Saviour, the Madonna, and St. Basil. The church, restored in 1754, contains nothing worthy of mention.

Interior. From the right aisle we enter the *CHAPEL OF ST. NILUS*, decorated with *Francos* from the life of the saint, one of the chief works of Domenico (1610; p. lxiv), restored in 1819 by V. Camuccini. At the entrance of the chapel, on the left, is represented the meeting of the saint with Otho III.; the attendant in green, holding the emperor's horse, is Domenico himself; to the right of the horse, *Guido Rensi* is also represented

in a green costume, and behind him Guercino. The boy in front of the horse, with blue cap and white feather, bears the features of a girl of Frascati to whom the artist was attached. On the right St. Bartholomew arrests the fall of a column, and saves the lives of the workmen. At the altar on the left, St. Nilus heals a boy possessed by an evil spirit with oil from a lamp of the Madonna. On the right, the Madonna presenting a golden apple to St. Nilus and St. Bartholomew. In the lunette, Death of St. Nilus. Outside the chapel, St. Nilus calming a storm by which the harvest is endangered; the saint kneeling before the cross. On the ceiling, the Annunciation.

Fairs held at Grotta Ferrata on 25th March and 8th Sept. attract numerous peasants from the neighbourhood, as well as strangers from Rome.

FROM ROME TO ALBANO we may take either the Terracina railway (p. 442) or the Nettuno railway (p. 488) as far as the station of Cecchima (18 M. in about $\frac{3}{4}$ hr.; fares 3 fr. 40, 2 fr. 40, 1 fr. 56 c.), whence a steam-tramway plies to ($2\frac{1}{2}$ M.) Albano on the hill in 20 min. (fares 80, 60, 40 c.). But it is preferable to take the direct —

RAILWAY FROM ROME TO ALBANO (*Ferrovie dei Castelli Romani*), 18 $\frac{1}{2}$ M., in about 1 hr. (fares 3 fr. 50, 2 fr. 45, 1 fr. 60 c.), starting from the Central Station in Rome. This route follows the main line (p. 428) to beyond the Porta Furba. To the left is the Torre Pignattara (p. 391), to the right the arches of the Acqua Felice. The line then crosses the ancient Via Latina near the tombs mentioned on p. 391, and skirts the Via Appia Nuova (p. 391). — 4 M. Acqua Santa (p. 392). Then, on the right, the tombs on the Via Appia. — 7 M. Capannelle (p. 394); to the right are the Casale Rotondo and Tor di Selce (p. 396), to the left the mountains. The line now begins to ascend gradually, and beyond a curve and a tunnel, soon reaches —

15 M. Marino (1166 ft.; *Albergo Italia*, plain), picturesquely situated on a mountain-spur, the site of the ancient *Castrimoenium*. In the middle ages it was a stronghold of the Orsini, who defended themselves here against their enemies, particularly the Colonnas; but the latter captured Marino under Martin V. in 1424, and still possess it. The town (7307 inhab.) is noted for its excellent but somewhat strong wine. It contains a *Corso* (the principal street) and a tasteful *Fountain* (17th cent.). The church of *La Trinità*, to the left of the Corso, contains a Trinity by Guido Reni. In the church of the *Madonna delle Grazie*, St. Rochus by Domenichino. The *Cathedral* is dedicated to St. Barnabas.

The railway next crosses the deep gorge in which flows the brook known in antiquity as the *Agua Ferentina*, the source of which was the rallying point of the Latin League. Charming retrospect of Marino. Beyond a tunnel, we enjoy a fine view, to the left, of the Alban Lake.

The "Lake of Albano" (960 ft. above the sea-level), about 6 M. in circumference, is of volcanic origin though no lava ever flowed from it (comp. p. 407), and is of sombre and melancholy aspect.

although its banks are well cultivated. The N. half near Castel Gandolfo is shallow, but the S. half is 580 ft. deep. Both it and Lake Nemi are fed by abundant subterranean springs, caused by melted snow and rain. It is drained by a very ancient *Emissarium* which issues below Castel Gandolfo.

The train rounds the inner margin of the crater, skirting the lake, of which it affords a beautiful view. To the left soon appear Manto Cave and Rocca di Papa. On the long low hill above the E. bank of the lake once lay *Alba Longa*, Rome's mother-city.

The foundation of Alba Longa belongs to a prehistoric period, and tradition has attributed it to Ascanius, the son of Aeneas. It was the ancient capital, and the political and religious centre, of the Latin League, but was destroyed at an early period by its younger rival on the banks of the Tiber, after which, however, the ancient festivals of the League on the Alban Mt. still continued to be celebrated.

No traces of the buildings of Alba Longa remain, but the settling of the hillside reveals the former presence of human activity. The necropolis lay on the so-called *Monte Occo*, to the W. of the town, and numerous graves, with hut-urns, bronze implements, and household utensils, have been discovered. It is alleged that some of these were found beneath the paperno, which would prove that they date back to an era when the Monti Albani were still in a state of volcanic activity.

16¹/₂ M. Castel Gandolfo (1395 ft., *Ristorante della Ferrovia*, with view-terrace, good; carriage-hire about the same as at Albano, p. 413), the seat of the Savelli in the middle ages, has belonged to the popes since 1586. It is an insignificant place (1960 inhab.) with a large *Papal Palace*, erected by Urban VIII. from designs by Carlo Maderna, and splendidly situated high above the Alban Lake. The chateau was formerly a favourite summer-resort of the popes, and enjoys the privilege of extraterritoriality by the guarantee of 1871. — The village is reached from the station either by a direct but steep footpath, or by the carriage-road which leads in 10 min. to the N. entrance and thence ascends to the left to the Piazza del Plebiscito, with the papal palace. At the S. end of the village, to the right, lies the *Villa Barberini*, with shady grounds, the ruins of a villa of Domitian, and a fine view of the Campagna (visitors usually admitted for a gratuity).

A charming avenue, shaded by evergreen oaks, the so-called "Galleria di Sopra," leads above the lake to Albano in $\frac{1}{2}$ hr., affording numerous pretty retrospects of Castel Gandolfo. At the Capuchin monastery (see p. 413) the path descends to the right to Albano. The route in a straight direction, close under the convent-wall, leads in 25-30 min. to the high-road from Albano to Rocca di Papa (p. 416). The beautiful footpath to the left, along the lake, leads to Palazzuolo (p. 418).

Visitors to the *Emissarium*, the above-mentioned artificial outlet of the Alban Lake, must bring the custodian with them from Castel Gandolfo (he lives in the red fisherman's hut, at the N. end of the village; fee 1-1 $\frac{1}{2}$ fr.). The path descends steeply from the Galleria di Sopra a little before the S. end of the village to the bank of the lake. The descent occupies nearly $\frac{1}{2}$ hr., and the whole inspection about 1 hr. The *Emissarium*, an imposing work, was constructed according to tradition by the Romans in B.C. 297, during the siege of Veii, when the lake

rose to an unusual height, but it is probably of still more remote origin. Hewn in the solid rock. At the entrance is a large stone building

resembling a nymphæum. The channel is 7-10 ft. in height, and issues $\frac{1}{2}$ M. below Albano by the village of *La Mola*, where the water is used as a motive power for mills, descending thence to the Tiber. The custodian holds lighted pieces of candle on boards down the stream, in order to give visitors an idea of its length (about 1300 yds.).

Beyond two more tunnels the train crosses the highroad from Rome to Albano and halts at —

18 $\frac{1}{2}$ M. Albano — Hotel. *Ruxora* or *Pestia*, Piazza Principe Umberto, 8 min. above the station, with trattoria and caffè, R. 3-5, pens. 3 fr. — *Ristorante Salustri* in the Piazza Principe Umberto; the landlord procures bedrooms for visitors, *Ristorante Albano*. — Caffè *Caruso*, Piazza Principe Umberto.

Omnibus from Albano to Genzano (p. 414), fare 40c. — Carriages with one horse to Nemi, one pers. 3, two pers. 5 fr.; to Rocca di Papa (p. 418), about 6 fr.; to Frascati via Rocca di Papa (incl. halt for a visit to the Monte Cavo), 12-15 fr. (bargain advisable).

Those who desire to make the tour mentioned at p. 407, via Rocca di Papa to Monte Cavo and back by Nemi, Genzano, and Ardea (8-7 hrs.), must turn to the left at the Piazza Principe Umberto, cross the Piazza Principe Amedeo and ascend to the right to the Capuchin convent.

Albano, officially *Albano Laziale* (1260 ft.), a small town with 8038 inhab., is supposed to owe its origin to the Emp. Septimius Severus, who here, about 195 A. D., erected the large barracks for the Second Parthian Legion in the *Albanum Domitiani*, or Villa of Domitian, on the Via Appia. [Numerous tombs, mostly colossal sarcophagi of soldiers, were found in 1866 above the Parco Chigi (p. 414) and left *in situ*.] The settlement that sprang up round these Albana Castra became the seat of a bishop in 460. It is repeatedly mentioned in connection with the contests of the popes with the citizens of Rome in the 11th century. In possession of the Savelli from 1260 to 1607, it passed in the latter year to that of the papal government. Its lofty site and beautiful environs attract many visitors in summer, but it is not entirely exempt from fever. It is an excellent centre for a number of interesting excursions.

Above the station is the Piazza Principe Umberto, the terminus of the steam-tramway from Cecchina (p. 411), and a fine point of view. The upper end of the piazza is skirted by the Via Appia, forming the S.W. boundary of the town, which stretches up the side of the hill. Between the monastery of San Paolo and the loftily-situated Capuchin Monastery (to the right from the Piazza, then the first turning to the left) lay an *Amphitheatrum*, the scanty remains of which are partly seen from the road. The church of *Santa Maria della Rotonda* stands on the foundations of an ancient circular temple. The ruins in the street of *Gesù o Maria* are supposed to be the remains of baths.

Outside the N.W. entrance to the town, to the right of the Via Appia (between this road and the avenue known as the Galleria di Botto, leading to Castel Gandolfo), rise the remains of a large tomb, called without authority the Tomb of Pompey. — On the S.E., just outside of the town, to the right on the road to Ardea (between it and the ancient road), stands a remarkable ancient Tomb

in the *Etruscan Style*, consisting of a massive cube, originally surmounted by five obtuse cones, of which two are still standing. It was formerly regarded as the tomb of the Horatii and Curiatii.

From Albano to *Rocca di Papa*, and thence to the top of *Monte Cavo*, see pp. 416, 417.

About $\frac{3}{4}$ M. to the S.E. of Albano lies Ariccia. Beyond the above-mentioned tomb the road crosses the imposing Viaduct which spans the deep gorge between Albano and Ariccia, erected by Bertolini under Pius IX. in 1846-53, 334 yds. in length, and 192 ft. in height, consisting of three series of arcades of six, twelve, and eighteen arches respectively, one above the other. To the right we obtain a view of the extensive plain as far as the sea; to the left is the park of the *Palazzo Chigi*, a mansion built by Bernini, immediately to the left beyond the viaduct. This park, containing fine old timber, is kept in as natural a condition as possible. Permission to visit it should be obtained through the porter or gardener (fee $\frac{1}{2}$ -1 fr.).

Ariccia (1350 ft.; *Café-Restaurant* in the piazza), a village with 3524 inhab., frequently attracts visitors in summer on account of the proximity of the woods. The women of Ariccia and Genzano are famed for their beauty. The ancient *Aricia*, which belonged to the Latin League, lay towards the S., in the *Valle Aricciana* (928 ft.), a valley below the modern town, encircled by cliffs of tufa and probably of the same volcanic origin as the neighbouring lakes (see p. 407). It was the fifth station on the *Via Appia*, which runs towards Genzano on massive and still visible substructures, at the foot of the modern town now occupying the site of the ancient *Arx* or citadel. (A circuit of $\frac{1}{2}$ hr. by the valley, instead of the direct route from Albano to Ariccia, is interesting.) In the middle ages Ariccia passed to the Savelli, and in 1661 was purchased by the Chigi, the present proprietors.

From Ariccia to Genzano is a walk of $\frac{1}{2}$ - $\frac{3}{4}$ hr. (omnibus, see p. 413). The beautiful and shady new road at first leads a little to the left and crosses three viaducts, which command fine views. After $\frac{1}{2}$ M. it passes *Galloro*, formerly a Jesuit church. About $\frac{1}{3}$ M. farther on, the road divides, the branch to the left descends to a Capuchin monastery and to the Lake of Nemi (below is a partly ancient road to Nemi); that in the middle leads through an avenue to the ($\frac{1}{2}$ M.) *Palazzo Cesarini*; and that to the right descends to the town.

Genzano (1430 ft.; *Trattoria Stocchi della Grotta Azzurra*, *Trattoria Torti*, both in the Corso Vittorio Emanuele, plain, bargain desirable; the landlords procure night-quarters for visitors) has 7376 inhab., who carry on a considerable cultivation of wine. Officially known as *Genzano di Roma*, the poverty-stricken village presents no attraction beyond its fine situation, high above the S.W.

² of the Lago di Nemi. The best view of the lake is from the

garden of the Palazzo Cesarini, which slopes rapidly towards the water (entrance to the left, opposite the palace, admission granted on application at the palace). — The famous *Infiorata di Genzano*, or flower-festival, formerly celebrated at Genzano on the 8th day after Corpus Christi, is now seldom held.

The *Lago di Nemi* (1045 ft.), about $3\frac{1}{2}$ M. in circumference (area 412 acres) and about 110 ft. deep, lies in an oval basin which is either a crateriform subsidence or an actual crater. It is drained by an artificial emissarium. The water is beautifully clear, and rarely ruffled by wind. The precipitous wooded slopes of the basin are of tufa, streaked with lava; they are 330 ft. in height and are carefully cultivated. In ancient times it was called the *Lacus Nemorensis*, and sometimes the 'Mirror of Diana', from a temple (see below) and *nemus*, or grove sacred to that goddess, whence the present name is derived. This exquisite lake, the gem of the Alban Mts., is especially beautiful when the sun is high.

From Genzano to Nemi 3 M.; by the Palazzo Cesarini we follow the road to the right, through the town, and past the church of the Santissima Annunziata. The pleasant road skirts the upper margin of the lake, affording several fine views. — A beautiful footpath descends to the lake from Santissima Annunziata, and ascends again near the mills below Nemi, traversing luxuriant orchards.

Nemi (1710 ft.) is a small mediæval town with an ancient castle of the Colonna, now belonging to Prince Ruspoli. The inn (*Albergo Desanctis*, fair) possesses a small verandah which commands a delightful view of the lake and the castle of Genzano, of an old watch-tower beyond them, and of the extensive plain and the sea. Nemi is famous for its strawberries.

In the district below Nemi, known as 'I Giardini', considerable remains of the foundations of the Temple of Diana and a colonnade surrounding it have been discovered. A little farther on in the direction of Genzano, near the 'Casa dei Pescatori', about 30 yds. from the bank, are the sunken remains of an artificial island constructed in the shape of a Roman *stipe* *Borge*. Attempts made in 1895 and 1901 to raise it resulted in the discovery of several tasteful bronze ornaments, mosaics, etc. A few massive beams are the only relics now to be seen on the spot.

An alternative route for the return from Nemi direct to Albano is the above-mentioned footpath on the N.W. bank of the lake. An omnibus (fare $1\frac{1}{2}$ fr.) plies daily from Nemi to Albano, starting towards evening and arriving in time for the last train to Rome.

From Nemi to the (2 hrs.) top of Monte Cavo (p. 417) a guide is advisable on account of the intricate forest-paths ($1\frac{1}{2}$ fr.).

Monte Cavo.

The ascent of Monte Cavo may be accomplished in about $3\frac{1}{4}$ hrs. from Frascati, in about $3\frac{1}{2}$ hrs. from Albano, and in about 2 hrs. (with guide) from Nemi.

From Frascati to Rocca di Papa is about 5 M. by road, which on account of the ascent represents a walk of not less than 2 hours. The

day's journey indicated at p. 407 may be lightened by taking a carriage (one-horse 7½ fr.) or the omnibus (p. 407) to Rocca di Papa. The road diverges to the left from the road to Marino (p. 411), at a point a little more than halfway, about 1¼ M. to the E. of Grotta Ferrata (p. 410), beyond the *Ponte degli Squarciavelli*, and ascends steadily, winding towards the end. — Rocca di Papa may also be reached from the castle of Tusculum (p. 409) direct in 2-3 hrs. by field and forest paths, passing the *Madonna Precotis* (guide desirable, 1-1½ fr.).

FROM ALBANO TO ROCCA DI PAPA, about 4½ M. (carriages, see p. 413; walkers require about 1¾ hr.). The road (bad in places) leads to the right below the Capuchin convent (p. 413), and after 12 min., at the park of the Palazzo Chigi (p. 414), is joined by a road leading to Ariccia. About ¾ M. farther on the road to the Galleria di Sopra (p. 412) diverges to the left, forming a shortcut for pedestrians from Albano. — The road soon enters a fine wood; the soil is composed of scorias and ashes from the crater of Monte Cavo.

From a bridge, about 1¼ M. short of the *Madonna del Tufo* (see below) a broad and stony road, diverging to the left, leads in 12 min. to the Franciscan monastery of Palasuello, situated above the E. margin of the Alban Lake and visible from the highroad. The monastery dates from the 18th century. Its garden contains a curious antique rock-tomb. Hence we may follow the S. shore of the lake to Albano; see p. 412.

The road now ascends more steeply and, beyond the *Madonna del Tufo* (ca. 2130 ft.) commands a splendid *View (finest by evening light) of the Alban Lake, the mountain-slopes, with Marino and Grotta Ferrata, and the Campagna stretching away to Rome. Crossing several streams of basalt, it reaches Rocca di Papa, where it joins the road from Frascati. Instead of following the road to the left to the town, we may ascend direct to the Campo di Annibale from beside a huge lime-tree enclosed by a low wall.

Rocca di Papa. — **Hotels.** ALBERGO & TRATTORIA DELL' ANGELETTO, two houses in the Piazza in the lower part of the town, R. 1½-2, pens. 4-6 fr., plain but good; ALB. & TRATT. BELVEDERE, in the Via del Tufo, above the town (fine view), mediocre.

Rocca di Papa (2080-2480 ft.), picturesquely perched on a rock, with 4023 inhab., is now a favourite summer-resort of the Romans, with numerous villas and a seismographical station (*Osservatorio Geodinamico*), and lies amid fragrant woods on the outer slope of the great extinct crater of *Campo di Annibale* (2460 ft.), so named from the unfounded tradition that Hannibal once pitched his camp here. The garrison of Rome occupies summer-quarters here in July, August, and September.

In order to reach the summit of Monte Cavo we turn to the right on the rim of the crater, which is reached by a walk of 20 min. through the steep lanes of the town, and ascend the

well-preserved and shady *Via Triumphalis*, an ancient road, paved with basalt, once traversed in triumphal procession by the generals to whom the Senate refused a triumph at Rome. From two open spaces, about three-quarters of the way up, a better view than from the top is obtained of Marino on the right, the Lago d'Albano to the left, Albano, Ariccia with the viaduct, Genzano, the Lago di Nemi, and Nemi itself.

On the summit of the *Monte Cavo (3115 ft.), the ancient *Mons Albanus* (an ascent of $\frac{3}{4}$ hr. from Rocca di Papa), stood the venerable sanctuary of the Latin League, the *Temple of Jupiter Latiaris*, where the great sacrificial festival of the *Feriae Latinae* was celebrated annually. Its scanty ruins were destroyed about 1777, when Cardinal York, the last of the Stuarts (p. 328), built a Passionist monastery on the spot. The latter, now the property of Prince Colonna, has been converted into a *Meteorological Station* and an *Inn* (pens. 5-6 fr., unpretending). A portion only of the ancient foundations is preserved on the S. E. side of the garden-wall. The view from several different points in the garden embraces the sea, the coast from Terracina to Civitá Vecchia, the Volscian and Sabine Mts., Rome and the Campagna, and below the spectator the beautiful Alban Mts. The distant view, generally obscured by mist, is seen to the best advantage immediately before sunrise, after sunset, or when a passing shower has cleared the atmosphere.

From MONTI CAVO to NEMI, about $1\frac{1}{2}$ hr. (guide, 1-1 $\frac{1}{2}$ fr., convenient but not necessary if the following directions be carefully observed). A steep and stony footpath (the beginning of which should be pointed out) descends from the S. E. angle of the top, and in 8-10 min. joins an easy path from the Campo di Annibale, which we follow to the right. Fine view of the Lago di Nemi and the sea. About 25 min. farther on a path diverges to the left and another to the right, but our route leads straight on. At the fork 10 min. farther we keep to the right, at the (10-12 min.) next fork to the left, and in 1 min. reach a broad road, which we follow to the right for 12 min. when we turn to the left. At the (3 min.) spring we turn to the left, then to the right almost immediately and follow a stony path which soon brings us in sight of Nemi.

3. The Sabine Mountains.

That chain of the Apennines which descends abruptly and bounds the Roman plain on the E., named Sabine Mts. from the ancient inhabitants, attains a height of 4490 ft. and is full of interest for lovers of the picturesque. It forms the margin of the mountain-range on the side facing the Roman depression occupied by volcanoes (comp. p. 331). Mt. Soracte (p. 36) and Cape Circeo (p. 447) are its isolated outliers. The Volscian Mts. (p. 440), to the S. E. of the Alban Mts., form a continuation of the great Apennine system. The unfruitful limestone rock has been covered by fertile volcanic ashes, and consequently has been made capable of bearing luxuriant crops. The olive-trees of the district are famous. — As a rule the lakes are good, though plain, but enquiry as to charges should be made beforehand; usual charge for board and lodging 5-6 fr., and $\frac{1}{2}$ fr. gratuity. — CARRIAGES are not always to be had except at Tivoli. The public conveyances are not recommended when ladies are of the party.

Those whose time is short must be satisfied with a visit to Tivoli, which was a favourite summer-resort of the Romans in the time of Horace. A

One day in April or May, when the vegetation is at its freshest, is the best time for this excursion. — If several days are devoted to the Sabine Mts., and they are well worth it, the following tour may be made: 1st day, from Rome by early train to Tivoli, thence in the evening or the next morning to Subiaco (p. 426); 2nd day, visit the monasteries in the morning, and in the afternoon, walk or drive to Olevano (p. 430); 3rd day, walk or take the diligence to Valmontone (p. 441) or Palestrina (p. 428), and return thence by rail to Rome (or to Segna, comp. p. 441). Those who wish to reserve Tivoli, the culminating point, for the end may proceed as follows: 1st day, from Rome by early train to Palestrina or Valmontone, and thence walk or take the diligence to Olevano; 2nd, to Subiaco, 3rd, to Tivoli; 4th, back to Rome. — A pleasant drive may be taken from Tivoli to Subiaco or Genzano (pp. 426, 430; 3, 2-4 hrs.).

From Rome to Tivoli.

Those who propose to devote one long day to Hadrian's Villa and Tivoli should proceed to Tivoli by steam-tramway, breaking their journey at the Villa, and should return to Rome by railway, as the last tramway from Tivoli starts at a comparatively early hour. To visit the Villa from Tivoli by carriage (there and back) takes more time.

1. RAILWAY (Rome, Solmona, and Castellammare-Adriatico line), 24½ M. in 1-1½ hr. (fares 4 fr. 50, 3 fr. 20, 2 fr. 5 c.). On Sun. and holidays return tickets are issued at a single fare. This route is more picturesque than that of the steam-tramway (see p. 418).

The trains start from the principal station at Rome (p. 133). On the right soon appears the ruined *Tor de' Schiavi* (p. 390). — 5 M. *Cervara di Roma*, the grottoes near which were once celebrated for the artists' festivals held in them. — 7½ M. *Salone*. A villa here, built in 1525 from Baldassare Peruzzi's designs for Card. Ant. Trivulzi, has interior decorations by Giov. Maria Falconetto. — 9 M. *Lunghezza*, the ancient *Collatia*, a 'tenuta' belonging to the Duce Strozzi, with a 15th cent. baronial castle, prettily situated in the well-wooded valley of the *Teverone*.

12½ M. *Bagni* (Restaurant at the Baths; two tolerable *Osterie* by the steam-tramway), the station for the sulphur-baths of *Acque Albule*, the Roman *Aquae Albulae*, which were much frequented in ancient times, and were again fitted up for the reception of patients in 1879 (swimming-baths for ladies and gentlemen; 68° Fahr.; bath from 1 fr.). The water, the unpleasant smell of which is due to its strong impregnation with sulphuretted hydrogen, rises from the tufa rock and is probably the outlet of a subterranean source from the Apennines.

The railway next crosses the highroad to Tivoli. To the right fine view of the road and of the railway-viaducts farther on, with the mountains in the background. — 15½ M. *Monticelio*, formerly called *Monticelli*, said to occupy the site of the ancient *Corniculum*. — The line begins to ascend rapidly.

20½ M. *Palombara*. The little town (*Palombara Sabina*, 1220 ft.), with 4517 inhab. and a château of the 14th cent. belonging to the Savelli family, is situated on an isolated hill, 6 M. to the N.

Palombara station is the best starting-point for the ascent of *Monte Muro* (4180 ft.), one of the highest peaks of the Sabine Mts., familiar to

the eye of every visitor to Rome. The excursion may be made from Rome in one day. A luncheon-basket should be provided. We follow the high-road from the station to ($\frac{3}{4}$ hr) the village of *Marcotina*, where we obtain a guide (2-3 fr.). Thence we may either follow the steep and conspicuous ravine of the *Scarpellina* to the (3-4 hrs) summit, or we may take the easier though somewhat longer route making a circuit to the E. partly through wood and crossing several wooded pastures, and finally traversing the fine maple and oak woods of the *Profane*. About $\frac{3}{4}$ hr below the summit the latter route passes a copious and excellent spring, where luncheon may be taken under the shade of the trees. The other parts of the mountain are destitute of water. On the summit is a trigonometrical signal. The view from the top is very extensive, comprising the coast from *Mis. Tirceo* as far as the lake of *Bracciano*, the broad plain with innumerable villages, from the *Volscian* and *Alban Mts.* as far as *Soracte* and the *Ciminian Forest*, then the *Apennines*, as far as the snowy peaks of the central range. — The descent may be made via the village of *San Polo de' Cavalieri* (2135 ft.), whence a road leads to the station of *San Polo* (p. 425), or via *Scoss Grotte* and through the *Valley of the Licorne* (p. 425) to the station of *Piccione* (p. 425).

A view of the Campagna opens on the right as the train proceeds: in front, *Tivoli*, with the beautiful cypresses of the *Villa d'Este* (p. 424). Beyond a tunnel we enjoy a view to the right of the waterfalls (p. 423) and the town. A short and a long tunnel follow. — $24\frac{1}{2}$ M. *Tivoli*, the station is outside the *Porta Sant' Angelo*.

2. **STEAM TRAMWAY**, 18 M., in $1\frac{1}{4}$ hr (fares 3 fr. 60, 1 fr. 85 c., return 2 fr., 2 fr. 30 c.). The steam-cars start outside the *Porta San Lorenzo*, for which a tramway in connection leaves the *Piazza Venezia* (Via Nazionale 131) $\frac{1}{2}$ hr. before their departure, running via the *Piazza delle Terme* (tramway-lines 8 and 12 of the Appx.; through-tickets to *Tivoli* may be obtained in the tramway cars). Cab to the steam tramway, see p. 4 of the Appendix. As the time-table of the steam-cars is frequently altered, enquiry should be made at the kiosk at the corner of the *Piazza Venezia*; the hours given in the time-tables and newspapers are not always correct. — Travellers with through-tickets are allowed to break their journey in order to visit *Hadrian's Villa* (part which the steam-tramway runs), which, if time presses, can be done in 2 hrs. Or visitors may walk from the *Villa* to *Tivoli*, as suggested at pp. 423 and 431.

The highroad, along which the steam-tramway runs, quits Rome by the *Porta San Lorenzo* (p. 183), passing the church of that name on the right. The road, which is generally identical with the ancient *Via Tiburtina*, crosses the *Anio*, now called the *Teverone*, by the *Ponte Mammolo* (station, 4 M.). This river forms the celebrated cascade at *Tivoli*, and falls into the *Tiber* at the *Ponte Salario* (p. 388). The bridge is said to be named after *Mamma*, the mother of *Alexander Severus*.

7 M. *Settecamini*. — $12\frac{1}{2}$ M. *Ragni*, station for *Acque Albule* (p. 418). — In the vicinity are the travertine quarries which furnished building-material for ancient and for modern Rome, for the *Colosseum* and for *St. Peter's* alike. The stone (*Lapis Tiburtinus*) is formed of the lime deposited by mountain streams; when freshly quarried it is soft and easy to work, but it hardens on exposure. In $\frac{1}{2}$ hr. more the *Anio* is crossed by the *Ponte Lucano* (station, $14\frac{1}{2}$ M.), near which is the well-preserved *Tomb of the Plautii*, dating from the early empire, and resembling that of *Cæcilia Metella* (p. 395).

15½ M. Villa Adriana (Ostia at the tramway-station). The entrance of the villa (comp. the Map, p. 422) lies about ¼ hr.'s walk from the tramway-station (cab usually to be had, 1-1½ fr. for 1-4 pers.). A fine avenue of cypresses leads to the lower *Casa della Guardia*, where tickets are sold (1 fr., Sun. free, permesso, see p. xxi).

The *VILLA OF HADRIAN, which with its magnificent grounds occupies an area of about 160 acres (four times larger than the Palatine), dates from the later years of the far-travelled emperor (d. 138 A.D.). Hadrian, as his biographer Spartian relates, 'created in his villa at Tivoli a marvel of architecture and landscape-gardening; to its different parts he assigned the names of celebrated buildings and localities, such as the Lyceum, the Academy, the Prytaneum, Canopus, the Stoa Poecile, and Tempe, while in order that nothing should be wanting he even constructed a representation of Tartarus'. After the death of its founder little use seems to have been made of this gigantic construction, which is mentioned only once more in ancient history, when the Emp. Aurelian assigned a villa at Tivoli, near the 'Palatium Hadriani', to Zenobia, the captive queen of Palmyra. In the 16th cent. a profitable search for works of ancient art was instituted here, and the ruins have furnished an almost inexhaustible series of works of art, including many of the principal treasures of the Vatican, Capitoline, and other museums. Unfortunately, however, the destruction of the buildings kept pace with the search for treasures of art, until in 1871 the Italian government purchased the villa from the family of the Braschi.

The Roman archaeologists have tried to identify the extant ruins with the buildings mentioned by Spartian in the passage cited above, and though it is often doubtful we here follow the usual terminology.

Adjoining the watchman's hut is the so-called *Tempe Grove*, of which the foundations of the stage and the rows of seats are still distinguishable. Skirting the posterior wall of the stage, we then ascend to the right through an avenue of cypresses to the *Poecile*, an imitation of the *stoa poecile*, or painted porch, at Athens, consisting of a huge colonnade, surrounding a garden with a large water-basin in the centre. The wall (220 yds. long) which bounds this on the N. runs almost due E. and W., so that of the arcades on either side one lay in shade while the other had a full S. aspect. The natural plateau of the hill has been enlarged on the W. and S.W. by gigantic substructures, which contain three stories of vaulted chambers, accessible through an entrance on the S. side of the square (Pl. 1), near the cypress tree. These chambers, generally called *Le Cunicoli* or *Camere*, are supposed to have been occupied by the imperial guards or slaves. — At the N.E. corner of the square is the entrance to the *Sala de' Pilastri*, with niches for statues. From it we enter a *Circular Building* (Pl. 3) containing a water-basin and an artificial island adorned with columns, this is usually described as a *Natatorium* or swimming-bath, but it is more probably a pavilion, used perhaps as a summer dining hall. To the E. of this building was situated the *Principal Palace*. We first enter, at a somewhat higher elevation, a rectangular court (*Cortile della Biblioteca*), the left side of which is occupied by the so-called *Library* (Pl. 4), which still remains with the exception of the upper story. To the E. lay a garden. A lower corridor (*Hedemulchus*), on the left side of which was a vestibule, leads N.E. to a room supposed to have been a *Triclinium*,



commanding a fine view of Tivoli and the mountains. Hence we proceed to the S. flight, through the *Opuscula* (Pl. 8) chambers with a cruciform ground plan and remains of frescoes and well preserved mosaic pavement, to the *Domus Peristylis* (Pl. 6) and to a large rectangular space known as the *Giardino*. Some fine mosaics (p. 306) were found in the adjoining rooms (*Peristylis*). On the E. side of the *Giardino* is the *Atrium* *Chloridius* (Pl. 7) a hall the ends of which are occupied by large semi-circular recesses. In the centre are two small fountain-basins. To the right is the *Atrium*, with its marble pillars. On the W. it is adjoined by a room with an *exedra*, in which is an elevated base or platform, this is supposed to be the throne room. We now return to the *Vestibulum* Corinthian, and on quitting it turn to the right. Beyond an octagonal vestibule we enter the so-called *Piazza d'Oro* a court surrounded with a colonnade of 16 columns, alternately of Oriental granite and cipollino, of which the bases alone are now visible. The costly material of the decorations found here in the excavations of the fifth cent. gave rise to the name. On the S.E. side of the *Piazza d'Oro* is a domed chamber, with a semicircular apse, containing water works and a fountain.

We now return to the *Giardino* along its S. side and follow the path leading to the S. part a handsome semicircular *Exedra* (Pl. 9) with a water basin, to the *Quadrone del Regio*, an isolated lofty building supposed to have been occupied by soldiers or by imperial officials. Further on is a large block of buildings facing the W. We pass through a *Cryptoporticus* and enter a series of rooms from which we overlook the *Stadium*. On leaving this building we proceed to the S. along the substructures. In the middle of the lower lying space which they enclose are the *Thermae* with remains of tasteful stucco ornamentation. To the left as we leave the *Thermae* opens the Valley of *Canopus*, artificially cut in the lava rock. *Canopus* says Strabo "is a town 120 stadia from Alexandria named after the stoicist of Mendes who is said to have died here, and containing a highly covered temple of Serapis." Troops of pilgrims descended the canal from Alexandria to celebrate the festivals of this godhead. The neighbourhood of the temple swarms day and night with men and women, who spend the time in their boats dancing and singing with the most unbridled merriment, or find accommodation in the town of *Canopus* beside the canal and there prosecute their orgies. Hadrian constructed the canal, with the temple in the background and also numerous small chambers, where he caused festivals to be celebrated in the Egyptian manner. At the end of the valley is a large and well preserved room, with a fountain, beyond which was a system of subterranean halls, terminating in a cella with a statue of Serapis. Many of the Egyptian works of art in the *Vatican* (p. 300) were discovered here.

Returning from the *Canopus* and passing in front of the above-mentioned *Thermae* we reach a second series of baths, smaller but in better preservation than the others. We pass through a modern door into the *Trochædrium*, a vaulted apartment with two large baths, beyond which is the octagonal *Apodyterium*, to the left of which is the circular *Frigidarium*. The name of the remaining apartments cannot be more particularly ascertained. The ancient entrance was on the N. side, facing the *Porta*. We then return to the *Vestibulum* pass through the door in the N. wall and reach the cypress avenue leading to the exit. On our way back we may enjoy the grateful shade of the grove below the *Giardino* (see Plan) and the view of Tivoli and the Vale of Tivoli.

The *Canopus* is the last part of the Villa usually visited by travellers. About 2 m. from the *Canopus*, a square building with a modern tower (see view) is known as the *Porta di Pisonia* (see lower part of Plan). The more distant parts, to the S., now occupied by private owners are more difficult to reach and to identify. To the S.E. lies the so-called *Academia*, more probably a residential palace, the principal palace to the S. In the E. of this is the *Odeum*, with the remains of a stage and rows of seats. To the W. of the *Odeum* is an extensive subterranean hall, in the form of a trapezium, about 350 yds. long and 150 yds. wide, called the *Subura*, erroneously supposed to be the *Porticus* mentioned

by Spartian. The colonnade supposed to be the *Lecum*, and extensive ruins on the *Colle di Santa Sigfrida*, to which the name of *Frytensum* has been attached, perhaps belonged to a private villa. All these remains are much ruined.

Tivoli lies about 1 hr's. walk (p. 424) above the Villa Adriana, $\frac{1}{4}$ hr. by tramway.

The tramway-line makes a wide curve to the S.E., ascends steeply through olive-groves past (10 $\frac{1}{2}$ M.) *Nepresso*, and ends at the (18 M.) *Porta Santa Croce*, the S.W. gate of Tivoli. Close by is the *Giardino Garibaldi*, which commands beautiful views of Rome and the Campagna and of the Villa d'Este. From the gate we ascend through the town to the piazza to the E. of the *Ponte Gregoriano*, whence the *Vicolo della Sibilla* leads to the left to the temples, while the street crossing the bridge to the right leads to the waterfalls.

Tivoli. — *Hotels* (previous enquiry as to charges necessary). *REGINA*, in the Piazza del Plebiscito, R. 2 $\frac{1}{2}$, B. 1, pens. 7-10 fr.; *BRANDI*, a dépendance of the Regina, opposite the entrance to the waterfalls, R. 3, pens. from 5 fr.; *ALBERGO RISTORANTE DEL PANISCIUTO*, 4-5 2 $\frac{1}{2}$ fr., modest but well spoken of; *SIBILLA*, situated near the temples, with view, pens. from 5 fr. — *Chief Restaurant des Cascades*, Villa Gregoriana, near the entrance to the waterfalls. — *Café d'Italia*, at the tramway-terminus.

Carriage to the Villa Adriana (p. 420) with one horse & two horses 8 fr., there and back, including 1 $\frac{1}{2}$ hr. & halt, 6 and 10 fr. An Omnibus occasionally plies to the Villa (return-fare 1 fr. 80 c.). — Carriage and pair to Licenza (p. 426) about 15 fr. — Donkeys and Guides (superfluous) to the waterfalls 1 fr. (3-4 fr. are generally demanded at first). Beggars are numerous and importunate.

Tivoli (760 ft.), the *Tibur* of antiquity, with 12,881 inhab., is splendidly situated on a limestone chain, a S. offshoot from Monte Genaro (p. 418), which here interrupts the course of the river Anio, and causes it to wind through a ravine at the end of which are the celebrated waterfalls. It existed, according to tradition, as a colony of the Siculi long before the foundation of Rome. In B.C. 380 Camillus subjugated Tibur along with Praeneste, after which it formed a member of the league of the Latin towns allied with Rome. Hercules and Vesta were the deities chiefly revered at Tibur. Many of the Roman nobles of the Augustan age, including Maecenas, and the emperor Augustus himself, founded beautiful villas here, under Hadrian the splendour of the place attained its climax. In the middle ages it participated in the fate of Rome. In 1480 Pius II. founded the citadel on the ruins of the amphitheatre. The modern flourishing town has narrow streets lighted by electricity; it is said to be damp and windy in spring.

Those who arrive by rail enter the town by the *Porta Sant' Angelo* on the N.E., immediately to the left of which is an iron gate forming the usual (E.) entrance to the grounds at the waterfalls (p. 428; visitors entering here may quit the grounds by the gate near the temples, on the other side of the valley). — Straight on is the *Ponte Gregoriano*, spanning the river above the falls, leading to a small piazza, from which the main street runs to the left to the

tramway-terminus (p. 422) and the Vicolo della Sibilla to the right to the Albergo Sibilla (on the right) and the temples.

The ***TEMPLE OF THE SIBYL**, which stands in the court of the hotel, is called by some authorities a temple of *Vesta* or of *Hercules Suxenus*. It is a circular edifice, surrounded by an open colonnade of 18 Corinthian columns, 10 of which are preserved. This temple was used as a church in the middle ages, to which period the round niche in the interior belongs. The door and windows contract at the top. It stands on a rock above the waterfall, of which it commands an admirable view. [The ruins on the projecting rock to the right were caused by an inundation in 1828, which carried away part of the village, and in consequence of which the Traforo Gregoriano was made; to the extreme left is the new waterfall; see below.] — Beside the Tempio di Sibilla is another fine old temple of oblong shape, with 4 Ionic columns in front, supposed to have been dedicated to *Tiberius*, or to the *Sibyl*. Until 1884 it was incorporated with a church. An iron gate near it is the W. entrance to the grounds of the waterfall, but it is open on Sun. only.

On week-days the only entrance to the ****WATERFALLS** is by the iron gate on the other (E.) side between the Porta Sant' Angelo and the Ponte Gregoriano (see Plan, 'Ingresso'; admission 1/2 fr., Sun. free; guide, see p. 422). The path directly opposite the entrance leads to the upper end of the *Traforo Gregoriano*, which consists of two shafts, 290 and 330 yds. long respectively, driven through the rock of Monte Catillo (p. 424) in 1828-35 by the engineer *Pöschl*, to protect the town from inundations by providing a sufficient outlet for the Anio even in time of flood. Near it is an arch of an ancient bridge in 'opus reticulatum'. As, however, the cutting can only be entered from the lower end, visitors entering the grounds usually turn at once to the left, pass (to the left again) through an archway below the road, and follow the margin of the valley, enjoying a view of the two temples on the left. We then reach a Terrace planted with young stone-pines, whence we obtain a charming view of the temple of the Sibyl, above us, and, below, of the New Waterfall (354 ft. high), by which the Anio emerges from the Traforo Gregoriano. Passing through a door, which a custodian opens (10-15 c.), we may proceed to the fall and the entrance of the tunnel (372 paces long; the walk by the roaring stream is far from pleasant) — From the terrace we retrace our steps for a short distance, and then, bearing constantly to the right, follow the footpath (not the stone steps) descending to the valley; to the left are some Roman substructures; halfway down, near some cypresses, a path descends to the right to a *Platform* of masonry, immediately above the new fall. — We now return to the cypresses and then descend the path, at first in zigzags and afterwards in steps. We descend to the lowest point to which it leads, finally by a flight of stone steps, wet with spray, to the fantastically-shaped *Strens' Grotto*. — From the grotto we return t

the point where the paths cross, and ascend the path on the other side of the valley to a *Gallery* hewn in the rock, the apertures of which we observe some time before reaching it. At the end of the gallery the path again divides; the branch to the left leads across an iron bridge to the *Grotto of Neptune*, formerly the channel of the main branch of the Anio. The new works drew off the greater part of the water from this channel, but the fall is still very fine.

We now return to the gallery and follow the path to the left, ascending in zigzags to the above-mentioned exit near the temples, which is opened on week-days for a few soldi.

The now neglected **VILLA D'ESTE*, to the W. of the town, one of the finest of the Renaissance period, was laid out by *Pirro Ligorio* in 1549 for Card. *Ippolito d'Este*, and belongs now to Archduke *Francis Ferdinand* of Austria-Este. The entrance is in the *Piazza San Francesco* (adm. 50 c.). In the casino are frescoes by *Fed. Zuccaro* and *Muriano* (damaged). The garden contains terraces, grottoes with cascades, densely-shaded avenues, magnificent groups of cypresses, and charming points of view.


We may either take the tramway from this point to *Hadrian's Villa* (p. 420) or walk thither ($\frac{3}{4}$ hr.) by the Roman road issuing from the *Porta del Colle*, the W. gate of the town. To the right, a short distance from the town, is the arroneously named *Villa of Maecenas*, where an iron manufactory and the works for the electric lighting of the town are now established. On the other side of the road is an ancient circular building, known as *Tempio della Tosse*, or 'temple of the cough', probably a tomb of the *Turcia* or *Toscia* family. Farther on we pass, on the right, a road leading to the *Ponte dell'Acquoria* (see below), and then pass under the tramway-line to the cross-road leading to the entrance to the *Villa Adriana* (p. 420).


If time permit a very pleasant detour may be made by the **Via delle Cascatelle*, the road that issues to the left from the *Porta Sant'Angelo* (p. 422) and skirts the slopes above the right bank of the Anio, between fine olive-trees. It affords beautiful views of Tivoli and its waterfalls, especially from ($\frac{3}{4}$ M.) the first terrace (marked *Belvedere* on the map) and ($\frac{1}{2}$ M. farther) from the terrace beyond *Sant'Antonio*, whence also are seen the smaller waterfalls below the town, known as *Le Cascatelle*.

It is usual to turn here. Visitors who wish to proceed to *Hadrian's Villa* continue to follow the same road. About $\frac{1}{4}$ M. farther on, various ancient ruins, said to be the remains of a villa of *Quintilius Varus*, are seen near the small church of *Santa Maria di Quintilele*. A '*Villa of Horace*', although the poet never had one at Tibur, is also pointed out by the guides. From *Santa Maria* we cross the meadows between garbed olive-trees, and in about 20 min. reach a road descending in a few minutes to the left to the *Ponte dell'Acquoria*, by which we cross the Anio. On the left bank we reach in a few min. (to the S.) the road to *Hadrian's Villa* (see above).

The summit of *Monte Catillo* (1140 ft.) may be reached in about 25 min. by following the steep path that ascends to the right from



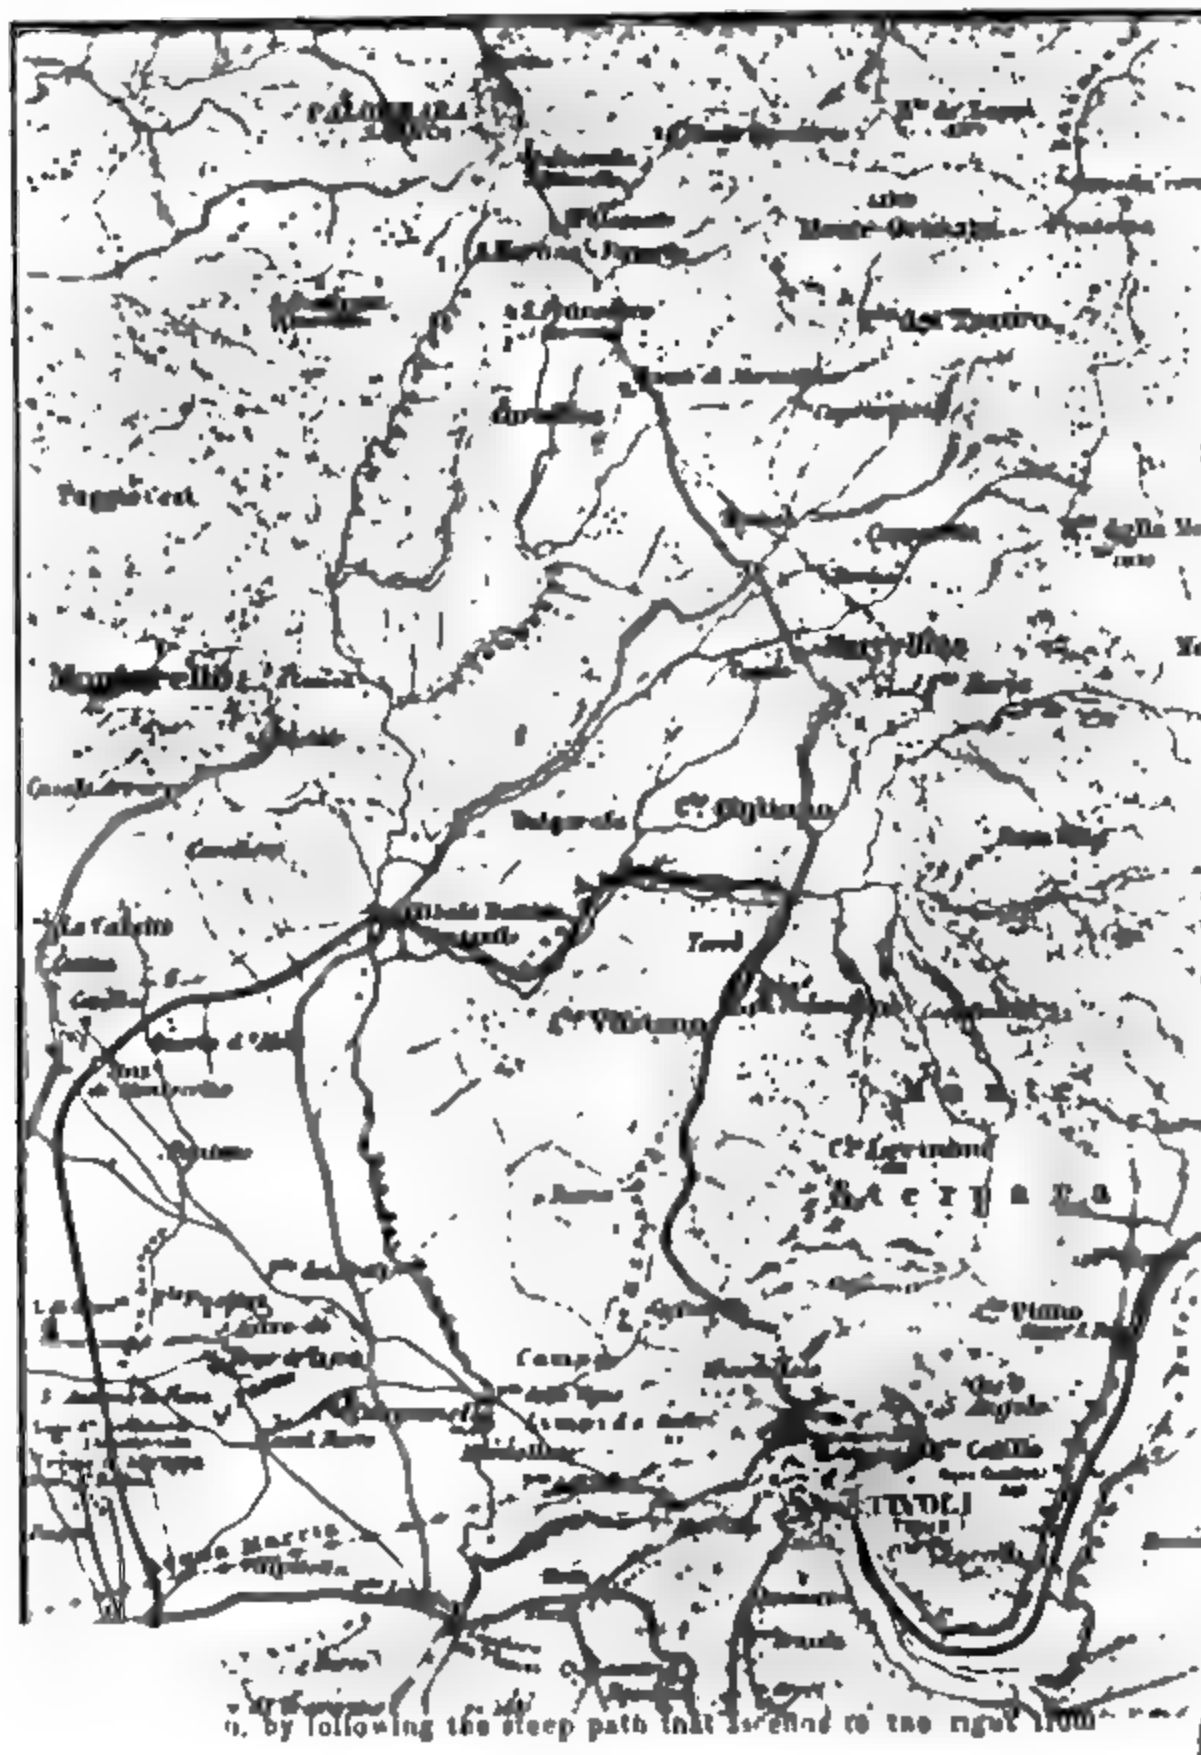

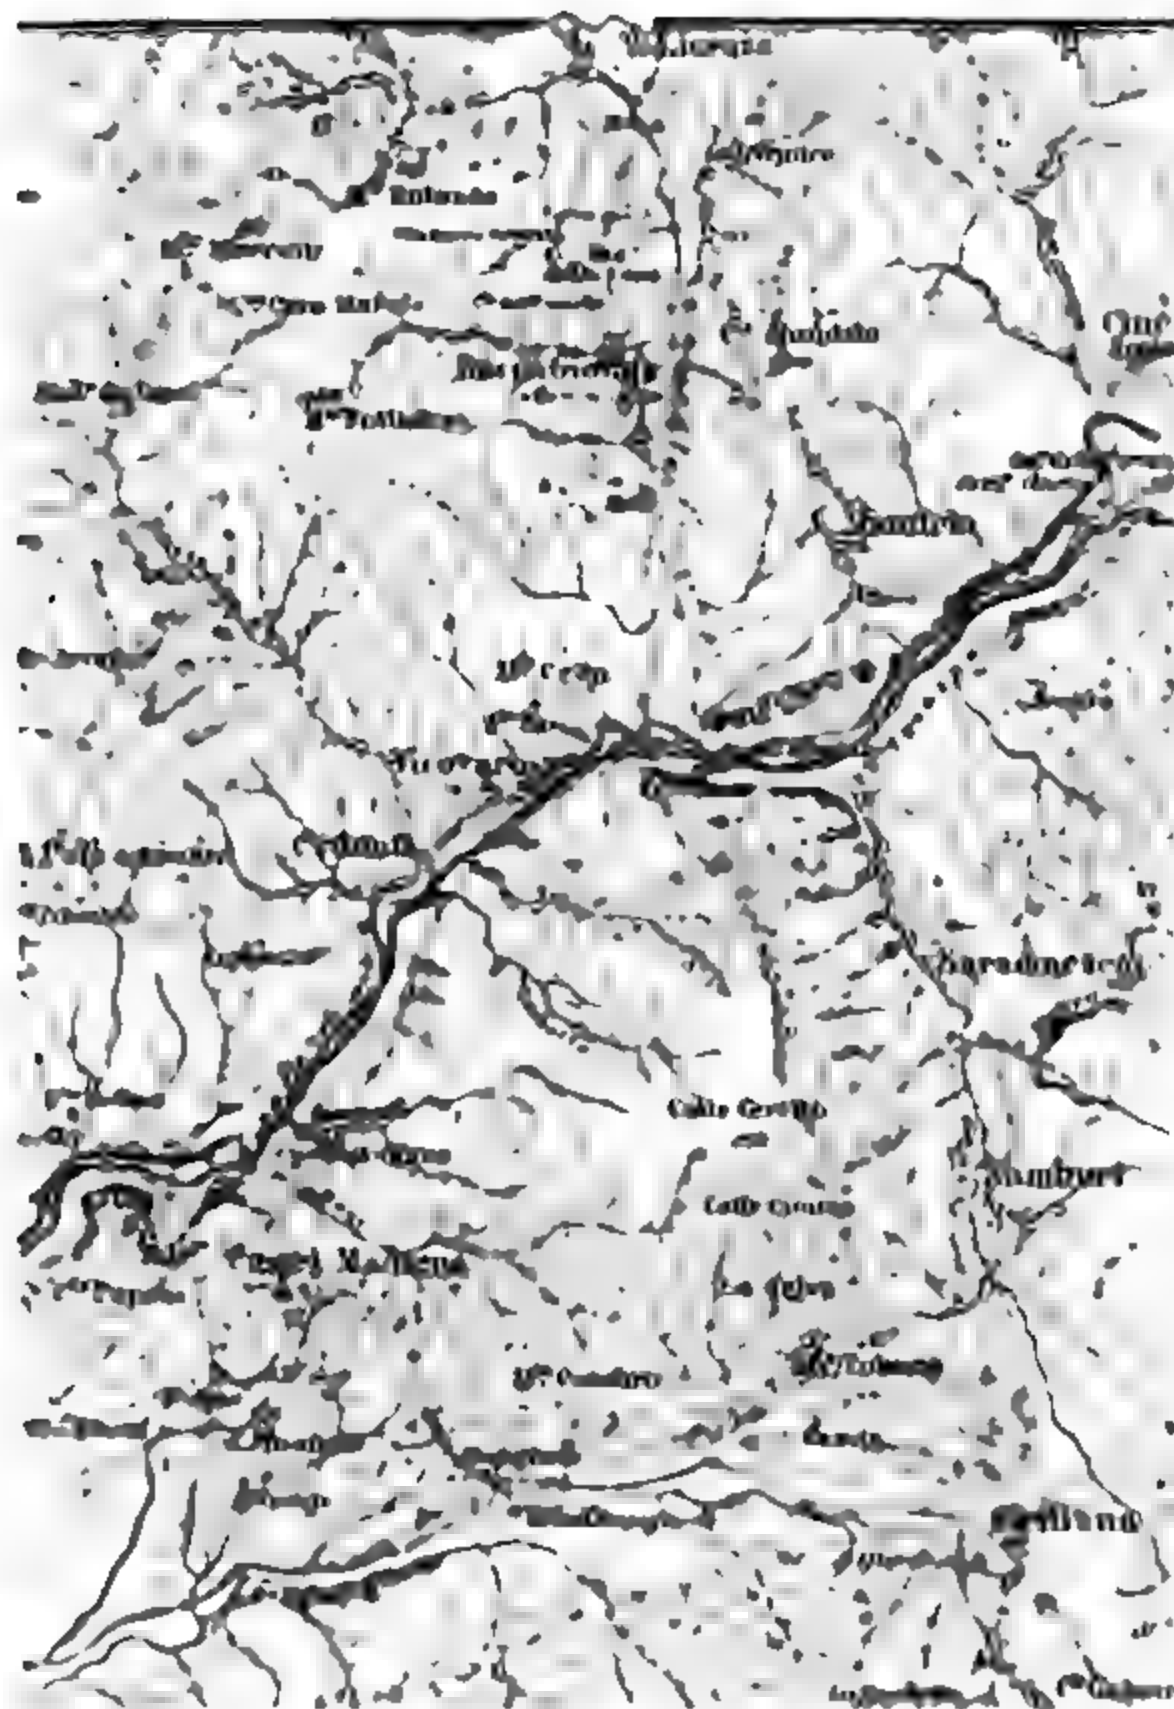

1

2

3

4

the Via delle Cascatelle a little way beyond the Porta Sant' Angelo. The top, which is marked by a cross, commands a beautiful view of the Campagna and the valley of the Anio.

From Tivoli to Palestrina via Ponte Lucano and Galliciano, or via San Gregorio and Poll, see p. 480.

The beautiful ROAD FROM TIVOLI TO SUBIACO OR GENASZANO (about 18½ M.; cart. in 3¼-4 hrs.) quits the town by the *Porta San Giovanni*, the S.E. gate, and after ascending the valley of the Anio for a short distance, enters that of the brook *Empignone*. Beyond the *Ponte degli Arci*, by which we cross the brook, near some remains of the Aqua Claudia (to the left; p. 392), a road diverges on the left to *Castel Madama* (see below); and beyond *Ciciliano* (2030 ft.), a village on the hill to the left, the road divides. The picturesque carriage-road to the left runs via *Gerano* (1645 ft.) to *Camerano* (1975 ft.), whence it is prolonged to join the road from *Cineti Romano* to Subiaco (p. 426) at a point 3½ M. from Subiaco. Our route leads straight on, ascending rapidly, via *Piscinone* (1735 ft.) to *San Vito Romano* (2270 ft.), whence we descend once more, with a fine view of the Volscian Mts. and the valley of the Sacco, to *Genaszano* (p. 480).

From Tivoli to Subiaco.

26 M. RAILWAY (continuation of the line from Rome to Tivoli) to (9 M.) *Mandula* in about ¾ hr. (fares 2 fr. 10, 1 fr. 50, 25 c.), and branch-line (two trains daily) thence to (14 M.) *Subiaco* in 54 min. (fares 2 fr. 80, 1 fr. 80, 1 fr. 20 c.). — Attractive carriage-route, see above.

The railway-station of Tivoli lies outside the Porta Sant' Angelo (p. 422). The train follows the right bank of the Anio, to the left of the road, the ancient *Via Valeria*, and the *Aqua Marcia* (p. 392). Fine view of the green valley to the right. — 2½ M. *San Polo de' Cavalieri*; the village (p. 419) lies on the hill, 4½ M. to the left of the station. Two tunnels. — 5 M. *Castel Madama*; the conspicuous village (1485 ft.; 9371 inhab.) lies high up on the other bank of the Anio, 2½ M. distant. — We now pass through another tunnel and cross to the left bank.

7 M. *Vicovaro* (1033 ft.). The small town (1986 inhab.) is on the right bank of the Anio, ¾ M. distant. On the way to it we pass, on the left, the church of *Sant' Antonio*, with a portico of ancient columns. Just below the entrance to the town are some remains of the walls of *Varia*, the ancient town now represented by Vicovaro. The octagonal chapel of *San Giacomo*, known as 'Il Tempietto', was built about 1450 by Dom. da Capodistria. The sculptured portals are by Giov. Dalmata.

Above Vicovaro opens the Valley of the Licenza, the ancient *Diguntia*, believed to be the spot in which lay the Sabine farm of Horace. The natural beauty of the valley would alone render it worth a visit, even apart from its classical associations. From Vicovaro we follow the road on the right bank of the Anio for 1 M., then diverge to the left by the road to Licenza. About 1½ M. farther on, before a bridge, the carriage-road to Rocca Giovane diverges to the left, crosses a bridge, and then ascends. Rocca Giovane does not become visible till we are close upon it.

Rocca Giovane (1700 ft.) is a small village charmingly situated on a precipitous rock. An inscription refers to the restoration of a temple of *Victoria* by Vespasian. According to Varro, *Victoria* is identical with the Sabine *Favuna*, and consequently Rocca Giovane is supposed to be the

Fanum Fagunae of Horace (Epist. I. 10). A guide should be obtained to take us to the chapel of *Maddama della Casa* (see below), the *Celle del Focelle* (properly *Il Faggetello*), and the *Fonte degli Ortolani* (properly *Fonte dei Latini*). These names are erroneously supposed to refer to the villa of Horace, which more probably lay in the bottom of the valley near Lianza. The ancient remains are insignificant.

From Rocca Giovane we may proceed (with a guide; $\frac{1}{2}$ fr.) via the *Maddama della Casa* to (1 hr.) Lianza (1568 ft.), which derives its name from the stream skirting the base of the hill, the ancient *Digentia* ('me quotiens reficit gelidus Digentis rivus', Hor. Epist. I. 18, 104). We return to (8 M.) Vicovaro by road, or at the mill we may cross the brook to the left, and follow a field-path to ($1\frac{1}{2}$ hr.) *Mandela*. Descent to the station $\frac{1}{2}$ hr. more (see below).

Ascent of *Monte Gennaro* from Rocca Giovane, see p. 419.

Beyond Vicovaro we traverse a long tunnel, penetrating the rocky hill on which the convent of *San Rocco* stands.

$8\frac{1}{4}$ M. *Mandela* is the junction for the branch-line to Subiaco. The village (1600 ft.) lies on the hill to the N. It was formerly known as *Cantalupo*, but has lately resumed its ancient name ('rugosus frigore pagus', Hor. Epist. I. 18, 105). — Continuation of the line to Solmons, etc., see *Baedeker's Southern Italy*.

On a steep rock to the S.E., about 2 hrs. from Vicovaro, lies the humble little hamlet of *Soracinese* (2080 ft.), with 635 inhab., commanding a fine view, extending as far as Rome.

The BRANCH RAILWAY TO SUBIACO (14 M.) crosses the Anio after $2\frac{1}{2}$ M. and follows its valley to the S.E. — 5 M. *Anticoll-Roviano*, two villages lying respectively 2 M. to the S. and 2 M. to the N. Roviano is also a station on the railway to Solmons. The valley of the Anio now expands picturesquely. — 8 M. *Marano-Agosta*. The former of these villages lies on the left bank, the latter on the right bank of the Anio, the valley of which again contracts. From Agosta a bridle-path ascends to the N.E. to *Cervara di Roma* (3455 ft.), on a lofty rock. — 11 M. *Rocca-Canterano-Canterano-Cervara*. Rocca Canterano (2440 ft.) and Canterano (p. 425) lie on the hills to the right, the one $4\frac{1}{2}$ M. from the railway, the other $2\frac{1}{2}$ M. For Cervara, see above. — We are close upon (14 M.) *Subiaco* before we see it, charmingly situated amidst wood and rock.

Subiaco. — *Hôtels.* ALBERGO DELL' ANIONE, pens. 5 fr. ($4\frac{1}{2}$ fr. for a long stay), very fair; LA FARMICA, mediocre, both at the top of the main street. — Carriage with one horse to Olevano, including halt at the monasteries, about 8 fr. (bargain desirable).

Subiaco (1840 ft.) is a small town (8003 inhab.) of mediæval appearance, commanded by a castle which was formerly often occupied by the popes. It was the ancient *Sublaqueum*, situated in the territory of the *Æqui*. It sprang up on the grounds of an extensive villa of Nero, which was embellished by three artificial lakes, the '*Simbrutæ stagna*' of Tacitus (Ann. 14, 22), which were destroyed by an inundation in 1305, and have given the village its name. On the left side of the Anio, opposite the monastery of Santa Scolastica, are seen walls and terraces of the time of Nero, who, according to Tacitus,

rowly escaped being struck by lightning while dining here. Not

—] .

.

.

•

•

far from the station, above the left bank of the Anio, near the cemetery, is the convent-church of *San Francesco*, with an altar-piece by *Antonissano Romano* (1487) and late 16th cent. frescoes (by *Sodoma*?) in the 1st chapel to the right of the high-altar.

The environs are delightful, and the far-famed *Monasteries* (closed 12-3 p. m.) are very interesting. Guide unnecessary. The excursion takes about 3 hrs., and affords a succession of beautiful views. We follow the main street which intersects the town, upwards of $\frac{1}{3}$ M. in length, and afterwards ascends the right bank of the Anio. About $\frac{3}{4}$ M. from the last houses of the suburb of *San Martino*, before the road crosses the gorge by the lofty *Ponte Rapone*, a path supported by masonry ascends to the left, passing several chapels, and leading to the ($\frac{1}{4}$ hr.) three —

***MONASTERIES OF SANTA SCHOLASTICA.** The first was founded in 530 by St. Benedict, who retired to this spot, and took up his abode as a hermit in one of the grottoes, now converted into chapels (*Il Sagro Speco*). The monastery was afterwards confirmed in its possessions by Gregory I. and his successors. In the 7th cent. it was destroyed, in 705 it was rebuilt, and it was subsequently dedicated to St. Scholastica, sister of St. Benedict. It is now entirely modern. In 1052 a second monastery was erected, and a third was added in 1235 by the Abbot *Landus*. (If time is limited, the monasteries should be visited in returning from *San Benedetto*.)

The **FIRST MONASTERY** (entrance to the right in the passage, beyond the anterior court) formerly had a library containing valuable MSS. In 1468 the Germans *Arnold Pannartz* and *Cosrad Schweinheim* printed here the first book published in Italy, an edition of *Donatus*, which was followed by *Lactantius*, *Cicero*, and *Augustine* (1467), of which copies are still preserved here (comp. p. 225).

The **SECOND MONASTERY**, dating from 1052, was afterwards rebuilt in the pointed style. The court contains a quaint relief and two medieval inscriptions.

The **THIRD MONASTERY**, of 1235, has a fine Romanesque arcaded court with mosaics of the school of the *Cosmati* (p. 121) and possesses a few antiquities (sarcophagus with Bacchic scenes, fine columns, etc.).

The *Church of Santa Scolastica*, originally founded by Benedict VII. in 975, was completely modernised in the 18th cent., and now contains nothing worthy of note, excepting some frescoes of 1428 in the chapel of St. Bede and fine carved choir-stalls.

An ascent of 25 min. from *Santa Scolastica* brings us to *San Benedetto*, or *Il Sagro Speco*, built against the rock, overtopped by a huge mass of stone, and shaded by oaks.

A corridor with some damaged frescoes of the Umbrian School leads to the **UPPER CHURCH**, which contains frescoes of scenes from the life of Christ and from the lives of St. Benedict and St. Scholastica, painted in the 13th century. An adjoining **CHAPEL** contains a remarkable *Portrait of St. Francis of Assisi* (who visited the convent in 1218), without the halo or the stigmata, and therefore probably painted before 1228 (comp. p. 71). We then descend to the **LOWER CHURCH**, adorned with paintings of the *Madonna*, *Massacre of the Innocents*, *Portrait of Pope Innocent III.*, etc., which are executed in 1219 by the otherwise unknown master *Cosmè*. The *Sacro Speco*, or grotto of St. Benedict, contains the statue of the hy a pupil of *Bernini*. The walls are decorated with venerable pai

The GARDEN of the monastery is well stocked with beautiful roses. They were, according to tradition, originally thorns, cultivated by St. Benedict for the mortification of the flesh, but converted into roses by St. Francis when he visited the monastery.

On leaving San Benedetto a visit should be paid to the fine point of view reached by a footpath on the right near the entrance gate. Having returned to the highroad after visiting the monasteries, we may cross the Anio by the Ponte Rapone, and return to the town by a footpath on the right. — By the highroad, which is mentioned at p. 431, Olevano is about 10 M. distant.

The narrow road, ascending the picturesque ravine of the Anio from the Ponte Rapone (p. 427), passes below ($4\frac{1}{2}$ M.) *Janus* (2735 ft.; Locanda Vincenzo de Angellis). Beyond ($5\frac{1}{2}$ M.) a bridge a route ascends the valley of the Anio to the right, to ($9\frac{1}{4}$ M.) *Trivoli nel Lago* (2695 ft.), the ancient *Trivium*. To the left the road runs to the N.E., up the valley of the *Sant'Anio*, to ($10\frac{1}{2}$ M.) *Vallepiastra* (2705 ft.; Osteria Manilio Urzani), situated in a mountain valley on the S.E. slope of *Monte Autore* (8090 ft.), which may be ascended direct from Sablaco in 5-6 hrs., with guide (splendid panorama). About $4\frac{1}{2}$ M. to the N. of Vallepiastra, at the foot of a perpendicular cliff on the E. slope of *Monte Autore*, lies the *Santuario della Santissima Trinità* (festival on the Sun. after Whit Sunday).

From Rome to Palestrina.

RAILWAY (Rome and Naples line) to (28 M.) *Palestrina* is about $1\frac{1}{4}$ hr. (fare 4 fr. 30, 3 fr. 5, 1 fr. 90 c.). The express trains do not stop at Palestrina.

The railway emerges from the city-walls to the left of the *Porta Maggiore*. On the right are the arches of the *Aqua Felice*, which our line crosses near the *Porta Furba* (p. 392), afterwards running beside the imposing arches of the ancient *Aqua Claudia* (p. 392), some of which were used by Sixtus V. for his aqueduct. To the right are the tombs on the *Via Appia*. To the left the *Sabine* and *Alban Mts.*; at the foot of the latter, *Frascati* (p. 406) is conspicuous. — At ($8\frac{3}{4}$ M.) *Clampino* (pp. 442, 438) lines to *Frascati* (p. 406), to *Terracina* (p. 446), and to *Nettuno* (p. 438) diverge.

The line, gradually ascending, skirts the slopes of the *Alban Mts.* Above, to the right, is *Monte Porzio* (p. 410). Tunnels. — 16 M. *Monte-Compatri-Colonna*. *Monte Compatri* is a mountain-village (1910 ft.) about $2\frac{1}{2}$ M. to the right of the station, on the highroad from *Frascati* to *Palestrina* (p. 410); *Colonna* occupies an isolated eminence (1140 ft.) in the plain. Between them lay the ancient town of *Labici* or *Labicum*.


The line now crosses the great depression between the *Alban Mts.* and the *Sabine Mts.*, approaching the latter, with fine views of both ranges and of the *Volsican Mts.* in the foreground. — $21\frac{1}{2}$ M. *Zagarolo*; the town (5528 inhab.) lies 2 M. to the left of the station.

23 M. *Palestrina*, with the high-lying *Castel San Pietro*, is conspicuous from a considerable distance. The town is nearly 4 M. to the N.E. of the station (diligence in about 1 hr., fare 50 c.).

Palestrina (1525 ft.; *Locanda della Vedova Pastina-Bernardini*, *rosetta della Fontana*, about 5 fr. per day; *Trattoria Arnellino*,

—

1

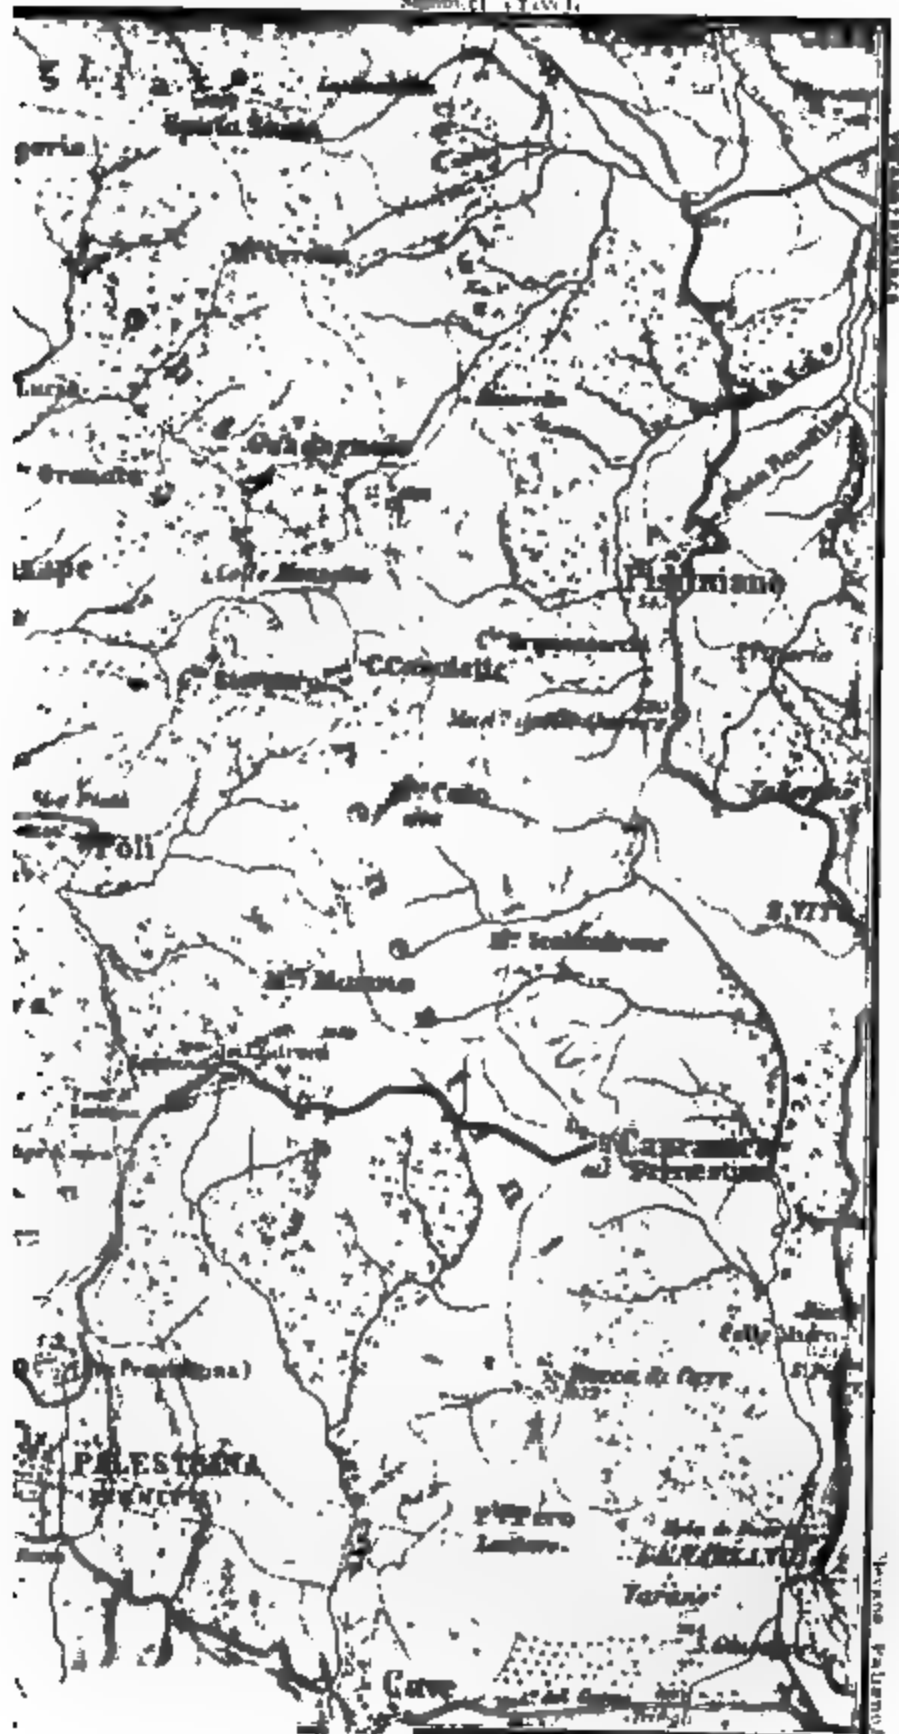

10 Kilometers

Wagner & Debes Leipzig

Corse Pierluigi 88, with bedrooms, both plain), a town of 7074 inhab., with steep and dirty streets, lies most picturesquely on the hillside. In the middle ages Palestrina was long the object of sanguinary conflicts between the powerful Colonnas and the popes, the result of which was the total destruction of the town in 1497. The territory was purchased in 1680 by the Barberini, who still own it. — The great composer *Giovanni Pierluigi da Palestrina*, who died in 1594 as director of the choir of St. Peter's, was born here in 1524.

Palestrina, the Roman *Præneste*, one of the most ancient towns in Italy, was captured by Camillus, B.C. 390, and was thenceforth subject to Rome. In the civil wars (82 B.C.) it was the chief arsenal of the younger Marius, and after a long siege was taken and destroyed by Sulla, who afterwards rebuilt it in a magnificent style as a Roman colony. Under the emperors it was a summer-resort of the Romans on account of its refreshing atmosphere, and it is extolled by Horace (*Carm.* iii. 4, 23) together with Tibur and Baia. A famous *Temple of Fortuna* and an *Oracle* ('*ecortis Prænestina*', *Cic. Div.* ii. 41) attracted numerous visitors. — Excavations in the necropolis of Præneste have always yielded a rich harvest; the so-called *clism*, or toilet-caskets (*comp.* p. 208), were almost all found here.

The town stands almost entirely on the ruins of the temple of Fortuna, which rose on vast terraces, surrounded by a semicircular colonnade, and occupied the site of the Palazzo Barberini. On entering the town we observe the lowest of these terraces, constructed of brick. The precise plan of the ancient building cannot now be ascertained. The arcades with four Corinthian half-columns in the Piazza Savoia near the cathedral probably belonged to the second terrace. The *Grottimi*, as the interior of these substructures is called, may be examined in the Barberini garden (No. 106 Corso), but more conveniently in autumn than in spring, when they are often filled with water. — From the Corso we ascend in about 10 min. to the Palazzo Barberini, which rests almost entirely on these ancient substructures and deserves a visit (see $\frac{1}{2}$ –1 fr.).

It contains a large *Mosaic*, probably executed in the reign of Domitian, representing scenes from the Nile, with numerous animals and figures in Egyptian and Greek costume.

The ancient Walls of Palestrina, of which various fragments are visible, exhibit four different systems of building, from the Cyclopean mode of heaping huge blocks of stone together, to the brick-masonry of the empire. Two walls, of which that to the N., the best preserved, is reached via the Porta San Francesco, while that to the S. may be well seen from the Porta delle Monache Farnesiane, connect the town with the citadel (*Arx*) on the summit of the hill, now *Castel San Pietro*, consisting of a few poor houses. A carriage-road and a direct bridle-path ascend from the Palazzo Barberini in $\frac{1}{2}$ hr., for which, however, the noble prospect from the summit (2486 ft.) amply compensates. The vast Campagna, from which the dome of St. Peter's rises, is surveyed as far as the sea; to the right rise Soracte and the Sabine Mts., then the Alban range; to the left is the valley of the Sacco, bounded by the Volscian Mts.

The picturesque, half-dilapidated *Fortezza* was erected by the Colonnas in 1332. The door is opened on application ($1\frac{1}{2}$ fr.); the approach is uncomfortable, but the view from the interior is particularly fine.

The distance from Palestrina to Tivoli by the highroad via Galliciano, Passerano (p. 390), and Ponte Lucano (p. 419) is about 15 M. — A pleasant expedition for a whole day (on foot or with donkey and driver) leads over the mountains to Tivoli. Following the above-mentioned carriage-road, which leads to the N. past the *castel*, for about $11\frac{1}{4}$ M., we then turn to the left and ascend by fatiguing footpaths to ($51\frac{1}{2}$ M.) *Poli* (1427 ft.) and ($71\frac{1}{2}$ M.) *Casape* (1558 ft.). Hence another carriage-road leads to (9 M.) *San Gregorio da Sassola* (1476 ft.) and ($17\frac{1}{2}$ M.) Tivoli (p. 422).

From Palestrina to Subiaco via Olevano.

FROM PALESTRINA TO OLEVANO, about 11 M., diligence thrice a week (Sun., Tues., & Thurs.; returning Mon., Wed., & Frid.) in $2\frac{1}{2}$ hrs., fare $2\frac{1}{2}$ fr.; one-horse carriage 18, two-horse 18-20 fr. Walkers require 4 hrs. — A diligences plies twice daily from the station of *Valmontone* (p. 441) to (12 M.) Olevano in $2\frac{1}{2}$ hrs. (returning in 3 hrs., fare 1 fr. 40 c. Palestrina and Genazzano are not on the route of these vehicles. — FROM OLEVANO TO SUBIACO, about 10 M.

The road, which is a continuation of that from Rome, passes below Palestrina and runs towards the E.; it is interesting also for pedestrians. To the left, and before us, rise the Sabine Mts., to the right the Volscian, and behind us the Alban Mts. Beyond a seven-arched bridge across the *Fiumicino di Cave* we reach ($21\frac{1}{4}$ M.) *Cave* (1280 ft.), a village belonging to the Colonnas, and then the church of the *Madonna del Campo*. Pallano (see below) on its lofty rock soon appears in the distance. About 2 M. beyond the church the highroad bends to the left, but the carriage-road straight on is shorter. A road to Genazzano soon diverges to the left from the highroad.

Genazzano (1225 ft.), a pleasant little town with 4180 inhab., is famed for its pilgrimage-chapel of the *Madonna del Buon Consiglio*, which attracts crowds of devotees on festivals of the Virgin. — We may either return to the highroad, or proceed through the valley direct to Olevano by a picturesque, but rugged route.

From Genazzano to Tivoli via San Vito and Pisoniano, see p. 425.

About $1\frac{1}{2}$ M. from the village, beside an osteria, the highroad rejoins the shorter route. Farther on it crosses two bridges, beyond the second of which, the *Ponte d'Orsino*, it divides; the branch to the left leads to ($41\frac{1}{2}$ M.) Olevano, that to the right to the little town of *Pallano* (1580 ft.; 5855 inhab.). The former road at first gradually ascends, and then describes a long curve, causing Olevano to appear much nearer than it really is.

Olevano. — *Hotels.* Roma, outside the town, R. $1\frac{1}{2}$, D. incl. wine $2\frac{1}{2}$, pens. 8, for a long stay $41\frac{1}{2}$ fr., well spoken of; Casa BALDI, an old-established artists' resort, which, beyond its view (see below), has now nothing to recommend it, above the town.

Olevano (1875 ft.), officially called *Olevano Romano*, with 4573 inhab., is a mediæval place belonging to the Borghese, with traces of an ancient wall, and lies most picturesquely on the slope of a hill, commanded by the ruins of an ancient castle. The interior of the town, with its narrow and dirty streets, presents no attraction. The top of the hill commanding the town, near the Casa Baldi, affords a splendid *View, especially fine towards evening. To the right are visible the barren summits of the Sabine Mts., with Bellegra, San Vito, Capranica, and Rocca di Cave; then the narrow plain, bounded by the Alban and Volscian Mts. In the distance lies Velletri. Nearer is Valmontone with its château; then Rocca Massima, Segni, and Paliano. Towards the S. stretches the valley of the Sacco, until lost to view. The town with its ruined castle forms a charming foreground.

On the left of the road to Bellegra and Subiaco (see below), $1\frac{1}{4}$ M. to the N. of Olevano, is the *Serpentara*, a fine grove of oaks, saved from destruction by the subscriptions of artists for that purpose and now the property of the German empire. Many artists have painted here.

FROM OLIVANO TO SUBIACO (p. 426) three beautiful routes.

1. The highroad, which passes below the *Serpentara* (see above), is the shortest and most convenient (on foot $3\frac{3}{4}$ hrs., by carr. $2\frac{1}{2}$ hrs.; no inn). After about 40 min. a road diverges to the left to Bellegra (see below). Less than $\frac{1}{2}$ hr. farther on a road branches off on the right to Rojate (see below) and $1\frac{1}{2}$ hr. farther on another to Affile (see below). Beyond the (40 min. more) Ponte Rapone (p. 427) over the *Anio*, 10 min. before Subiaco is reached, a path to the right diverges to the monasteries (p. 427).

2. The route via Bellegra and Rocca Santo Stefano, the most beautiful ($4\frac{1}{2}$ -5 hrs.), must, like the following, be traversed on foot, or on the back of a donkey (3 fr., and as much more to the attendant). By the above-mentioned road we reach in $1\frac{1}{4}$ hr. *Bellegra* (formerly named *Civitella*), a poor village lying on an isolated peak (2875 ft.) in a barren, mountainous district. On the W. side of the village are considerable remains of the very ancient wall, constructed of rough-hewn blocks. The road then leads by *San Francesco* in $1\frac{1}{4}$ hr. to *Rocca Santo Stefano*, where it comes to an end. A picturesque but fatiguing bridle-path (guide necessary), recommended only to good walkers, goes on thence to (2 hrs.) Subiaco. It first descends steeply into a lateral valley and then crosses a ridge (view) into the valley of the *Anio*.

3. The third route (5-6 hrs., guide necessary), the longest, and in some respects the most fatiguing, but also highly interesting, leads via Rojate and Affile. *Rojate* is a small village. *Affile* (2245 ft.), a place of more importance, boasts of a few relics of ancient walls and inscriptions from the ancient *Afilæ*. A road descends from Affile to join the road from Anticoli, which farther on joins in its turn the highroad (see above) to Subiaco.

4. Etruscan Towns.

That part of the Roman Campagna which extends to the N. from the Tiber to the Cimbrina Forest and the mountains of Tolfa was the Southern Etruria of antiquity. It is composed of volcanic tufa and is furrowed by deep ravines. Originally occupied by a tribe akin to the Latins, then conquered by the Etruscans, it was finally, after the protracted contests with which the first centuries of the annals of Rome abound, reconquered and Latinised. The fall of the mighty Veil, B.C. 396, mainly contributed to effect this memorable change. Excursions are frequently made to the remains of the Etruscan tombs at *Cerveteri* and *Veii*. Malaria is unfortunately very prevalent throughout this whole district. *Corneto* (p. 6), *Gaieta*, *Bracciano*, etc., may be reached by the Viterbo railway (pp. 105-101).

VIII.

An excursion to *Veii* takes one day. Provisions should be brought, as no good inns are passed. The site of *Veii* is picturesque and interesting, but the ruins are scanty.

Railway from Rome (Trastevere) to (12 M.) *La Storta-Formello* (p. 104) in $\frac{1}{2}$ -1 hr. (fares 2 fr. 25, 1 fr. 55 c., 1 fr., return-tickets 8 fr. 35, 2 fr. 35, 1 fr. 50 c.). — From the road leading to Bracciano (p. 103) a footpath diverges on the right, immediately beyond the old posting-station of *La Storta*, and brings us in $\frac{1}{2}$ hr. to the humble hamlet of *Isola Farnese*. The carriage-road is $\frac{3}{4}$ M. longer. About $\frac{1}{2}$ M. beyond *La Storta* the *Via Clodia* diverges to the left to Bracciano (p. 103). We remain, however, on the *Via Cassia*, to the right (leading to *Sutri*, p. 102). About 500 yds. farther on we take the turning to the right to *Isola*. At *Isola* we engage a guide (4 fr., bargaining necessary).

Veii was one of the most powerful of the Etruscan cities. After contests protracted for centuries (comp. p. 388), and after manifold vicissitudes and a long siege, the city was taken by *Camillus* in B.C. 396. After its capture it fell to decay, and was repeopled by *Cæsar* with Romans; but this colony scarcely occupied one-third of the former area.

The ancient site of the city had a circumference of 3-3 $\frac{1}{2}$ M. and forms a triangle between two brooks, which unite with each other farther down: viz. the *Fosso dell' Isola*, washing the N. E. base of the hill of *Isola*, and the *Fosso di Formello* or *Marrana di Valchetta* (the ancient *Oremera*), flowing from N. to S. The ancient citadel (*Arx*), now the *Piazza d'Armi* or *Cittadella*, occupies a separate plateau at the confluence of the brooks, connected with the site of the town by a narrow isthmus only.

A visit to the principal points takes 2-3 hrs. We descend from *Isola* to the N.W. to the *Fosso dell' Isola*, which forms a pretty waterfall beside the mill (*molino*). — Thence we proceed to the *Ponte Sodo*, a tunnel hewn in the rock, through which flows the *Fosso di Formello*. Then to the *Grotta Campana*, a rock-tomb discovered in 1843, with two interior chambers, the wall-paintings in which date from a high antiquity. The skeletons which were found

,

,

]

on the benches when the tomb was opened rapidly crumbled into dust on the admission of air. A few remains of armour and terracotta vessels are still extant. — We now recross the Fosso di Formello to the *Porta Specieria* (drug-shop), with remains of a columbarium, the recesses of which explain the name. On the hill above are some singularly well-preserved remains of the fortifications, a gate, and a street paved with lava. — We may either follow the hill or the valley of the Fosso di Formello to the S. to the above-mentioned *Piazza d'Armi*, which commands a fine view. To the N. is the conspicuous *Tumulus of Vascareccia*, crowned with battlements. — We return from the piazza to Isola, in the rocks near the entrance to which are numerous sepulchral niches.

Walkers may descend the valley of the Cremera from the *Piazza d'Armi* and in about 2 hrs. strike the *Via Flaminia* (p. 353), about 8 M. from Rome. The supposed site of the camp of the Fabii, whose whole family was destroyed by the Volaturni, is about $1\frac{1}{2}$ M. from the *Piazza d'Armi*.

Cuma.

Cerveteri, the ancient *Cærs*, may be visited from Rome in one day. The first train should be taken as far as Palo (p. 9; express in 1 hr., fares 6 fr. 15, 4 fr. 50 c.; slow train in about $1\frac{1}{2}$ hr., 5 fr. 80, 3 fr. 90, 2 fr. 65 c.); thence drive (diligences in 50 min.) or walk (in $1\frac{1}{2}$ hr.) to (5 M.) Cerveteri, where a stay of 5 hrs. may be made, leaving time to regain Rome by the afternoon train.

It is necessary to inform the *Bindaco* of Cerveteri of the intended visit a day or two beforehand, as otherwise the custodian with the key may not be forthcoming. After two or three days of rain the graves are filled with water.

Cerveteri (265 ft.; *Café-Restaurant*, in the Piazza; the landlord provides guides and carriages to the tombs), the *Cærs* of antiquity, originally named *Agylla* (Phœnician, 'circular city'), a place of very remote origin, afterwards became subject to the Etruscans, and carried on an extensive commerce from its harbours *Pyrgi* (Santa Severa) and *Alisium* (Palo, p. 9). At the same time it always maintained friendly relations with Rome, and in B.C. 361 it was incorporated with the Roman state. It was a prosperous place in the reign of Trajan, and continued to flourish down to the 13th cent., at the beginning of which it was abandoned by its inhabitants, who founded *Cærs Nuovo*, 3 M. distant, the present Cerci. A number of them, at an uncertain date, afterwards returned to *Cærs Vetera*, whence the name Cerveteri. The present town (1272 inhab.), belonging to the Ruspelli, occupies but a small part of the site of the ancient city, which was 3 M. in circumference. Numerous tombs have been discovered here since 1829. In the middle ages Cerveteri was surrounded with a battlemented wall, and had, as now, only one entrance. Part of the walls and several towers are still well preserved and give a picturesque air to the town, especially on the N.E. side, where the old baronial château is situated.

The only point of interest for the tourist is the *Necropolis*, which may be visited in 3-4 hrs., with a guide (see above; 1 pers.

2 ft., 2 pers. 3 ft., a party in proportion). Some of the tombs are clustered together and hewn in the rock, while others stand alone in conical mounds or tumuli. They are not nearly so well preserved as those of Corneto (p. 6), and only faint traces of painting remain. Most of them lie on the hill opposite the town, and separated from it by a gorge. The more important tombs are Nos. 5, 6, and 7.

1. *GNOTTA DELLA FIANCA E SCUDI*, so called from two seats and several shields hewn in the rock, consists of an anteroom and five chambers.
2. *GNOTTA DEL TRICLINIO*, with faded paintings representing a banquet.
3. *GNOTTA DELLA BELLA ASCRITTURA*, with two chambers, supported by pillars.
4. *GNOTTA DELLA CASA*, with three marble sarcophagi.
5. *GNOTTA DELLA LECTICLITUS, OR DE' TANCURIS*, with two chambers, borne by pillars, contains numerous Etruscan inscriptions with the name of *Tarcunus*, which appears in Latin inscriptions found in the same tomb as *Tarquinius* (not *Tarquinius*), thus throwing no light on the origin of the Roman kings.
6. *GNOTTA DEI BASSORILIEVI*, excavated in 1850, the best preserved and most interesting of all. At the head of the flight of steps are two *Uroessa* as guardians of the tomb. The two pillars supporting the roof, and the walls above the niches are decorated with various bas-reliefs of instruments, weapons, and objects of domestic life, partly in stucco, partly hewn in the tuff-rock, and mostly painted.

On the road to Pale lies 7. *GNOTTA REGURIO-GALASSI*, opened in 1820, a tomb of great antiquity and now very dilapidated. The roof is vaulted by means of the gradual approach of the lateral walls to each other, instead of on the arch principle. The yield of this tomb, now in the Gregorian Museum (pp. 361-364), was very considerable, consisting of a bed, a four-wheeled chariot, shields, tripods, vessels of bronze, an iron altar, terracotta figures, silver goblets, and golden trinkets once worn by the deceased, all found in the small chambers to the right and left of the vaulted passage. — Fully $\frac{1}{2}$ M. from this is situated another tomb, opened in 1850, and still containing the vases, vessels, and other objects then discovered.

Besides these, there are many other tombs (e.g. *Gruta Portina*, the first chamber of which contains 54 recesses for the dead).

5. The Sea Coast of Latium.

Communication with the sea was of far greater importance to ancient than to modern Rome, and its former facility was one of the chief factors in the attainment of the proud rank held by the mistress of the world. Vast harbours and other structures were accordingly founded at the extremity of the Tiber. The coast was a favourite resort of the wealthy Romans, as the numerous villas testify, but the deposits of mud and sand left by the Tiber, especially when in flood, have thrown forward the coast line and entirely altered its appearance. It is now desolate, and is skirted by a broad belt of forest (*macchia*), where the malaria in summer is endemic. Lofty sand-hills, extending to the S. beyond the Pontine Marshes, bound the whole coast.

PORTO. FUMICINO. OSTIA.

FROM ROME TO FUMICINO, 21 M., railway in about $1\frac{1}{2}$ hr. (3 fr. 00, 2 fr. 80, 1 fr. 60) c.; there and back, including a bath in the sea, 4 fr. 80, 2 fr. 75 c.). Express trains do not stop at Porto Galera. — The excursion from Fumicino to Ostia and Castel Fusano takes about 6 hrs. there and back, on foot. By carriage it is most conveniently made direct from Rome (one-horse car 20-25, two horses 30-40 fr., and driver's fee). This is also a good cycling excursion (comp. p. 129), the *Via Ostiensis* (p. 437) gradually descends (except for the Declive Hills) almost all the way from Rome to (13 M.) Ostia. Luncheon should be brought, and the beautiful cells of the temple at Ostia or the woods at Castel Fusano may be chosen as a sitting place. There is no inn at Castel Fusano.

The railway describes a circuit round the town (p. 9). $5\frac{1}{2}$ M. *Roma San Paolo* (p. 9), the junction for the line from Trastevere (p. 106) — $9\frac{1}{2}$ M. *Magliana*. Close to the station, on the hill to the right, is the *Vigna Coccegrilli*, the site of the sacred Grove of the *Arvales*, a brotherhood ('*fratres Arvales*') of very ancient Latin origin, founded, according to tradition, by the sons of Acca Larentia, the foster-mother of Romulus.

The ancient foundations on which the Casino of the vigne rests are said to belong to the circular temple of the *Dea Dia*, which lay in the middle of the grove. Fragments of the records of the society during the imperial period, engraved on stone, have been discovered (p. 171). In the plain below the grove (on the other side of the road) there are remains of a rectangular building, with a hall enclosed by rows of columns. — Higher up the hill lay an ancient Christian burial place, where remains of an oratory of Pope Damasus I. have been discovered. Adjacent to the entrance (closed) to the small Catacombs of *St. Geminus*, which are interesting for their primitive construction and excellent preservation.

About $\frac{1}{2}$ M. farther on, to the left of the railway, is situated the ruinous hunting-château of *La Magliana*, with pleasing Renaissance details, once a favourite retreat of Innocent VIII., Julius II., and Leo X., and now the property of the convent of Santa Cecilia (frusconi in the *Palazzo del Conservatori*, p. 244).

14 M. *Ponte Galeria*, see p. 9. Carriages are changed here. The branch-line to *Fiumicino* continues to run westwards.

$18\frac{1}{2}$ M. *Porto* was founded in A.D. 109 by the Emp. Trajan (*Portus Trajani*), as the harbour constructed by Claudius as a substitute for that of Ostia (see below), which had become choked up by the deposits of the Tiber, had soon shared the same fate. Trajan also formed a new canal here (*Fossus Trajani*), which now forms the main arm of the Tiber. Trajan's seaport, which soon attracted the commerce of Rome, lay close to the sea, but it is now 2 M. distant from it, and the delta formed by the river is estimated to advance 13 ft. annually. The present village consists of the *Cathedral of Santa Rufina* (a modernised edifice of the 10th cent.), an *Episcopal Palace*, with inscriptions and antiquities, and a *Villa of Prince Torlonia*. The harbour of Trajan is now a shallow lake. In the meadows to the N. of it, the extent of the harbour of Claudius is still traceable.

21 M. *Fiumicino* (*Locanda dei Cacciatori*) is a modern place. The castle (*Torre Clementina*), erected in 1773 close to the sea, is now $\frac{1}{2}$ M. distant from it. The tower commands a fine view. — In the height of summer the train goes on hence to the *Stabilimento Bagno*, or sea-bathing establishment, $\frac{1}{2}$ M. farther on.

The *Isla Sacra*, situated between the two arms of the river, was so named at a very early period, either from having been the site of a heathen temple, or from having been presented by Constantine to the Church. Before reaching *Fiumicino* we cross a bridge-of-boats and follow the road to (ca. 1 hr.) the main arm of the Tiber, opposite the *Torre Boacciana*, an ancient watch-tower, to which we cross by ferry (see p. 15 c.). This tower approximately marks the position of the ancient Tiber mouth.

The Ostia ('river-mouth') of antiquity, founded by Ancus Mar-tius, extended eastwards along the Tiber, from the Torre Boacciana. It was a large commercial town, and near the tower are considerable remains of structures belonging to its harbour (known as the *Em-porium*). Though under Augustus Ostia lost some of its importance through the choking up of the harbour by the Tiber, it still main-tained an influential position. The inhabitants belonged to numerous nationalities and various religions; Christianity also was introduced here at an early period. The bishopric of Ostia, according to some accounts, was founded by the Apostles themselves, and is still regarded with great veneration by the Romish clergy. Monica, the mother of St. Augustine, died here.



The modern hamlet of Ostia (poor Osteria near the castle) is reached in $1\frac{1}{2}$ hr. from the landing-place by the Via di Tor Boacciana, a narrow road leading to the right and then round the tower. This humble village was founded by Gregory IV. in 830, several centuries after the destruction of the ancient town. Under Leo IV. (847-856) the Saracens sustained a signal defeat here, which Raphael has represented in the Stanze. Julius II. (1503-13), when Cardinal della Rovere, caused the *Castello* to be erected by *Baccio Pontelli* and *Giul da Sangallo* in 1483-86, and commissioned Peruzzi to adorn it with frescoes, of which no trace now remains. Various inscriptions and sculptures found on the spot may be seen inside. The tower commands an extensive view. The town lost its importance when Paul V. re-opened the right arm of the Tiber at Porto in 1612. The pleasing church of *Sant' Aurea*, from plans by *Baccio Pontelli* (or *Meo del Caprino*?), was erected under Julius II.

A visit to the "Ruins of the Ancient City" requires at least 2 hrs.; the custodian (2-3 fr.) is generally to be found at the Casino del Sale (see below). On leaving modern Ostia we pass a series of antique Tombs, and reach the ancient *Porta Romana* of the city in 8 minutes. Most of the antiquities found in the tombs are now in the Lateran (p. 308). Where the road forks, we turn to the right and reach first the *New Thermae*, a small edifice with well-preserved basin and numerous remains of its marble decorations, excavated in 1891. — To the W. lies the *Barrack of the Firemen (Vigiles)*, which the custodian opens. This is a colonnaded court, on one side of which is a chapel with pedestals for imperial statues and a well-preserved black and white mosaic of a sacrificial scene. Several other honorary pedestals erected by the vigiles (to emperors of the 2nd and 3rd cent.) stand in the court. The other rooms seem to have served as the guard-room and dwelling rooms. Various figures and inscriptions are scratched on the walls. — Farther on is the *Forum*, excavated in 1880-81, a square structure, each side of which was 285 ft. long, and which was surrounded with colonnades. The porticus on the S. had marble columns, the others brick columns encased in stucco. At a later period the colonnades were divided into a series of small chambers (best seen at the S.E. corner), which served as the offices of various Collegia or guilds, such as the raftsmen who conveyed timber to Rome and the boatmen of Terracina. In the centre of the forum is the substructure of a *Templum 'in antis'*, 80 ft. long and 35 ft. wide. The walls are in a very ruinous condition and have been almost entirely stripped of their marble lining, while the altar has experienced a similar fate. Adjoining the S. colonnade of the forum is the rear-wall of the *Theatre*, of which considerable remains of both stage and auditorium are extant. This edifice, built in the early imperial period, perhaps by M. Agrippa, was restored by Septimius Severus in 196-197, and again, in a very imperfect and hasty manner, in the 4th or 5th century. Numerous marble pedestals with inscriptions, brought from the forum, were used in the last restoration, but have again been taken out. — Leading from the S.W. corner of the Forum is an ancient street, immediately to the right in which are the foundations of three small *Temples*, all exactly alike. In one of these the altar is still extant with the inscription *Veneri sacrum*. Behind is a well-preserved *Shrine of Nithras* (opened by the custodian), with stone benches for the worshippers; upon it is a mosaic with figures of the gods of the seven planets, etc. — We then follow a street between private buildings and turn to the left to the modern *Casino del Sale*. Hence a well-preserved and fine ancient street (20-23 ft. wide), with rows of pillars on each side, leads to a handsome and conspicuous *Temple*, the only edifice of ancient Ostia that remained unburied throughout the middle ages. The cella, of admirable masonry, is well preserved. The vaulted substructures contain the receptacles for the sacred vessels (*favissae*).

Farther to the S. (10 min.) is the shrine of the *Magna Mater*, an irregular quadrangular structure with a colonnade on each side, where the statue of Attis mentioned at p. 308 was found. A little farther to the S. is the ancient road to Laurentum, where a number of graves and columbaria (p. 203) were discovered in 1866.

We return to the Casino del Sale and skirt the river through the ruins of ancient *Megastum*, some of the walls of which project into the stream, proving that its course has altered since antiquity. Here we observe a *Store Chamber*, with thirty earthen jars for wine, oil, and grain, imbedded in the floor. — A few min. to the left is the entrance to a sumptuous *Private Mansion* (groundlessly named *Pala-zzo Imperiale*), with columns of stipollino. Within were extensive *Thermae*, fine mosaics (now in the Vatican), and a small *Mithraeum*.

The return from Ostia to Rome may be made direct by the highroad, the ancient *Via Ostiense* (18 M.; diligence in 2½ hrs.; fare 1 fr. 50 c.). The road is carried by an embankment across the former *Stagno di Ostia*, a marsh that has been drained and brought under cultivation (*Semifredo di Ostia*). Salt has been yielded here ever since the period of the kings. It then runs through a growth of underwood (*Macchia di Ostia*) and crosses the hills of Decima to the (8½ M.) *Ostia di Metafede*, where a road diverges to the right to *Tor Paterno* (see below). Thence it continues not far from the Tiber, passing the *Ostia di Mazzette* and the *Ostia di Fregi Valle*, to the *Ostia del Ponticello*, where it joins the *Via Laurentina*. Continuation of the road to Rome, see pp. 396-397.

A road devoid of shade, turning to the right on the N.E. side of the village, leads from Ostia to (1¾ M.) *Castel Fusano*, in the midst of a beautiful pine-forest. The castle was erected by the Marchese Sacchetti in the 16th cent., and fortified against pirates, and is now the property of the Chigi, who leased it in 1888 to the royal family (adm. on Sun. & Thurs., with permesso as for the Quirinal, pp. 150, 151). A pleasant road, with an ancient pavement of basalt, leads hence to the sea, 1½ M. distant.

From Castel Fusano to *Tor Paterno*, a farm near the ancient *Laurentum*, 6 M. Thence we may follow the road viâ (5 M.) *Ostia Portuense*, a royal hunting lodge on the site of the ancient *Vicus Augustanus*, to (4½ M.) the *Ostia di Metafede* (see above), or walk, with guide, to (½ M.) *Pratica* (200 ft.), an insignificant village on the site of the ancient *Laurentum*.

About 6 M. from Pratica and 11 M. from Albano lies Ardea (121 ft.), the ancient capital of the Rutuli, one of the few towns of Latium which even in the time of the Roman emperors were avoided on account of the malaria. Early deserted for this reason Ardea has preserved especially in its fortifications, a more antique appearance than any other Latin town. The modern village occupies the site of the old citadel, on a hill with artificially precipitous sides. There are remains of massive walls of different periods at various places; on the E. are two ramparts with trenches, several hundred yards long, like the rampart of Servius at Rome.

ANNO NETTUNO.

RAILWAY to (37 M.) Anzio in 1½-2 hrs. (fare 0 fr. 85, 4 fr. 00, 8 fr. 10 c., return 10 fr. 10, 7 fr. 10, 4 fr. 55 c.) Stations: 9¾ M. *Olympico* (p. 428); 18 M. *Cerchia* (p. 411); 26 M. *Carroccio*; 34 M. *Anzio*; 39 M. *Nettuno*.


Anzio. — Hotel (comp. p. xvii): **GRAND HOTEL**, near the station, R. from 8 fr., B. 60 c., déj. 2½, D. 4, pens. from 8 fr. — Several *Trattorie*. — *Private Apartments* in the season at many of the villas.

Carriage with one horse to Nettuno for 1-3 pers. about 1 fr., single place 25 c. — Omnibus 25 c.

Boats in the harbour, 1-3 pers. 1½ fr. per hr., each additional person ½ fr. more.

The little fishing-town of Anzio, a favourite resort of the Romans during the bathing-season (June, July, and August), in spite of its liability to fever, occupies the site of the ancient *Antium*. Pop. 3449.

Antium, the capital of the Volsci, and a prosperous seaport at an early period, the place where Coriolanus sought refuge when banished from Rome in B. C. 490 and where he died after sparing Rome at the intercession of his mother, was compelled in 468 to succumb to the Romans. In 838, when all the Latins were conquered, Antium received a Roman colony, and was thus permanently united with Rome. Extensive villas were erected here towards the end of the republic. Cicero possessed an

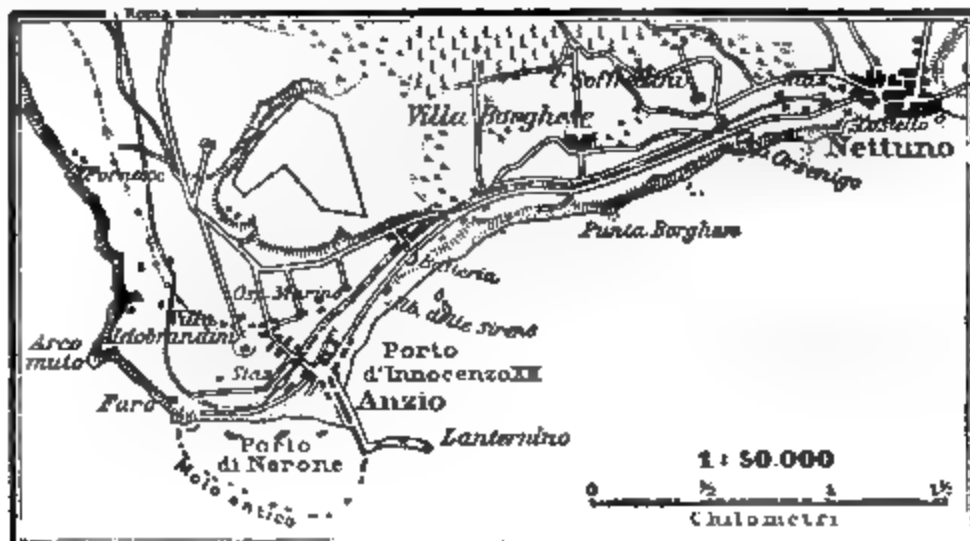

estate at Antium, the tranquillity and charms of which he highly extols (*Att.* iv. 8). Caligula and Nero were born here; the latter constructed an artificial harbour (see below). Though at a later period Antium seems to have been surpassed in popularity by Baia and the places on the bay of Naples, the temple of Fortune, mentioned by Horace (*Carm.* I. 35), where oracular responses were given, existed until the latest era of paganism. The place was entirely deserted in the middle ages, but in the 18th cent. it began to be rebuilt. The present town dates almost wholly from the period after the restoration of the harbour by Innocent XII. (1693).

The station lies close to the Piazza, and a few paces from the small harbour, which, as it opens to the S., is in continual danger of being sanded up. The remains of an ancient pier may be seen opposite, in the direction of Nettuno, near the bathing-establishment. Nero's harbour lay to the W. of the present one; it was about 150 acres in area and was protected by a jetty of which traces are still visible above water.

Close by the town itself is the *Villa Aldobrandini*, commanding pretty views from its neglected grounds; we reach it by ascending from the Piazza, crossing the rails in the *Via Pietro Aldobrandini*, and then turning to the left. Opposite the entrance is the former *Villa Albani*, now the *Ospizio Marino* (for scrofulous children) and not open to visitors. Continuing along the *Via Pietro Aldobrandini* and ascending the hill straight in front, we come upon (8 min.) the remains of an antique wall. Fine survey of the town and sea. The *Via della Galleria*, a shady avenue, leads from this point round the back of the *Villa Borghese* to Nettuno.

Excursions by Small Boat (comp. p. 439) afford picturesque views of the beach with its numerous ruins. The promontory upon which the lighthouse (*Faro*) stands is pierced by ancient passages (*Grotte di Nerone*), which lead to a large villa, probably belonging to the emperors. The so-called *Arco Mute*, a little to the N.W., has recently been walled up. — The farther we retreat from the land the freer view do we obtain of the beautifully-formed *Monte Circeo* (p. 447).

The RAILWAY FROM ANZIO TO NETTUNO (see below; in 6 min., fares 35, 25 c.) follows the highroad (1½ M.). Adjoining the railway signal-box No. 36 is the side-entrance to the —

Villa Borghese (main entrance opposite the Casino), which is surrounded by fine shady trees. When occupied by the family the villa can be visited only with a special permesso, to be obtained at the Pal. Borghese (p. 213) in Rome (at other times, fee 50 c.). The casino is said to occupy the site of the ancient *Arx*; and fragments of columns, capitals, and other remains have been found here at various points. — From the gate of the villa to Nettuno, ½ M.

Nettuno (*Rail. Restaurant; Caffè Nettuno*, in the Piazza; *Trattoria Romana*), a small place with 5072 inhab. and a fort built in 1496, depends for its interest on its picturesque situation. It is said to have been once a settlement of the Saracens. Lodgings are easily obtained. The native costume of the women is picturesque, but it is now worn only on holidays.

A coast-road leads to the E. from Nettuno, past an artillery-range (*Poligono d'Artilleria*) to the (1½ M.) *Torre Astura*, where there are numerous remains of Roman villas, and where Cicerone also once possessed a villa. The tower, connected with the mainland by a bridge, belonged to a castle in which Prince Cavarotto of Sicily vainly sought refuge with *Giuseppe Frangipani* after the battle of Scutari in 1283.

6. The Volscian Mountains and the Railway to Terracina.

The Volscian mountain-range (*Monti Lepini*), which culminates in the *Sempervia* (3000 ft.), to the S. of Carpineto, is separated on the E. from the principal chain of the Apennines by the valley of the Sacco, and on the W. from the Alban Mts. by a narrow depression; it extends to the S. as far as the Bay of Gaeta, and on the W. is bounded by a dreary and in some places marshy plain adjoining the sea. This district was anciently the chief seat of the Volsci, but was at an early period subjugated by the Romans and Latinised. Its towns, picturesquely rising on the slopes, still bear many traces of the republican epoch of Italy, which add great interest to the natural attractions of the scenery. This is a typical limestone-range.

consisting of a plateau with steep slopes towards the N.E. and N.W.; there is little water on the plateau itself, but there are several copious springs at its foot. In the valley of the Sacco rise several small volcanic cones.

Segni (see below) or *Niye* and *Norma* (p. 444) may be included in a single day's excursion from Rome; but the following plan is recommended to those who have more time at their disposal. 1st day: take the morning express to *Segni* station (see below), thence by diligence to the town, and in the afternoon go on by rail via *Velletri* (p. 442) to *Cora* (p. 443). 2nd day: Walk with guide or ride (the latter preferable in rainy weather) to *Norma* (p. 444) and *Niye* (not advisable in summer; p. 444), or by early train to *Norma*, and thence by footpath to *Norma* and on by road to the station of *Sarmate-Norma* (p. 444), whence take the train to *Torvatone* (p. 446). 3rd day: in the morning visit *Monte Circeo* (p. 447, *Semifora*), and return to Rome in the afternoon. Those who proceed as far as the summit of *Monte Circeo* must pass the night at *San Felice*.

FROM ROME TO SEGNI. — 33½ M. Railway (Rome and Naples line) in 1-1¼ hr. (fare 8 fr. 30, 4 fr. 40, 2 fr. 85 c.; express 8 fr. 90, 4 fr. 85 c.). — From Rome to *Palestrina*, see p. 428. — 26½ M. *Labico*, formerly *Lugnano*, the recent change of name being due to an erroneous identification of the place with the ancient *Labici* (p. 428). — 28½ M. *Valmontone* (991 ft.) a small town (4913 inhab.) with a handsome chateau belonging to the Doria-Pamphili, on an isolated volcanic cone, is the starting-point of the diligence to *Oliveno* (p. 430). Farther on the line skirts the streamlet *Sacco*.

33½ M. *Segni* (689 ft.) where the line to *Velletri* (p. 443) joins our line. Diligences ply from the station to the town (fare 1 fr.) in connection with all trains.

A diligence also plies from the station via (8¼ M.) *Mastriano* (1000 ft.; hence to *Norma*, see p. 445) in ¾ hr. (3 fr.), to (1 M.) *Carpineto Romano* (1011 ft.), a small town (1634 inhab.) with several old Gothic churches, the birthplace of Leo XII., who did much to its prosperity. A huge cross was erected in 1901 on the *Monte Capran* (1623 ft.), which towers to the S. From *Carpineto* to *Norma*, see p. 445; to *Picerno*, see p. 446.

From the station we take about 2 hrs. to reach the town. We ascend the steep and rugged incline, and then skirt the slopes of the mountains enclosing the valley of the Sacco; to the left, on a solitary hill below us, is the picturesque *Gavignano* (1294 ft.), the birthplace of Innocent III. The remains of the old walls of *Segni* and the *Porta Saracinesca* are seen on the height above a lateral valley to the left. A winding road ascends to the modern town.

Segni (2190 ft.; *Loc. Colaiacomo*), the ancient *Signtia*, said to have been colonised by the Romans under Tarquinius Superbus, lies on a mountain-slope (rising to a height of 2300 ft.), in a secure position, with fine views of the valley and the towns of the Hernici. The present town (6842 inhab.) occupies the lower half of the old site.

Ascending through the streets, we reach above the town the church of *San Pietro*, built over the central cella of an ancient temple, the walls of which consist of rectangular blocks of tufa, with two courses of polygonal masses of limestone below. A cistern near the church is also of the Roman epoch. The "Town Wall", constructed of polygonal blocks, and 1¼ M. in circumference, is to

great extent well preserved. From San Pietro we follow an easy path to the summit of the hill, which is indicated by a cross; fine view of the town and the valley of the Sacco. Hence we follow the wall, passing a small sally-port at the N. angle, to the half-buried *Porta in Lucino*. Farther on, on the slope of the N.W. spur, is the curious *Porta Saracinesca*, apparently built before the discovery of the arch-principle, as a substitute for which the lateral walls gradually approach until they meet at an angle. From this point we may follow the footpath along the slope, which passes a large washing-bench and descends to the lower gate.

The station of Segni is 4.5 M. from Anagni. Regarding this and other towns of the Hernici, and for the continuation of the railway, see *Baedeker's Southern Italy*.

FROM ROME TO TERRACINA. — 76 M. Railway in about 4 $\frac{3}{4}$ hrs. (fares 14 fr. 20, 9 fr. 95, 6 fr. 40 c.; return-tickets, comp. p. xiv). — From Rome to (8 $\frac{3}{4}$ M.) Ciampino, see p. 428. — The railway, running at first to the S., skirts the W. slopes of the Alban Mts. To the left, above the town, on the mountain, appears Rocca di Papa (p. 416), adjoining which on the right is Monte Cavallo with the former monastery. Beyond (10 $\frac{1}{2}$ M.) *Fratteocchie* (p. 396) we cross the Via Appia Nuova and the ancient Via Appia. To the left, on the olive-clad hill, appears Castel Gandolfo (p. 412), immediately beyond which Albano and Ardea, connected by a long viaduct, are visible in the distance. — 18 M. *Cecchina* (Rail. Restaurant) is the junction for the steam-tramway (left) to Albano (p. 413) and for the railway (right) to Nettuno (p. 438). — To the right, rising abruptly from the sea, is the Monte Circeo (p. 447), and nearer us rise the Volaterran Mts. — 20 $\frac{1}{2}$ M. *Civita Lavinia* (1060 ft.). The insignificant town lies 1 $\frac{1}{2}$ M. from the station, on a W. spur of the Alban Mts. It is the ancient *Lavinium*, which was celebrated for its worship of Juno Sospita. A few remains of her temple were found in 1885. At the W. end of the town are considerable remains of the ancient walls, built of massive blocks of peperino, and also the pavement of a street skirting the walls. In the piazza are a sarcophagus and several fragments from tombs and villas in the neighbourhood. — The line intersects several lava-streams.

26 M. Velletri (1155 ft.; Rail. Restaurant; *Albergo e Trattoria del Gallo*, good), the ancient *Velitrae*, a town of the Volaterrani, which became subject to Rome in B. C. 338, was the home of the Octavian family to which Augustus belonged. The town (18,784 inhab., including suburbs), the seat of the bishop of Ostia, famous for its wine, lies picturesquely on a spur of the Monte Artemisia, $\frac{1}{4}$ M. from the station. The loggia (built by Mart. Lunghi the elder) of the *Palazzo Lancellotti*, in the piazza, commands an extensive view. The cathedral of *San Clemente* contains a Madonna painted Antoniazio Romano. In 1888 a column of victory was erected in

the new cemetery, where Garibaldi successfully encountered the Neapolitan troops on May 19th, 1849.

Velletri is the starting-point for the ascents of the *Monte Ardemio* (2005 ft.; 2 hrs with guide) and the *Monte Algidio* or *Maschio d'Arimo* (2025 ft.; 3-4 hrs with guide, or a little less from the station of *Ontonno*, see below), the two highest summits rising from the margin of the crateriform circular rampart formed by the E. Alban Mts. On the summit of *Monte Algidio* (extensive view) are the remains of ancient fortifications and of a medieval fort belonging to the Colonnas (*Castello Lariano*). From *Monte Ardemio* the descent may be made to *Nemi*.

FROM VELLETRI TO SEGNI: 15 M., railway (fares 2 fr. 50, 1 fr. 65, 1 fr. 30 c.). — The line turns to the N.E. and at (5 M.) *Ontonno* intersects the depression between the Alban and the Volscian Mts. — 10 M. *Arimo*; the village lies $1\frac{1}{4}$ M. to the S., on the slope of the Volscian Mts. We now descend the valley of the *Sacco* to (15 M.) *Segni* (p. 441).

The railway beyond Velletri traverses a dreary plain — 33 M. *Giustinello-Rocca-Massima*, the station for the villages of *Giustinello* to the right and *Rocca Massima* in the Volscian Mts. to the left. The line now runs along the W. slope of the Volscian Mts.

36 $\frac{1}{2}$ M. Cori. — The *Station* (500 ft.) is about $2\frac{1}{2}$ M. below the town (altitude 60 c.). — *Albergo dell'Unione*, in the *Piazza*, comparatively good — *Guide*, to save time, $\frac{1}{2}$ -1 fr. — Two *Horses* to *Norma* and *Niata*, with mounted guide, about 12 fr.

Cori (1900 ft.) is the ancient *Coras*, which claimed to have been founded by the Trojan *Dardanos* or by *Coras* and was at an early period a member of the Latin League. Even in antiquity it consisted of an upper and a lower town. The remains of the ancient walls, constructed of huge polygonal blocks, are still considerable. During the empire it still prospered, but its name afterwards fell into oblivion. In the early part of the middle ages it seems to have been wholly deserted, but in the 13th cent. it was rebuilt by the *Conti di Segni* and fortified with a wall, the greater part of which is still extant. Pop. 7118. Tobacco is largely cultivated in the neighbourhood.

From the piazza, on which the road from the station debouches, the 'Via Pelaga', skirting a portion of the ancient wall, ascends to the upper town. Following this, we reach first the church of *Sancti Olivi*, which is built on ancient foundations and possesses antique columns, quaint ceiling-paintings of the 16th cent., and two-storied cloisters. Beside the church is a fragment of the ancient wall in unusually good preservation; farther up are some scantier remains. Adjoining the church of *San Pietro* is the portico of a **Temple* (now maintained as a national monument), generally, though without authority, called the *Temple of Hercules*, but perhaps dedicated to the three Capitoline deities, Jupiter, Juno, and Minerva. The statue of Minerva which now adorns the fountain in the Palace of the Senators in Rome (p. 238), and which has been restored as *Roma*, is believed to have been found here. The cells of the temple is incorporated with the church of *San Pietro*; but eight Doric columns, with a frieze of travertine bearing traces of a coating of stucco, are preserved. The inscription above the door of the cells, recording

the erection of the edifice by the *duumviri*, or chief magistrates of the place, dates from the time of Sulla. Beautiful view hence over the town towards the sea, and of the plain with the isolated Monte Circeo (p. 447). Within the church (opened on application; 25 c.) is an ancient marble altar, used as a font.

We now descend to the Via San Salvatore, where two admirably executed **Corinthian Columns* are still standing. On the architrave above is part of the ancient inscription, from which it appears that the columns belonged, in the time of Sulla, to a *Temple of Castor and Pollux*. They probably were the two in the centre of the six columns which seem to have stood in front of the temple. — Still lower down, in the Vicolo di Pozzo Dorico and the Piazza Pizzittonico, are the remains of the substructures of large cisterns, proving that even in antiquity Cori depended on the rainfall for its water-supply.

Near the *Porta Ninfesina* is another large fragment of the earliest polygonal wall. Outside the gate is a deep ravine, spanned by the ancient *Ponte della Catena*, constructed of triple tiers of tufa blocks.

Picturesque but steep and difficult paths (guide necessary, 3-4 fr.) lead along the mountain-slopes from Cori to *Forbe* (see below), in 2½-3 hrs., whe her on foot or on horseback.

38 M. *Cisterna di Roma*; the village (252 ft.; diligence only from Velletri) with a castle of the Caëtani, lies 3 M. to the W., on a hill rising above the edge of the Pontine Marshes. Cisterna was called *Cisterna Neronis* in the middle ages, and is believed to occupy the site of the ancient *Tres Tabernæ*, where St. Paul met the friends coming from Rome to welcome him (Acts, 28).

43½ M. *Ninfa*, the station for the remains of the mediæval town of that name. The ivy-clad *Ruins lie to the W. of the station, on the road from Velletri to Sezze. They date mainly from the 12th and 13th cent. and include a palace, a monastery, a church with faded frescoes, and several streets. The marshy surroundings were the cause of its abandonment; and in summer the malaria makes a visit to Ninfa unadvisable, while the crops also render a closer investigation of the ruins impracticable.

Norma may be reached direct from the station of Ninfa in 1½ hr. by steep footpaths diverging to the left about 200 paces along the *Sermoneta* road.

45½ M. *Sermoneta-Norma*. *Sermoneta* (844 ft.) a little town (1151 inhab.) to the S.E., has an ancient castle belonging to the Caëtani, who derive their ducal title from it. *Norma* (1367 ft.; pop. 2529; Locanda della Fortuna, tolerable) is a small mountain-village, to which a steep road with many windings ascends, passing the abbey-church of *Valtesciolo* (310 ft.; 13th cent.), at the end of the Val Carella. About ¾ M. to the N.W. of Norma, on the mountain-path leading to Cori, are the ruins of *Norba* ('Olvit'), which became a Latin colony, B.C. 492, and was captured and destroyed by the

troops of Sulla during the civil wars. The well-preserved wall, in the polygonal style, was $1\frac{1}{2}$ M. in circumference, and several towers and a gateway are still traceable, it encloses two hills containing the substructures of temples. Excavations were begun here in 1902.

Fatiguing mountain-paths lead from Norma to *Montebello* (p. 441) in about 4 hrs. ride, and to (8 M.) *Carpineto* (p. 441) in 4-6 hrs. (horses and guides about \$ fr.).

Farther on the line skirts the Pontine Marshes (*Paludi Pontine*), which vary in breadth between the mountains and the sea from 6 to 11 M., and from Nettuno to Terracina are 31 M. in length. A considerable part of them is now cultivated and they afford extensive pastures, the most marshy spots of which are the resort of the buffalo. Towards the sea the district is fringed with forest (*macchia*). The malaria in summer is a dreadful scourge.

These marshes were formerly a fertile and well-cultivated plain, but towards the close of the Republic they gradually fell into their present condition owing to the decline of agriculture. The marshes occupy a depression running parallel with the Apennines, and separated from the sea by a series of sandhills, and it is the want of fall in the surface of the soil that is the cause of the evil. Many subterranean springs rise to the surface here, and the streams and canals are totally inadequate to carry off the excess of water that descends from the mountains during the rainy season; its escape is further impeded by the rank growth of the aquatic plants. Attempts to drain the marshes were successively made by the censor *Appius Claudius* (p. 388) in B.C. 312, by the consul *Cornelius* (about 100 years later, by *Cicero*, *Augustus*, *Nero*, *Vespasian*, and finally by *Theodorus* the Ostracot, all of which were of temporary benefit only. Similar operations were undertaken by the popes *Sixtus VIII.*, *Urban V.*, *Sixtus V.*, and *Pius VI.*, the last of whom reconstructed the ancient *Via Appia* in the most admirable manner. In 1790 the Italian government promulgated a law according to which the landed proprietors are bound to arrange for the safe escape of the rain that falls in the mountains, to keep the existing canals clean and open, and to reclaim the district exposed to inundation, either by the construction of a natural outlet, or by the aid of mechanical devices. A period of 24 years is allowed for the completion of this work, and 7,000,000 fr. have been granted to defray the expenses.

52 M. *Sora* (1046 ft., *Locanda Nazionale*, in the piazza, unpretending), a town of 10,827 inhab., with the surname *Romano*, is the ancient *Setia* of the Volscians, a Roman colony after 382 B.C., and frequently mentioned in the Italian wars up to the time of Sulla. Under the empire its name was remembered only on account of its wine, which Augustus preferred even to Falernian. Considerable remains of its ancient walls have been preserved, built of massive polygonal blocks. The rough rusticated work here is an unusual feature in ancient town-walls, which in most cases are carefully smoothed. A massive substructure in the same style, below the entrance of the town, is arbitrarily named *Tempio di Saturno*.

The highroad, visible to the right, leads straight on through the Pontine plain, following the ancient *Via Appia*. On this side also we have the streamlet *Ufente*, the ancient *Ufens*. On the left rises the slopes of *Monte Troia* (1665 ft.), crowned by the ruins of a town destroyed in the 18th cent. by the inhabitants of Sora.

61 M. **Piperno** (490 ft.; *Locanda Serafai*, tolerable), a town with 6796 inhab., was founded early in the middle ages by refugees from the ancient Volscian town of *Præneum*, remains of which have recently been excavated on the road about 1¼ M. to the N. The *Cathedral*, in the picturesque piazza, was built in 1283 and modernised in the interior in 1782.

Carpiate (p. 441) may be reached in 4-5 hrs. from Piperno by a path over the mountains. — From Piperno to (18 M.) *Frosinone*, diligence in 3½ hrs. (fare 3 fr.) on Tues., Thurs., & Sat., starting in the morning; see *Snodgrass's Southern Italy*.

We obtain a picturesque view on the left of the valley of the *Amaseno*, with its heights crowned with ancient castles and villages: *Rocca Gorpa*, *Maenza*, *Prosesti*, and *Boccasacca*. We then cross the *Amaseno*.

64 M. **Sonnino** (1410 ft.; 4518 inhab.) was formerly noted for the picturesque costume of its women and for the audacity of the brigands.

About 1 M. to the N. of the station of Sonnino lies the Cistercian convent of *Fossanova*, where St. Thomas Aquinas died in 1274 while on his way to the Council of Lyons. The convent-church, consecrated in 1208, with rectangular choir and an octangular tower over the crossing, is one of the earliest examples of Italian Gothic (restored). The cloisters, chapter-house, and refectory are also interesting. One of the rooms contains a relief of St. Thomas Aquinas, by *Bernini*.

69 M. **Frasso**. On the slope of *Monte Lano* (2220 ft.), to the left, once lay the sacred grove and fountain of *Feronia*, mentioned by Horace (Sat. I, 5, 23). The line here joins the ancient *Via Appia*.

76 M. **Terracina**. — *Hotels*. *Albergo Reale*, at the E. end of the town, with a view of the sea at the back, R., L., & A. 1¼ fr., very fair; *Locanda Nazionale*, in the piazza, unpretending. — *Restaurants*. *Sirens*, *Felis*, both clean. — *Café Centrale*, in the main street.

Terracina (10,996 inhab.), situated conspicuously on a rocky limestone eminence (Hor. Sat. I, 5, 26), the *Anxur* of the ancient Volscians and the *Terracina* of the Romans, is the seat of an ancient bishopric, and is the natural frontier-town between Central and Southern Italy. The high-road intersects the new quarter, constructed by Pope Pius VI., while the old town is built on the slope of the hill. Above the latter extend the ruins of the ancient city, crowned by the remains of the temple of *Venus*. Adjoining the new quarter on the S.W., beyond the *Linea Pia Canal*, is a hamlet of primitive and mostly conical straw-huts, inhabited in winter by peasants from the *Abruzzi*, who then work in the fields here.

The **Cattedrale San Cesareo**, in the ancient Forum, occupies the site of a *Temple of Roma and Augustus*, dedicated by A. *Æmilius*, who also caused the forum to be laid with its present well-preserved pavement. The inscription A. *ÆMILIUS* A. F. in large letters is distinctly legible upon the travertine slabs. The vestibule of the cathedral rests on ten ancient columns, with recumbent lions at their bases. On the right is a large granite basin, which, as inscription records, played a part in the martyrdom of Christians.

The beautiful fluted columns of the canopy in the interior are antique. The pulpit, with its ancient mosaics, rests on columns with lions' feet. In the chapter-house is a nuptial chest of carved wood (10th or 11th cent.). An extensive view is enjoyed from the belfry (91 steps).

The summit of the promontory (748 ft.) may be attained in $1\frac{1}{2}$ hr., directly from the new town by a steep path to the right of the new church, but more conveniently from the old town, by ascending to the right, under the archway adjoining the cathedral. The latter route is partly by an ancient road passing remains of tombs and ancient walls, and then to the right by a gap in the wall encircling the olive-plantations, and through the latter along the dividing wall. The summit is occupied by the remains of an imposing *Temple of Venus*, 110 ft. long and 65 ft. broad, standing upon a terrace partly supported by arcades. The cella, which was decorated with pilasters on the walls and a mosaic pavement, still contains the pedestal for the sacred statue. Until the excavations of 1884 the arcades were regarded as the remains of a palace of Theodoric the Ostrogoth. The magnificent view embraces, towards the W., the plain as far as the Alban Mts., then the Monte Circeo; to the S. are the Ponza Islands, to the E. the plain of Fondi, farther off the promontory of Gaeta, with the tomb of Munatius Plancus, and finally the island of Ischia.

At the E. access of the town is the *Taglia di Pisco Montano*, an interesting piece of Roman engineering. The promontory approaches close to the sea, in consequence of which Appian originally conducted his road over the hill. At a later period the rocks were removed for the construction of a new and more spacious road. On the perpendicular wall thus produced the depth is indicated at intervals of 10 Roman feet, beginning from the top, the lowest mark, a few feet above the present road, is CXX.

A carriage road (11 M.; diligence to San Felice once daily in 3 hrs.) leads along the shore to the Monte Circeo, or Circeia (1080 ft.), the *Promontorium Circense* of the ancients, the traditional site of the palace and grove of the enchantress Circe, daughter of the sun, described by Homer. The promontory is a relic of a now almost wholly sunken spur of the Apennines which bounded the Pontine Marshes on the W., it was at one time an island but has been joined to the mainland by alluvial deposits. Accommodation of a rustic character may be obtained at *San Felice Circeo* (320 ft.) on application at *Franc. Mitene's Caffè*. From San Felice a good footpath, following the telegraph wires and passing a little above a fine piece of ancient Cyclopean masonry, known as the *Cittadella Vecchia*, leads to the ancient town of *Cereri* or *Oleri*, which became a Roman colony in 183 and still existed in Cicero's time, and thence, in 1 hr., to the *Stazione* or signal station (1225 ft.). The view hence is magnificent to the S.E. Ischia, Capri, and Mt. Vesuvius are distinctly visible; to the N.W. the dome of St. Peter's can be distinguished; to the E. and N.E. we see the mountains as far as Velletri; to the S. is the sea, with the Ponza Islands. — The summit of the mountain (1775 ft.) may be reached from San Felice in about $2\frac{1}{2}$ hrs. (with guide; $1\frac{1}{2}$ fr.), the final ascent being steep and fatiguing. On the top, which commands an extensive view, are the remains of a supposed *Temple of Circe*.

The hill is strewn with the remains of Roman buildings; thus, about halfway up the N. side, under a group of lofty trees, is a low parapet of Roman workmanship enclosing a well called the *Fontana di Messo Monte*. — Remains of Roman palaces and water-works (including the so-called *Piscina di Lucullo* and, farther to the N.E., the *Ponte della Sagnola*) have also been found at *Lago di Paola*, a small lake at the N. base of the promontory, which served as a harbour for the town of Cereci. Cicero and Atticus, Tiberius and Domitian frequently resorted to this spot. — On the seaward side of the promontory are several extensive grottoes, some of them accessible only by boat. — Travellers pressed for time can visit the *Stemaforo* from Terracina and return the same day.

The *Lago di Fondo*, originally a bay of the sea but now (owing to alluvial deposits) a marshy lake, situated to the N.E. of Terracina amidst dense woods and connected with the sea by two channels, may be visited by boat (about 8 fr.). We enter by the E. channel at the *Torre Sanf' Anastasia* and emerge by the W. channel at the *Torre Canaleto*. The ancient name of the lake was *Lacus Fundanus* or *Amyclaeus*, from the now vanished town of *Amyclae*, said to have been founded on this spot by Laconian refugees.

From Terracina to Formia and Gaeta, see *Baedeker's Southern Italy*.

List

of the most important Artists mentioned in the Handbook, with a
note of the schools to which they belong.

Abbreviations A. = architect, P. = painter, S. = sculptor; ca. = circa, about; Bol. = Bolognese, Ferr. = Ferrarese, Flem. = Flemish, Flor. = Florentine, Fr. = French, Lom. = Lombard, Rom. = Roman, etc.

The Arabic numerals enclosed within brackets refer to the art-articles throughout the Handbook, the Roman figures to the Introduction.

- Agostino**, Greek S., pupil of Phidias, ca. 480-421 B.C.
Albani (*Albano*), Franc., Ital. P., 1878-1880.
Alberti, Leon Batt., Flor. A., 1404-72. — (lxiv).
Alcmenes, Greek S., pupil of Phidias, ca. 480-398 B.C.
Alfani, Domenico di Pietro, Umbr. P., 1483-after 1538. — (81).
Alghisi, Al., Bol. S., A., 1592-1634.
Alfonsi (*Ant. Vassilacchi*), Umbr. and Ven. P., d. 1828.
Allegri, Ant., see Correggio.
Alighi, Al., Flor. P., 1555-1607.
 — *Cristofano (-fore)*, Flor. P., 1577-1621.
Alonso, Niccolò, see Polignio.
Amarighi, see Caravaggio, Mich.
Ammanati, Bart., Flor. A., S., 1511-82.
Angelico da Fiesole, Fra Gio., Flor. P., 1387-1455.
Angelica (*Angelica*), Sforzista, Crem. P., 1525-1528.
Apelles, Greek P., 565-505 B.C. — (ii).
Arnolfo di Cambio, see Cambio.
Arpino, il Cavaliere d' (*Gius. Cesari*), Rom. P., ca. 1580-1640. — (lxxiii).
Ascanio, see Santh.
Audinet, Matteo, Stan. P., 16th cent.
Bandinelli, Jacopo, Flor. S., 1483-1560.
Barbarelli, Giorgio, see Giorgione.
Barbieri, see Guercino.
Barili, Ant. (1458-1518) and Gio. (d. 1520), Stan. wood-carvers. — (21).
Berna or **Berno**, Men. P., d. 1381.
Bernasconi, Federico, Rom. P., imitator of Correggio, 1525-1612. — (128).
Bertoldo, Taddeo di, see Taddeo.
Bertoldo di Fredi, see Fredi.
Bertoldo, Domenico di, see Donatello.
Bartolomeo della Porta, Fra, Flor. P., 1475-1517.
Bassano, Francesco (*da Ponte*), the Younger, son of Jacopo, Ven. P., 1545-90.
Bassano, Jacopo (*da Ponte*), Ven. P., 1510-92.
Batoni, Pompeo, Rom. P., 1703-87.
Bazzi, Ottaviano, see Rodomo.
Becchioni, Domenico, Stan. P., 1480-1551. — (22).
Belini, Giovanni, Ven. P., 1428-1516.
Benedetto di Giovanni, Stan. P., d. 1517. — (22).
Borghese (*Borghesi*), Class. Pictors, Dutch P., 1620-88.
Borlino, Pietro, see Cortona.
Borini, Gio. Lorenzo, Rom. A., S., 1808-1880. — (lxxiv).
Borini, see Ghirlandajo.
Boudas, Greek S., son of Lysippus. — (H).
Bolognese, Gio. da, or Giambologna (*Jean de Boulogne* of Donat), Flem. and Flor. S., 1524-1608.
Botticelli, Sandro, Mil. P., pupil of Leonardo, 1467-1510.
Botticelli, see Botticelli.
Bonifazio the Elder (*del Pitti*), d. 1510, the Younger, d. 1555, the Youngest, ca. 1555-79, Ven. P.
Bonvicino, see Moratti.
Bordone, Paris, Ven. P., ca. 1500-1571.
Borghese, Ambrogio, da Pesaro, Mil. P., floruit 1488-1528.
Borromeo, Franc., Rom. A., S., 1509-1667. — (lxxiii).
Botticelli, Al. or Sandro (*del Pitti*), Flor. P., 1466-1510. — (lxiv).
Brumante, Donato, Umb. Mil., and Rom. A., 1444-1514. — (lxvi). — Cp. also the Index, under 'Rome'.
Bryner, Andreas, Lom. and Rom. S., 1421-1800.
Brd, Paul, Flem. P., 1554-1620.
Brumante, Angelo, Flor. P., 1502-72.
Buonarroti, see Michelangelo.
Buonfigli (or *Bonfigli*), Bonadotto, Umbr. P., ca. 1420 - c. 1488. — (81).
Buonvicini, Bern., Flor. A., 1508-1608.

- Dallari, Paolo, see Veronesi.
 Camaino, Tino da, Sien. P., d. 1388.
 Cambiaso, Luca, Gen. P., 1527-85.
 Cambio, Arnolfo di, Flor. A., S., 1282-1304.
 Campagna, Girolamo, Ven. S., pupil of Jac. Sansovino, 1552-1625.
 Camuccini, Vinc., Rom. P., 1775-1844.
 Canaletto (Antonio Canale), Ven. P., 1697-1768.
 Canova, Antonio, Ital. S., 1757-1822.
 Capricci, Amadeo or Massimo del, Rom. A., 1430-1501. — (lxiv).
 Caracci, see Carracci.
 Caravaggio, Michelangelo Merisi da, Lomb. and Rom. P., 1593-1609. — (lxiv).
 —, Felice Caldara da, Rom., Neap., and Sicil. P., 1485-1543.
 Cardù, Luigi, see Ogli.
 Carpi, Ottavio da, Ferr. P., 1501-88.
 Carracci, Agostino, Bol. P., 1558-1601.
 —, Annibale, brother of Agostino, Bol. P., 1558-1609. — (lxiv).
 —, Ludovico, Bol. P., 1558-1619.
 Carracci, see Pontormo.
 Cavallini, Pietro, Rom. P. and mosaicist, 14th cent. — (lxiii).
 Cellini, Benvenuto, Flor. S. and goldsmith, 1500-1571.
 Cephissodorus the Elder, Greek S. (father of Praxiteles). — (xlix).
 —, the Younger, Greek S., son of Praxiteles. — (xlix).
 Cignani, Carlo, Bol. P., 1628-1719.
 Cignani (Luigi Cardù da), Flor. P., 1508-1613.
 Cimabue, Giotto, Flor. P., 1240?—after 1302.
 Ciotto, see Pomarancio.
 Clafagut, Bernardo di Piero, Flor. S., 1281-1357.
 Claude le Lorrain (Gellée), French P., 1600-1682.
 Clovis, Don Giulio, P. of miniatures, pupil of Giulio Romano, 1498-1578.
 Cornelius, Peter von, Germ. P., 1768-1807. — (lxxv).
 Correggio (Antonio Allegri da), Parm. P., 1494-1534.
 Corione, Pietro (Borstini) da, Flor. A., P., 1508-1609. — (li).
 —, Urbano da, Sien. S., d. 1504.
 Cosimo, Piero di, see Piero.
 Cosmelli, the, Rom. S. and mosaicist, 15th cent. — (lxii).
 Cosmelli, Gio. Ben. A., S., 1458-1515.
 —, Guido, Sien. P., 1450-1500.
 Credi, Lorenzo di, Flor. P., 1459-1537.
 Credi, Don., da Passignano, Flor. P., 1480-1523.
 Crivelli, Carlo, Pad. and Ven. P., Savail ca. 1400-85.
 Schenck, Giotto, Rom. S., ca. 1470-80.
 David, Gerard, Dutch P., d. 1631.
 Dole, Carlo, Flor. P., 1616-88.
 Domenichino (Domenico Zampieri), Bol. P., 1601-1641. — (lxiv).
 Domenico di Bartolo, Sien. P., middle of 15th cent. — (22).
 Domenico di Piero Alfani, see Alfani.
 Donatello (Donato di Niccolò di Berti Bardi), Flor. S., 1388-1466.
 Dondi, Adone, Umb. P., 1540-1598.
 Dono Dono (Giov. di Niccolò Luteri), Ferr. P., ca. 1470-1542.
 Duccio, Agostino d'Antonio di, Flor. S., A., b. 1418, d. after 1481.
 Duccio di Buoninsegna, Sien. P., Savail ca. 1285-1318. — (23).
 Duquesnoy, Frans, Dutch and Rom. S., 1594-1648.
 Dürer, Albrecht, Germ. P., 1471-1528.
 Dyck, Ant. van, Flem. P., pupil of Rubens, 1609-1641.
 Eusebio di San Giorgio, Umb. P., ca. 1507. — (li).
 Eutychides, Greek S., son of Lysippus. — (li).
 Eutychides, Greek S., pupil of Lysippus. — (li).
 Fabriano, Gentile da, Umb. P., ca. 1370-1428. — (lxiv. 61).
 Federighi, Ant. (de' Tolomei), Sien. A., S., ca. 1420-80. — (21).
 Ferroni, Gaudenzio, Pied. and Lem. P., 1471?—1548.
 Flemming, Arrigo, of Malines, Rom. P., d. 1601.
 Filice, Fra Giovanni Angelico da, see Angelico.
 —, Mine da, Flor. and Rom. S., 1481-84.
 Filarete, Ant. (Ant. Averulino), Flor. A., S., d. after 1465. — (lxv).
 Fiorano di Lorenzo, Umb. P., ca. 1472-1520. — (61).
 Follino, Nic. (Alunno) di Liberatore da, Umb. P., ca. 1430-1503. — (61. 76).
 Fontana, Carlo, Rom. A., 1654-1714. (lxxiii).
 —, Domenico, Rom. A., 1548-1607. — (lxxiii).
 —, Giotto, brother of Domenico, Rom. A., 1540-1614.
 Fontana, Jac. della, see Quercini.
 Francesconi, Piero della (Pietro di Benedetto), Umb. Flor. P., ca. 1420-1492. — (54. 126).
 Francesco (Ciccio) di Giorgio (Martini), Sien. A., S., P., 1488-1503. — (21).
 Francesco di Simone, Flor. S., 1488-1493.
 Franchi, Francesco (Franc. Ruffini), Bol. P., S., 1450-1517.
 Francesco, Jacopo, see Imola.

- Freddi, Bartolo di Maestro*, Sien. P., 1330-1410. — (22).
- Fuga, Ferdinando*, Rom. A., 1699-1780.
- Fährich, Jos.*, Ger. P., 1800-1874.
- Fungai, Bernardino*, Sien. P., 1480-1516. — (23).
- Furini, Franc.*, Flor. P., 1804-1848.
- Gastano, Scip.*, Neap. P., 16th cent.
- Gallai, Alessandro*, Flor. A., 1681-1787.
- Gerbo, Raffaellino del*, Flor. P., 1486-1524.
- Gerfsalo (Benvenuto Tisi da)*, Ferr. P., 1481-1559.
- Gualti, Giov. Batt.*, surnamed *il Bastardo*, Rom. P., 1639-1709.
- Gialli, see Claude le Lorrain.*
- Gerino da Platina*, Umbr. P., first half of 16th cent. — (81).
- Gherardi, Lor.*, Flor. S., 1378-1455.
- Ghirlandajo, Dom. (Dom. Bigordi)*, Flor. P., 1449-94. — (lxiv).
- , *Bidolfo (R. Bigordi)*, son of Dom., Flor. P., 1483-1561.
- Giambologna, see Bologna, Giov. da.*
- Giannino, Vinc. da San (Vinc. Tammagni)*, Rom. P., pupil of Raphael, 1492-after 1529.
- Giovando, Fra*, Veron. and Rom. A., 1438-1515.
- Giordano, Luca*, surnamed *Papavento*, Neap. P., ca. 1622-1706.
- Giorgione (Giorgio Barbarelli)*, Ven. P., 1477-1510.
- Giotto (di Bondone)*, Flor. P., A., S., 1276-1337. — (lxiii).
- Gossoli, Benazzo*, Flor. P., pupil of Fra Angelico, 1420-97.
- Guercino, il (Giov. Franc. Barbieri)*, Bol. and Rom. P., 1591-1666. — (lxxiv).
- Guido da Siena*, Sien. P., 13th cent.
- Holbein, Hans, the Younger*, Germ. P., 1497-1543.
- Houtaeret, Gerh. (Gerard de la Nette)*, Dutch P., 1590-1636.
- Houdon, Jean Ant.*, Fr. S., 1741-1823.
- Ibi, Sindaldo*, Umbr. P., first half of 16th cent. — (81).
- Imola, Innocenzo da (Inn. Franceschi)*, Bol. P., 1494-1549.
- Kauffmann, Maria Angelica*, Ger. P., 1741-1807.
- Koch, Joseph Ant.*, Ger. P., 1778-1800.
- Lappus, Greek S.*, pupil of Lysippus. — (li).
- Landini, Taddeo*, Flor. S., d. 1594.
- Landfranco, Giov.*, Bol., Rom., and Neap. P., 1580?-1647.
- Laureana, Luciano da*, of Dalmatia, A., d. 1479.
- Laurenti, Tom.*, Rom. P., S., ca. 1580.
- Le Brun, Charles*, French P., 1619-90.
- Legros, Pierre*, Fr. P., 1656-1719.
- Leochares, Greek S.*, middle of 4th cent. B.C. — (xlix).
- Leonardo da Vinci*, Flor. and Milan. P., S., A., 1452-1519.
- Leone, Bernardino*, Bergam. and Ven. P., pupil of Pordenone, Sor. ca. 1611-44.
- , *Giov. Ant.*, see Pordenone.
- Lissens, Jan*, Dutch P., 1607-74.
- Lipario, Fiero*, Rom. A., d. 1593.
- Lionardo, see Leonardo.*
- Lippi, Filippino*, Flor. P., 1459-1504. — (lxiv).
- , *Fra Filippo*, father of Filippino, Flor. P., 1412-69.
- Lombardo, Girolamo*, Ven. S., 16th cent.
- Loughi, Luca*, P., Ravenna, 1507-80.
- Lorenzetti, Ambrogio*, Sien. P., d. 1348? — (23).
- , *Pietro*, Sien. P., ca. 1309-1348. — (22).
- Lorenzetto, Martino (di Lodovico Campana)*, Flor. and Rom. A., S., 1484-1541.
- Lorenzo di Pietro, see Vecchiotta.*
- Lotto, Lorenzo*, Ven. P., 1480-1556.
- Luca di Tommè*, Sien. P., second half of 14th cent.
- Luini, Bernardino*, Lom. P., 1470?-1530?
- Lungi, Mart.*, the Elder, Rom. A. ca. 1670.
- , *Onerio*, Rom. A., son of the preceding, 1561-1619.
- , *Mart.*, the Younger, son of the last, d. 1657.
- Luk, Bened.*, Flor. P., 1698-1724.
- Lysippus, Greek S.*, 4th cent. B.C. — (i).
- Maderna, Carlo*, Rom. A., 1556-1628. — (lxxiii).
- , *Stefano*, Lom. Rom. S., 1571-1636.
- Majano, Benedetto da*, Flor. A., S., 1442-97.
- , *Giuliano*, brother of the preceding, Flor. A., 1432-80.
- Mainardi, Seb.*, Tusc. P., d. 1515.
- Malland, Lor.*, Sien. A., S., P., ca. 1275?-1330.
- Manetti, Rutiko*, Sien. P., 1572-1639.
- Manni (Nanni), Giannicola di Paolo*, Umbr. P., d. 1544. — (81).
- Montagna, Andrea*, Pad. and Mant. P., 1431-1508.
- Maratti (Maratti), Carlo*, Rom. P., 1625-1713.
- Marcantonio Raimondi*, Bol. and Rom. engraver, ca. 1495-1527.

- Marcantonio, Carlo*, Rom. A. S., 1704-80.
Marcantoni, Guillaume de, stained-glass artist, 1487-1528.
Margheritone, P. and S., of Arezzo, 1267-1313. — (46).
Martino, Lor. di, vernished & Martini, Sien. S., 1476-1504. — (21).
Martini, Simone (Sim. di Martino), Sien. P., ca. 1285-1344. — (22).
Massaccio (Tommaso di Ser Giovanni Guido da Castel San Giovanni), Flor. P., 1401-28. — (44).
Massimo (da Pontente), Flor. P., teacher of the preceding, 1375-1440?
Matys, Quentin, Flam. P., ca. 1480-1580.
Matteo (di Giovanni di Bartolo) da Siena, Sien. P., 1435-85. — (23).
Massola, Franc., see *Parmigianino*.
Massolino, Lodov., Ferr. P., 1481-1580.
Melazzo da Forlì, Umbr. and Rom. P., 1435-1484. — (lxiv. 107-126).
Mening, Hans, Flam. P., 1430-84.
Mennini, Lippo, Sien. P., d. 1350. — (27).
Mencius, Græco-Rom. S. of the time of Augustus. — (III).
Mengo, Ant. Raphael, P., 1728-70.
Mes, see Caprino.
Messina, Antonello da, Sicil. and Ven. P., d. ca. 1493.
Michael Angelo Buonarroti, Flor. and Rom. S., P., A., 1475-1564. — (lxv-lxviii lxix) — Comp. also the index under 'Rome'.
Mindio, Pietro del, Sien. P., 15th cent.
Mosca, Franc., Tuscan S., 1580-1646.
Mola, Francesco, Rom. P., 1612-68.
Montalupo, Raffaele da, Flor. S., 1505-1547.
Montorsoli, Fra Gio. Ag., Flor. S., assistant of Michael Angelo, 1507-83.
Morillo da Brescia (Alessandro Bonvicino), Branc. P., 1498-1555.
Morone, Franc., Veron. P., 1474-1520.
Moroni, Gio. Batt., Bergam. and Branc. P., 1510?-1578.
Mosca, Bruno, da Battigiano, S., 1484-1554.
Murillo, Bartolomé Estéban, Span. P., 1617-82.
Murino, Orol., Rom. P., 1590-92.
Myron, Greek S., 6th cent. B.C. — (xlvii).
Nelli, Ottaviano, Umbr. P., d. 1444. — (57. 81.)
Niccolò di Bartolomeo (di Landi), Sien. S., P., 1447-1500.
Nironi, Bartolomeo (di Niccolò), Sien. S., middle of 16th cent.
Niccolò, Andr. di, Sien. P., 1480-1520.
Nocci, Amanteo, Umbr. P., 1522-1620.
Nuti, Allegretto, da Fabriano, Umbr. P., 1308-1330.
Oderisi of Gubbio, miniature-painter, 1240-80. — (57. 60).
Oggioni, Marco d', Milan. P., pupil of Leonardo, 1470?-1580.
Orgagna or Orsagna (Andrea di Cione), Flor. A. S., P., pupil of Giotto, 1228-1308.
Overbeck, Joh. Friedr., Germ. P., 1785-1859.
Pacchia, Girolamo del, Sien. P., 1477-after 1505. — (22).
Pascherette, Giac., Sien. P., 1474-after 1510. — (23).
Palladio, Andr., Vicent. and Ven. A., 1518-80.
Palma Giovane (Stefano), Giac., Ven. P., 1644-1638.
 — *Vecchio*, Giac., Ven. P., 1630-1628.
Palmerino, Guido, Umbr. P., 1280-1345?. — (57).
Palmasano, Marco, of Forlì, P., 1450-after 1557.
Parmigianino or Parmeggianino (Franc. Massola), Parm. P., 1503-1540.
Pastello, Græco-Rom. S., 72-48 B.C. — (III).
Pasquano, see Crasti.
Pellegrini, see Tibaldi.
Penni, Franc. (di Fattore), Flor. and Rom. P., pupil of Raphael, 1488-1528. — (lxix).
Perin del Vaga, see Vaga.
Perugino, Pietro (Pietro Vannucci), Umbr. and Flor. P., teacher of Raphael, 1446-1524. — (lxiv. 61. 65).
Peruzzi, Baldassare, Sien. and Rom. A., P., 1491-1536. — (lxvii. 27).
Pesellino (Franc. di Stefano), Flor. P., 1422-57.
Phidias, Greek S., 500-430 B.C. — (xlvii).
Piero di Cosimo, Flor. P., 1463-1521.
Pintelli, or Pontelli, Baccio, Flor. A., S., d. 1484. — (lxiv).
Pinturicchio (Bernardino Betti), Umbr. P., 1454-1513. — (lxiv. 61).
Piombo, Seb. del, see Sebastiano.
Pippi, see Romano.
Pisanello, see Pisano, Vittore.
Pisano, Olee., Pis. S., A., see of Niccolò, ca. 1280-ca. 1325. — (21).
 —, *Pisello*, Pis. S., A., ca. 1208-1280. — (21).
 —, *Vittore (Pisanello)*, Ver. P., ca. 1380-1401.
Polders, see Caravaggio.
Pollajuolo, Ant., Flor. S., P., A., 1428-88.
 —, *Piero*, Flor. S., P., 1448-88?
Polycletus, Greek S., 6th cent. B.C. — (xlvii).

- Pomarancio (Oreigano)*, Rom. P., end of 16th cent. — (lxvii).
- Pons, Franc.*, Jac. da, see Bassano.
- Pontik*, see Pintak.
- Pontorno, Jac. da (Carracci)*, Flor. P., 1494-1557.
- Pontio, Flaminio*, Rom. A., ca. 1570-1615.
- Perdonone, Giov. Ant. (G. A. Lianio da P.)*, Friulian and Ven. P., 1458-1539.
- Perin, Bart. della*, see Bartolomeo.
- , *Giac. della*, Lom. A., S., 1541-1604.
- , *Giov. Batt. della*, Rom. S., 1542-97.
- , *Giulio della*, Lom. and Rom. S., d. 1577.
- Perrault, Gaspard (G. Duguet)*, French P., 1618-75.
- , *Nicolas*, French P., 1594-1665.
- Pesce, Andrea*, Jesuit, P., A., and decorator, 1642-1708.
- Pharistos*, Greek S., ca. 384-339 B.C. — (xlix).
- Preziosola, Marcello*, Rom. mosaicist, d. 1639.
- Querina, Jac. della (or J. della Pente)*, Sien. S., 1374-1455. — (xi).
- Raffaello del Colle*, Rom. P., 1480-1540. — (lxvii. 51).
- Raphael Santi da Urbino*, Umb. Flor., and Rom. P., A., 1483-1520. — (lxviii-lxxii. 128. Comp. also the Index under 'Roma'.)
- Rabolini*, see Francis.
- Raimondi*, see Marcantonio.
- Rainaldi, Carlo*, Rom. A., son of the following, 1611-91.
- , *Giov.*, Rom. A., 1570-1655.
- Rembrandt, Harmen van Ryn*, Dutch P., 1606-69.
- Rena, Guido*, Bol. P., 1574-1642. — (lxv).
- Ribera, Jua. (Le Espagnoletto)*, Span., Neap. P., 1588-1658.
- Ricciardi, see Voterra, Daniele da.*
- Ristoro, Fra*, Flor. A., d. 1283. — (lxv).
- Robbia, Andrea della*, Flor. S., 1457-1528.
- , *Giov. della*, son of Andrea, Flor. S., 1469-1529?
- , *Luca della*, Flor. S., 1509-1482.
- Robusti*, see Titoretto.
- Romano, Gio. Franc.*, Rom. P., 1610?-1682.
- Romano, Giulio (G. Pippi)*, Rom. P., A., pupil of Raphael, 1492-1548. — (lxv).
- , *Pueto (Pueto di Mariano di Tuccio Tuccione)*, Rom. S., ca. 1410-ca. 1470.
- Rondelli (della Pomerance)*, Rom. P., second half of 16th cent. — (lxvii).
- Rondinello, Niccolò*, Ravenna and Ven. P., ca. 1500.
- Rosa, Salvatore*, Neap. and Rom. P., 1615-73.
- Rosselli, Cosimo*, Flor. P., 1439-1507. — (lxiv).
- Rossellino (Bern. di Matteo Gambellini)*, Flor. and Rom. A., S., 1408-64. — (lxiv).
- Rubens, Peter Paul*, Flam. P., 1577-1640. — (lxv).
- Ruschi, A.*, Rom. P., 1593?-1661.
- Salsino, Andr.*, Milan. P., pupil of Leonardo, ca. 1495-1515.
- Salmendani, Ventura*, Sien. P., 1507?-1613.
- Salviati, Franc.*, Flor. and Rom. P., 1510-63.
- Sammicheli, Michele*, Ver. A., 1484-1554.
- Sangallo, Antonio da, the Elder*, Flor. A., 1445-1534.
- , *Antonio da, the Younger*, Flor. A., nephew of the preceding, 1488-1548. — (lxv).
- , *Francesco da*, son of Giuliano, Flor. S., 1494-1576.
- , *Giuliano da*, brother of Antonio (the Elder), Flor. A., 1445-1516.
- Sano di Pietro (di Domenico)*, Sien. miniature painter, 1406-61.
- Sansovino, Andrea da (Andrea Contucci)*, of Monte Sansavino, Flor. and Rom. S., 1480-1529. — (49).
- , *Jac. (J. Tutti)*, pupil of Andrea, Flor., Rom. and Ven. A., S., 1488-1570.
- Santi, Giov.*, father of Raphael, Umb. P., d. 1480-94. — (128).
- , *Raffaello*, see Raphael.
- Saraceni, Carlo*, surnamed Venetian, Ven. and Rom. P., 1565-1626.
- Sarto, Andrea del*, Flor. P., 1487-1561.
- Sassaferrato (Giov. Batt. Salvi)*, Rom. P., 1606-85. — (lxv. 127).
- Scarsellino (Ippolito Scarsella)*, Ferr. P., 1551-1621.
- Schadow, W. von*, Ger. P., 1739-1802.
- Schiavone (Andr. Meldola)*, Ven. P., 1522-82.
- Schidone, Bart.*, Mod. P., d. 1616.
- Schnorr (von Carlsfeld)*, Julius, Ger. P., 1794-1872.
- Scopas*, Greek S., ca. 380-350 B.C. — (xlix).
- Sebastiano del Piombo (Seb. de' Lugani)*, Ven. and Rom. P., 1485-1547.
- Sermoneta, Girol. Biadonisi da*, Rom. P., d. 1580.
- Signorelli, Luca*, Tusc.-Umb. P., 1450-1528. — (lxv. 51. 90).
- Sisto, Fra*, Flor. A., d. 1289. — (lxv).

- Sedona, G. (Giov. Ant. Bassi)*, Lom., Sien., and Rom. P., ca. 1477-1549. — (lxxi. 22).
- Solaris, Andrea (A. del Gobbo)*, Lom. P., ca. 1470-1515?
- Spada, Lionello*, Bol. P., 1508-1522.
- Spagna (Giov. di Pietro)*, Umbr. P., pupil of Perugino, flor. ca. 1507, d. before 1530. — (81).
- Spagnoletta*, see *Ribera*.
- Specht, Aliss.*, Rom. A. and engraver, first half of 18th century.
- Spinello Aretino*, Flor. P., pupil of Giotto, 1333-1410. — (45).
- Stefano di Giovanni*, surnamed *Sassetta*, Sien. P., d. ca. 1450.
- Staphanos*, Græco-Rom. S., 1st cent. B.C. — (111).
- Subiyras, Pierre*, French P., 1693-1748.
- Taddes di Bartolo*, Sien. P., ca. 1383-1422. — (22).
- Tamagni, Vinc.*, see *Ottaviano*.
- Tatti*, see *Bancone*.
- Tempesta, Ant.*, Rom. P., 1687-1701.
- Teniers, David, the Younger*, Flem. P., 1610-80.
- Thornildsen, Bartel, S.*, of Copenhagen, 1770-1844. — (lxxv).
- Tibaldi (Pellegrino Pellegrini)*, Bol. A. P., 1532-98.
- Tiberio d'Assisi*, Umbr. P., 16th cent. — (81).
- Timarchos*, Greek S., son of Praxiteles, 4th cent. B.C. — (xliz).
- Tintoretto, Dom. (Dom. Robusti)*, son of the following, Ven. P., 1562-1637.
- , *G. (Jac. Robusti)*, Ven. P., 1519-84.
- Tisi, Bern.*, see *Garafalo*.
- Titian (Tiziano Vecelli da Cadore)*, Ven. P., 1477-1576.
- Torriti, Jacobus*, Rom. mosaicist, second half of 13th cent. — (lxiii).
- Tribble (Nic. Periconi)*, Flor. S., 1485-1550.
- Uccello, Paolo*, Flor. P., 1397-1475. — (128).
- Uddes, Giov. (Hans) de*, Ven. Rom. P., colleague of Raphael, 1487-1564. — (lxxii).
- Vacas, Flaminio*, Rom. S., second half of 16th cent.
- Vaga, Perin del (Pier. Buonaccorsi)*, Rom. P., pupil of Raphael, 1499-1547. — (lxxii).
- Valadier, Gius.*, Rom. A., 1782-1839.
- Valentin, Fr. P.*, 1801-34.
- Valotido*, Rom. S., second half of 16th cent.
- Vanni, Andrea*, Sien. P., 1320-1414.
- , *Franc.*, Sien. P., 1563-1609.
- , *Lippo*, Sien. P., 14th cent.
- Vannucci, Pietro*, see *Perugino*.
- Vasviletti, Lodov.*, Rom. P., A., 1700-73.
- Vasari, Giorgio*, Flor. P., A., and writer on art, 1512-74. — (46).
- Veschiatta (Lorenzo di Pietro)*, Sien. S., A., P., 1412-80. — (21).
- Veselli, Tiziano*, see *Titian*.
- Vell, Philipp*, Ger. P., 1793-1877.
- Velasquez (Diego V. de Silva)*, Span. P., 1599-1660.
- Venusti, Marcello*, P., pupil of Michael Angelo, 1515-1579.
- Veronesi, Paolo (P. Celleri)*, Ver. and Ven. P., 1528-88.
- Vignola (Giacomo Barozzi)*, A., 1507-73. — (lxxiii).
- Vinci, Leonardo da*, see *Leonardo*.
- Vitardo, Lor. da*, P., ca. 1444-89?
- Viti, Timoteo (Tim. della Vite)*, Bol., Umbr., and Rom. P., 1467-1523. — (128).
- Voltarra, Daniele da (D. Ricciarelli)*, Flor. P. S., pupil of Michael Angelo, 1509-66. — (11).
- Wouwerman, Philips*, Dutch P., 1619-66.
- Zampieri*, see *Domenichino*.
- Zuccheri (Eusebio)*, *Federigo*, Rom. P., 1580-1809. — (lxxiii).
- , *Taddes*, Rom. P., 1525-89.

Contractions of Proper Names.

Ag. = Agostino.	Fil. = Filippo.	Lod. = Lodovico.
Al. = Alessandro.	Franc. = Francesco.	Lor. = Lorenzo.
Ann. = Annibale.	Giac. = Giacomo.	Nicc. = Niccolò.
Ant. = Antonio.	Giov. = Giovanni.	Rid. = Ridolfo.
Bart. = Bartolomeo.	Girol. = Girolamo.	Seb. = Sebastiano.
Batt. = Battista.	Gius. = Giuseppe.	Tom. = Tommaso.
Bern. = Bernardo.	Gugl. = Guglielmo.	Vinc. = Vincenzo.
Dom. = Domenico.	Jac. = Jacopo.	Vitt. = Vittorio.

INDEX.

- Abete, Monte dell' 13.
 Accumoli 82.
 Acquaiagna 127.
 Acqua Acetosa 384.
 — Felice 185.
 — Rossa 101.
 — Santa 382.
 — Vergine 390.
 Acquasanta 82.
 Acquaviva Marche 127.
 Acque Albule 418.
 Adriana, Villa 420.
 Aesis 125.
 Aethalia 14.
 Affile 431.
 Agosta 428.
 Agylla 433.
 Albacina 123.
 Alba Longa 412.
 Alban Mountains, the 407.
 Albano 413.
 —, Lago di 411.
 — Laziale 413.
 Albanum 413.
 Albarese 4.
 Albegna 5.
 Albinia 5.
 S. Albino 44.
 Algido, Monte 443.
 Alleronia 83.
 Alila 388.
 Allumiere 8.
 Almo, brook 393. 394.
 Alsium 9.
 Alviano 94.
 Amaseno 448.
 Amatrice 82.
 Amelia 85.
 Ameria 85.
 Amiata, Monte 41.
 Amyclae 443.
 Ancona 118.
 Anemo 105.
 S. Angelo (near Grosseto) 41.
 — in Vado 117.
 Anghiari 54.
 Anguillara 104.
 Anio, river 389. 419. 425.
 Anio novus 185.
 S. Aniano a Dofana 89.
 Ansedonia 5.
 Antemnae 388.
 Antico, Monte 41.
 Anticoli 428.
 S. Antimo 40.
 Antium 439.
 Anxur 446.
 Anzio 439.
 Apennines, the 121, etc.
 Appia Antica, Fortezza 398.
 —, Via 393. 445.
 Aqua Alexandrina 391.
 — Claudia 392.
 — Ferentina 411.
 — Marcia 393.
 Aquae Albulae 418.
 — Apollinares 104.
 — Tauri 8.
 — Volaterranae 10.
 Aquila 82.
 Arbia 88.
 —, river 40.
 S. Arcangelo di Romagna 109.
 Arcavia 127.
 Arcidosso 41.
 Arco Muto 440.
 — Oscuro 198.
 Ardea 438.
 Arezzo 45.
 Argentario, Monte 5.
 Ariccia 414.
 Aricciana, Valle 414.
 Ariminum 110.
 Arquata 82.
 Arretium 45.
 Arrone, river 6. 9.
 Artemisio, Monte 448.
 Artana 413.
 Arvales, Grove of the 435.
 Asciano 89.
 Ascoli Piceno 82.
 Asdrubale, Mte. d' 117.
 Assino, the 57.
 Assisi 70.
 Astagno, Monte 119.
 Astura 440.
 Attidium 128.
 Attigliano 84.
 Augustanus, Vicus 438.
 Augustus, Bridge of 80.
 Autore, Monte 423.
 Auximum 121.
 Avellana 127.
 Baccano 103.
 Badia del Furlò 117.
 Bagnaja 100.
 Bagni 418.
 Bagno a Morbo 10.
 Bagnorea 98.
 Balneum Regis 98.
 Balze, Le 12. 55.
 Barbarano 102.
 Baschi 94.
 Bassano di Sutri 103.
 — in Teverina 94.
 Bastia 70.
 Bedesis 108.
 Belcaro 98.
 Belforte sul Chienti 125.
 Bellegra 431.
 Bellisio Solfare 127.
 Belrespiro, Villa 380.
 S. Benedetto 108.
 — (convent near Su-
 biaco) 427.
 S. Bernardino 130.
 Bertinoro 103.
 Betolla 50.
 Bevagna 77.
 Bibbina-Casale 3.
 Bieda 102.
 Bisentina 93.
 Bisenzo, Monte 93.
 Blera 102.
 Bologna 105.
 Bolsena 93.
 —, Lago di 93.
 Bomarzo 94.
 Borghese, Villa 440.
 Borghetto 94.
 Bosco 89.
 — Sacro 394.
 Bovillae 396.
 Bracciano 109.
 —, Lago di 103.
 Branca 59.
 Bruna, river 4.
 Bucine 45.
 Bullicame, Il 101.

- Buonconvento 40.
 Burano, river 127.
 Caccina 3.
 Cere 438.
 Casena¹ 103.
 Caffarella, brook 394.
 Cagli 127.
 Calamita, Monte 14.
 Calles 127.
 Calmasso 117.
 Calvario, Mte. 103.
 Calvi 94.
 —, Monte 101.
 Camaldoli 410.
 Camerino 126.
 Camerinum Ubrorum 126.
 Campagna di Roma 381.
 Campana, Grotta 422.
 Campello 78.
 Campiglia Marittima 3.
 Campo d'Annibale 416.
 — Reggiano 57.
 Camucia 50.
 Candigliano, river 117.
 127.
 Canneto Marche 127.
 Canoscio 58.
 Cantalupo 426.
 Canterano 425.
 Cantiano 117.
 Capalbio 5.
 Capanne, Monte 14.
 Capannelle 411.
 Capo d'Acqua 82.
 — di Bove 395.
 Capodimonte 98.
 Capoliveri 14.
 Caporelano 13.
 Capraia 13.
 Capranica 102.
 Caprarie 13.
 Caprarola 102.
 Caprea, Monte 441.
 Caprile, Col 75.
 Carceri, Eremita delle 75.
 Careise 104.
 Carpineto 441.
 Carroceto 435.
 Caraulis 70.
 Casale Marcigliana 383.
 — di S. Maria Nuova 386.
 — di Prima Porta 384.
 — Rotondo 386.
 Casalina 89.
 Casape 430.
 Cascate Marmore 83.
 Casclana 2.
 Casino di Terra 10.
 Cassia, Via 383. 98.
 Castagneto 3.
 Castel d'Asso 101.
 — Bolognese 105.
 — Durante 127.
 — S. Elia 98.
 Castelfidardo 122.
 Castel Fiorentino 15.
 — Fusano 438.
 — Gandolfo 412.
 — Giubileo 388.
 — Madonna 425.
 — del Piano 41.
 — Porziano 438.
 — Raimondo 125.
 — Todino 70.
 Castellina in Chianti 18.
 Castellum Axia 101.
 Castelnuovo dell' Abate 40.
 — Berardenga 39.
 — di Val di Cecina 10.
 Castelplanio 128.
 Casteluccio 82.
 Castiglione 380.
 — Fiorentino 50.
 — del Lago 86.
 — d'Orcia 41.
 — della Pescaja 4.
 — in Teverina 94.
 —, Promontory of 4.
 Castrimocinium 411.
 Catillo, Monte 424.
 Catria, Monte 127.
 Cattolica, La 113.
 Cave 480.
 Cavo, Monte 417.
 Ceccarelli, Vigna 435.
 Cecchina 411.
 Cecchignola 398.
 Cecina 3.
 —, river 3. 10.
 Celliole 18.
 Celsa 58.
 Centum Cellis 8.
 Cerboli 14.
 —, Monte 10.
 Cere Nuovo 438.
 Cersone, the 51.
 Ceri 433.
 Cerrara 83.
 Cerrato d'Esti 125.
 — di Spolito 82.
 Certaldo 15.
 Cervara 418. 428.
 Cerveteri 433.
 Cesano 101.
 —, river 118.
 S. Cesario, Osteria di 410.
 Cesena 103.
 Cesi 85.
 Cetinale 88.
 Cetona 88.
 —, Monte 44.
 Chiagio, river 70. 126.
 Chiana, river 38. 41. 50. 88.
 Chianciano 44.
 Chiaravalle 125.
 Chiarone 5.
 Chiascio, river 57.
 Chienti, the 124. 125.
 Chiusi 86.
 —, Lake of 44.
 Ciampino 428.
 Ciciliano 425.
 Ciminus, Mons 101.
 Cinigiano 41.
 Circeo, or
 Circeio, Monte 447.
 Cisterna 444.
 Cliterna 54.
 Città di Castello 55.
 — della Pieve 88.
 Civitella Castellana 95.
 — Lavinia 442.
 Civitanova, Porto 124.
 Civitella Vecchia 8.
 Civitella 431.
 — d'Agliano 100.
 Clanis 50.
 Clitumnus, the 77. 78.
 Clivus Cinnae 385.
 — Martis 383.
 Clusium 86.
 Collatia 418.
 Colle di Val d'Elsa 16.
 — del Postello 426.
 — Salvetti 2.
 Collescipoli 85.
 Collestata 83.
 S. Colomba 38.
 Colonia Fidenis Julia
 Arretium 45.
 — Julia Hispellum 75.
 — — Saena 20.
 — Junonia 95.
 Colonna 4.
 — (Mte. Compatri) 428.
 Compitobbi 44.
 Conca, river 113.
 Conero, Monte 121.
 Coira 443.
 Corcolle 390.
 Cori 443.
 Corneto (Tarquini) 6.
 Corniculum 418.
 Corsignano 43.
 Cortona 50.
 Cosa 5.
 Costacciaro 117.
 S. Costanza 389.
 Cremera, the 384. 432.
 Crocchiole 104.
 Cura Nuova 4.
 Cures 98.
 Deruta 68.
 Digentia 426.

S. Donato 18.
— Marche 127.
S. Donnino 15.
Due Ponte 384.
Durante Castel 127.

Egeria, Grotto of 394.
S. Egidio, Alta 53.
Elba 13.
Ellera 54.
S. Ellero 44.
Elsa, river 15.
Emissarium of the Lago
Albano 412.
Empighione, the 425.
Empoli 15.
Ercole, Port' 5.
Esino, river 125. 118.
Etruscan Towns 432.
S. Eugenio, Abbatia di 83.
Eugubium 57.

Fabrizio 126.
S. Facondino 126.
Faenza 105.
Falconara 118.
Falcone, Monte 391.
Falconieri, Villa 410.
Falerii 95.
Falerium Novum 95.
Fano 115.
Fanum Fortunae 115.
— Vacunae 426.
— Voltumnus 97.
Fara Sabina 95.
Farfa 95.
Fauglia 2.
Faventia 105.
S. Felice Circeo 447.
Ferento 100.
Ferentum 101.
Fermignano 127.
Ferrata, Grotta 410.
Ficulle 83.
Fidenae 388.
Figline 44.
Filomarino, Osteria di
388.
Flora, river 5.
S. Flora 41.
Fiumicino 435.
— di Cave 430.
—, river 109.
Florence 15.
Foggia, river 119. 115.
Fogliano, Mta. 101.
Fojano 50.
Foligno 75.
Follonica 4.
Fondo, Lago di 419.
Fonte degli Oratini 426.
— della Bagnata 448.
Forca Cannapina 82.

Forca di Cerro 82.
Forlì 107.
Forlimpopoli 108.
Formello, Fosso di 432.
Fortezza Appia Antica
Forum Cassii 102.
— Clodii 104.
— Livii 107.
— Poplii 106.
— Sempronii 117.
Fossanova 446.
Fossato di Vico 126.
Fossa Trajani 435.
Fosso Cacchiano 102.
— di Formello 432.
— dell' Isola 432. 96.
— di Ponte di Nona
380.
Fossombrone 117.
S. Francesco (Sabine
Mta.) 431.
— (Fojano) 50.
Fracati 408.
Frassinetto 50.
Frasso 446.
Fratocchie, Le 396.
Fregense 9.
Frontone 127.
Frosinone 446.
Fulginia 76.
Fumalolo, Monte 55.
Furbara 9.
Furlo Pass 117.
Gabi 390.
Gagliole 125.
Galera 104.
S. Galgano 88.
Gallese 94.
Galliano 390.
Gallinas, Villa ad 384.
Galloro 414.
Gambettola 109.
Gavignano 441.
Gavorrano 4.
Gelsomina, river 104.
S. Gemini 70.
Genazzano 430.
Gennaro, Monte 418.
Gensano 414.
Gerano 425.
S. Giacomo 78.
Giano, brook 128.
Giglio 15.
S. Gimignano 16.
S. Giovanni d'Asso 40.
— di Ponte allo Spino
— Valdarno 44.
S. Girolamo, convent
13.
Giove, Monte 117.

Giulianello 448.
Giuncano 82.
Giuncarico 4.
S. Giustino 55.
S. Giusto, Monte 124.
Gonfolina, the 15.
Gordiani, Villa of the 390.
Gorgona 13.
Gradara 115.
Granaiolo 15.
Grano, Monte del 392.
Gran Sasso d'Italia 121.
—, Monte 82.
Graviscia 8.
S. Gregorio 480.
Grosseto 4.
Grotta Campana 432.
— Ferrata 410.
Grotti 82.
Grotto of Egeria 394.
Gualdo Tadino 126.
Guasco, Monte 119.
Gubbio 57.

Hadrian's Villa 420.
Helvia Ricina 124.
Hispellum 76.
Horace, Villa of 424.
Horta 94.

Ighium 15.
Iguvium 57.
Iva 14.
Imola 105.
Imperiale, Villa 115.
Incisa 44.
Inferno, Valle d' 104.
Inghirami, Villa 18.
Interamna Nahars 83.
Intercisa 117.
Isola Farnese 432.
— Maggiore 53.
— Minore 53.
— Polvere 53.
— Sacra 435.

Jenne 428.
Jesi 125.
Jupiter Latialis, Temple
of 417.

Labici 428.
Labico 441.
Labicum 428.
Lacus Albanus 411.
— Amyclaeus 448.
— Ciminus 101.
— Fundanus 448.
— Nemorensis 415.
— Praetis 4.
— Sabatinus 108.
— Trasimeneus 58.
— Vadimonis 94.

- Lacus Vulsiniensis 98.
 Ladispoli 9.
 La Magliana 9. 435.
 — Mola 418.
 Lago Zelforco 10.
 Lamone, river 106. 108.
 Lanuvium 443.
 Larderello 10.
 Laterina 45.
 Latium 382.
 Laurentum 438.
 Lavinium 438.
 Lcano, Mte. 448.
 Le Balze 12. 55.
 Leghorn 2.
 S. Leo 118.
 Le Vene 78.
 Licenza 426.
 —, river 425.
 Livia, Villa of 384.
 Loreto 122.
 S. Lucchese, monast. 18.
 S. Luce 8.
 Lucignano 41.
 Lugo, Monte 81.
 Lugnano 441.
 Lunghezza 418.
 Maccarase 9.
 —, Stagno di 9.
 Macchia di Ostia 438.
 Macerata 124.
 Madonna del Buon Consiglio 430.
 — del Campo 430.
 — di Canoscio 58.
 — della Casa 428.
 — del Piano 102.
 — del Tufo 416.
 Mæcenæ, Villa of 424.
 Macenza 448.
 Magazzini 14.
 Magione 54.
 Magliana 9. 435.
 Magliano 84.
 Malafede, Ost. di 438.
 Manciano 5.
 Mandela 428.
 Mansiana 108.
 Marano 426.
 —, river 118.
 Marcellina 419.
 Marches, the 105.
 Marsocchia, river 109. 110.
 Maremma, the 2.
 S. Maria degli Angeli 70.
 — delle Grazie 118.
 — del Monte 109.
 — della Quercia 100.
 — di Quintifoglio 424.
 — dei Servi 88.
 S. Marinella 9.
 Marino 411.
 S. Marino 112.
 Mario, Mte. 385.
 S. Marmai 11.
 Marmorata 38.
 Marmore 84.
 —, Cascade della 84.
 Marotta 118.
 Marsiliana 5.
 Marta 98.
 —, river 6. 98.
 Martana 98.
 Martignano, Lago 103.
 S. Martino al Cimino 102.
 — — Piano 117.
 Massa Marittima 4.
 Massi, Monte 18.
 Matelica 125.
 Melano 127.
 Meldola 108.
 Meloria 18.
 Mentana 390.
 Metaurus 117. 118.
 Mevania 77.
 S. Mezzano, Villa 44.
 Mignone, river 8.
 Milvius, Pons 388.
 S. Miniato al Tedesco 15.
 Mola, La 413.
 Mondavio 118.
 Mondolfo 118.
 Mondragone, Villa 410.
 Mons Albanus 417.
 — Ciminus 101.
 — Sacer 389.
 Montalcino 40.
 Montalto di Castro 5.
 Monte dell' Abete 13.
 — Accio 118.
 — Aligido 443.
 — Amata 41.
 — di Ancona 121.
 — Antico 41.
 — Argentario 5.
 — Artemisio 448.
 — d'Asdrubale 117.
 — Astagno 118.
 — S. Bartolo 115.
 — Calvario 103.
 — Calvi 104.
 — Capanne 14.
 — Castelli 58.
 — Castillo 424.
 — Catini 13.
 — Cavo 417.
 Montecchio 50. 115.
 Monte Cello 418.
 — Cerboli 10.
 — Ciminio 101.
 — Clearo, or
 — Circello 447.
 — Compatri 410. 428.
 — Conero 121.
 — Corona 57.
 Montecosaro 124.
 Monte Cristo 15.
 Montefalco 77.
 Monte Falcone 391.
 Montefiascone 97.
 Montefiorentino 127.
 Monte Fogliano 101.
 — Gennaro 418.
 — Giove 117.
 — S. Giusto 124.
 — del Grano 362.
 — Guasco 118.
 Montelanico 441.
 Monte Leano 446.
 — Luce 81.
 Montelupo 15.
 Monte Malo 385.
 Montemarciano 118.
 Monte Mario 385.
 — Massi 18.
 — Oliveto Maggiore 39.
 — Pennino 126.
 Montepescali 4.
 Monte Petrara 117.
 — Porzio Catone 410.
 Montepulciano 41.
 —, Lago di 44.
 Montersale 82.
 Monte Riggioni 19.
 Monterosi 103.
 Monte Rosso 127.
 — Rotondo (near Rome)
 390. 97.
 Monterotondo (near Vol-
 terra) 10.
 Monte Sansavino 49.
 — Subasio 75.
 — Trevi 445.
 Montevarchi 45.
 Monte Verano 104.
 Monticelli 418.
 Montone, river 106.
 Morrovalle 124.
 S. Mustiola a Torri (Val
 di Merse) 88.
 Nar 83.
 Narni 85.
 Narnia 85.
 Nemi 415.
 —, Lago di 415.
 Nepete 96.
 Nepi 96.
 Nequinum 85.
 Nera, river 70. 82. 83.
 — Montoro 86.
 Nero's Tomb 384.
 Nettuno 440.
 Ninfa 441.
 Nocera Umbra 126.
 Nomentum 390.
 Norba 444.
 Norchia 102.

- Norda 82.
 Norma 444.
 Nuceria 128.
 Nursia 82.

 Oriculum 84.
 Olevano 480.
 Ombrone, river 4. 15. 38.
 S. Onofrio 104.
 Ontanese 443.
 Oratini, Fonte degli 426.
 Orbetello 5.
 Orcla, river 41.
 Orciano 3.
 Orcla 102.
 S. Oreste 98.
 Ortolano Romano 103.
 Orte 84.
 Orvieto 89.
 Osa, river 5.
 Osimo 121.
 Osservanza, L' 87.
 Osteria di Cavamonte 391.
 — S. Cesario 410.
 — di Filomarino 383.
 — delle Frattocchie 398.
 — di Malafede 438.
 — dell' Osa 390.
 — del Ponticello 389.
 438.
 — della Volte 38.
 Ostia 436.
 —, Macchia di 438.
 —, Stagno di 438.
 Otricoli 84.

 Padule 59.
 Paganico 41.
 Paglia, river 83.
 Palazzo 126.
 — del Pero 54.
 Palazzolo 126.
 Palazzuola 416.
 Palestina 428.
 Pallano 480.
 Palidoro 9.
 Palmarola 14.
 Palo 9.
 Palombara 418.
 Palombaro 396.
 S. Pancrazio, Monte 94.
 Panicle 88.
 Paola, Lago di 448.
 S. Paolo, Stazione di 435.
 Papa Giulio, Villa of 198.
 Papigno 83.
 Passerano 390.
 Passignano 54.
 S. Pastore 391.
 Pausula 124.
 Pedum 890.
 Pellegrino 126.
 Pennino, Mte. 126.

 Pergola 127.
 Perugia 59.
 Accademia di Belle Arti 87.
 S. Agostino 88.
 S. Angelo 88.
 Antiquarian Museum 86.
 Arco di Augusto 85.
 Banca di Perugia 62.
 S. Bernardino, Oratorio 87.
 Biblioteca Pubblica 64.
 Botanic Garden 85.
 Cambio, Coll. del 62.
 Cathedral 64.
 Cemetery 89.
 Chiesa Nuova 87.
 Collegio del Cambio 62.
 Corso Cavour 67.
 — Garibaldi 86.
 — Vanucci 82.
 S. Costanzo 89.
 S. Domenico 68.
 Episcopal Palace 64.
 S. Ercolano 67.
 Fonte Maggiore 64.
 S. Francesco al Prato 87.
 Frontone, Giardino del 69.
 House of Perugino 67.
 S. Lorenzo 64.
 Madonna della Luce 67.
 — di Monte Luce 80.
 Maestà delle Volte 64.
 S. Martino di Verzaro 64.
 Museum 88.
 Necropolis 69.
 Painting (Umbrian School) 60.
 Pal. Antinori 85.
 — del Capitano del Popolo 67.
 — Cesaroni 82.
 — Gallenga 65.
 — del Municipio 63.
 — del Podestà 67.
 Perugino, House of 67.
 Piazza Danti 85.
 — Fortebraccio 65.
 — Garibaldi 67.
 — del Municipio 64.
 — del Sopramuro 67.
 — Vitt. Emanuele 82.
 Picture Gallery 63.
 S. Pietro de' Cassinensi 68.
 Pinacoteca 68.
 Porta S. Angelo 68.
 — Marzia 67.

 Perugia:
 Porta S. Pietro 68.
 Prefettura 62.
 Scirri, Torre degli 67.
 S. Severo 85.
 Statue of Julius III. 64.
 — of Garibaldi 67.
 — of Victor Emmanuel II. 62.
 University 65.
 —, Old 67.
 Via de' Priori 67.
 Volanni, Sepolcro del 69.
 Perugia 60.
 Pesa, river 15.
 Pesaro 113.
 Petrarca, Monte 117.
 Pianosa 15.
 Picenum 121.
 Piediluco 85.
 Piedipaterno 82.
 Pienza 43.
 Pietralata 117.
 Pietralunga 57.
 Pieve S. Stefano 55.
 Piombino 3.
 Piperno 448.
 Pisa 2.
 Pisaurum 113.
 Pisaurus 118.
 Pisciatello, the 109.
 Pisoniano 425.
 Pitigliano 5.
 Pizzoli 82.
 Planasia 15.
 Plautii, Tomb of the 419.
 Poggibonsi 18.
 Poggio degli Alparelli 38.
 — Croce 13.
 — Mirteto 86.
 — (near Campiglia) 3.
 Pola-Piobbico 127.
 Poli 480.
 Polimartium 94.
 Pollenza 125.
 S. Polo de' Cavalieri 419.
 Pomarance 10.
 Pompey, Tomb of 418.
 Pons Milvius 383.
 Pontassieve 44.
 Ponte dell' Acquoria 424.
 — dell' Abbadia 5.
 — a Botte 117.
 — della Catena 444.
 — Centesimo 123.
 Pontedera 9.
 Ponte a Elsa 15.
 — Falcino 68.
 — Felice 91.
 — Galera 9.

Ponte Ginori 10.
 — S. Giovanni 70.
 — Lucano 419.
 — Mammolo 419.
 — Molle 883.
 — Nomentano 889.
 — di Nona 890.
 — d'Orsino 480.
 — Salaria 888.
 — Sodo 482.
 Ponticello, Osteria del 391 438.
 Ponticino 45.
 Pontignano, Certosa di 38.
 Pontine Marshes 445.
 Populonia 8.
 Porta Aurelia 379.
 — Furba 392.
 Porto 435.
 — Civitanova 124.
 — Clementino 8.
 — Ercole 5.
 Portoferrato 14.
 Porto Legnano 15.
 Portonaccio 97.
 Porto Recanati 123.
 — S. Stefano 5.
 Portovecchio 3.
 Portus Trajani 485.
 Porzio, Mte. 410.
 Potenza, river 124. 125.
 — Picena 124.
 Praeneste 429.
 Pratone 419.
 Pratica 453.
 Prima Porta, Casale di 384.
 Privernum 446.
 Prose di 446.
 Punicum 9.
 Pupluna 8.
 Pussino, Val di 884.
 Pyrgos 8. 433.
 S. Quirico 40.
 Ranchi del Nestoro 56.
 Ranza 13.
 Rapolano 41.
 Ravenna 105, 108.
 Recanati 123.
 Regillus, Lake 891.
 Regresso 422.
 Rieclione 113.
 Rignano, on the Arno 44.
 Rimini 109.
 Rio Fallace 96.
 — Marina 14.
 Riparbella 10.
 Rocca Canterano 426.
 — S. Casciano 108.
 — Giovane 425.

Rocca Gorga 446.
 — Massima 443.
 — di Papa 418.
 — Romana 104.
 Roccasecca 448.
 Rocca S. Stefano 421.
 Roccastrada 41.
 S. Rocco 428.
 Rojate 431.
 Roma Vecchia 396.
 ROME 131.
 Accademia di Francia 169.
 — di Belle Arti 213.
 — de' Lincol 371.
 — di S. Luca 272.
 Acqua Acetosa 824.
 — Felice 165.
 — Paola 379.
 — Santa 392.
 — Vergine 390.
 S. Adriano 268.
 Aedes Castoris 259.
 Aerarium milit. 273.
 — publ. 265.
 S. Agata in Subura 178.
 Ager Vaticanus 312.
 S. Agnese 221.
 — Fuori le Mura 889.
 S. Agostino 214. lxiv
 Albergo dell' Orso 213.
 Aldobrandine Nuptials 367.
 S. Alessio 287.
 S. Alfonso de' Liguori 143.
 All Saints, Ch. of 167.
 Alta Semita 155.
 Amazon after Polycle-
 tus 860.
 American Church 174.
 146.
 — Classical School 141.
 Amphitheatrum Cas-
 trense 312.
 — Flavianum 266.
 Anaglyphs Trajani 256.
 S. Andrea 883.
 — delle Fratte 160.
 — al Quirinale 177.
 — della Valle 221. lxviii.
 —, Chap. of 383.
 S. Angelo, Castello 314.
 — in Pescheria 282.
 Anlo Novus 185.
 S. Anna, Chapel of 266.
 S. Anselmo 288.
 Antinous 352. 387. (356).
 liv.
 Antiquarium 294.
 Antiquities, vendors of 141.

ROME:
 S. Antonio Abbate 182.
 S. Apollinare 214.
 Apollo Belvedere 358.
 — Musagetes 352.
 — Sauroctonus 353.
 SS. Apostoli 210.
 Apoxyomenos 360. 1
 Aqua Claudia 185. 281
 — Julia 183.
 — Marcia 174.
 — Trajana 379.
 — Virgo 161.
 Ara Pacis 199.
 Arch of Augustus 259.
 — of Constantine 270.
 — of Dolabella and
 Silanus 297.
 — of Drusus 294.
 — of Gallienus 182.
 — of the Money-
 Changers 282.
 — of Sept. Severus
 257.
 — of Tiberius 255.
 — of Titus 265. liv.
 Archmol. Society, Brit-
 ish and American 146.
 —, German 249.
 —, French 229.
 Archivio Vaticano 364.
 Arco della Ciambella
 218.
 — di Giano 282.
 — Oscuro 196.
 — del Pantani 273.
 Arcus Argentariorum
 282.
 Area Capitolina 284.
 — Palatina 278.
 Ariadne (Vatican) 354.
 Arrival 133.
 Art Dealers 141.
 Artists' Association 141.
 Arx Capitolina 284.
 Atrium Vestae 262.
 Auditorio di Mecenate
 182.
 Augustus, Bust of 365.
 —, Mausoleum of 188.
 —, Statue of 359. lvi.
 Aula Dei 303.
 Aurora, Casino dell' 163.
 Aventine, the 286. 154.
 Bagni di Paolo Emilio
 274.
 S. Balbina 281.
 Banca d'Italia 176.
 Bankers 139.
 Baptistery (Lateran)
 302.
 Barcaccia, La 160.
 Barracks 316.

ROME:

- S. Bartolomeo 288.
 Basilica Aemilia 261.
 285.
 — of Constantine 264.
 — Constantiniana 308.
 — Eudoxiana 188.
 — Julia 264.
 — Liberiana 180.
 — of SS. Marco ed Achilleo 405.
 — of St. Petronilla 405.
 — Porcia 261.
 — S. Salvatore 303.
 — Sempronia 261.
 — Sessoriana 188.
 — di S. Stefano 303.
 — Ulpia 276.
 — of St. Valentine 389.
 Baths 140.
 Battistero, il 302.
 Bear 187.
 Belrespiro 380.
 S. Bernardo 184.
 S. Biagio della Fagnola 280.
 S. Bibiana 188.
 Bibliography xvii.
 Biblioteca Alessandrina 219, 220.
 — Angelica 214.
 — Barberiniana 265.
 — Cassanese 219.
 — S. Cecilia 145.
 — Christiana 145.
 — Corsiniana 145.
 — Lancianiana 317.
 — Sarti 272.
 — Vallicelliana 227.
 — Vaticana 384.
 — Vittorio Emanuele 148.
 Bibulus, Tomb of 202.
 Bicycles 182.
 Birrerie 187.
 Bocca della Verità 285.
 Bohemian Hospice 237.
 S. Bonaventura 285.
 Bookbinders 142.
 Booksellers 142.
 Borghese, Villa 190.
 Borgo 312.
 — S. Angelo 317.
 — Nuovo 317.
 — S. Spirito 317.
 — Vecchio 317.
 Botanic Garden 274, 386.
 Bracciale:
 — Balvedere of the Vatican 329.
 — Cortile di S. Damaso (or della Loggia) 330.

R.M.E.:

- Bracciale:
 — Cloisters of S. Maria della Pace 228.
 — Pal. Giraud 317.
 — St. Peter's 319.
 — Templatio 377.
 British Academy 141.
 Bronzes, antique 242.
 263.
 —, Imitations of 142.
 Caba, see Appz.
 Cecilia Metella, Tomb of 305.
 Cellius, the 154, 294.
 Café 186, 147.
 Calcografia Regia 181.
 Cameos 142.
 Camera de' Deputati 215.
 Campagna di Roma 381.
 Campo di Fiore 225.
 — Vaccino 252.
 — Veneto 185.
 Campus Martius 158.
 197.
 Cancellaria, Pal. 226.
 lxvi.
 Candelabra 350, 354.
 Capitol 234.
 —, Coll. of the 239.
 Capitoline Hill 153.
 — Museum 244.
 — Picture Gallery 244.
 — Venus 249.
 — Wolf 242.
 Capo di Bove 385.
 Cappella del Sudario 214.
 Capuchin Church 162.
 Caracalla, Thermae of 201.
 Carcer Mamertinus 271.
 Carceri Nuove 230.
 S. Carlo alle Quattro Fontane 164, lxviii.
 — al Calinari 281.
 — al Corso 198.
 Carnival 147.
 Carriage Hires 139.
 Carthusian Monastery 167.
 Casa di Crescenzo 285.
 — di Livia 277.
 — di Pilato 285.
 — Professa 224.
 — di Raffaele 215.
 — di Rinaldi 285, lxii.
 — Tarpeia 249.
 — Zuccari 162.
 Casale Rotondo 386.
 Casino dell'Aurora 183.

ROME:

- Casino of Julius III. 198.
 — Massimo 305.
 — Rospigliosi 179.
 Castello S. Angelo 314.
 Castra Peregrina 297.
 Castro Pretorio 166.
 Casto 142.
 Catacombs 400, xxxiv.
 — of St. Agnes 408.
 — of S. Alessandro 408.
 — of St. Calixtus 404.
 — of Domitilla 405.
 — of S. Genesio 405.
 — Jewish 408.
 — of SS. Nereus and Achilleus 405.
 — of SS. Peter and Marcellinus 408.
 — of St. Pontianus 408.
 — of St. Proterius 408.
 — of St. Priscilla 408.
 — of S. Sebastiano 408.
 S. Caterina de' Funari 251.
 — di Siena 178.
 S. Cecilia in Trastevere 375.
 Cemetery, German 328.
 —, Jewish 286.
 —, Protestant 289.
 S. Cesareo 285.
 Cestius, Pyramid of 289.
 Chemists 140.
 Chiesa Nuova 227.
 Christian Museum 308.
 Chronological Table of the Emperors and Popes xxxix.
 Church Festivals 144.
 Circo Agonale 220.
 Circus of Caligula 312.
 — of Domitian 220.
 — of Flaminio 231.
 — of M. Aemilius 305.
 — Maximus 268.
 Civitas Leonina 312.
 Claude Lorrain's Landscapes 207.
 S. Clemente 289, lx.
 lxii, lxiii.
 Climate xxiiv.
 Clivus Capitolinus 255.
 — Cium 385.
 — Martia 386.
 — Victorin 278.
 Cloaca Maxima 243.
 Clothing 148.

ROME:

Comitium 260.
Comitium Ostrianum 404.
Collegio S. Anselmo 288.
— di Propaganda Fide 180.
— Romano 202, 218.
Collegium Urbanum 180.
Collis Hortorum 158.
Colonna, Le 774.
Colonna, Pal. 210.
Colonnade of the Twelve Gods 205.
Colosseum 268.
Colymbaria 288, 284, 310, 304.
Comitium 260.
Concerts 147.
Concordia, Temple of 264.
Confectioners 138.
Congregazione di Carità 378.
Conservatori, Palace of the 288.
Consulates 188, 198.
Coral 182.
Corso Umberto Primo 197.
— Vittorio Emanuele 197.
Corte d' Appello 227.
S. Cosimato 378.
S. Cosma e Damiano 288, lx, lxi.
S. Costanza 389.
Court of Justice 318.
Crescentina, House of 288.
S. Crisogono 374.
S. Croce in Gerusalemme 188.
Curia Hostilia 260.
— Julia 268.
Dentists 140.
Deputies, House of 215.
Diadumeneos Relief 356.
Diary 150, 151.
Dioeletian, Thermæ of 188.
Dioscuri 287.
Discus-thrower of Myron 215, 300, xlvi.
S. Domenico e Sisto 178.
Domine Quo Vadis 303.
Dominican Monastery 257.
Domus Augustiana 278.
Flavia 278.

ROME:

Domus Livina 277.
— Tiberiana 277.
Doria, Pal. 207.
Doryphoros (after Polyctas) 300.
Drusus, Arch of 284.
Egeria, Grotto of 384.
Egyptian Museum 380.
S. Eligio degli Orefici 280.
Embassies 188, 198.
English Churches 144.
Engravings 143, 161.
Eros of Praxiteles xlix.
Esquilina 158.
Ethnographical Museum 204.
Etruscan Museum 381.
Eurysaces, Mon. of 188.
S. Eusebio 188.
Excubitorium of the Vigiles 374.
Farnese Gardens 278.
Farnesina, Villa 389, lxxi.
Fasti Consulares 243.
Fattoriali Pubblici 188.
Faustina, Temple of 263.
Festivals, Church 144.
—, Popular 147.
Ficoronian Cista 208.
Filippo Neri, Chapel of 226.
—, Oratorio di 227.
Finance Office 183.
Flavian Palace 278.
Fontana delle Tartarughe 231.
— di Trevi 161.
— del Tritone 162.
Fontanone dell' Acqua Felice 168.
— di Ponte Sisto 378.
Fors of the Emperors 271.
Fortuna, Temple of 265.
Forum of Augustus 278.
— Boarium 283.
— of Caesar, or Forum Julium 273.
— Helitorium 283.
— of Nerva 274.
— Romanum 260.
— of Trajan 274.
— Transitorium 274.
S. Francesca Romana 284.
S. Francesco di Paola 188.
— a Ripa 378.

ROME:

Galleria d'Arte Moderna 174.
— Barberini 164.
— Borghese 218.
— Colonna 210.
— Corsini 370.
— Doria-Pamphili 207.
— Lateranense 310.
— of the Vatican 344.
Gallienus, Arch of 182.
Gallus, Le 180.
Ganymede (after Leocareus) xlix.
Garrison 146.
Gaul, Dying 248, li.
German Hospice 222.
Gesh 223, lxxiii.
— e Maria 188.
Ghetto 282.
S. Giacomo in Augusta (degli Incurabili) 198.
— Scossa Cavalli 317.
— degli Spagnuoli 231.
Gibson's House 157.
S. Giocchino 318.
S. Giorgio in Velabro 282.
Giotto's Navicella 321.
S. Giovanni de' Fiorentini 228.
— in Fonte 302.
— in Laterano 308, lxxiii, lxxiii.
— in Olio 288.
— e Paolo 288.
— e Porta Latina 283.
Giulio, Villa di Papa 198.
S. Giuseppe a Capo le Case 161.
— del Palagium 271.
Gladiator, Dying 246.
Gloves 143.
Goethe's House 188.
Golden Palace of Nero 278.
Goldsmiths 142.
Goods Agents 141.
Graces, relief of the 188.
S. Gregorio Magno 288.
Grotte Vaticane 327.
Grotto of Egeria 384.
Guerzino's Aurora 168.
Guide Rami's Aurora 178.
Hadrian's Tomb 314.
Hairdressers 140.
Hawthorne's Marble Faun 214, 248.
Hercules, Torso of 367.
Hilda's Tower 214.

ROME:

Hills of Rome, Seven 155.
 History of the City of Rome xviii.
 Horrea 205.
 Horse Tamers (Quirinal) 177.
 Horses 159.
 Hospice, German 222.
 — Military 205.
 — for Women 302.
 Hotels 153.
 Hydropathics 140.
 S. Ignazio 203, lxviii.
 Ilian Tablet 248.
 Immacolata, Column of the 160.
 Isola Tiberina (di Bartolomeo) 238.
 Istituto Chimico 180.
 — de' Ciechi 287.
 — Tecnico 165.
 S. Ivo 220.
 Janiculum, the 375.
 Janus Quadrifrons 252.
 Jesuit Churches 208.
 228, lxviii.
 — House 224.
 Jewish Cemetery 285.
 Juno Barberini 302.
 — Ludovisi 175.
 Keats' House 180.
 Laocoon 355, lii.
 Lateran, the 305.
 Lending Libraries 142.
 Leonardo da Vinci's Madonna 308.
 Lex Regia of Vespasian 246.
 Libraries 145.
 Liceo Euno Quirino Visconti 201.
 Lieux d'Aisance 140.
 Livia, House of 277.
 Longara, see Lungara.
 S. Lorenzo in Damaso 224.
 — fuori le Mura 184.
 — 1st, lxii.
 — in Lucina 193.
 — in Miranda 208.
 — in Panisperna 180.
 — in Placidus 318.
 S. Luigi de' Francesi 270.
 Lungara 363.
 Lungaretta 374.
 Lugo Tevere Tibaldi 280.
 Lupercal, the (grotto) 252.
 Macellum Magnum 205.
 Madame Lucretia 208.

ROME:

Museums, Gardens of 182.
 — Auditorium of 182.
 Museo Archeologico 204.
 Mute Villa 208.
 Mamertine Prison 271.
 Maps 142.
 S. Marcello 201.
 S. Marco 202, lxi.
 Marcus Aurelius, Column of 200.
 —, Statue of 238, liv.
 Marforio, Statue of 244.
 Margherita, Passaggiata 375.
 S. Maria degli Angeli 167.
 — dell' Anima 221.
 — Antiqua 260.
 — in Araceli 235.
 — Aventina 287.
 — Bocca della Verità 288.
 — in Campitelli 281.
 — de' Capricci 285.
 — dei Cappuccini 182.
 — della Concezione 182.
 — in Cosmedin 288, lxiii.
 — in Domnica 297.
 — Egizia 285.
 — di Grottopia 228.
 — di Loreto 275.
 — Maggiore 180, lxi.
 — 1st, lxiii.
 — ad Martyras 218.
 — Mater Dei 180.
 — sopra Minerva 218.
 — de' Miracoli 157.
 — di Monserrato 220.
 — in Monte Santo 157.
 — della Morte 229.
 — della Navicella 297.
 — ad Nives 180.
 — Nova 264.
 — Nuova 396.
 — dell' Orto 375.
 — della Pace 222.
 — della Pietà in Campo Santo 329.
 — del Popolo 156, lxxv.
 — ad Prosepe 180.
 — del Priorato 287.
 — Rotonda 218.
 — della Scala 375.
 — Scala Caeli 390.
 — del Sole 285.
 — Traspontina 317.
 — in Trastevere 374.
 — in Vallicella 227.
 — in Via 200.
 — in Via Lata 201.

ROME:

S. Maria della Vittoria 165.
 Marius, Trophies of 237.
 Marmorata, the 298.
 Marrana, the 291.
 S. Martina e Luca 272.
 S. Martino ai Monti 183.
 Mascherone del Farnese 201.
 Mausoleum of Augustus 198.
 — of Hadrian 314.
 Melager, Statue of 354.
 Meta Sudana 266.
 Michael Angelo (lxvii, lxviii).
 Carthusian Convent 167, 171.
 Christ bearing the Cross 219.
 Frescoes in the Cappella Paulina 305.
 Frescoes in the Sixtine Chapel 332.
 S. Giov. de' Fiorentini 228.
 — — in Laterano 304.
 Last Judgment 334.
 S. Maria degli Angeli 167.
 Monument of Julius II. 189.
 — of Moses 189.
 Pal. Farnese 229.
 Pedestal of the Mars, Aur. statue 288.
 St. Peter's 321.
 Piazza del Campidoglio 287.
 Pietà 324.
 —, unfinished 198.
 Prophets and Sibyls 308.
 S. Michele, Osp. 378.
 — in Sessia 313.
 Milliarium Aureum 205.
 Minerva Medica, Temple of 185.
 Ministers' offices:
 Agriculture 181.
 Education 219.
 Exterior 178.
 Finance 165.
 Interior 225.
 Marine 214.
 Posts and Telegraphy 205.
 Public Works 196.
 War 164.

ROME:

Moles Hadriani 314.
 Molossian Hounds 366.
 Mons Sacer 389.
 Monte Caprino 235. 249.
 — Clitorio 215.
 — Molo 365.
 — Mario 385.
 — di Pietà 280.
 — Testaccio 288.
 Monuments:
 — Cairoli 158.
 — Carlo Alberto 177.
 — Cavour 316.
 — Cola di Rienzo 267.
 — Costa 231.
 — Euryaces 188.
 — Galilei 168.
 — Garibaldi 379.
 — Giord. Bruno 228.
 — Mamiani 227.
 — Marc Aurel 228. liv.
 — Metastasio 199.
 — Minghetti 225.
 — O'Connell 177.
 — Sella 185.
 — Spaventa 185.
 — Spedalieri 224.
 — Victor Emmanuel II. 168. 237.
 — Mosaic, Studio del 367.
 — Museo Agrario 165.
 — Artistico-Industriale 161.
 — Barracco 228.
 — Boncompagni 172.
 — Borgiano 160.
 — dei Gesu 283.
 — Kircheriano 201.
 — Nazionale delle Terme Diocleziane 167.
 — Profano 308.
 — Torlonia 373.
 — Museums, see Capitol, Lateran, Vatican.
 — Music 142.
 — Navicella (Giotto's) 321.
 —, Piazza della 287.
 — S. Nereo ed Achilleo 292. lxi.
 — Nero, Buildings and Statue of 266.
 — Newspapers 148.
 — S. Niccolò da Tolentino 164.
 — S. Nicola in Carcere 235.
 — Nile, Group of the 360. li.
 — Niobe, Daughter of 356.
 — Nome di Maria 275.
 — Nymphæum 279.

ROME:

Obelisks 158. 159. 169. 177. 180. 215. 218. 302. 318.
 Observatory 207.
 Octavia, Colonnade of 232.
 October Festival 147.
 Oculists 140.
 Omnibuses, see Appz.
 S. Onofrio (Lungara) 368.
 — (Monte Mario) 385.
 Oratorio di S. Filippo Neri 277.
 Orientation 149.
 Orti Farnesiani 276.
 Ospedale di S. Spirito 317.
 Ospizio di S. Michele 378.
 Osterie 188.
 Packers 141.
 Pædagogium 281.
 Painters 141.
 Palatine 275. 154.
 — Area Palatina 278.
 — Basilica 279.
 — Buildings of Tiberius 277.
 — of Sept. Severus 281.
 — Excavations 276.
 — Farnese Gardens 276.
 — Flavian Palace 278.
 — Lupercal 282.
 — Pædagogium 281.
 — Palatium 278.
 — Septizonium 276.
 — Stadium 280.
 — Temple of Jupiter Victor 280.
 — of the Magna Mater 278.
 — Palazzetto Borghese 218.
 — Palazzo Albani 164.
 — — Altimpe 214.
 — — Altieri 223.
 — — Antonelli 178.
 — — Ascarelli 231.
 — — Barberini 163.
 — — Bernini 198.
 — — Bolognetti 224.
 — — Bonaparte 201.
 — — Boncompagni-Piombino 168.
 — — Borghese 218.
 — — Borromeo 208.
 — — Braschi 225.
 — — Caffarelli 285.
 — — della Cancelleria 226.
 — — Capranica 225.

ROME:

Palazzo Conti - Bolognetti 232.
 — Chigi 189.
 — Colonna 210.
 — of the Conservatori 288.
 — del Convertendi 317.
 — Corsini 370.
 — Doria 207.
 — Falconieri 280.
 — Farnese 228.
 — Fiano 199.
 — Field-Brancaccio 182.
 — Gabrielli 228.
 — Galitini 213.
 — Giraud - Torlonia 317.
 — Giustiniani 220.
 — del Governo Vecchio 228.
 — Graciani 228.
 — Hüffer 178.
 — Lancellotti 214.
 — del Laterano 308.
 — Linotte 225.
 — Madama 220.
 — Margherita 168.
 — Marignoli 199.
 — Massimo alle Colonne 225.
 — Mattei 281.
 — Muti-Papassurri 177.
 — Odescalchi 201.
 — del S. Offizio 320.
 — Orsini 233.
 — Pamphili 221.
 — dei Penitenzieri 317.
 — Pio 228.
 — Poli 161.
 — Regio 178.
 — Ricciardi 317.
 — Righetti 228.
 — Rinuccini 201.
 — Rondanini 198.
 — Rospigliosi 178.
 — Ruspoli 198.
 — Sacchetti 280.
 — Salvati 201. 365.
 — Sciarra-Colonna 200.
 — del Senato 220.
 — del Senatore 288.
 — Sforza-Cesarini 227.
 — Simonetti 201.
 — Sora 227.
 — Spada alla Regola 229.
 — di Spagna 180.
 — Torlonia 199. 202.
 — Vaticano 326.
 — Venezia 202. lxiv.

ROME:

Palazzo Venezia 199.
 — Vidoni 224.
 S. Pancrazio 379.
 S. Pantaleo 225.
 Pantheon 218. lxii.
 S. Paolo Fuori le Mura 397. lxii.
 — alle Tre Fontane 599.
 Partoll, Monte and Viale del 538.
 Pasquino, the 226.
 Passeggiata Margherita 379.
 Passionist Monastery 297.
 Patriarchal Churches, the xxv.
 S. Paul, Ch. of 174.
 Pensions 185.
 St. Peter's 319.
 Philippine Convent 227.
 Phocas, Column of 268.
 Photographs 142.
 Physicians 189.
 Piazza S. Apollinare 214.
 — di S. Apostoli 210.
 — Araceli 265.
 — Barberini 182.
 — Benedetto Cairoli 261.
 — Bocca della Verità 263.
 — del Campidoglio 257.
 — Campitelli 231.
 — Campo di Fiore 226.
 — della Cancelleria 226.
 — Capo di Ferro 229.
 — Capranica 216.
 — dei Cinquecento 186.
 — di S. Claudio 199.
 — Colonna 200.
 — dell' Equilino 180.
 — S. Eustachio 219.
 — Farnese 229.
 — del Foro Traiano 274.
 — di S. Giovanni in Laterano 302.
 — Guglielmo Pope 186.
 — Magnanapoli 178.
 — S. Marco 202.
 — S. Maria Maggiore 180.
 — Mignanelli 160.
 — della Minerva 218.
 — Montanara 283.
 — di Monte Citorio 215.
 — della Navicella 297.
 — Navona 220.
 — dell' Orologio 226.

ROME:

Piazza del Pantheon 215.
 — de' Pallagrini 260.
 — Pia 316.
 — di Pietra 200.
 — di S. Pietro 318.
 — del Popolo 158.
 — di Porta S. Giovanni 311.
 — del Quirinale 177.
 — della Rotonda 215.
 — Rusticucci 317.
 — di S. Silvestro 199.
 — di Spagna 160.
 — Tartaruga 231.
 — delle Terme (di Termini) 188. 174.
 — della Trinità 159.
 — di Venezia 201.
 — Vitt. Emanuele 185.
 S. Pietro in Carcere 272.
 — e Marcellino 361.
 — in Montorio 377.
 — in Vaticano 319.
 — in Vincoli 189.
 Pincio, the 158.
 Pliny's Doves 249.
 Police Office 183.
 Policlinica 166.
 Pons Aelius 313.
 — Aemilius 265.
 — Cestius 284.
 — Gratianus 234.
 — Milvius 363.
 — Sublicius 373.
 — Valentiniani 373.
 Ponte S. Angelo 318.
 — S. Bartolomeo 284.
 — Cavour 218.
 — Cestio 234.
 — Emilio 265.
 — Fabricio 285.
 — ai Fiorentini 228.
 — Garibaldi 373. 374.
 — Margherita 156.
 — Molla 383.
 — Nomentano 389.
 — Palatino 285.
 — de' Quattro Capit 233.
 — Rottio 285.
 — Salario 388.
 — Sisto 373.
 — Umberto 213.
 — Vitt. Emanuele 314.
 Popes, List of xxix.
 Popular Festivals 147.
 Population 153.
 Porta Appia 294.
 — Asinaria 311.
 — Aurelia 379.
 — Capena 291.
 — Furba 392.

ROME:

Porta S. Giovanni 311.
 — Latina 298.
 — S. Lorenzo 183.
 — Magica 163.
 — Maggiore 185. 380.
 — Nomentana 165.
 — Ostiense 290.
 — S. Pancrazio 379.
 — S. Paolo 290.
 — Pia 165.
 — Flacciana 165.
 — del Popolo 158.
 — Portese 377.
 — Salaria 365.
 — S. Sebastiano 294.
 — Settimiana 373.
 — S. Spirito 368.
 — Tiburtina 183.
 Porters 139.
 Porticus (Colonnade) of Octavia 282.
 — Pompeiana 226.
 — of the Twelve Gods
 Post Office 135. 199.
 Præneste, Treasure of 204.
 S. Praxedes 187. lxi.
 Prati di Castello 316.
 — del Popolo Romano
 Prehistoric Museum
 S. Prisca 290.
 Prison 271.
 Private Apartments 186.
 Propaganda 160.
 Protestant Cemetery 289.
 — Churches 145.
 Protomoteca 241.
 Provision Dealers 137.
 S. Pudenziana 179. lxi.
 Pyramid of Cestius 289.
 S. Quattro Coronati 301.
 Quattro Fontane 164.
 Quasture 133.
 Quirinal, the 158.
 —, Pal. of 178.
 Race Course 364.
 Railway Office 183.
 — Station 186.
 Raphael (lxviii-lxxii):
 Bible of B. 343.
 Ohigi Chapel 197.
 S. Rikigio 290.
 Entombment 194.
 Faith, Hope, and Charity 344.
 Formarini 164. 194.

ROME:

Frescoes in the Pantheon 369.
 Galatea 370.
 Loggia (Vatican) 342.
 Madonna di Foligno 344.
 Navagero and Beazano 208.
 St. Peter's 320.
 Prophet Isaiah 214.
 Sibyls 222.
 Raphael's Stanzas (Vatican) 335.
 — Tapestry 346. lxx.
 — House 215. 317.
 — Frescoes from the Villa 190.
 — Tomb 217.
 — Transfiguration 345.
 — Villa 190.
 Reading Rooms 142.
 Regia 261.
 Restaurants 186.
 Rioni's House 285.
 Rione Monti 155.
 Ripa Grande 376.
 Ripetta, the 213.
 S. Rocco 213.
 Roma Quadrata 276.
 Roma Vecchia 396.
 Romulus, Grave of 257.
 Rostra 255.
 — Julia 209.
 Rotonda, La 216.
 Round Temple 285.
 Rupe Tarpeia 249.
 S. Sabina 286. lxi. lxii.
 Sacra Via 264.
 Septia Julia 201.
 Sallust, Gardens of 163.
 S. Salvatore in Lauro 215.
 Sancta Sanctorum, chapel 311.
 Sapienza, Università della 219.
 Sarcophagi, ancient liv.
 —, early Christian 309.
 Saturn, Temple of 255.
 Satyr of Myron 307.
 — of Praxiteles 248.
 Savings Bank 201.
 Scala Santa 311.
 — di Spagna 180.
 Scipios, Tomb of the 296.
 Scott, House of Walter 196.
 sculptors 141.

ROME:

S. Sebastiano 394.
 — alla Polveriera 265.
 Semaio Cominale 291.
 Septia Julia 201.
 Septimius Severus, Palace of 281.
 Septisomium 276.
 Servius, Wall of 166.
 178. 182. 290.
 Sessorium 186.
 Sette Sale 188.
 Seven Churches of Rome, the xxv.
 Shelley's House 199.
 — Tomb 289.
 Shops 141.
 Sick Nurses 140.
 S. Silvestro in Capite 199.
 — al Quirinale 179.
 Sixtine Chapel 331. lxiv.
 S. Sisto 292.
 Slaughter Houses 288.
 Sophocles, Statue of 307.
 Spagna, Scala di 180.
 Spanish Church 238.
 S. Spirito, Ospedale di 317.
 S. Spirito in Sassia 318.
 Sport 147.
 Stadium (Circus) of Domitian 220.
 — of Septimius Severus 280.
 Statues, see Monuments.
 S. Stefano delle Carrozze 265.
 — Rotondo 293.
 Strangers' Quarter 155.
 Street Scenes 148.
 Studios 141.
 S. Susanna 166.
 Synagogue 232.
 Tabernæ Veteres and Novæ 250.
 Tabularium 249.
 Tarpeian Rock 249.
 Teatro Argentina 231.
 — Drammatico 177.
 Telegraph Office 189.
 196.
 Tempietto 377.
 Temple of Augustus 281.
 — of Caesar 206.
 — of Castor and Pollux 209.
 — of Concordia 264.
 — of Cybele 276.

ROME:

Temple of the Deus Rediculus 396.
 — of Faustina 288.
 — of Fortune 285.
 — of Isis 209.
 — of Juno Moneta 234.
 — of Juno Sospita 233.
 — of Jupiter Capitolinus 284.
 — of Jupiter Victor 280.
 — of Magna Mater 278.
 — of Mars Ultor 276.
 — of Mater Matuta 286.
 — of Minerva Medica 185.
 — of Neptune 200.
 — of the Sacra Urbs 284.
 — of Saturn 265.
 — of Spes 283.
 — of Venus Genetrix 273.
 — of Venus and Roma 285.
 — of Verapian 258.
 — of Vesta 261.
 Templum Sacre Urbis 284.
 S. Teodoro 292.
 Testaccio, Monte 288.
 Theatres 147.
 Theatre of Marcellus
 — of Pompey 226.
 Thermæ of Agrippa 218.
 — Antoniniane 291.
 — of Caracalla 291.
 — of Constantine 177.
 — of Diocletian 166.
 — of Titus 270.
 — of Trajan 271.
 Thorn Extractor 242.
 Tiber, river 153.
 —, Island of the 233.
 Tiberius, Palace of 277.
 Time-Ball 208.
 Tivoli:
 Amor Sacro e Profano 195.
 St. Dominic 196.
 Tiro Nazionale 381.
 Tobacco Manufacture 138.
 Tomb of Bibulus 202.
 — of Cæcilia Metella 393.
 — of Hadrian 314.
 — of the Empress Helena 391.
 — of the Farneselli 391.
 — of the Scipios 293.
 — of St. Urbanus 393.

ROME:

Tomb of the Valerii 331.
 S. Tommaso di Canterbury or
 — degli Inglesi 226.
 — in Formia 297.
 Topography 158.
 Tor de' Conti 273.
 — di Quinto 384.
 Torlonia, Museo 371.
 Torre degli Anguillara 374.
 — Cantarelli 183.
 — dei Capocci 183.
 — delle Milizie 176.
 — di Nerone 176.
 — della Scimia 214.
 Trajan's Column 275.
 — Forum 274.
 Tramways, see Appx.
 Trastevere 378.
 Trattorie 187.
 Tre Fontane 396.
 Tribunale Civile e Correzionale 227.
 — di Commercio 227.
 Triclinium of Leo III. 311.
 S. Trinità de' Monti 159.
 — de' Pellegrini 280.
 Trinity, Ch. of the 169.
 Triumphal Arches, see Arch.
 Trofei di Mario 183.
 237.
 Tullianum 271.
 Umbilicus Urbis Romæ 253.
 Università della Sapienza 219.
 Universitas Gregoriana 209.
 S. Urbano 394.
 Ustrinum 215. 396.
 Vatican, the 328.
 Antiquities 346.
 Appartamento Borgia 347.
 Arazzi, Galleria degli 346.
 Archives 364.
 Assyrian Antiquities 361.
 Belvedere, Cortile del 355.
 — Vestibule of the 356.
 Boscareccio 349.
 Braccio Nuovo 360.
 Bronzes 363.
 Candelabri, Galleria dei 350.

ROME:

Cappella di Nisco-
 lo V. 342.
 — Paolina 334.
 — Sistina 331.
 Casino del Papa 349.
 Cortile del Belvedere 355.
 — di S. Damaso 380.
 — delle Logge 380.
 Egyptian Museum 360.
 Etruscan Museum 361.
 Gabinetto delle Maschere 355.
 Galleria degli Arazzi 346.
 — dei Candelabri 350.
 — Geografica 347.
 — Lapidaria 359.
 — delle Statue 363.
 Garden 349.
 Giardino della Pigna 367.
 Hall of the Busts 354.
 Library 364.
 Mich. Angelo's Frescoes 383. 385.
 Museo Chiaramonti 357.
 — Etrusco-Gregoriano 364.
 — Pio-Clementino 349.
 Museum of Christian Antiquities 366.
 Pauline Chapel 334.
 Picture Gallery 344.
 Portone di Bronzo 380.
 Raphael's Loggia 342.
 — Stanze 336.
 — Tapestry 346. lxx.
 Sala degli Animali 359.
 — della Biga 350.
 — dei Busti 354.
 — di Costantino 341.
 — a Croce Greca 349.
 — Ducale 334.
 — dell' Immacolata 335.
 — delle Muse 352.
 — Regia 330.
 — Rotonda 351.
 Scala Pia 329.
 — Regia 330.
 Sistine Chapel 331.
 Stanza d'Elodoro 340.

ROME:

Stanza dell' Incendio 336.
 — de' Papiri 366.
 — della Segnatura 336.
 Tomb Paintings 364.
 Torre Borgia 329.
 Vases, Collection of 362.
 Vatican Hill 312.
 Velabrum 262.
 Velasquez's Innocent X. 207.
 Velia 263.
 Venus after Praxiteles 249. 349.
 Vesta, Temple of 261.
 Vestal Virgins, Palace of the 262.
 Via Agostino Depretis 179.
 — Anicia 376.
 — Appia 261.
 — Araceli 206.
 — del Babuino 157.
 — de' Banchi Vecchi 229.
 — de' Baullari 225.
 — Bocca della Verità 233.
 — Bonella 272.
 — Carlo Alberto 182.
 — Cavour 188.
 — de' Cenci 286.
 — del Clementino 213.
 — de' Condotti 212.
 — Conte Verde 186.
 — de' Coronari 214.
 — della Croce Bianca 274.
 — della Dataria 178.
 — de' Due Macelli 160.
 — Em. Filiberto 185.
 — Flaminia 117. 388.
 — Fontanella di Borgheze 218.
 — Galvani 283.
 — Garibaldi 377.
 — Giovanni Lanza 183.
 — di S. Giovanni in Laterano 299.
 — Giulia 280.
 — del Governo Vecchio 226.
 — Gregoriana 159.
 — di S. Gregorio 294.
 — Labicana 186.
 — Lata 197.
 — Latina 283.
 — della Lungara 368.
 — Lungarina 374.
 — di Marforio 271.

ROME:

- Via Margutta 157.
 — della Marmorata 288.
 — S. Martino ai Monti 187.
 — Marulana 182.
 — di Monserrato 228.
 — del Nazareno 161.
 — Nazionale 174.
 — de' Pettinari 280.
 — della Pliotta 177.
 — del Plabicito 201.
 — di Porta S. Sebastiano 291.
 — Preneestina 188. 390.
 — Principe Eugenio 186.
 — di Propaganda 180.
 — Quattro Fontane 163.
 — del Quirinale 177.
 — di Ripetta 157.
 — Sacra 251.
 — della Salara 268.
 — della Scrofa 214.
 — Sistina 162. 159.
 — dallo Statuto 187.
 — di S. Stefano 288.
 — S. Teodoro 282.
 — di Tor Argentina 280.
 — delle Tre Pile 285.
 — del Tritone 161.
 — Triumphant 266.
 — de' Vascellari 376.
 — Veneto 163.
 — Venti Settembre 164.
 Viale di Porta S. Paolo 290.
 — Principessa Margherita 186.
 Victor Emmanuel, Mon. of 156. 287.
 —, Tomb of 217.
 Vicus Tuscus 281. 284.
 Villa Albani 385.
 — Aldobrandini 176.
 — Borghese 180.
 — Campanari 311.
 — Celimontana 206.
 — Colonna 212.
 — Doria-Pamphili 379.
 — Farnesina 368.
 — Lante 379.
 — Ludovisi 163.
 — Madama 384.
 — Magistrale (Maltese) 268.
 — Malta 162.
 — Massimo 305.
 — Mattei 298.

ROME:

- Villa Medici 159.
 — Mellini 305.
 — di Papa Giulio 196.
 — Spada 388.
 — Torlonia 308.
 — Umberto Primo 190.
 — Wolkonsky 311.
 Viminal 159.
 S. Vincenzo ed Anastasio 161. 390.
 S. Vitale 174.
 S. Vito 182.
 Waldensian Church 177.
 War Office 184.
 Wine-shops 157.
 Zeus of Utricoli 382.
 Ronciglione 102.
 Ronco, the 108. 109.
 Rosaro 70.
 Rosia 88.
 Rosignano S.
 Rosso, Monte 128.
 Roviano 426.
 Rubicon, the 106.
 Ruffinella, Villa 409.
 Rusignano 117.
 Rusellin 4.
 Sabate 104.
 Sabina, the 98.
 Sabine Mountains, the 417.
 Sacco 443.
 Sacra, Isola 435.
 Sacraia 78.
 Salona 418.
 S. Salvatore, Abbey 12.
 Sanguinetto 54.
 San Sepolcro 54.
 Sapia 108.
 Saracinesco 426.
 Sarteano 88.
 Sasso 10.
 Sassoferato 127.
 Sassoferato, Abbadia di 77.
 Saturnia 5.
 Savignano 109.
 Savio, river 108.
 Saxa Rubra 384.
 Scheggia 117.
 Schiantapetto 4.
 S. Scolastica 427.
 Scopetone, the 54.
 S. Secondo 56.
 Segni 441.
 Selagite, Mt. 18.
 Selci Lama 55.
 Sene Gallica 118.
 Senigallia 118.

- Senio, river 105.
 Sentinum 127.
 S. Sepolcro 54.
 Septempeda 125.
 Sermoneta 444.
 Serpentara 451.
 Serra S. Abbondio 127.
 — Partucci 57.
 — S. Quirico 128.
 Setia 445.
 Settecamini 419.
 S. Severa 9.
 S. Severino Marche 125.
 Sevo, Pizzo di 82.
 Sezze 445.
 Sibillini, Monti 82.
 Siena 19.
 Accademia delle Belle Arti 38.
 S. Agostino 80.
 Archives 31.
 Banca d'Italia 29.
 Bandini, Statue of 22.
 S. Barbara, Fort 36.
 S. Bernardino, Oratorio di 39.
 Biblioteca Comum. 35.
 Botanic Garden 30.
 Campani, Monast. 36.
 Cappella di Piazza 24.
 Carmine 80.
 Casa di S. Caterina 35.
 Casino de' Nobili 25.
 Cathedral 25.
 Cimitero della Misericordia 30.
 S. Concessione 82.
 S. Cristofano 23.
 S. Domenico 36.
 Fontebranda 35.
 Fontegiusta 37.
 Fonte di Follonica 31.
 — Gai 25.
 — Ovis 37.
 — de Pantaneto 31.
 — de' Pispini 32.
 S. Francesco 32.
 Garibaldi, Monument of 36.
 S. Giorgio 31.
 S. Giovanni 25.
 S. Girolamo 32.
 House of St. Catharine
 Library of the Cathedral 27.
 Lizza, La 36.
 Loggia del Papa 31.
 L'Osservanza 37.
 Madonna d. Angeli 32.
 Mangia, Torre del 23.
 S. Maria del Carmine 30.

- Siena:**
 S. Maria delle Neri 22.
 — di Provensano 32.
 — della Scala 29.
 S. Martino 31.
 Metropolitana, Chiesa 25.
 Opera del Duomo 28.
 Osservanza 37.
 Palazzo Arcivescovile 25.
 — Bichi 23.
 — Buonsignori 29.
 — Chigi (now Piccolomini) 29.
 — del Diavoli 37.
 — Finetti 30.
 — Gori 23.
 — del Governo 30.
 — Grottanelli 29.
 — del Magnifico 25.
 — Marascotti 29.
 — Marsili 29.
 — Nerucci 23.
 — Palmieri 23.
 — Pecci 29.
 — Piccolomini 30, 29.
 — Pollini 30.
 — Pubblico 23.
 — Reale 29.
 — Salimbeni 23.
 — Sansedoni 23.
 — Saracini 29.
 — Spannocchi 23.
 — Tolomei 23.
 — del Turco 37.
 Peruzzi, House of 37.
 Piazza del Campo (Vittorio Emanuele) 28.
 — di S. Francesco 32.
 — Giordano Bruno 29.
 — del Mercato 25.
 S. Pietro alla Magione 37.
 — — alle Scale 29.
 Pinacoteca 33.
 Porta Camollia 37.
 — S. Marco 30.
 — Orile 37.
 — Piepini 32.
 — Romana 32.
 Regie Scuole 29.
 S. Sebastiano 30.
 Servi di Maria 32.
 S. Spirito 31.
 Statue of Italia 23.
 — of Bandini 23.
 Tolomei, Collegio 30.
 University 31.
 S. Vigilio 32.
 Wood Carving 21.
 Sieve, river 44.
 Sigillo 117.
- Signa 15.
 Signa 441.
 S. Silvestro 96.
 Simbrina stagna 423.
 Sinalunga 41.
 Sinigaglia 118.
 Sinius 105.
 Sipicciano 97.
 Sirole 121.
 Sonnino 446.
 Soracte, Mt. 96.
 Sorcina 98.
 Sovana 8.
 Spello 75.
 Spolegium 78.
 Spoleto 78.
 Staggia 18.
 S. Stefano, Grotte 97.
 —, Porto 8.
 Sticciano 41.
 Sticci 84.
 Stimigliano 96.
 Storta, La 432, 104.
 Stracclacappa 103.
 Stroncone 84.
 Suana 5.
 Subasio, Monte 75.
 Sublaco 423.
 Sublaquenum 423.
 Sutri 102.
 Sutrium 102.
 Tadinum 126.
 Talamone 5.
 Tarquinii 7.
 Tarracina 446.
 Telamon 5.
 Terni 32.
 Terontola 53.
 Terracina 446.
 Teverone, river 418, 419.
 Tiber, river 54, 88, 94, 97, etc.
 —, Source of the 55.
 Tibur 422.
 Tifernum Tiberinum 55.
 Tivoli 422.
 Todi 89.
 Tolentino 125.
 Tolentinum Piceum 125.
 Tolfa 8.
 Tomba di Nerone 384.
 — del Pancratii 381.
 — del Valerii 381.
 Topina, Val 128.
 Topino, the 75.
 Tor Paterno 438.
 — di Quinto 384.
 — Sapienza 390.
 — de' Schiavi 390.
 — di Selce 396.
 — Tre Teste 390.
- Torraccia 396.
 Torre Boacciana 435.
 — Chiaruccia 9.
 — Maggiore, Monte 70.
 — Pignattara 381.
 Torrenieri 40.
 Torri (Val di Merse) 38.
 Torrita 41.
 Toscanella 101.
 Trasimeno, Lago 58.
 Treba 423.
 Trebie 77.
 Tre Fontane 399.
 Trestina 56.
 Trevi 77.
 —, Monte 445.
 — nel Lazio 423.
 Trevignano 104.
 Triponeo 82.
 Trojaccia, island 4.
 Tudor 69.
 Tuficum 126.
 Tuoro 54.
 Turchina 7.
 Toscana 101.
 Tusculana, Villa 409.
 Tusculum 409.
 Uccellina, Monti dell' 4.
 Ufens 445.
 Uffente 445.
 Umbertide 11.
 Urbana 127.
 S. Urbano 384.
 Urbibentum 89.
 Urbino 127.
 —, Monte 69.
 Urbisaglia 124.
 Urbs Salvia 124.
 — Vetus 89.
 Urgone, the 109.
 Urvinum Metaurense 128.
 Uso, river 109.
 Vaccarocchia, Tumulus of 433.
 Vada 8.
 Vagnolini, Vigna 384.
 Valchetta, the 384.
 Val d'Elsa 15.
 — di Fossino 384.
 — Topina 128.
 Valle Ariccia 441.
 — d'Inferno 385.
 Vallepietra 423.
 Vallombrosa 44.
 Valmontone 444.
 Valpiana 4.
 Valvisciolo, Abbey of 444.
 Varano 121.
 Varia 425.

- Vasciano 34.
 Veli 432.
 Velathri 10.
 Velino, river 84.
 Velletri 442.
 Vene, Le 78.
 Venere, Monte 101.
 Verano, Mta. 104.
 Verucchio 112.
 Vespasie 82.
 Vetralla 102.
 Vettore, Monte 82.
 Vetulonia 4.
 Via Emilia 105.
 — Appia 398. 445.
 — — Nuova 391.
 — Aurelia 2. 8. 380.
 — Caecilia 391.
 — Cassia 383. 98.
 — Collatina 390.
 — Flaminia 117. 383. 433.
 — Labicana 391.
 — Latina 391.
 — Laurentina 399.
 — Nomentana 388.
 — Ostiensis 399. 438.
 — Prænestina 390.
 Via Salaria 395. 97.
 — Tiburtina 419.
 — Triumphalis 417.
 — Tuscolana 391.
 — Valeria 425.
 Vicarello 104.
 Vico, Lago di 101.
 Vicovaro 423.
 Vicus Augustanus 438.
 Vignoni, Bagli di 41.
 Villa Adriana 420.
 — Albani 385.
 — Aldobrandini 408.
 — Barberini 412.
 — Belrespiro 380.
 — of Cicero 409.
 — Conti 403.
 — d'Este 424.
 — Falconieri 410.
 — ad Gallinas 384.
 — of the Gordiani 390.
 — of Hadrian 420.
 — of Horace 424.
 — Imperiale 115.
 — Inghirami 13.
 — Lante 100.
 — of Livia 384.
 — of Maecenas 424.
 Villa S. Messano 44.
 — Mondragone 410.
 — Piccolomini 408.
 — Ruffinella 409.
 — Sanmessano 44.
 — Spada 388.
 — Torlonia 435.
 — Tuscolana 409.
 Villa Montereali 54.
 S. Vincenzo 3.
 S. Vincenzo ed Ana-
 stasio 399. 161.
 Visentium 98.
 Visco 82.
 Vite, Capo della 14.
 Viterbo 98.
 S. Vito 94.
 — Romano 425.
 S. Vitorino 82.
 Vivo 41.
 Volaterræ 10.
 Volscian Mountains 440.
 Volturni 89. 93.
 Volterra 10.
 Vulci 5.
 Zagarolo 426.
 Zolfereo, Lago 10.



222

11





3 2044 018 077 883



3 2044 018 077 883

1. The first part of the document is a list of the names of the persons who have been appointed to the various offices of the government of the State of New York.

